
# **Customer Case Study**

# Data Center Provider Boosts Hosting Capability

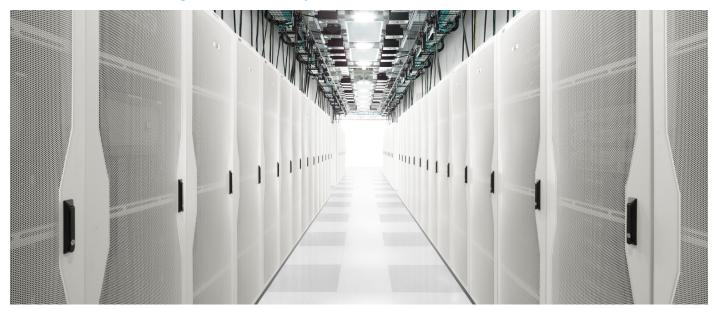

Oetker Daten und Informationsverarbeitung speeds provisioning times by 40 percent with Cisco Unified Computing System

#### **EXECUTIVE SUMMARY**

**Customer Name:** Oetker Daten und Informationsverarbeitung

**Industry:** IT services

Location: Germany

Number of Employees: 100

#### Challenge

- Reduce costs while maintaining quality of service
- Attract new hosting customers
- · Improve time to market

# Solution

 Data center architecture transformation with Cisco Unified Computing System servers and Cisco Nexus switching

#### Results

- IT team productivity improved by 30 percent
- Provisioning time reduced by 40 percent and availability increased by 10 percent
- Hardware and cabling decreased by 25 percent and 85 percent respectively
- Customers see benefit of higher hosting capability with more reliable data center services

# Challenge

Oetker Daten und Informationsverarbeitung (OEDIV) is a data center application hosting business belonging to Dr. Oetker, the German multinational conglomerate. Providing data center services to other businesses across the Dr. Oetker group and commercially to mid-sized enterprises, OEDIV focuses on SAP hosting, managed services, HR applications, and EDI systems. Balancing quality against cost is an ongoing challenge for the business.

"What we try to achieve is not the lowest cost, but a fair price for the services we offer," says Simona Georgescu, of IT Marketing and Sales at OEDIV. "We try to be as efficient as possible and achieve a faster time to market while maintaining or improving our quality of service. That means we have to increasingly rely on automation."

Historically, however, the company's data center used rack servers from a range of vendors, which did not help towards the goal of efficient operations. Hence OEDIV sought to move toward a single-vendor, stateless computing model. This model would allow compute nodes with no set configuration to be reconfigured spontaneously using standard service profiles.

#### Solution


The company was already using Cisco Catalyst® 6500 Series Switches and Cisco Nexus® 7000, 5000, and 2000 Series Switches in its network and decided to include Cisco on its list of potential data center partners. "A series of factors led us to choose Cisco," Georgescu says. "Our buzzword is the software-defined data center, and Cisco acknowledged this market gap. Other companies simply weren't as innovative and tended to focus on their core products, whereas Cisco had started from scratch."

The Cisco Unified Computing System™ (UCS®) was a new platform that broke away from the traditional mold to form a more flexible platform that was pre-configured to be compatible with storage and virtualization technologies.



"Cisco changed our mindset and offered exactly what we needed in order to get to our goal, which is automation and reduced time to market."

Martin Stratmann Managing Director Oetker Daten und Informationsverarbeitung

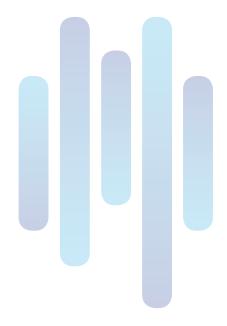

"Our buzzword is the software-defined data center, and Cisco acknowledged this market gap. Other companies simply weren't as innovative and tended to focus on their core products, whereas Cisco had started from scratch."

Simona Georgescu
IT Marketing and Sales
Oetker Daten und Informationsverarbeitung

In addition to the technical capabilities of the Cisco® UCS architecture, OEDIV was impressed by the quality of the account team, which was the only one offering equipment for testing. Following an 18-month selection process, a Cisco data center architecture was implemented initially to power three SAP High Performance Analytic Appliance (HANA) instances and for generic SAP hosting.

The OEDIV UCS architecture comprises eight Cisco UCS 6296UP 96-Port Fabric Interconnects, plus sixteen UCS chassis equipped with a total of 200 Cisco UCS B200 M3 Blade Servers. These are powered by Intel® Xeon® Processor E5-2690 chip sets with 256GB of RAM. Selected for their high-performance capabilities, they operate as VMware ESX hosts. These appliances include two HANA S-Size single nodes (C260 256GB) and a M-Size (C460 512GB) node used to support customer demonstrations for SAP HANA hosting.

The servers are attached to EMC storage arrays. Switching is by Cisco Nexus 5000 Series Switches, and the infrastructure is secured via Cisco ASA 5500 Series Adaptive Security Appliances, Cisco Email Security Appliances, and Cisco Web Security Appliances. UCS Director is also used. This arrangement improves automation through unified converged infrastructure management for administering computing, network, virtualization, and storage from one self-service web interface.

The Cisco equipment is covered by a Cisco SMARTnet™ services agreement and installed in two fully redundant active-active data centers located about six miles (10 kilometers) apart. The kit was purchased with finance from Cisco Capital®. Computacenter, a Cisco Gold Certified Partner, was engaged to help with equipment installation and configuration.

#### Results


OEDIV is relying on Cisco UCS to boost its hosting capabilities, a strategic focus for the business. Compared to its previous infrastructure, the Cisco UCS data center architecture affords a number of measurable benefits. Cabling requirements, for example, have dropped by 85 percent. "You no longer need different servers connected to a hundred cables," says Georgescu.

The move to blade technology also allows OEDIV to provision new services 40 percent faster, since the hardware required can be slotted easily into an existing chassis and configured in minutes with pre-existing service profiles. "You have one big block with replaceable blades," Georgescu says. "Having only one block and not different servers saves time and optimizes cost."

This simplicity, plus the fact that about 25 percent less hardware now has to be managed, has also increased the productivity of the IT team by around 30 percent. Finally, the reliability of the Cisco UCS platform has resulted in a 10 percent increase in availability. Georgescu says: "The MAC address and the BIOS are not on the hardware, but on the software layer. So if a blade breaks, you just replace it, and the information's still there. So customers enjoy much reduced downtime."

# **Next Steps**

With around 200 Cisco UCS blades already in production, OEDIV is planning to use Cisco UCS and Citrix technologies as a platform for customer virtual desktop infrastructure services. It is also planning to use Cisco technologies elsewhere in its business. Martin Stratmann, managing director, sums up: "Cisco changed our mindset and offered exactly what we needed in order to get to our goal, which is automation and reduced time to market."

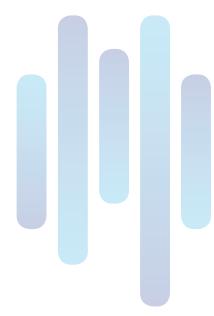

### For More Information

To learn more about the Cisco architectures and solutions featured in this case study go to:

www.cisco.com/go/nexus www.cisco.com/go/ucs

#### **Product List**

#### **Data Center Solutions**

- Cisco Unified Computing System (UCS)
  - Cisco UCS B200 M3 Blade Servers

#### Routing and Switching

- Cisco Nexus 7000 Series Switches
- · Cisco Nexus 5000 Series Switches
- · Cisco Nexus 2000 Series Switches
- Cisco Catalyst 6500 Series Switches

#### Fabric Interconnets

Cisco UCS 6296UP Series Fabric Interconnects

#### Security

- Cisco ASA 5500 Series Adaptive Security Appliances
- Cisco Email Security Appliances
- Cisco Web Security Appliances

# **Processors**

Intel Xeon Processor E5-2690

#### **Applications**

- VMware
- SAP HANA (two S-Size single node C260 256GB and one M-Size C460 512GB)

# Storage

• EMC

# cisco.

Americas Headquarters Cisco Systems, Inc. San Jose, CA Asia Pacific Headquarters Cisco Systems (USA) Pte. Ltd Singapore Europe Headquarters Cisco Systems International BV Amsterdam, The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)