

# Konfigurieren und Überprüfen von LACP ESI Multi-Homing in EVPN VXLAN

## Inhalt

- [Einleitung](#)
- [Voraussetzungen](#)
- [Anforderungen](#)
- [Verwendete Komponenten](#)
- [Konfigurieren](#)
- [Netzwerkdiagramm](#)
- [Spine-1](#)
- [Spine-2](#)
- [Blatt-1](#)
- [Blatt-2](#)
- [Blatt-3](#)
- [Blatt-4](#)
- [Host-1](#)
- [Host-2](#)
- [Überprüfung](#)
- [Fehlerbehebung](#)

## Einleitung

In diesem Dokument wird die Bereitstellung des LACP (Link Aggregation Control Protocol) Active/Active EVPN Virtual Extensible LAN (VXLAN) auf dem Nexus 9000 beschrieben.

## Voraussetzungen

### Anforderungen

Cisco empfiehlt, dass Sie über Kenntnisse in folgenden Bereichen verfügen:

- Border Gateway Protocol (BGP)
- Open Shortest Path First (OSPF)
- Ethernet-VPN (EVPN)
- Virtueller vPC
- vPC
- Ethernet-Segment

### Verwendete Komponenten

Die Informationen in diesem Dokument basierend auf folgenden Software- und Hardware-Versionen:


- Cisco Nexus 9372PX-E mit Version 9.3(9) [Leaf]
- Cisco Nexus 93180YC-FX mit Version 10.2(2)F [Spine]
- Cisco Nexus 3548-Chassis mit Version 6.0(2)A8(11b) [Host]

Die Informationen in diesem Dokument beziehen sich auf Geräte in einer speziell eingerichteten

Testumgebung. Alle Geräte, die in diesem Dokument benutzt wurden, begannen mit einer gelöschten (Nichterfüllungs) Konfiguration. Wenn Ihr Netzwerk in Betrieb ist, stellen Sie sicher, dass Sie die möglichen Auswirkungen aller Befehle kennen.

## Konfigurieren

### Netzwerkdiagramm

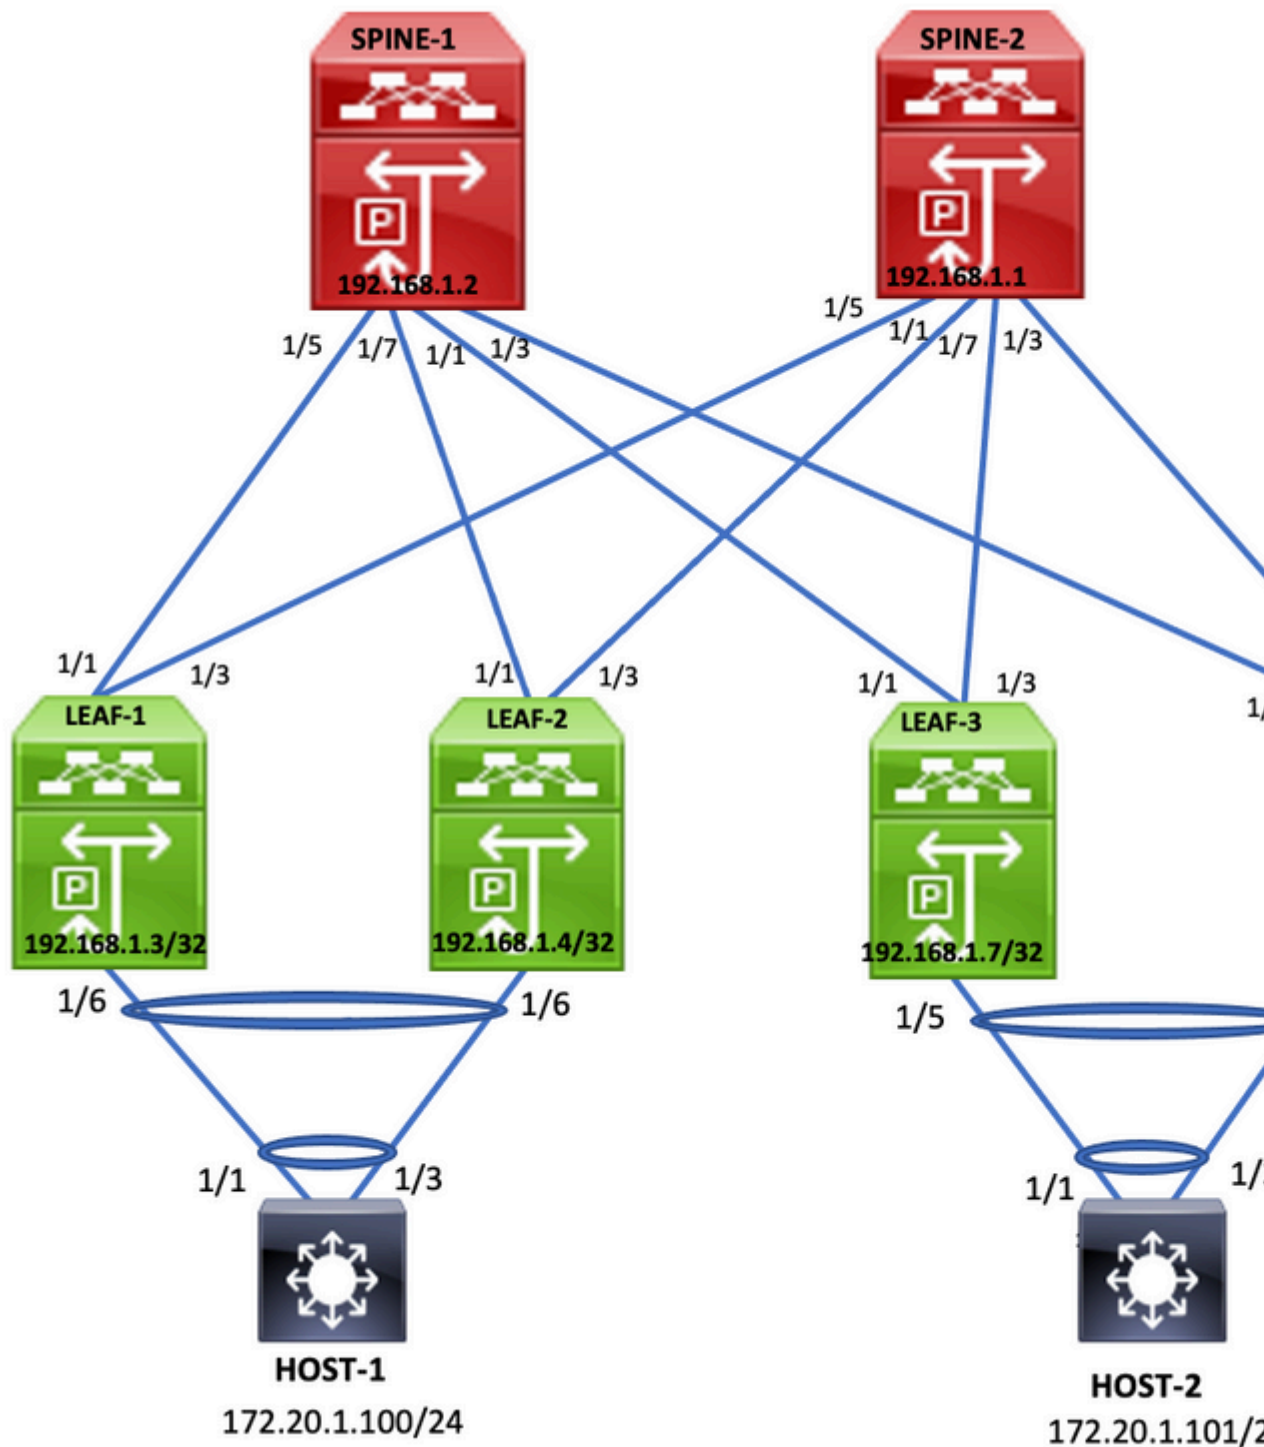

### Spine-1

```
hostname Spine1

feature scp-server
feature sftp-server
nv overlay evpn
feature ospf
feature bgp
feature pim
feature nv overlay

copp profile strict

ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

interface Ethernet1/1
ip address 172.16.4.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/3
mtu 9216
ip address 172.16.6.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/5
ip address 172.16.0.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/7
mtu 9216
ip address 172.16.2.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface loopback0
ip address 192.168.1.2/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
router-id 192.168.1.2
router bgp 100
router-id 192.168.1.2
address-family ipv4 unicast
address-family l2vpn evpn
maximum-paths ibgp 32
additional-paths send
additional-paths receive
neighbor 192.168.1.3
remote-as 100
```

```
update-source loopback0
address-family ipv4 unicast
  send-community extended
  route-reflector-client
address-family l2vpn evpn
  send-community extended
  route-reflector-client
neighbor 192.168.1.4
  remote-as 100
update-source loopback0
address-family ipv4 unicast
  send-community extended
  route-reflector-client
address-family l2vpn evpn
  send-community extended
  route-reflector-client
neighbor 192.168.1.7
  remote-as 100
update-source loopback0
address-family ipv4 unicast
  send-community extended
  route-reflector-client
address-family l2vpn evpn
  send-community extended
  route-reflector-client
neighbor 192.168.1.8
  remote-as 100
update-source loopback0
address-family ipv4 unicast
  send-community extended
  route-reflector-client
address-family l2vpn evpn
  send-community extended
  route-reflector-client
```

## Spine-2

```
hostname spine2

nv overlay evpn
feature ospf
feature bgp
feature pim
feature nv overlay

copp profile strict

ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

interface Ethernet1/1
  ip address 172.16.5.2/30
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/3
```

```
mtu 9216
ip address 172.16.7.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/5
ip address 172.16.1.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/7
mtu 9216
ip address 172.16.3.2/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface loopback0
ip address 192.168.1.1/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

router ospf 100
router-id 192.168.1.1
router bgp 100
router-id 192.168.1.1
address-family ipv4 unicast
address-family l2vpn evpn
maximum-paths ibgp 32
additional-paths send
additional-paths receive
neighbor 192.168.1.3
remote-as 100
update-source loopback0
address-family ipv4 unicast
send-community extended
route-reflector-client
address-family l2vpn evpn
send-community extended
route-reflector-client
neighbor 192.168.1.4
remote-as 100
update-source loopback0
address-family ipv4 unicast
send-community extended
route-reflector-client
address-family l2vpn evpn
send-community extended
route-reflector-client
neighbor 192.168.1.7
remote-as 100
update-source loopback0
address-family ipv4 unicast
send-community extended
route-reflector-client
address-family l2vpn evpn
send-community extended
```

```
    route-reflector-client
neighbor 192.168.1.8
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
    send-community extended
  route-reflector-client
  address-family l2vpn evpn
    send-community extended
  route-reflector-client
```

## Blatt-1

<#root>

```
hostname Leaf1
```

```
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay
```

```
copp profile strict
```

```
evpn esi multihoming
```

```
    ethernet-segment delay-restore time 180
```

```
fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8
```

```
vlan 1,10,100,200,300,400
```

```
vlan 10
```

```
  vn-segment 500001
```

```
vlan 100
```

```
  vn-segment 5001002
```

```
vlan 200
```

```
  vn-segment 5001001
```

```
vrf context vxlan-500001
```

```
  vni 500001
```

```
  rd auto
```

```
  address-family ipv4 unicast
```

```
    route-target both auto
```

```
    route-target both auto evpn
```

```
  address-family ipv6 unicast
```

```
    route-target both auto
```

```
    route-target both auto evpn
```

```
hardware access-list tcam region vacl 0
```

```
hardware access-list tcam region e-racl 0
hardware access-list tcam region arp-ether 256
```

```
interface Vlan10
  no shutdown
  vrf member vxlan-500001
  ip forward
```

```
interface Vlan100
  no shutdown
  vrf member vxlan-500001
  ip address 172.20.1.1/24
  fabric forwarding mode anycast-gateway
```

```
interface Vlan200
  no shutdown
  vrf member vxlan-500001
  ip address 172.21.1.1/24
  fabric forwarding mode anycast-gateway
```

```
interface port-channel111
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400
```

```
ethernet-segment 2011
```

```
system-mac 0000.0000.2011
```

```
mtu 9216
```

```
interface nve1
  no shutdown
  host-reachability protocol bgp
  source-interface loopback0
  member vni 500001 associate-vrf
  member vni 5001001
    suppress-arp
    mcast-group 239.0.0.1
  member vni 5001002
    suppress-arp
    mcast-group 239.0.0.1
```

```
interface Ethernet1/1
  no switchport

evpn multihoming core-tracking

  ip address 172.16.0.1/30
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown
```

```
interface Ethernet1/3
  no switchport

evpn multihoming core-tracking
```

```
ip address 172.16.1.1/30
```

```

ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/6
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400
  mtu 9216
  channel-group 111 mode active

interface loopback0
  ip address 192.168.1.3/32
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode

router ospf 100
  router-id 192.168.1.3
router bgp 100
  router-id 192.168.1.3
  address-family ipv4 unicast
  address-family l2vpn evpn
    maximum-paths ibgp 3
    additional-paths send
    additional-paths receive
  neighbor 192.168.1.1
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
      send-community extended
    address-family l2vpn evpn
      send-community extended
  neighbor 192.168.1.2
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
      send-community extended
    address-family l2vpn evpn
      send-community extended

evpn
vrf context vxlan-500001
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn
address-family ipv6 unicast
route-target both auto
route-target both auto evpn

```

## Blatt 2

```
<#root>
```

```
hostname Leaf2
```

```
feature scp-server
feature sftp-server
nv overlay evpn
feature ospf
```



```
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay
```

```
copp profile strict
```

```
evpn esi multihoming
```

```
    ethernet-segment delay-restore time 180
```

```
fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8
```

```
vlan 1,10,100,200,300,400
```

```
vlan 10
    vn-segment 500001
vlan 100
    vn-segment 5001002
vlan 200
    vn-segment 5001001
```

```
vrf context vxlan-500001
    vni 500001
    rd auto
    address-family ipv4 unicast
        route-target both auto
        route-target both auto evpn
    address-family ipv6 unicast
        route-target both auto
        route-target both auto evpn
hardware access-list tcam region span 0
hardware access-list tcam region rp-qos 0
hardware access-list tcam region arp-ether 256
```

```
interface Vlan10
    no shutdown
    vrf member vxlan-500001
    ip forward
```

```
interface Vlan100
    no shutdown
    vrf member vxlan-500001
    ip address 172.20.1.1/24
    fabric forwarding mode anycast-gateway
```

```
interface Vlan200
    no shutdown
    vrf member vxlan-500001
    ip address 172.21.1.1/24
    fabric forwarding mode anycast-gateway
```

```
interface port-channel111
    switchport mode trunk
```

```
switchport trunk allowed vlan 100,200,300,400
```

```
ethernet-segment 2011
```

```
system-mac 0000.0000.2011
```

```
mtu 9216
```

```
interface nve1
no shutdown
host-reachability protocol bgp
source-interface loopback0
member vni 500001 associate-vrf
member vni 5001001
  suppress-arp
  mcast-group 239.0.0.1
member vni 5001002
  suppress-arp
  mcast-group 239.0.0.1
```

```
interface Ethernet1/1
no switchport
```

```
evpn multihoming core-tracking
```

```
mtu 9216
ip address 172.16.2.1/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown
```

```
interface Ethernet1/3
no switchport
```

```
evpn multihoming core-tracking
```

```
mtu 9216
ip address 172.16.3.1/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown
```

```
interface Ethernet1/6
switchport mode trunk
switchport trunk allowed vlan 100,200,300,400
mtu 9216
channel-group 111 mode active
```

```
interface mgmt0
vrf member management
ip address 10.88.146.115/24
```

```
interface loopback0
ip address 192.168.1.4/32
ip router ospf 100 area 0.0.0.0
```

```
ip pim sparse-mode

router ospf 100
  router-id 192.168.1.4
router bgp 100
  router-id 192.168.1.4
  address-family ipv4 unicast
  address-family l2vpn evpn
    maximum-paths ibgp 32
    additional-paths send
    additional-paths receive
  neighbor 192.168.1.1
    remote-as 100
    update-source loopback0
  address-family ipv4 unicast
    send-community extended
  address-family l2vpn evpn
    send-community extended
  neighbor 192.168.1.2
    remote-as 100
    update-source loopback0
  address-family ipv4 unicast
    send-community extended
  address-family l2vpn evpn
    send-community extended
evpn
vrf context vxlan-500001
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn
address-family ipv6 unicast
route-target both auto
route-target both auto evpn
```

## Blatt-3

```
<#root>
```

```
hostname Leaf3
```

```
feature scp-server
feature sftp-server
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay
```

```
copp profile strict
hardware access-list tcam region egr-racl 0
hardware access-list tcam region ing-netflow 0
hardware access-list tcam region ing-flow-redirect 512
```

```
fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8
```

```
vlan 1,10,100,200
vlan 10
  vn-segment 500001
vlan 100
  vn-segment 5001002
vlan 200
  vn-segment 5001001
```

```
vrf context vxlan-500001
vni 500001
rd auto
address-family ipv4 unicast
  route-target both auto
  route-target both auto evpn
address-family ipv6 unicast
  route-target both auto
  route-target both auto evpn
```

```
vpc domain 100
peer-switch
peer-keepalive destination 10.88.146.113 source 10.88.146.112
virtual peer-link destination 192.168.1.8 source 192.168.1.7 dscp 56
peer-gateway
ip arp synchronize
```

```
interface Vlan1
no ip redirects
no ipv6 redirects
```

```
interface Vlan10
no shutdown
vrf member vxlan-500001
ip forward
```

```
interface Vlan100
no shutdown
vrf member vxlan-500001
no ip redirects
ip address 172.20.1.1/24
no ipv6 redirects
fabric forwarding mode any cast-gateway
```

```
interface Vlan200
no shutdown
vrf member vxlan-500001
no ip redirects
ip address 172.21.1.1/24
no ipv6 redirects
fabric forwarding mode any cast-gateway
```

```
interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300,400
spanning-tree port type network
vpc peer-link
```

```
interface port-channel30
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400
  vpc 30
```

```
interface nve1
  no shutdown
  host-reachability protocol bgp
  advertise virtual-rmac
  source-interface loopback1
  member vni 500001 associate-vrf
  member vni 5001001
    suppress-arp
    mcast-group 239.0.0.1
  member vni 5001002
    suppress-arp
    mcast-group 239.0.0.1
```

```
interface Ethernet1/1
```

```
port-type fabric
```

```
  ip address 172.16.4.1/30
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown
```

```
interface Ethernet1/3
```

```
port-type fabric
```

```
  ip address 172.16.5.1/30
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown
```

```
interface Ethernet1/5
```

```
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400
  channel-group 30 mode active
  no shutdown
```

```
interface mgmt0
```

```
  vrf member management
  ip address 10.88.146.112/24
```

```
interface loopback0
```

```
  ip address 192.168.1.7/32
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
```

```
interface loopback1
```

```
  ip address 192.168.1.5/32
  ip address 192.168.1.51/32 secondary
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
```

```
router ospf 100
  router-id 192.168.1.5
router bgp 100
  router-id 192.168.1.7
  address-family ipv4 unicast
  address-family l2vpn evpn
  maximum-paths ibgp 32
  advertise-pip
  additional-paths send
  additional-paths receive
  neighbor 192.168.1.1
    remote-as 100
    update-source loopback0
  address-family ipv4 unicast
    send-community extended
  address-family l2vpn evpn
    send-community extended
  neighbor 192.168.1.2
    remote-as 100
    update-source loopback0
  address-family ipv4 unicast
    send-community extended
  address-family l2vpn evpn
    send-community extended
evpn
vrf context vxlan-500001
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn
address-family ipv6 unicast
route-target both auto
route-target both auto evpn
```

## Blatt-4

```
<#root>
```

```
hostname Leaf4
```

```
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay
```

```
copp profile strict
hardware access-list tcam region egr-racl 0
hardware access-list tcam region ing-netflow 0
hardware access-list tcam region ing-flow-redirect 512
```

```
fabric forwarding anycast-gateway-mac 0000.2222.3333
```

```
ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,10,100,200

vlan 10
  vn-segment 500001
vlan 100
  vn-segment 5001002
vlan 200
  vn-segment 5001001

vrf context vxlan-500001
  vni 500001
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
  address-family ipv6 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.88.146.112 source 10.88.146.113
  virtual peer-link destination 192.168.1.7 source 192.168.1.8 dscp 56
  peer-gateway
  ip arp synchronize

interface Vlan1
  no ip redirects
  no ipv6 redirects

interface Vlan10
  no shutdown
  vrf member vxlan-500001
  ip forward

interface Vlan100
  no shutdown
  vrf member vxlan-500001
  no ip redirects
  ip address 172.20.1.1/24
  no ipv6 redirects
  fabric forwarding mode any cast-gateway

interface Vlan200
  no shutdown
  vrf member vxlan-500001
  no ip redirects
  ip address 172.21.1.1/24
  no ipv6 redirects
  fabric forwarding mode any cast-gateway

interface port-channel10
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400
  spanning-tree port type network
  vpc peer-link

interface port-channel30
```

```
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300,400
vpc 30
```

```
interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 500001 associate-vrf
member vni 5001001
    suppress-arp
    mcast-group 239.0.0.1
member vni 5001002
    suppress-arp
    mcast-group 239.0.0.1
```

```
interface Ethernet1/1
mtu 9216
```

```
port-type fabric
```

```
ip address 172.16.6.1/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown
```

```
interface Ethernet1/3
mtu 9216
```

```
port-type fabric
```

```
ip address 172.16.7.1/30
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown
```

```
interface Ethernet1/5
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300,400
channel-group 30 mode active
no shutdown
```

```
interface mgmt0
vrf member management
ip address 10.88.146.113/24
```

```
interface loopback0
ip address 192.168.1.8/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
```

```
interface loopback1
ip address 192.168.1.6/32
ip address 192.168.1.51/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
```



icam monitor scale

```
router ospf 100
  router-id 192.168.1.6
router bgp 100
  router-id 192.168.1.8
  address-family ipv4 unicast
  address-family l2vpn evpn
  maximum-paths ibgp 32
  advertise-pip
  additional-paths send
  additional-paths receive
neighbor 192.168.1.1
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  send-community extended
  address-family l2vpn evpn
  send-community extended
neighbor 192.168.1.2
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  send-community extended
  address-family l2vpn evpn
  send-community extended
evpn
vrf context vxlan-500001
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn
address-family ipv6 unicast
route-target both auto
route-target both auto evp
```

## Host-1

```
feature bash-shell
feature scp-server
feature interface-vlan
feature lacp
feature lldp

vlan 1,10,100,200,300,400

interface Vlan100
  no shutdown
  ip address 172.20.1.100/24

interface port-channel111
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400

interface Ethernet1/2
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300,400
  channel-group 111 mode active
```

```
no shutdown
```

```
interface Ethernet1/3  
  switchport mode trunk  
  switchport trunk allowed vlan 100,200,300,400  
  channel-group 111 mode active  
  no shutdown
```

## Host 2

```
feature bash-shell  
feature scp-server  
feature interface-vlan  
feature lacp  
feature lldp
```

```
vlan 1,10,100,200,300,400
```

```
interface Vlan100  
  no shutdown  
  ip address 172.20.1.101/24
```

```
interface port-channel30  
  switchport mode trunk  
  switchport trunk allowed vlan 100,200,300,400
```

```
interface Ethernet1/1  
  switchport mode trunk  
  switchport trunk allowed vlan 100,200,300,400  
  channel-group 30 mode active  
  no shutdown
```

```
interface Ethernet1/3  
  switchport mode trunk  
  switchport trunk allowed vlan 100,200,300,400  
  channel-group 30 mode active  
  no shutdown
```

## Überprüfung

Verwenden Sie diesen Abschnitt, um zu überprüfen, ob Ihre Konfiguration ordnungsgemäß funktioniert.

```
H2# ping 172.20.1.100  
PING 172.20.1.100 (172.20.1.100): 56 data bytes  
36 bytes from 172.20.1.101: Destination Host Unreachable  
Request 0 timed out  
64 bytes from 172.20.1.100: icmp_seq=1 ttl=254 time=2.324 ms  
64 bytes from 172.20.1.100: icmp_seq=2 ttl=254 time=1.546 ms  
64 bytes from 172.20.1.100: icmp_seq=3 ttl=254 time=1.574 ms  
64 bytes from 172.20.1.100: icmp_seq=4 ttl=254 time=1.527 ms
```





```
G 100 003a.9c07.9b07 static - F F sup-eth1(R)
G 400 003a.9c07.9b07 static - F F sup-eth1(R)
G 200 003a.9c07.9b07 static - F F sup-eth1(R)
G - 0200.c0a8.0133 static - F F sup-eth1(R)
G 100 8c94.1f5f.f787 static - F F vPC Peer-Link(R)
G 200 8c94.1f5f.f787 static - F F vPC Peer-Link(R)
Leaf4#
```

## Fehlerbehebung

Dieser Abschnitt enthält Informationen, die Sie zur Fehlerbehebung bei Ihrer Konfiguration verwenden können.

```
Leaf2# show nve ethernet-segment
ESI: 0300.0000.0020.1100.07db
  Parent interface: port-channel111
  ES State: Up
  Port-channel state: Up
  NVE Interface: nve1
  NVE State: Up
  Host Learning Mode: control-plane
  Active Vlans: 100,200,300,400
  DF Vlans:
  Active VNIs: 5001001-5001002
  CC failed for VLANs:
  VLAN CC timer: 0
  Number of ES members: 2
  My ordinal: 1
  DF timer start time: 00:00:00
  Config State: config-applied
  DF List: 192.168.1.3 192.168.1.4
  ES route added to L2RIB: True
  EAD/ES routes added to L2RIB: True
  EAD/EVI route timer age: not running
```

```
-----
Leaf2# show port-ch summary
Flags:  D - Down          P - Up in port-channel (members)
        I - Individual    H - Hot-standby (LACP only)
        s - Suspended    r - Module-removed
        b - BFD Session Wait
        S - Switched     R - Routed
        U - Up (port-channel)
        p - Up in delay-lacp mode (member)
        M - Not in use. Min-links not met
```

```
-----
Group Port-      Type      Protocol  Member Ports
Channel
-----
111  Po111(SU)  Eth      LACP      Eth1/6(P)
```

```
Leaf2# show bgp l2vpn evpn
BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 123, Local Router ID is 192.168.1.4
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2
```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 192.168.1.3:19536					
*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffffff]/152	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.3:27110					
*>i[4]:[0300.0000.0020.1100.07db]:[32]:[192.168.1.3]/136	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.3:32867					
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.3:32967					
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.4:27110 (ES [0300.0000.0020.1100.07db 0])					
*>i[4]:[0300.0000.0020.1100.07db]:[32]:[192.168.1.3]/136	192.168.1.3		100	0	i
*>l[4]:[0300.0000.0020.1100.07db]:[32]:[192.168.1.4]/136	192.168.1.4		100	32768	
Route Distinguisher: 192.168.1.4:32867 (L2VNI 5001002)					
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	0	i
*>l	192.168.1.4		100	32768	i
*>i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
*>i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
* i	192.168.1.51		100	0	i
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216	192.168.1.3		100	0	i
*>l	192.168.1.4		100	32768	i
*>i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272	192.168.1.51		100	0	i
*>i	192.168.1.51		100	0	i
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272	192.168.1.3		100	0	i
*>l	192.168.1.4		100	32768	i
Route Distinguisher: 192.168.1.4:32967 (L2VNI 5001001)					
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	0	i
*>l	192.168.1.4		100	32768	i
*>i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
*>i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216					

```

192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.4:65534 (L2VNI 0)
*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152
192.168.1.3 100 0 i
Route Distinguisher: 192.168.1.7:3
* i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.7:32867
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
* i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.7:32967
* i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.8:3
* i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.8:32867
* i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.8:32967
* i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
192.168.1.51 100 0 i
*>i 192.168.1.51 100 0 i
Route Distinguisher: 192.168.1.4:19536 (EAD-ES [0300.0000.0020.1100.07db 19536])
*>l[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152
192.168.1.4 100 32768 i

```

Leaf2#

Leaf1# show port-ch su

```

Flags: D - Down          P - Up in port-channel (members)
       I - Individual    H - Hot-standby (LACP only)
       s - Suspended    r - Module-removed
       b - BFD Session Wait
       S - Switched     R - Routed
       U - Up (port-channel)
       p - Up in delay-lacp mode (member)
       M - Not in use. Min-links not met

```

```
-----
Group Port-      Type      Protocol  Member Ports
  Channel
-----
```

```
111 Po111(SU)  Eth      LACP      Eth1/6(P)
```

```
Leaf1#
```

```
Leaf1#
```

```
Leaf1# show nve ethernet-segment
```

```
ESI: 0300.0000.0020.1100.07db
```

```
  Parent interface: port-channel111
```

```
  ES State: Up
```

```
  Port-channel state: Up
```

```
  NVE Interface: nve1
```

```
  NVE State: Up
```

```
  Host Learning Mode: control-plane
```

```
  Active Vlans: 100,200,300,400
```

```
  DF Vlans: 100,200,300,400
```

```
  Active VNIs: 5001001-5001002
```

```
  CC failed for VLANs:
```

```
  VLAN CC timer: 0
```

```
  Number of ES members: 2
```

```
  My ordinal: 0
```

```
  DF timer start time: 00:00:00
```

```
  Config State: config-applied
```

```
  DF List: 192.168.1.3 192.168.1.4
```

```
  ES route added to L2RIB: True
```

```
  EAD/ES routes added to L2RIB: True
```

```
  EAD/EVI route timer age: not running
```

```
-----
Leaf1#
```

```
Leaf1# show bgp l2vpn evpn
```

```
BGP routing table information for VRF default, address family L2VPN EVPN
```

```
BGP table version is 189, Local Router ID is 192.168.1.3
```

```
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
```

```
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2
```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 192.168.1.3:27110 (ES [0300.0000.0020.1100.07db 0])					
*>l[4]:[0300.0000.0020.1100.07db]:[32]:[192.168.1.3]/136	192.168.1.3		100	32768	i
*>i[4]:[0300.0000.0020.1100.07db]:[32]:[192.168.1.4]/136	192.168.1.4		100	0	i
Route Distinguisher: 192.168.1.3:32867 (L2VNI 5001002)					
*>l[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	32768	i
* i	192.168.1.4		100	0	i
*>i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
*>i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
* i	192.168.1.51		100	0	i
*>l[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216	192.168.1.3		100	32768	i
* i	192.168.1.4		100	0	i
*>i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216	192.168.1.51		100	0	i
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272	192.168.1.51		100	0	i
*>i	192.168.1.51		100	0	i



```

*>l[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272
      192.168.1.3          100      32768 i
* i      192.168.1.4          100      0 i

Route Distinguisher: 192.168.1.3:32967 (L2VNI 5001001)
*>l[1]:[0300.0000.0020.1100.07db]:[0x0]/152
      192.168.1.3          100      32768 i
* i      192.168.1.4          100      0 i
*>i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
      192.168.1.51        100      0 i
*>i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
      192.168.1.51        100      0 i

Route Distinguisher: 192.168.1.3:65534 (L2VNI 0)
*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152
      192.168.1.4          100      0 i

Route Distinguisher: 192.168.1.4:19536
* i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152
      192.168.1.4          100      0 i
*>i      192.168.1.4          100      0 i

Route Distinguisher: 192.168.1.4:27110
* i[4]:[0300.0000.0020.1100.07db]:[32]:[192.168.1.4]/136
      192.168.1.4          100      0 i
*>i      192.168.1.4          100      0 i

Route Distinguisher: 192.168.1.4:32867
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152
      192.168.1.4          100      0 i
*>i      192.168.1.4          100      0 i
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216
      192.168.1.4          100      0 i
*>i      192.168.1.4          100      0 i
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272
      192.168.1.4          100      0 i
*>i      192.168.1.4          100      0 i

Route Distinguisher: 192.168.1.4:32967
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152
      192.168.1.4          100      0 i
*>i      192.168.1.4          100      0 i

Route Distinguisher: 192.168.1.7:3
* i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
      192.168.1.51        100      0 i
*>i      192.168.1.51        100      0 i

Route Distinguisher: 192.168.1.7:32867
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216
      192.168.1.51        100      0 i
*>i      192.168.1.51        100      0 i
* i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
      192.168.1.51        100      0 i
*>i      192.168.1.51        100      0 i
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272
      192.168.1.51        100      0 i
*>i      192.168.1.51        100      0 i

Route Distinguisher: 192.168.1.7:32967
* i[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216
      192.168.1.51        100      0 i

```

```
*>i 192.168.1.51 100 0 i
```

```
Route Distinguisher: 192.168.1.8:3
```

```
* i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216  
192.168.1.51 100 0 i
```

```
*>i 192.168.1.51 100 0 i
```

```
Route Distinguisher: 192.168.1.8:32867
```

```
* i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216  
192.168.1.51 100 0 i
```

```
*>i 192.168.1.51 100 0 i
```

```
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216  
192.168.1.51 100 0 i
```

```
*>i 192.168.1.51 100 0 i
```

```
* i[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272  
192.168.1.51 100 0 i
```

```
*>i 192.168.1.51 100 0 i
```

```
Route Distinguisher: 192.168.1.8:32967
```

```
* i[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216  
192.168.1.51 100 0 i
```

```
*>i 192.168.1.51 100 0 i
```

```
Route Distinguisher: 192.168.1.3:19536 (EAD-ES [0300.0000.0020.1100.07db 19536])
```

```
*>l[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152  
192.168.1.3 100 32768 i
```

```
Leaf1#
```

```
leaf3# show port-ch summary
```

```
Flags: D - Down P - Up in port-channel (members)  
I - Individual H - Hot-standby (LACP only)  
s - Suspended r - Module-removed  
b - BFD Session Wait  
S - Switched R - Routed  
U - Up (port-channel)  
p - Up in delay-lacp mode (member)  
M - Not in use. Min-links not met
```

```
-----  
Group Port-      Type      Protocol  Member Ports  
Channel  
-----  
10   Po10(SU)  Eth       NONE      --  
30   Po30(SU)  Eth       LACP      Eth1/5(P)
```

```
Leaf3#
```

```
Leaf3# show vpc
```

```
Legend:
```

```
(*) - local vPC is down, forwarding via vPC peer-link
```

```
vPC domain id          : 100  
Peer status            : peer adjacency formed ok  
vPC keep-alive status  : peer is alive  
Configuration consistency status : success  
Per-vlan consistency status : success  
Type-2 consistency status : success  
vPC role               : secondary  
Number of vPCs configured : 1  
Peer Gateway           : Enabled  
Dual-active excluded VLANs : -  
Graceful Consistency Check : Enabled  
Auto-recovery status   : Disabled  
Delay-restore status   : Timer is off.(timeout = 30s)
```

Delay-restore SVI status : Timer is off.(timeout = 10s)  
Operational Layer3 Peer-router : Disabled  
Virtual-peerlink mode : Enabled

vPC Peer-link status

id	Port	Status	Active vlans
1	Po10	up	100,200

vPC status

Id	Port	Status	Consistency Reason	Active vlans
30	Po30	up	success success	100,200

Please check "show vpc consistency-parameters vpc

" for the

consistency reason of down vpc and for type-2 consistency reasons for

any vpc.

Leaf3# show bgp l2vpn evpn

BGP routing table information for VRF default, address family L2VPN EVPN

BGP table version is 66, Local Router ID is 192.168.1.7

Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best

Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected

Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 -best2

Network	Next Hop	Metric	LocPrf	Weight	Path
---------	----------	--------	--------	--------	------

Route Distinguisher: 192.168.1.3:19536

\*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152

	192.168.1.3		100	0	i
--	-------------	--	-----	---	---

* i	192.168.1.3		100	0	i
-----	-------------	--	-----	---	---

Route Distinguisher: 192.168.1.3:32867

\*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152

	192.168.1.3		100	0	i
--	-------------	--	-----	---	---

* i	192.168.1.3		100	0	i
-----	-------------	--	-----	---	---

\*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216

	192.168.1.3		100	0	i
--	-------------	--	-----	---	---

* i	192.168.1.3		100	0	i
-----	-------------	--	-----	---	---

\*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272

192.168.1.3 100 0 i

\* i 192.168.1.3 100 0 i

Route Distinguisher: 192.168.1.3:32967

\*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152

192.168.1.3 100 0 i

\* i 192.168.1.3 100 0 i

Route Distinguisher: 192.168.1.4:19536

\* i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152

192.168.1.4 100 0 i

\*>i 192.168.1.4 100 0 i

Route Distinguisher: 192.168.1.4:32867

\* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152

```
192.168.1.4 100 0 i
*>i 192.168.1.4 100 0 i
```

```
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216
```

```
192.168.1.4 100 0 i
*>i 192.168.1.4 100 0 i
```

```
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272
```

```
192.168.1.4 100 0 i
*>i 192.168.1.4 100 0 i
```

Route Distinguisher: 192.168.1.4:32967

```
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152
```

```
192.168.1.4 100 0 i
*>i 192.168.1.4 100 0 i
```

Route Distinguisher: 192.168.1.7:32867 (L2VNI 5001002)

```
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152
```

	192.168.1.3	100	0 i
* i	192.168.1.4	100	0 i
*>l[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216			
	192.168.1.51	100	32768 i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216			
	192.168.1.3	100	0 i
* i	192.168.1.4	100	0 i
*>l[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216			
	192.168.1.51	100	32768 i
*>l[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272			
	192.168.1.51	100	32768 i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272			
	192.168.1.3	100	0 i
* i	192.168.1.4	100	0 i

Route Distinguisher: 192.168.1.7:32967 (L2VNI 5001001)

\*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152

192.168.1.3 100 0 i

\*|i 192.168.1.4 100 0 i

\*>l[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216

192.168.1.51 100 32768 i

Route Distinguisher: 192.168.1.7:65534 (L2VNI 0)

\*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152

192.168.1.3 100 0 i

\*|i 192.168.1.4 100 0 i

Route Distinguisher: 192.168.1.7:3 (L3VNI 500001)

\*>l[2]:[0]:[0]:[48]:[8c94.1f5f.f787]:[0]:[0.0.0.0]/216

192.168.1.51 100 32768 i

\*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.10]/272



```

192.168.1.3          100          0 i
*|i                 192.168.1.4      100          0 i

```

Leaf4#

Leaf4# show vpc

Legend:

(\*) - local vPC is down, forwarding via vPC peer-link

```

vPC domain id          : 100
Peer status            : peer adjacency formed ok
vPC keep-alive status  : peer is alive
Configuration consistency status : success
Per-vlan consistency status : success
Type-2 consistency status : success
vPC role               : primary
Number of vPCs configured : 1
Peer Gateway           : Enabled
Dual-active excluded VLANs : -
Graceful Consistency Check : Enabled
Auto-recovery status   : Disabled
Delay-restore status   : Timer is off.(timeout = 30s)
Delay-restore SVI status : Timer is off.(timeout = 10s)
Operational Layer3 Peer-router : Disabled
Virtual-peerlink mode  : Enabled

```

vPC Peer-link status

```

-----
id   Port   Status Active vlans
--   -
1    Po10   up     100,200

```

vPC status

```

-----
Id   Port           Status Consistency Reason           Active vlans
--   -
30   Po30           up     success      success           100,200

```

Please check "show vpc consistency-parameters vpc <vpc-num>" for the consistency reason of down vpc and for type-2 consistency reasons for any vpc.

Leaf4#

Leaf4# show port-channel summary

```

Flags: D - Down          P - Up in port-channel (members)
       I - Individual    H - Hot-standby (LACP only)

```

s - Suspended    r - Module-removed  
 b - BFD Session Wait  
 S - Switched    R - Routed  
 U - Up (port-channel)  
 p - Up in delay-lacp mode (member)  
 M - Not in use. Min-links not met

```

-----
Group Port-      Type      Protocol  Member Ports
  Channel
-----
  
```

```

10   Po10(SU)    Eth       NONE      --
30   Po30(SU)    Eth       LACP      Eth1/5(P)
  
```

Leaf4#

Leaf4#

Leaf4# show bgp l2v evpn

BGP routing table information for VRF default, address family L2VPN EVPN

BGP table version is 101, Local Router ID is 192.168.1.8

Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best

Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected

Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 192.168.1.3:19536					
*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.3:32867					
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.3:32967					
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.3		100	0	i
* i	192.168.1.3		100	0	i
Route Distinguisher: 192.168.1.4:19536					
* i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152	192.168.1.4		100	0	i
*>i	192.168.1.4		100	0	i
Route Distinguisher: 192.168.1.4:32867					
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.4		100	0	i
*>i	192.168.1.4		100	0	i
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216	192.168.1.4		100	0	i
*>i	192.168.1.4		100	0	i
* i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272	192.168.1.4		100	0	i
*>i	192.168.1.4		100	0	i
Route Distinguisher: 192.168.1.4:32967					
* i[1]:[0300.0000.0020.1100.07db]:[0x0]/152	192.168.1.4		100	0	i

```

*>i                192.168.1.4                100                0 i

Route Distinguisher: 192.168.1.8:32867      (L2VNI 5001002)
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152
                192.168.1.3                100                0 i
*|i                192.168.1.4                100                0 i
*>l[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
                192.168.1.51                100                32768 i
*>l[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[0]:[0.0.0.0]/216
                192.168.1.51                100                32768 i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[0]:[0.0.0.0]/216
                192.168.1.3                100                0 i
*|i                192.168.1.4                100                0 i
*>l[2]:[0]:[0]:[48]:[005d.73bb.10fc]:[32]:[172.20.1.101]/272
                192.168.1.51                100                32768 i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272
                192.168.1.3                100                0 i
*|i                192.168.1.4                100                0 i

Route Distinguisher: 192.168.1.8:32967      (L2VNI 5001001)
*>i[1]:[0300.0000.0020.1100.07db]:[0x0]/152
                192.168.1.3                100                0 i
*|i                192.168.1.4                100                0 i
*>l[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
                192.168.1.51                100                32768 i

Route Distinguisher: 192.168.1.8:65534      (L2VNI 0)
*>i[1]:[0300.0000.0020.1100.07db]:[0xffffffff]/152
                192.168.1.3                100                0 i
*|i                192.168.1.4                100                0 i

Route Distinguisher: 192.168.1.8:3          (L3VNI 500001)
*>l[2]:[0]:[0]:[48]:[003a.9c07.9b07]:[0]:[0.0.0.0]/216
                192.168.1.51                100                32768 i
*>i[2]:[0]:[0]:[48]:[6cb2.aefa.2b01]:[32]:[172.20.1.100]/272
                192.168.1.3                100                0 i
*|i                192.168.1.4                100                0 i

```

## Informationen zu dieser Übersetzung

Cisco hat dieses Dokument maschinell übersetzen und von einem menschlichen Übersetzer editieren und korrigieren lassen, um unseren Benutzern auf der ganzen Welt Support-Inhalte in ihrer eigenen Sprache zu bieten. Bitte beachten Sie, dass selbst die beste maschinelle Übersetzung nicht so genau ist wie eine von einem professionellen Übersetzer angefertigte. Cisco Systems, Inc. übernimmt keine Haftung für die Richtigkeit dieser Übersetzungen und empfiehlt, immer das englische Originaldokument (siehe bereitgestellter Link) heranzuziehen.