



Installation, Maintenance, and Upgrade

- [Power the Unit via the AC Power Supply, on page 1](#)
- [Power the Unit via DC Power Cable, on page 1](#)
- [Power the Unit via DC Terminal Block Adapter, on page 2](#)
- [Connect to the Network, on page 4](#)

Power the Unit via the AC Power Supply

Safety Warnings

Take note of the following warnings:



Warning Ensure the unit's power source(s) have been turned OFF before servicing.

To power the unit:

Step 1 Connect the AC plug to the AC appliance coupler.

Step 2 Plug the power cord into a suitable power outlet.

Step 3 Secure the power cord through the retainer clip.

Warning The AC plug must be connected to a properly grounded AC outlet.

Power the Unit via DC Power Cable

Safety Warnings

Take note of the following warning:



Warning Each input should be protected by a 1.5 to 2.0 A externally-mounted fast-acting fuse or equivalent. There should be one fuse per power feed. Disconnect all power sources before servicing. Removing fuses can be used as a disconnect method. Fuses must be installed on the live wire(s) and not on the grounded wire(s).

To power the unit via the DC power cable:


Before you begin

- Make sure that the chassis ground is connected on the chassis before you begin installing the DC power supply. See [Ground the Chassis](#) for the procedure.

Step 1 Establish the proper connections between the cable end and the power sources.

Step 2 Connect the DC connector to the back of the Module.

Figure 1: Connect the DC Connector

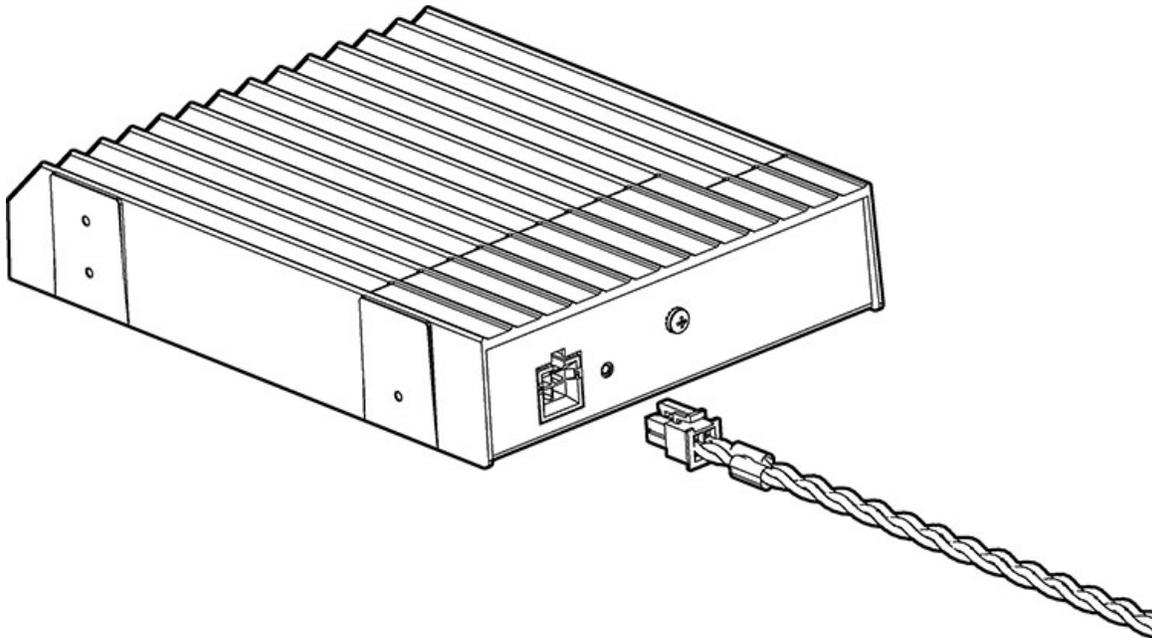

Power the Unit via DC Terminal Block Adapter

Safety Warnings

Take note of the following warning:



Warning Each input should be protected by a 1.5 to 2.0 A externally-mounted fast-acting fuse or equivalent. There should be one fuse per power feed. Disconnect all power sources before servicing. Removing fuses can be used as a disconnect method. Fuses must be installed on the live wire(s) and not on the grounded wire(s).


To power the unit via the terminal block adapter:

Before you begin

- Make sure that the chassis ground is connected on the chassis before you begin installing the DC power supply. See [Ground the Chassis](#) for the procedure.

Step 1 Fasten the Terminal Block Adapter to the back of the Module.

Figure 2: Fasten the Terminal Block Adapter

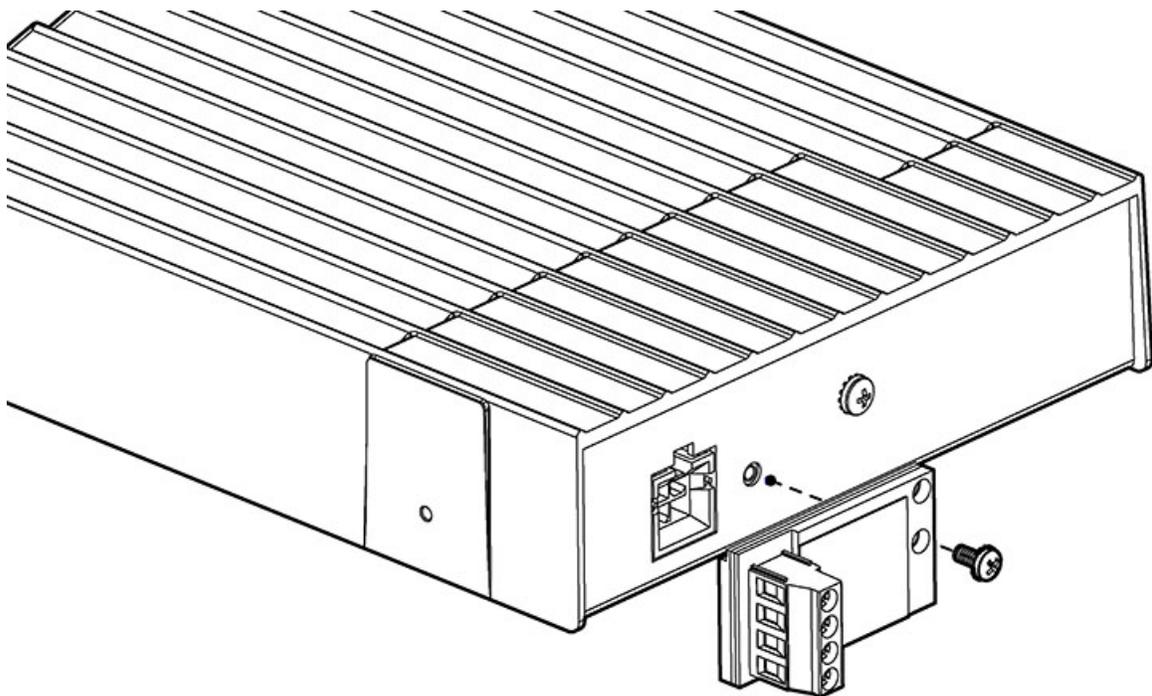

Step 2 Establish the proper connections between the wires and the power sources.

Step 3 Connect wires to the terminal block connector of the adapter.

Note Applicable wire range: 0.34 to 4 mm² (22 to 12AWG)

Connect to the Network

Establish the Ethernet connections to the unit by plugging the appropriate media types to the proper ports of the unit (see [Front Panel](#)).



Note For more information, refer to the User Material.



Warning The intra-building ports of the equipment or subassembly is suitable for connection to intra-building or unexposed wiring or cabling only. The intra-building ports of the equipment **MUST NOT** be metalically connected to interfaces that connect to the OSP or its wiring.
