

# **Routing Policy Language Commands**

This module describes the Cisco IOS XR software routing policy language (RPL) commands used to create, modify, monitor, and maintain routing policies.

For detailed information about RPL concepts, configuration tasks, and examples, see the *Implementing Routing Policy on* Cisco ASR 9000 Series Router module in the *Routing Configuration Guide for Cisco ASR 9000 Series Routers*.

- abort (RPL), on page 5
- add, on page 7
- apply, on page 9
- as-path in, on page 11
- as-path is-local, on page 13
- as-path length, on page 14
- as-path neighbor-is, on page 16
- as-path originates-from, on page 19
- as-path passes-through, on page 21
- as-set, on page 23
- as-path-set, on page 25
- as-path unique-length, on page 27
- community is-empty, on page 29
- community matches-any, on page 30
- community matches-every, on page 32
- community matches-within, on page 34
- community-set, on page 36
- delete community, on page 39
- delete large-community, on page 41
- delete extcommunity rt, on page 43
- destination in, on page 45
- done, on page 47
- drop, on page 49
- edit, on page 51
- end-global, on page 54
- end-policy, on page 55
- end-set, on page 56
- event prefix route-policy pass, on page 58

- extcommunity rt is-empty, on page 59
- extcommunity rt matches-any, on page 60
- extcommunity rt matches-every, on page 62
- extcommunity rt matches-within, on page 64
- extcommunity-set bandwidth, on page 66
- extcommunity-set cost, on page 67
- extcommunity-set opaque, on page 69
- extcommunity-set rt, on page 70
- extcommunity-set seg-nh, on page 72
- extcommunity-set soo, on page 73
- extcommunity soo is-empty, on page 75
- extcommunity soo matches-any, on page 76
- extcommunity soo matches-every, on page 78
- globalVarN is, on page 80
- if, on page 82
- if route-aggregated, on page 88
- is-best-path, on page 89
- is-backup-path, on page 90
- is-multi-path, on page 91
- local-preference, on page 92
- large-community is-empty, on page 93
- large-community matches-any, on page 95
- large-community matches-every, on page 97
- large-community matches-within, on page 99
- large-community-set, on page 101
- med, on page 102
- next-hop in, on page 103
- orf prefix in, on page 105
- origin is, on page 107
- ospf-area, on page 109
- ospf-area-set, on page 111
- pass, on page 113
- path-type is, on page 115
- policy-global, on page 116
- prefix-set, on page 118
- prepend as-path, on page 120
- protocol, on page 122
- rd in, on page 124
- rd-set, on page 125
- replace as-path, on page 127
- remove as-path private-as, on page 129
- rib-has-route, on page 130
- route-has-label, on page 131
- route-policy (RPL), on page 132
- route-type is, on page 134
- rpl editor, on page 136

- rpl maximum, on page 138
- rpl set-exit-as-abort, on page 140
- set administrative-distance, on page 141
- set aigp-metric, on page 142
- set community, on page 143
- set core-tree, on page 145
- set dampening, on page 146
- set fallback-vrf-lookup, on page 148
- set eigrp-metric, on page 149
- set extcommunity color, on page 151
- set extcommunity cost, on page 152
- set extcommunity rt, on page 154
- set ip-precedence, on page 156
- set isis-metric, on page 158
- set label, on page 159
- set label-mode, on page 160
- set large-community, on page 162
- set level, on page 164
- set local-preference, on page 165
- set med, on page 166
- set metric-type (IS-IS), on page 168
- set metric-type (OSPF), on page 169
- set next-hop, on page 170
- set origin, on page 172
- set ospf-metric, on page 173
- set path-selection, on page 174
- set qos-group (RPL), on page 176
- set rib-metric, on page 177
- set rip-metric, on page 178
- set rip-tag, on page 179
- set rpf-topology, on page 180
- set rtset route-limit, on page 182
- set spf-priority, on page 183
- set tag, on page 184
- set traffic-index, on page 185
- set vpn-distinguisher, on page 187
- set weight, on page 188
- show rpl, on page 190
- show rpl active as-path-set, on page 192
- show rpl active community-set, on page 195
- show rpl active extcommunity-set, on page 198
- show rpl active prefix-set, on page 201
- show rpl active rd-set, on page 204
- show rpl active route-policy, on page 206
- show rpl as-path-set, on page 208
- show rpl as-path-set attachpoints, on page 210

- show rpl as-path-set references, on page 213
- show rpl community-set, on page 215
- show rpl community-set attachpoints, on page 217
- show rpl community-set references, on page 219
- show rpl extcommunity-set, on page 222
- show rpl inactive as-path-set, on page 225
- show rpl inactive community-set, on page 228
- show rpl inactive extcommunity-set, on page 231
- show rpl inactive prefix-set, on page 234
- show rpl inactive rd-set, on page 237
- show rpl inactive route-policy, on page 239
- show rpl maximum, on page 242
- show rpl policy-global references, on page 244
- show rpl prefix-set, on page 246
- show rpl prefix-set attachpoints, on page 248
- show rpl prefix-set references, on page 251
- show rpl rd-set, on page 253
- show rpl rd-set attachpoints, on page 255
- show rpl rd-set references, on page 257
- show rpl route-policy, on page 259
- show rpl route-policy attachpoints, on page 262
- show rpl route-policy inline, on page 265
- show rpl route-policy references, on page 267
- show rpl route-policy uses, on page 270
- show rpl unused as-path-set, on page 273
- show rpl unused community-set, on page 276
- show rpl unused extcommunity-set, on page 279
- show rpl unused prefix-set, on page 281
- show rpl unused rd-set, on page 284
- show rpl unused route-policy, on page 286
- source in, on page 289
- source rt, on page 291
- suppress-route, on page 292
- tag, on page 293
- tag in, on page 294
- tag-set, on page 296
- unsuppress-route, on page 297
- var globalVarN, on page 299
- vpn-distinguisher is, on page 300

# abort (RPL)

To discard a route policy or set definition and return to global configuration mode, use the **abort** command in the appropriate configuration mode.

#### abort

Syntax Description	This command has no keywords or arguments.		
	This command has no arguments or keywords.		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
	Prefix set configuration		
	Route distinguisher set configuration		
	AS path set configuration		
	Community set configuration		
	Extended community set configuration		
Command History	 Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	The following example shows how to discard a route policy definition that was started and return to global configuration mode:		
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# if as-path is-local then RP/0/RSP0/CPU0:router(config-rpl-if)# abort RP/0/RSP0/CPU0:router(config)#</pre>		

The following example shows how to discard a prefix set definition that was started and return to global configuration mode:

```
RP/0/RSP0/CPU0:router(config)# prefix-set legal-ipv4-prefix-examples
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.1.1,
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.2.0/24,
RP/0/RSP0/CPU0:router(config-pfx)# abort
RP/0/RSP0/CPU0:router(config)#
```

# add

To add a value to an Routing Information Protocol (RIP) or Enhanced Interior Gateway Protocol (EIGRP) existing metric, use the **add** command in route-policy configuration mode.

**add** {**eigrp-metric** *bandwidth delay reliability loading max-transmission* | **rip-metric** {*numberparameter*}}

Syntax Description	eigrp-metric	Specifies an EIGRP metric attribute.			
	bandwidth	Bandwidth in kilobits per second. Range is from 0 to 42949672	295.		
	delay	Delay in 10-microsecond units. Range is from 0 to 429496729.	5.		
	reliability	Reliability metric. 255 is 100-percent reliable. Range is from 0	to 255.		
	loading	Effective bandwidth (loading). 255 is 100-percent loaded. Range	ge is from 0 to 255.		
	max-transmiss	n Maximum transmission of the path. Range is from 0 to 65535.			
	rip-metric	rip-metric         Specifies an RIP metric attribute.			
	number	Value assigned to a four-bit unsigned integer. Range is from 0	to 16.		
	parameter	Parameter name. The parameter name must be preceded with a			
Command Default	No default bel	vior or values			
Command Modes	Route-policy	ifiguration			
Command History	Release	Nodification			
	Release 3.7.2	'his command was introduced.			
Usage Guidelines		nand, you must be in a user group associated with a task group tha roup assignment is preventing you from using a command, contac			
		s greater than the maximum allowed value, the metric is added. If the r the routing protocol, then the route is dropped (by the client rou	-		
Task ID	Task ID	erations			
	route-policy 1	d, ite			
Examples	The following	cample shows how to offset the RIP metric value:			
	RP/0/RSP0/	<pre>U0:router(config)# route-policy policy_1</pre>			

```
RP/0/RSP0/CPU0:router(config-rpl)# add rip-metric 4
RP/0/RSP0/CPU0:router(config-rpl)# end-policy
```

The following example shows how to set the EIGRP metric value:

```
RP/0/RSP0/CPU0:router(config) # route-policy policy_1
RP/0/RSP0/CPU0:router(config-rpl) # add eigrp-metric 50000 24000 230 14000
RP/0/RSP0/CPU0:router(config-rpl) # end-policy
```

# apply

To execute a parameterized or unparameterized policy from within another policy, use the **apply** command in route-policy configuration mode.

	<b>apply</b> <i>policy_name</i> [argument1, argument2,, argumentN]				
Syntax Description	policy_name Name of a route policy.				
	<i>argument</i> (Optional) Parameter name. The <i>argument</i> can be a value (for example, '100') or a parameter (for example, '\$parameter')				
Command Default	No default behavior or values				
Command Modes	Route-policy configuration				
Command History	Release Modification				
	Release 3.7.2 This command was introduced.				
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.				
	Use the <b>apply</b> command to execute a policy (either parameterized or unparameterized) from within another policy, which allows for the reuse of common blocks of policy.				
Task ID	Task ID Operations				
	route-policy read, write				
Examples	In the following example, the policy CustomerIn applies the route-policy SetLocalPref to conditionally set the local preference on a route. The parameters 20, 30, 40, and 50 are passed to the parameterized policy SetLocalPref, where the local preference is set to:				
	• 20, if the community 217:20 is present in the route				
	<ul> <li>30, if the community 217:30 is present in the route</li> <li>40, if the community 217:40 is present in the route</li> </ul>				
	<ul> <li>50, if the community 217:50 is present in the route</li> </ul>				
	RP/0/RSP0/CPU0:router(config)# route-policy SetLocalPref (\$1p0, \$1p1, \$1p2, \$1p3, \$1p4) RP/0/RSP0/CPU0:router(config-rp1)# if community matches-any (\$1p0:\$1p1)then RP/0/RSP0/CPU0:router(config-rp1-elseif)# set local-preference \$1p1				
	<pre>RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif community matches-any (\$lp0:\$lp2) then RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference \$lp2 RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif community matches-any (\$lp0:\$lp3) then</pre>				
	RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference \$1p3				

RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif community matches-any (\$1p0:\$1p4) then

RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference \$lp4
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl)# end-policy

RP/0/RSP0/CPU0:router(config) # route-policy CustomerIn(\$cust)
RP/0/RSP0/CPU0:router(config-rpl) # apply SetLocalPref (\$cust, 20, 30, 40, 50)
RP/0/RSP0/CPU0:router(config-rpl) # end-policy

RP/0/RSP0/CPU0:router(config)# route-policy Cust\_217 RP/0/RSP0/CPU0:router(config-rpl)# apply CustomerIn(217) RP/0/RSP0/CPU0:router(config-rpl)# end-policy

# as-path in

To match the AS path of a route to an AS path set, use the **as-path in** command in route-policy configuration mode.

	<b>as-path in</b> {as-path-set-nameinline-as-path-setparameter}
Syntax Description	as-path-set-name Name of an AS path set.
	<i>inline-as-path-set</i> Inline AS path set. The inline AS path set must be enclosed in parentheses.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	<ul> <li>To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.</li> <li>Use the <b>as-path in</b> command as a conditional expression within an <b>if</b> statement to match the AS path of a route to an AS path set. The AS path is a sequence of autonomous system numbers traversed by a route.</li> </ul>
-	Note For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
	The <b>as-path in</b> command evaluates to true if at least one of the regular expressions defined in the associated AS path set matches the AS path attribute of the route. In the case where the AS path set is defined but contains no elements in it, the <b>as-path in</b> conditional expression command returns false.
Task ID	Task ID Operations
	route-policy read, write
Examples	For example, assume we have an AS path set named my-as-set defined as follows:
	<pre>RP/0/RSP0/CPU0:router(config)# as-path-set my-as-set RP/0/RSP0/CPU0:router(config-as)# ios-regex '_12\$', RP/0/RSP0/CPU0:router(config-as)# ios-regex '_13\$'</pre>

RP/0/RSP0/CPU0:router(config-as)# end-set

and the following policy excerpt using an *as-path-set-name* argument:

```
RP/0/RSP0/CPU0:router(config-rpl)# if as-path in my-as-set then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

The AS path in condition evaluates to true if one or more of the regular expression matches in the set my-as-set match the AS path associated with the route. In the case of a defined but empty AS path set, this operator returns false.

The preceding policy excerpt is equivalent to the following version, which uses an *inline-as-path* set variable:

```
RP/0/RSP0/CPU0:router(config-rpl)# if as-path in (ios-regex `_12$,ios-regex `_13$') then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

### as-path is-local

To determine if this router or another router within this autonomous system or confederation originated a Border Gateway Protocol (BGP) route, use the **as-path is-local** command in route-policy configuration mode.

#### as-path is-local

- Syntax Description This command has no arguments or keywords.
- **Command Default** No default behavior or values

Command Modes Route-policy configuration

 Command History
 Release
 Modification

 Release 3.7.2
 This command was introduced.


Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **as-path is-local** command as a conditional expression within an **if** statement to determine if this router (or another router within this autonomous system or confederation) originated the route.

Note For a list of all conditional expressions available within an **if** statement, see the **if** command.

Routes that are locally originated within the autonomous system or confederation carry an empty AS path. For the Border Gateway Protocol (BGP) specification, when a route is advertised across the autonomous system boundary or a confederation boundary, the local autonomous system number or confederation ID is appended to the autonomous system path. The AS path of a locally originated aggregate is also empty unless it has been modified by policy.

The **is-local** operator evaluates to true for autonomous system paths that are empty. An empty AS path is how an AS path that is local to our autonomous system is represented in BGP.



#### **Examples**

In the following example, if the AS path is local, then the local preference is set to 100:

```
RP/0/RSP0/CPU0:router(config-rpl)# if as-path is-local then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

# as-path length

To compare the number of ASN in the AS path of a Border Gateway Protocol (BGP) route, use the as-path **length** command in route-policy configuration mode.

**as-path length** {**eq** | **is** | **ge** | **le**} {*numberparameter*}

Syntax Description	ion $eq \mid is \mid ge \mid le$ Equal to; greater than or equal to; less than or equal to.		
	<i>number</i> Value assigned to an 11-bit unsigned integer. Range is from 0 to 2047.		
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>as-path length</b> command as a conditional expression within an <b>if</b> statement to perform a conditional check based on the length of the AS path.		
	Note For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.		
	Note For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.		
	This command takes either a specific integer value or a range of integer values specified with the <b>ge</b> and <b>le</b> operators. Any or all these integers can be parameterized. The operator counts one for each autonomous system in the path. In the case where the route may be aggregated and contain one or more AS sets, the length operator adds one for each set present, the occurrence of an AS set typically indicates that this route is an aggregated route, and the aggregated route had a component route that contained one of the autonomous systems in the set. Likewise, in the case of confederations, a count of one is added for each confederation in the path or each confederation set in the path. A null AS path has a length of zero.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	In the following example, if the AS path length equals 10, then the local preference is set to 100:		
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# if as-path length eq 10 then</pre>		

**Routing Policy Language Commands** 

RP/0/RSP0/CPU0:router(config-rpl-if) # set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if) # endif
RP/0/RSP0/CPU0:router(config-rpl) #

#### **Related Commands**

Command	Description
as-path in, on page 11	Matches the AS path of a route to an AS path set.
as-path originates-from, on page 19	Compares an AS path against the AS sequence beginning with the AS number that originated a route
as-path passes-through, on page 21	Verifies if the supplied integer or parameter appears anywhere in the AS path or if the supplied sequence of integers and parameters appears, in the same order, anywhere in the AS path.
as-path unique-length, on page 27	Performs specific checks based on the length of the AS path.

# as-path neighbor-is

To test autonomous system numbers at the head of the AS path against a sequence of one or more values or parameters, use the **as-path neighbor-is** command in route-policy configuration mode.

as-path neighbor-is as-number-list [exact]

Syntax Description		Numbers or parameters, enclosed in single quotation marks, that represent a sequence of autonomous system numbers.	
		• Range for 2-byte Autonomous system numbers (ASNs) is 1 to 65535.	
		• Range for 4-byte Autonomous system numbers (ASNs) in asplain format is 1 to 4294967295.	
		• Range for 4-byte Autonomous system numbers (ASNs) is asdot format is 1.0 to 65535.65535.	
	1	(Optional) Specifies that with the <b>exact</b> keyword, the <i>as-number-list</i> value must identically match the AS path for the route; without the <b>exact</b> keyword, any element in the <i>as-number-list</i> argument matches one or more occurrences of that element in the AS path for the route.	
Command Default	No default behav	vior or values	
Command Modes	Route-policy con	nfiguration	
Command History	Release N	Modification	
	Release 3.7.2 T	This command was introduced.	
	Release 3.9.0 A	Asplain format for 4-byte Autonomous system numbers notation was supported.	
Usage Guidelines		nand, you must be in a user group associated with a task group that includes appropriate task group assignment is preventing you from using a command, contact your AAA administrator	
	Use the <b>as-path neighbor-is</b> command as a conditional expression within an <b>if</b> statement to test the autonomous system number or numbers at the head of the AS path against a sequence of one or more integral values or parameters. In other words, to test to learn if the sequence of autonomous system numbers matches the path beginning with the neighboring autonomous system from which this route was heard.		
-	Note For a list of	f all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.	

For a list of all conditional expressions available within an **if** statement, see the **if** command.

This command has an equivalent regular expression (ios-regex). For example, AS path neighbor-is '1' would be ' $^1_'$ .

Task ID	Task ID	Operations				
	route-policy read, write					
Examples	The following	ng are incomplete configu	ration examples:			
	RP/0/RSP	0/CPU0:router(config-	rpl)# if as-path neighbor-is '10' then rpl-if)# if as-path neighbor-is '\$asnum' then rpl-if)# if as-path neighbor-is '10 20' then			
	These statements evaluate to true when the first autonomous system numbers on the AS path match, in the same order, the supplied parameters or integer values in the <b>neighbor-is</b> statement. If the neighboring autonomous system location happens to be an AS-set, the operator evaluates to true if the corresponding argument to the <b>neighbor-is</b> operator is an element of the AS-set.					
	Without the example,	exact keyword, repeated	autonomous system numbers in the AS path are ignored. For			
	RP/0/RSP0/CPU0:router(config-rpl)# if as-path neighbor-is '10 20' then					
	matches an AS path beginning					
	10 10 10 20					
	and an AS path beginning:					
	10 20					
	With the <b>exact</b> keyword, repetitions are not ignored, therefore					
	RP/0/RSP0/CPU0:router(config-rpl)# if as-path neighbor-is '10 20' exact then					
	matches the	second of these AS paths	but not the first.			
Related Commands	Command		Description			
	as-path in,	on page 11	Matches the AS path of a route to an AS path set.			
	as-path leng	gth, on page 14	Compares the number of ASN in the AS path of a route.			
	as-path orig	ginates-from, on page 19	Compares an AS path to the AS sequence beginning with the AS number that originated a route.			
	as-path pas	ses-through, on page 21	Verifies if the supplied integer or parameter appears anywhere in the AS path or if the supplied sequence of integers and parameters appears, in the same order, anywhere in the AS path.			

Command	Description
as-path unique-length, on page 27	Performs specific checks based on the length of the AS path.

### as-path originates-from

To compare an AS path against the AS sequence beginning with the AS number that originated a route, use the **as-path originates-from** command in route-policy configuration mode.

as-path originates-from as-number-list [exact]

Syntax Description	as-number-l	ist Numbers or parameters, enclosed in single quotation marks, that represent a sequence of autonomous system numbers.		
		• Range for 2-byte Autonomous system numbers (ASNs) is 1 to 65535.		
		• Range for 4-byte Autonomous system numbers (ASNs) in asplain format is 1 to 4294967295.		
		• Range for 4-byte Autonomous system numbers (ASNs) is asdot format is 1.0 to 65535.65535.		
	exact	(Optional) Specifies that with the <b>exact</b> keyword, the <i>as-number-list</i> value must identically match the AS path for the route; without the <b>exact</b> keyword, any element in the <i>as-number-list</i> argument matches one or more occurrences of that element in the AS path for the route.		
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release	Modification		
	Release 3.7.2	2 This command was introduced.		
	Release 3.9.0	Asplain format for 4-byte Autonomous system numbers notation was supported.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
		<b>ath originates-from</b> command as a conditional expression within an <b>if</b> statement to compare the autonomous system sequence.		
-	Note For a lis	t of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.		
	The originat	es-from operator is similar to the neighbor-is operator, except that it looks at the autonomous		

The **originates-from** operator is similar to the **neighbor-is** operator, except that it looks at the autonomous system number at the opposite end of the AS path. In other words, it is comparing to the autonomous system that originated the route. It can take numbers or parameters, enclosed in single quotation marks, that represent a sequence of autonomous system numbers. When more than one number is specified in the list, the sequence of autonomous system numbers listed must appear as a subsequence in the AS path, with the last number corresponding to the autonomous system that originated the route.

Task ID	Task ID	Operations			
	route-policy	read, write			
Examples	The followi	ng are incomplete conf	figuration examples:		
	The followin	ng are meomplete com			
			<pre>.g-rpl) # if as-path originates-from '10 11' then .g-rpl-if) # if as-path originates-from '\$asnum 11' then</pre>		
	The first line of the preceding example evaluates to true if autonomous system 11 originated the route and then advertised it to autonomous system 10, from which the route was eventually propagated to us. In the case where the route has been aggregated, and the location of the originating autonomous system contains an AS-set, the <b>originates-from</b> operator evaluates to true if the argument to the <b>originates-from</b> operator is contained in the AS-set.				
	Without the <b>exact</b> keyword, repeated autonomous system numbers in the AS path are ignored. For example,				
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# if as-path originates-from '10 11' then</pre>				
	matches an autonomous system path ending				
	10 10	10 11			
	and an autonomous system path ending				
	10 11				
	With the exact keyword, repetitions are not ignored, therefore				
	RP/0/RSP	0/CPU0:router(confi	g-rpl)# if as-path originates-from '10 11' exact then		
	matches the second of these autonomous system paths but not the first.				
Related Commands	Command		Description		
	as-path in,	on page 11	Matches the AS path of a route to an AS path set.		
	as-path leng	gth, on page 14	Compares the number of ASN in the AS path of a route		
	as-path pas	ses-through, on page 2	Verifies if the supplied integer or parameter appears anywhere in the AS path or if the supplied sequence of integers and parameters appears, in the same order		
	as-path uni	que-length, on page 27	Performs specific checks based on the length of the AS path.		

### as-path passes-through

To verify if the supplied integer or parameter appears anywhere in the AS path or if the supplied sequence of integers and parameters appears, in the same order, anywhere in the AS path, use the **as-path passes-through** command in route-policy configuration mode.

as-path passes-through as-number-list [exact]

Syntax Description	as-number-list	Numbers or parameters, enclosed in single quotation marks, that represent a sequence of autonomous system numbers.		
		• Range for 2-byte Autonomous system numbers (ASNs) is 1 to 65535.		
		• Range for 4-byte Autonomous system numbers (ASNs) in asplain format is 1 to 4294967295.		
		• Range for 4-byte Autonomous system numbers (ASNs) is asdot format is 1.0 to 65535.65535.		
	exact	(Optional) Specifies that with the <b>exact</b> keyword, the <i>as-number-list</i> value must identically match the AS path for the route; without the <b>exact</b> keyword, any element in the <i>as-number-list</i> argument matches one or more occurrences of that element in the AS path for the route.		
Command Default	No default beh	avior or values		
Command Modes	Route-policy c	Route-policy configuration		
Command History	Release	Modification		
	Release 3.7.2	This command was introduced.		
	Release 3.9.0	Asplain format for 4-byte Autonomous system numbers notation was supported.		
Usage Guidelines		nmand, you must be in a user group associated with a task group that includes appropriate task group assignment is preventing you from using a command, contact your AAA administrator		
	Use the <b>as-path passes-through</b> command as a conditional expression within an <b>if</b> statement to verify if the specified integer or parameter appears anywhere in the AS path or if the sequence of integers and parameters appears.			
	Note For a list	of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.		
	The <b>passes-th</b>	rough operator takes a sequence of integers or parameters enclosed in single quotation marks		

The **passes-through** operator takes a sequence of integers or parameters, enclosed in single quotation marks, as an argument. It can also take a single integer or parameter as an argument. It evaluates to true if the supplied integer or parameter appears anywhere in the AS path, or if the supplied sequence of integers and parameters appears, in the same order, anywhere in the AS path. This includes the **originates-from** or **neighbor-is** location in the AS path.

I

Task ID	Task ID	Operations		
	route-policy	read, write		
		write		
Examples	The followir	ng are incom	plete configura	tion examples:
	RP/0/RSP( RP/0/RSP(	)/CPU0:rout )/CPU0:rout	er(config-rp) er(config-rp)	<pre>L)# if as-path passes-through '10' then L-if)# if as-path passes-through '\$asnum' then L-if)# if as-path passes-through '10 11' then L-if)# if as-path passes-through '10 \$asnum 12' then</pre>
	Without the example:	<b>exact</b> keywo	ord, repeated au	tonomous system numbers in the AS path are ignored. For
	RP/0/RSP(	)/CPU0:rout	er(config-rp]	L)# if as-path passes-through '9 10 11' then
	matches an A	AS path cont	aining	
	9 10 1	LO 10 11	•••	
	and an AS p	ath containin	g:	
	9 10 1	11		
	With the <b>ex</b>	act keyword	l, repetitions are	e not ignored. Therefore:
	RP/0/RSP(	)/CPU0:rout	er(config-rp]	) $\#$ if as-path passes-through '9 10 11' exact then
	matches the	second of the	ese AS paths bu	it not the first.
Related Commands	Command			Description

ls	Command	Description
	as-path in, on page 11	Matches the AS path of a route to an AS path set.
	as-path length, on page 14	Compares the number of ASN in the AS path of a route
	as-path originates-from, on page 19	Compares an AS path to the AS sequence beginning with the AS number that originated a route.
	as-path unique-length, on page 27	Performs specific checks based on the length of the AS path.

#### as-set

To create a named AS set, use the **as-set** command in global configuration mode. To remove the named AS set, use the **no** form of this command. **as-set** accelerates the look-up time.

	Note as-set is faster than as-path	<b>h-set</b> if the only requirement is to check the origin of AS.		
	as-set name			
Syntax Description	name Name of the AS path set.			
Command Default	No default behavior or values			
Command Modes	global configuration			
Command History	Release	Modification		
	Release 7.3.1	This command was introduced.		
Usage Guidelines	elines To use this command, you must be in a user group associated with a task group that includes ap IDs. If the user group assignment is preventing you from using a command, contact your AAA for assistance. Use the <b>as-set</b> command to create a named AS set. This command enters AS set mode, in which you can use any of the below option to specify an operation. This as-set can be u "as-path originates-from", please refer example below.			
	Options	Description		
	<1-4294967295>	32 bit number indicating the autonomous system (AS).		
	<1-65535>	16 bit number indicating the autonomous system (AS).		
Task ID	Task ID Operations			
	route-policy read, write			

The following is a sample definition of an AS set named set1. This AS set is composed of two elements. This **as-set** can be used only with **as-path originates-from** in the route-policy as shown in the example below:

as-set set1 1240, 1.2, 1568, 2345, 2.3, as-set

1297, end-set route-policy sample if as-path originates-from set1 then pass endif end-policy Incoming Route 1: AS-path= 123,457,895,443, 1568 For this route the condition evaluates to 'TRUE' because 1568 is there in as-set "set1" Incoming Route 2: AS-path= 123,457,895,596 AS 596 is not there in as-set "set1", the condition evaluates to FALSE Incoming Route 3: AS-path= 123,457,895,443,100 As 100 is not there in as-set "set1", the condition evaluates to FALSE Incoming Route 4: AS-path= 123,457,895,443,1240 For this route the condition evaluates to 'TRUE' because 1240 is there in as-set "set1"

**Routing Policy Language Commands** 

### as-path-set

To create a named AS path set, use the **as-path-set** command in global configuration mode. To remove the named AS path set, use the **no** form of this command.

**as-set** faster than **as-path-set** if the only requirement is to check the origin of AS. For more information, see as-set, on page 23.

as-path-set name no as-path-set name

Syntax Description	name Name o	of the AS path set.	
Command Default	No default bel	havior or values	
Command Modes	global configuration		
Command History	Release	Modification	
	Release 3.7.2	This command was introduced.	

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the as-path-set command to create a named AS path set.

An AS path set comprises operations for matching an AS path attribute.

This command enters AS path set configuration mode, in which you can use any of the below option to specify an operation.

Options	Description
dfa-regex	Indicates the DFA (deterministic finite automata) style regular expression. It performs better for complex regular expressions. Single quotation marks are required around the regular expression.
ios-regex	Indicates the traditional IOS style regular expression. It performs better with simpler regular expressions. Single quotation marks are required around the regular expression.
length	Indicates the number of ASN (Autonomous System Number) in the AS path of a Border Gateway Protocol (BGP) route.

Note

Options	Description
neighbor-is	Indicates the neighbor's AS-path number that can be matched with.
originates-from	Indicates the BGP AS from which the route originated.
passes-through	Indicates if the supplied integer or parameter appears anywhere in the AS path, or if the supplied sequence of integers and parameters appear, in the same order, anywhere in the AS path.
unique-length	Indicates the length of BGP AS-path, ignoring duplicates.

The above options can also be used as an inline set in a parenthesized list of comma-separated expressions.

#### Task ID Task ID Operations

route-policy read, write

#### **Examples**

The following is a sample definition of an AS path set named aset1. This AS path set is composed of two elements. When used in a matching operation, this AS path set matches any route whose AS path ends with either the autonomous system number 42 or 127.

```
RP/0/RSP0/CPU0:router(config)# as-path-set aset1
RP/0/RSP0/CPU0:router(config-as)# ios-regex '_42$',
RP/0/RSP0/CPU0:router(config-as)# ios-regex '_127$'
RP/0/RSP0/CPU0:router(config-as)# end-set
```

The following is a sample of the as-path options used as an inline set.

```
RP/0/RSP0/CPU0:router(config-rpl)# if as-path in (ios-regex '_42$', ios-regex$ '_127$')
RP/0/RSP0/CPU0:router(config-rpl-if)# pass
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

# as-path unique-length

To perform specific checks based on the length of the AS path (match against the number of unique ASNs in the AS path), use the **as-path unique-length** command in route-policy configuration mode.

	as-path uniqu	$e-length  \{eq \mid is \mid ge \mid le\}$	numberparameter}	
Syntax Description	eq   is   ge	le Equal to; greater than or	equal to; less than or equal to.	
	number	Value assigned to an 11-	bit unsigned integer. Range is from 0 to 2047.	
	parameter	Parameter name. The par	rameter name must be preceded with a "\$."	
Command Default	No default beha	avior or values		
Command Modes	Route-policy co	onfiguration		
Command History	Release	Modification	_	
	Release 3.7.2	This command was introduced	_ · _	
Usage Guidelines	IDs. If the user for assistance.	group assignment is preventin	roup associated with a task group that includes g you from using a command, contact your AA s a conditional expression within an <b>if</b> stateme	A administrator
	-	the length of the AS path.		
_				
	<b>Note</b> For a list of	of all conditional expressions a	vailable within an if statement, see the if co	mmand.
	with the same a padded. Theref	utonomous system number m ore, given an AS path of 333 3	e length operator, except that when an AS path ultiple times, the operator counts only one whe 333 111 222 123 444 444 444, the <b>unique-leng</b> operator would return a value of 8.	en the route is
Task ID	Task ID 0	perations		
	route-policy re w	rite		
Examples	0	example shows show to perfore ecified values, the local prefere	m checks based on the AS path length. If the A ence is set to 100:	AS path
	RP/0/RSP0/C	CPU0:router(config-rpl-if)	f as-path unique-length eq 10 then # if as-path unique-length ge 10 then # if as-path unique-length le 10 then	

RP/0/RSP0/CPU0:router(config-rpl)# if as-path unique-length eq \$integerparam then
RP/0/RSP0/CPU0:router(config-rpl-if)# if as-path unique-length ge \$geparam then
RP/0/RSP0/CPU0:router(config-rpl-if)# if as-path unique-length le \$leparam then

RP/0/RSP0/CPU0:router(config-rpl)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl)# endif

Related Commands	Command	Description	
	as-path length, on page 14	Performs conditional checks based on the length of the AS path.	

### community is-empty

To check if a route has no community attributes associated with it, use the **community is-empty** command in route-policy configuration mode.

#### community is-empty

Syntax Description This command has no arguments or keywords.

**Command Default** No default behavior or values

Command Modes Route-policy configuration

Command History Release Modification

Release 3.7.2 This command was introduced.

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **community is-empty** command as a conditional expression within an **if** statement to check if a route has community attributes associated with it.

Ò

Note For a list of all conditional expressions available within an if statement, see the if command.

This command takes no arguments and evaluates to true only if the route has no community attributes associated with it.

Task ID	Task ID	Operations
	route-policy	read, write

**Examples** 

In the following example, if the route has no community attributes associated with it, then the local preference is set to 100:

RP/0/RSP0/CPU0:router(config-rpl)# if community is-empty then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# endif

### community matches-any

To match any elements of a community set, use the **community matches-any** command in route-policy configuration mode.

**community matches-any** {community-set-nameinline-community-setparameter}

Syntax Description	community-set-name Name of a community set.			
	inline-comm	nunity-set Inline community set. T	The inline community set must be enclosed in parentheses.	
	parameter	Parameter name. The pa	arameter name must be preceded with a "\$."	
Command Default	No default b	ehavior or values		
Command Modes	Route-policy	configuration		
Command History	Release	Modification	-	
	Release 3.7.	2 This command was introduced.	-	
Usage Guidelines		ser group assignment is preventing	oup associated with a task group that includes appropriate tas g you from using a command, contact your AAA administrate	
	Use the een	munity matches any command	as a conditional expression within an <b>if</b> statement to match	

Use the **community matches-any** command as a conditional expression within an **if** statement to match any element of a community set.



Note

For a list of all conditional expressions available within an if statement, see the if command.

A simple condition using the **matches-any** operator evaluates as true if at least one community element of the community attribute for the route matches an element in the community set operand. If no community in the route matches any of the specifications in the named or inline set, then the condition evaluates to false. Likewise, when there is no community at all in the route, the condition evaluates to false.

Matching of a community in the route to a specification in a named or an inline set is intuitive. If the community specification in a set is the familiar colon-separated decimal 16-bit numbers specification, or one of the well-known communities, the community matches the specification if the specification denotes the same 32-bit number as that in the route. If the community specification uses a wildcard, then the community in the route matches if it is one of the many communities denoted by the wildcard specification. In inline sets, community specifications may be parameterized, in which case the relevant matching is done when the value of the parameter has been supplied.

Communities may also be matched using range and regular expression operators. Range specifications are entered as follows: [*low-value*...*high-value*]. Either or both colon-separated halves of a community value may contain a range. The following are valid range specifications:

10:[100..1000]

[10..100]:80 [10..100]:[100..2000]

In addition, the **private-as** keyword may be used to specify the range from 64512 to 65534. Regular expressions are specified as the **ios-regex** keyword followed by a valid regular expression string.

Community values from the route are matched one at a time to the match specifications. Therefore, regex match specifications are expected to represent one individual community value and not a sequence of community values.

Task ID	Task ID	Operations
	route-policy	read, write

#### **Examples**

In the following example, a named community set called my-community-set and a route policy called community-matches-any-example are created. The policy sets the local-preference to 100 for any route that has one or more of the communities in the my-community-set community set. If the route does not have any of these communities, the policy checks whether it has any communities whose first half is in the range from 10 to 25 and whose second half is the value 35, in which case it sets the local-preference to 200. Otherwise, it checks for a community value in the range of 30:100 to 30:500, in which case it sets the local-preference to 300.

```
RP/0/RSP0/CPU0:router(config)# community-set my-community-set
RP/0/RSP0/CPU0:router(config-comm)# 10:20,
RP/0/RSP0/CPU0:router(config-comm)# 10:30,
RP/0/RSP0/CPU0:router(config-comm)# 10:40
RP/0/RSP0/CPU0:router(config-comm)# end-set
RP/0/RSP0/CPU0:router(config-rpl)# if community_matches-any_example
RP/0/RSP0/CPU0:router(config-rpl)# if community matches-any my-community-set then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# elseif community matches-any ([10..25]:35) then
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl)# end-policy
```

Related Commands	Command	Description
	community matches-every, on page 32	Matches every element of a community set.

### community matches-every

To match every element of a community set, use the **community matches-every** command in route-policy configuration mode.

**community matches-every** {*community-set-nameinline-community-setparameter*}

Syntax Description	community-set-name Name of a community set.				
	<i>inline-community-set</i> Inline community set. The inline community set must be enclosed in parentheses.				
	parameterParameter name. The parameter name must be preceded with a "\$."				
Command Default	No default behavior or values				
Command Modes	Route-policy configuration				
Command History	Release	Modification			
	Release 3.7.	2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.				
	Use the community matches-every command as a conditional expression within an if statement to match				

Use the **community matches-every** command as a conditional expression within an **if** statement to match every element of a community set.



```
Note
```

For a list of all conditional expressions available within an **if** statement, see the **if** command.

A simple condition using the **matches-every** operator evaluates as true if every specification in the named set or inline set specified matches at least one community value in the route. If any community specification in the named or inline set is not matched, then the operation evaluates to false.

Matching of a community in the route to a specification in a named or an inline set is intuitive. If the community-specification in a set is the familiar colon-separated decimal 16-bit numbers specification, or one of the well-known communities, the community matches the specification if the specification denotes the same 32-bit number as that in the route. If the community specification uses a wildcard, then the community in the route matches if it is one of the many communities denoted by the wildcard specification. In inline sets, community specifications may be parameterized, in which case the relevant matching is done when the value of the parameter has been supplied.

Communities may also be matched using range and regular expression operators. Range specifications are entered as follows: [*low-value*...*high-value*]. Either or both colon-separated halves of a community value may contain a range. The following are valid range specifications:

```
10:[100..1000]
[10..100]:80
[10..100]:[100..2000]
```

**Routing Policy Language Commands** 

Therefore, a matches-every operation with two community range specifications means that a community must be present in the route that corresponds to each range. For example, in the following statement:

```
if community matches-every (10:[100..200],20:[100..200]) then
```

the statement evaluates as true if one or more communities in the route lie in the range 10:[100.200] and one or more communities in the route lie in the range 20:[100..200].

In addition, the **private-as** keyword may be used to specify the range from 64512 to 65534.

Regular expressions are specified as the **ios-regex** keyword followed by a valid single-quoted regular expression string. Community values from the route are matched one at a time against the match specifications. Therefore, regex match specifications are expected to represent one individual community value and not a sequence of community values.

Task ID	Task ID Operations				
	route-policy read, write				
Examples	In the following example, the route policy named community-matches-every-example sets the local-preference value to 100 for all routes that have all three communities in the my-community-set community set. Routes that do not have all three communities but have a community that matches the first regular expression match have the local-preference value set to 200. Finally, any remaining routes that match the last regular expression have the local-preference values set to 300.				
	<pre>RP/0/RSP0/CPU0:router(config) # community-set my-community-set</pre>				
	<pre>RP/0/RSP0/CPU0:router(config-comm) # 10:20,</pre>				
	<pre>RP/0/RSP0/CPU0:router(config-comm) # 10:30,</pre>				
	RP/0/RSP0/CPU0:router(config-comm) # 10:40				
	RP/0/RSP0/CPU0:router(config-comm)# end-set				
	RP/0/RSP0/CPU0:router(config)# route-policy community-matches-every-example				
	RP/0/RSP0/CPU0:router(config-rpl)# if community matches-every my-community-set the				
	RP/0/RSP0/CPU0:router(config-rpl-if)# <b>set local-preference 100</b>				
	<pre>RP/0/RSP0/CPU0:router(config-rp-elseif)# elseif community matches-every (ios-regex</pre>				
	'_10:[0-9]0_') then				
	RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 200				

```
seif community matches-every (ios-regex
                                             set local-preference 200
 RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif community matches-every
(ios-regex' 20:[0-9]0 ') then
 RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 300
 RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
```

```
RP/0/RSP0/CPU0:router(config-rpl)# end-policy
```

Related Commands	Command	Description
	community matches-any, on page 30	Matches any element of a community set.

# community matches-within

To configure a route policy to match within a community set, use the **community matches-within** command in route-policy configuration mode.

community matches-within { community-set-name or inline-community-set | parameter }

Syntax Description	community	<i>community-set-name</i> Name of a community set.						
	<i>inline-community-set</i> Inline community set. The inline community set must be enclosed in parentheses.							
	parameter	r P	arameter name. The parameter name must be preceded with a "\$."					
Command Default	No default	No default behavior or values						
Command Modes	Route-poli	Route-policy configuration						
Task ID	Task ID	Operations	-					
	route-polic	ey read, write	_					
Command History	Release		Modification					
	Release 6.3.1		This command was introduced.					
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriat IDs. If the user group assignment is preventing you from using a command, contact your AAA administ for assistance. This command is similar to the <b>community matches-any</b> command, but every community in the route match at least one match specification. If the route has no communities, then it matches.							
	Note For a	list of all cor	ditional expressions available within an <b>if</b> statement, see the <b>if</b> command.					
Task ID	Task ID	Operations	-					
	route-polic	cy read, write	-					
	The following example shows how to configure a route policy to match within the elements of a community set.							
	RP/0/RSP0	RP/0/RSP0/CPU0:router#config						

```
RP/0/RSP0/CPU0:router(config)#route-policy bob
RP/0/RSP0/CPU0:router(config-rpl)#if community matches-within (*:3, 5:*) then
RP/0/RSP0/CPU0:router(config-rpl)#set local-preference 94
```

RP/0/RSP0/CPU0:router(config-rpl)#endif RP/0/RSP0/CPU0:router(config-rpl)#end-policy

For example, routes with these sets of communities return TRUE:

- (1:3, 5:10)
- (5:3)
- (2:3, 6:3, 4:3)

Routes with the following set of communities return FALSE:

(1:3, 5:10, 6:5) — The community (6:5) does not match

### community-set

To define a community set, use the **community-set** command in global configuration mode. To remove the community set, use the **no** form of this command.

community-set name
no community-set name

**Syntax Description** *name* Name of the community set.

**Command Default** No default behavior or values

Command Modes global configuration

Command History Release Modification

Release 3.7.2 This command was introduced.

Usage Guidelines To u

To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Regular expressions and ranges can be specified to match the communities. An attempt to use a community set that contains a range or regular expression to set a community value is rejected when an attempt to attach such a policy is made.

A community set holds community values for matching against the Border Gateway Protocol (BGP) community attribute. A community is a 32-bit quantity. For notational convenience, each community value must be split in half and expressed as two unsigned decimal integers in the range from 0 to 65535, separated by a colon.

The inline form of a community set also supports parameterization. Each 16-bit portion of the community may be parameterized.

The routing policy language (RPL) provides symbolic names for the standard well-known community values: **accept-own** is 0xFFFF0001, **internet** is 0:0, **no-export** is 65535:65281, **no-advertise** is 65535:65283, and **local-as** is 65535:65283.

RPL also provides a facility for using wildcards in community specifications. A wildcard is specified by inserting an asterisk (\*) in place of one of the 16-bit portions of the community specification, which indicates that any value for that portion of the community matches.

Every community set must contain at least one community value. An empty community set is invalid and the policy configuration system rejects it.

Community sets can be entered in these formats:

Format	Description
#-remark	Remark beginning with '#'
*	Wildcard (any community or part thereof)
0-65535	16-bit half-community number

L

Format	Description
]	Left bracket to begin range
accept-own	Accept-Own (BGP well-known community)
dfa-regex	DFA (deterministic finite automata) style regular expression
internet	Internet (BGP well-known community)
ios-regex	Traditional IOS style regular expression
local-AS	Do not send outside local AS (BGP well-known community)
no-advertise	Do not advertise to any peer (BGP well-known community)
no-export	Do not export to next AS (BGP well-known community)
private-as	Match within BGP private AS range [6451265534]

**Note** The dfa-regex and ios-regex syntax for community set is "['][^':&<> ]\*:[^':&<> ]\*[']". This means that regex starts with a single-quote (") followed by a string of any character (that does not include single-quote, colon, ampersand, less-than, or space) followed by a colon, and a string of any characters (that does not include single-quote, colon, ampersand, less-than, greater-than, or space) followed by a colon, and a string of any characters (that does not include single-quote, colon, ampersand, less-than, greater-than, or space) followed by a colon, and a string of any characters (that does not include single-quote, colon, ampersand, less-than, greater-than, or space) followed by single-quote.

Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	In the follow	ing example	e, a community set named cset_accept_own is created:

RP/0/RSP0/CPU0:router#configure RP/0/RSP0/CPU0:router(config)#community-set cset\_accept\_own

RP/0/RSP0/CPU0:router(config-comm)#**accept-own** RP/0/RSP0/CPU0:router(config-comm)#**end-set** 

In the following example, a community set named cset1 is created:

```
RP/0/RSP0/CPU0:router(config)# community-set cset1
RP/0/RSP0/CPU0:router(config-comm)# 12:34,
RP/0/RSP0/CPU0:router(config-comm)# 12:56,
RP/0/RSP0/CPU0:router(config-comm)# 12:78,
RP/0/RSP0/CPU0:router(config-comm)# internet
RP/0/RSP0/CPU0:router(config-comm)# end-set
```

In the following example, a community set named cset2 is created:

```
RP/0/RSP0/CPU0:router(config) # community-set cset2
RP/0/RSP0/CPU0:router(config-comm) # 123:456,
RP/0/RSP0/CPU0:router(config-comm) # no-advertise,
RP/0/RSP0/CPU0:router(config-comm) # end-set
```

In the following example, a community set named cset3 is created. This policy uses wildcards and matches all communities where the autonomous system part of the community is 123.

```
RP/0/RSP0/CPU0:router(config)# community-set cset3
RP/0/RSP0/CPU0:router(config-comm)# 123:*
RP/0/RSP0/CPU0:router(config-comm)# end-set
```

### delete community

To delete community attributes associated with a Border Gateway Protocol (BGP) route, use the **delete community** command in route-policy configuration mode.

**delete community** {**all** | **in** {*community-set-nameinline-community-setparameter*} | **not in** {*community-set-nameinline-community-setparameter*}

Syntax Description	all	Removes all communities except the well-known communities.
	in	Removes any communities associated with the route that are listed in either the named community set or the inline community set.
	community-set-nam	ne Name of a community set.
	inline-community-s	set Inline community set. The inline community set must be enclosed in parentheses.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
	not in	Removes all communities that are not listed in either the named community set or the inline community set, and are not well-known communities.
Command Default	No default behavio	r or values
Command Modes	Route-policy config	guration
Command History	Release Mod	dification
	Release 3.7.2 This	s command was introduced.
Usage Guidelines		nd, you must be in a user group associated with a task group that includes appropriate task up assignment is preventing you from using a command, contact your AAA administrator
	Use the <b>delete con</b>	<b>nmunity</b> command to delete community attributes associated with a BGP route.
		<b>community</b> command can be used as an action statement within an <b>if</b> statement. For a list command available within an <b>if</b> statement, see the <b>if</b> command.
		2-bit values carried in Border Gateway Protocol (BGP) routes. Each route may have zero ies in an unordered list.
	this removal must b	well-known community (internet, no-export, no-advertise, or local-as) from a route, but be done explicitly. This command should be used with a degree of caution. In general, few

circumstances exist in which you would need to remove a well-known community.

Task ID	Task ID	Operations
	route-policy	read, write

**Examples** 

The following example shows how to delete any communities associated with the routes that are listed in either the named community set or inline community set, respectively.

```
RP/0/RSP0/CPU0:router(config-rpl)# delete community in my_community_set
RP/0/RSP0/CPU0:router(config-rpl)# delete community in (10:[0..50],20:[60..80])
```

The following example shows how to remove all communities including well-known communities.

RP/0/RSP0/CPU0:router(config-rpl)# delete community in (internet, no-export, no-advertise, local- as, \*:\*)

The following example shows how to remove all communities except for the well-known communities.

RP/0/RSP0/CPU0:router(config-rpl)# delete community all

The following example shows how to delete the well-known community value internet from a route:

RP/0/RSP0/CPU0:router(config-rpl)# delete community in (internet)

### delete large-community

To delete the specified large-communities from a route policy, use the **delete large-community** command in the route-policy configuration mode.

```
delete large-community {all |[not] in {named or inline-large-community-set |
parameter } }
```

Syntax Description	all	Removes all large communities.
	in	Removes any large communities associated with the route that are listed in either the named large community set or the inline large community set.
	large-community-set-name	Name of a large community set.
	inline-large-community-set	Inline large community set. The inline community set must be enclosed in parentheses.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
	not	Removes all communities that are not listed in either the named large community set or the inline large community set.
Command Default	No default behavior or valu	ies
Command Modes	Route-policy configuration	
Command History	Release	Modification
	Release 6.3.1	This command was introduced.
Usage Guidelines		nust be in a user group associated with a task group that includes appropriate task nment is preventing you from using a command, contact your AAA administrator
		specified as three non negative decimal integers separated by colons. For example, d in 32 bits. The possible range for each integer is 0 to 4294967295.
	In route-policy statements, expressions:	each integer in the BGP large community can be replaced by any of the following
	• [xy] — This expressi	on specifies a range between x and y, inclusive.
	* 51 : :	tonda for any number
	<ul> <li>* — This expression s</li> </ul>	tands for any number.
	• peeras — This express	sion is replaced by the AS number of the neighbor from which the community is he community is sent, as appropriate.
	• peeras — This express received or to which the term of t	sion is replaced by the AS number of the neighbor from which the community is



**Note** The peeras and not-peeras expressions can only be used in delete statements that appear in route policies that are applied at the neighbor-in or neighbor-out attach points.

IOS regular expression (ios-regex) and DFA style regular expression (dfa-regex) can be used in the delete statements. For example, the IOS regular expression ios-regex '^5:.\*:7\$' is equivalent to the expression 5:\*:7.

Task ID	Task ID	Operations
	route-policy	read,
		write

The following example shows how to delete specified BGP large-communities from a route policy using the delete large-community command.

RP/0/RP/0/RSP0/CPU0:router#config

```
RP/0/RSP0/CPU0:router(config)#route-policy lrg_comm_rp2S
RP/0/RSP0/CPU0:router(config-rpl)#delete large-community in (ios-regex '^100000:')
RP/0/RSP0/CPU0:router(config-rpl)#delete large-community not in (peeras:*:*, 41289:*:*)
RP/0/RSP0/CPU0:router(config-rpl)#delete large-community in catbert
RP/0/RSP0/CPU0:router(config-rpl)#end-policy
```

### delete extcommunity rt

To delete route target (RT) extended community attributes associated with a Border Gateway Protocol (route), use the **delete extcommunity rt** command in route-policy configuration mode.

**delete extcommunity rt** {**all** | **in** {*extcommunity-set-nameinline-extcommunity-setparameter*} | **not in** {*extcommunity-set-nameinline-extcommunity-setparameter*}

Syntax Description	all	Removes all extended communities.
	in	Removes any extended communities associated with the routes that are listed in either the named extended community set or the inline extended community set.
	extcommunity-set-name	Name of an extended community set.
	inline-extcommunity-set	Inline extended community set. The inline extended community set must be enclosed in parentheses.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
	not in	Removes all extended communities that are not listed in either the named extended community set or the inline extended community set, and are not well-known extended communities.
Command Default	No default behavior or v	ralues
Command Modes	Route-policy configurat	ion
Command History	Release Modifica	tion
	Release 3.7.2 This com	mand was introduced.
Usage Guidelines	<ul><li>IDs. If the user group as for assistance.</li><li>Use the delete extcomm</li></ul>	bu must be in a user group associated with a task group that includes appropriate task signment is preventing you from using a command, contact your AAA administrator <b>nunity rt</b> command to delete extended community values from a BGP route target
	extended community lis	t in a route.
		<b>munity rt</b> command can be used as an action statement within an <b>if</b> statement. For a tements available within an <b>if</b> statement, see the <b>if</b> command.
		are similar to regular Border Gateway Protocol (BGP) communities but contain more ructure for encoding information in them.
	Extended communities of	can be in the following forms: SoO:AS:tag, SoO:IP:tag, RT:AS:tag, or RT:IP:tag.
	Wildcards (*) and regula	ar expressions are allowed for extended community set elements.

The forms of this command that take a named extended community set or an inline extended community set value as arguments are equivalent. They delete any extended communities that are listed in either the named set or the inline set, respectively.

Task ID	Task ID Operations	
	route-policy read, write	
Examples	In the following example, all extended communities are deleted:	
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# delete extcommunity rt</pre>	all

In this example, any extended communities that are listed in my-extcommunity-set are deleted:

RP/0/RSP0/CPU0:router(config-rpl)# delete extcommunity rt in my-extcommunity-set

In this example, extended communities associated with the route listed in the named inline extended community sets are deleted:

RP/0/RSP0/CPU0:router(config-rpl)# delete extcommunity rt in (67:29, 67:55)

### destination in

To match a destination entry in a named prefix set or inline prefix set, use the **destination in** command in route-policy configuration mode.

	<b>destination in</b> { <i>prefix-set-nameinline-prefix-setparameter</i> }	
Syntax Description	prefix-set-name Name of a prefix set.	
	inline-prefix-set Inline prefix set. The inline prefix set must be enclosed in parentheses.	
	parameterParameter name. The parameter name must be preceded with a "\$."parameter	
Command Default	No default behavior or values	
Command Modes	Route-policy configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
	Use the <b>destination in</b> command as a conditional expression within an <b>if</b> statement to match a destination entry in a named prefix set or inline prefix set.	
	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.	
	This command takes either a named prefix set or an inline prefix set value as an argument. The condition returns true if the destination entry matches any entry in the prefix set or inline prefix set. An attempt to match a destination using a prefix set that is defined but contains no elements returns false.	
	The routing policy language (RPL) provides the ability to test destinations for a match to a list of prefix match specifications using the <b>in</b> operator. The <b>destination in</b> command is protocol-independent.	
	In Border Gateway Protocol (BGP), the destination of a route is also known as its network-layer reachability information (NLRI). It comprises a prefix value and a mask length.	
	RPL supports both 32-bit IPv4 prefixes, specified in dotted-decimal format, and 128-bit IPv6 prefixes, specified in colon-separated hexadecimal format.	
Task ID	Task ID Operations	
	route-policy read, write	

#### Examples

In the following example, a prefix set named my-prefix-set is defined and a route policy named use-destination-in is created. Within the use-destination-in route policy, the **destination in** command is used within an **if** statement to learn if the destination is in the prefix-set named my-prefix-set. If it is, then local preference is set to 100. If it is not in my-prefix-set but does match the next prefix specifications, then local preference is set to 200.

```
RP/0/RSP0/CPU0:router(config) # prefix-set my-prefix-set
RP/0/RSP0/CPU0:router(config-pfx) # 10.0.0.1/32,
RP/0/RSP0/CPU0:router(config-pfx) # fe80::203:0:0:0/64,
RP/0/RSP0/CPU0:router(config-pfx) # 10.0.0.2/24 le 32
RP/0/RSP0/CPU0:router(config-pfx) # end-set
RP/0/RSP0/CPU0:router(config-pfx) # end-set
RP/0/RSP0/CPU0:router(config-rpl) # if destination in my-prefix-set then
RP/0/RSP0/CPU0:router(config-rpl-if) # set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if) # elseif destination in (10.0.0.1/32, 10.0.0.2/24 le
32) then
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif) # endif
RP/0/RSP0/CPU0:router(config-rpl-elseif) # endif
RP/0/RSP0/CPU0:router(config-rpl) # end-policy
```

In the following example, a prefix set named ipv6-prefix-set is defined and a route policy named ipv6-destination-in is created. Within the ipv6-destination-in route policy, the **destination in** command is used within an **if** statement to learn if the destination is in the prefix-set named ipv6-prefix-set. If it is, then the next-hop is set to 2001:abcd:fedc::1. If it is not in ipv6-prefix-set but does match the next prefix specifications, then the next-hop is set to 1111:2222:3333:4444:5555:6666:7777:8888.

```
RP/0/RSP0/CPU0:router(config) # prefix-set ipv6-prefix-set
RP/0/RSP0/CPU0:router(config-pfx) # 2001:0:0:1::/64,
RP/0/RSP0/CPU0:router(config-pfx) # 2001:0:0:2::/64,
RP/0/RSP0/CPU0:router(config-pfx) # 2001:0:0:4::/64
RP/0/RSP0/CPU0:router(config-pfx) # end-set
RP/0/RSP0/CPU0:router(config-pfx) # end-set
RP/0/RSP0/CPU0:router(config-rpl) # if destination in ipv6-prefix-set then
RP/0/RSP0/CPU0:router(config-rpl-if) # set next-hop 2001:abcd:fedc::1
RP/0/RSP0/CPU0:router(config-rpl-if) # elseif destination in (2001::1, 2002:1:2:3::/64)
then
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set next-hop
1111:222:333:4444:5555:6666:7777:8888
RP/0/RSP0/CPU0:router(config-rpl-elseif) # endif
```

RP/0/RSP0/CPU0:router(config-rpl)# end-policy

### done

To stop executing a policy and accept the route, use the **done** command in route-policy configuration mode.

	done		
Syntax Description	This command has no arguments or keywords.		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the <b>done</b> command to stop executing the policy and accept the route.		
	See the done command to stop exceding the poney and decept the route.		
	Note The done command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.		
	When encountering a <b>done</b> statement the route is passed and no further policy statements are executed. All modifications made to the route prior to the <b>done</b> statement are still valid.		
	<b>Note</b> The default action of a route policy is to drop or discard any routes that have not been either explicitly passed or for which no attempt has been made to modify with an action. The routing policy language (RPL) does not have specific "match clauses," which means the default drop behavior is controlled by whether a route has been explicitly passed or an attempt has been to modify the route using an action statement.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	In the following example, if the destination match succeeds for 29.0.0.0/8 le 32, the execution continues past set community 102:12 and onto the next statement. If the destination match succeeds for 39.0.0.0/8 le 32 execution, then the policy execution stops when in encounters the <i>done</i> statement.		
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy done_st_example RP/0/RSP0/CPU0:router(config-rpl)# if destination in (29.0.0.0/8 le 32) then</pre>		

RP/0/RSP0/CPU0:router(config-rpl-if)# set community 102:12 RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# if destination in (39.0.0.0/8 le 32) then RP/0/RSP0/CPU0:router(config-rpl-if)# set community 102:39 RP/0/RSP0/CPU0:router(config-rpl-if)# done RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# if destination in (49.0.0.0/8 le 32) then RP/0/RSP0/CPU0:router(config-rpl)# if destination in (49.0.0.0/8 le 32) then RP/0/RSP0/CPU0:router(config-rpl-if)# set community 102:49 RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# if destination in (59.0.0.0/8 le 32) then RP/0/RSP0/CPU0:router(config-rpl)# if destination in (59.0.0.0/8 le 32) then RP/0/RSP0/CPU0:router(config-rpl)# if destination in (59.0.0.0/8 le 32) then RP/0/RSP0/CPU0:router(config-rpl)# if destination in (59.0.0.0/8 le 32) then

RP/0/RSP0/CPU0:router(config-rpl) # end-policy

## drop

To discard a route, use the **drop** command in route-policy configuration mode.

	drop		
Syntax Description	This command has no arguments or keywords.		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>drop</b> command within a route policy to drop a route.		
	Note The drop command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.		
	This command causes the route to be dropped. After a route is dropped, no further execution of policy occurs. Therefore, if after executing the first two statements of a policy the <b>drop</b> statement is encountered, the route is discarded and execution stops immediately even when the policy contains further statements.		
	Note The default action of a route policy is to drop or discard any routes that have not been either explicitly passed or attempted to be modified with an action. The routing policy language (RPL) does not have specific "match clauses," which means the default drop behavior is controlled by whether a route has been explicitly passed or an attempt has been to modify the route using an action statement.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	In the following example, any route with a destination address contained within the prefix set pset1 is dropped:		
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# if destination in pset1 then RP/0/RSP0/CPU0:router(config-rpl-if)# drop</pre>		

I

RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)#

### edit

To edit the contents of a route policy, a prefix set, an AS path set, a community set, or an extended community set, use the **edit** command in EXEC configuration mode.

 $\begin{array}{l} \textbf{edit} \quad \{\textbf{route-policy} \mid \textbf{prefix-set} \mid \textbf{as-path-set} \mid \textbf{community-set} \mid \textbf{extcommunity-set} \quad \{\textbf{rt} \mid \textbf{soo}\} \mid \textbf{policy-global} \mid \textbf{rd-set} \quad name \quad [\textbf{nano} \mid \textbf{emacs} \mid \textbf{vim} \mid \textbf{inline} \quad \{\textbf{add} \mid \textbf{prepend} \mid \textbf{remove}\} \quad set-element] \end{array}$ 

yntax Description	route-policy	Edits the contents of a route policy.
	prefix-set	Edits the contents of a prefix set.
	as-path-set	Edits the contents of an AS path set.
	community-set	Edits the contents of a community set.
	extcommunity-set	Edits the contents of an extended community set of the specified type.
	rt	Edits the BGP route target (RT) extended community.
	<b>S00</b>	Edits the BGP site of origin (SoS) extended community.
	policy-global	Edits the contents of policy-global definitions.
	rd-set	Edits the contents of a route-distinguisher set.
	name	Name of a route policy, a prefix set, an AS path set, a community set, or an extended community set, RD set, or global parameters.
	nano	(Optional) Uses GNU Nano text editor.
	emacs	(Optional) Uses Micro Emacs editor.
	vim	(Optional) Uses VI Improved editor.
	inline	(Optional) Uses the command line.
	add	Appends the element to the set.
	prepend	Prepends the element to the set.
	remove	Removes the element from the set.
	set-element	Value of the set element.
		<b>Note</b> To inline edit multiple set elements separated with comma, use quotes to club the entries as a single argument. Example:
		edit extcommunity-set rt rt_set inline add "4:4,5:4"

**Command Default** Default editor is GNU vim text editor

**Command Modes** EXEC configuration

Command History	Release Modification
	Release 3.7.2 This command was introduced.
	ReleaseThe Nano and Emacs keyword was deprecated.7.11.1
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>edit</b> command to edit the contents of a route policy, a prefix set, an AS path set, a community set, an extended community set, a global policy, or a route destination set.
	After editing with Nano, save the edit buffer and exit the editor using the Ctrl-X keystroke.
	After editing with Emacs, save the editor buffer by using the Ctrl-X and Ctrl-S keystrokes. To save and exit the editor, use the Ctrl-X and Ctrl-C keystrokes.
	After editing with VIM, to write to a current file and exit use the :wq or :x or ZZ keystrokes. To quit and confirm, use the :q keystrokes. To quit and discard changes, use the :q! keystrokes.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the policy_A policy is opened in the editor:
	RP/0/RSP0/CPU0:router# edit route-policy policy_A
	<pre>== MicroEMACS 3.8b () == rpl_edit.139281 == if destination in (2001::/8) then drop endif end-policy !</pre>
	<pre>== MicroEMACS 3.8b () == rpl_edit.139281 == Parsing. 83 bytes parsed in 1 sec (82)bytes/sec Committing. 1 items committed in 1 sec (0)items/sec Updating. Updated Commit database in 1 sec</pre>
	If there are parse errors, you are asked whether editing should continue:
	<pre>RP/0/RSP0/CPU0:router#edit route-policy policy_B == MicroEMACS 3.8b () == rpl_edit.141738 route-policy policy_B set metric-type type_1 if destination in (2001::/8) then drop</pre>

drop endif

```
end-policy
!
== MicroEMACS 3.8b () == rpl_edit.141738 ==
Parsing.
105 bytes parsed in 1 sec (103)bytes/sec
% Syntax/Authorization errors in one or more commands.!! CONFIGURATION
FAILED DUE TO SYNTAX/AUTHORIZATION ERRORS
set metric-type type_1
if destination in (2001::/8) then
    drop
    endif
end-policy
!
Continue editing? [no]:
```

If you answer **yes**, the editor continues on the text buffer from where you left off. If you answer **no**, the running configuration is not changed and the editing session is ended.

After the policy is opened, it may be manipulated using normal editor commands, then saved and committed to the running configuration.

### end-global

To end the definition of global parameters and exit global parameter configuration mode, use the **end-global** command in global parameter configuration mode.

		-	
	end-global		
Syntax Description	This comm	and has no ar	guments or keywords.
Command Default	No default	behavior or v	alues
Command Modes	Global para	meter config	uration
Command History	Release	Modificat	ion
	Release 3.7.2	This comr	nand was introduced.
Usage Guidelines	IDs. If the u for assistant	ser group ass ce.	ou must be in a user gro signment is preventing mand to end the definit
	mode.	groom com	
Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	In the follow	wing example	e, the <b>end-global</b> cor
	RP/0/RSP0/ RP/0/RSP0/	CPU0:route: CPU0:route:	c(config)# <b>policy-gl</b> c(config-rp-gl)# <b>gl</b> c(config-rp-gl)# <b>gl</b> c(config-rp-gl)# <b>er</b>

Related Commands	Command	Description
	policy-global, on page 116	Enters global parameter configuration mode.

### end-policy

To end the definition of a route policy and exit route-policy configuration mode, use the **end-policy** command in route-policy configuration mode.

	end-policy			
Syntax Description	This comma	and has no arguments	s or keywords.	
Command Default	No default b	No default behavior or values		
Command Modes	Route-polic	y configuration		
Command History	Release	Modification		
	Release 3.7	2.2 This command wa	as introduced.	
Usage Guidelines		ser group assignmen	be in a user group associated with a task group that includes appropriate task t is preventing you from using a command, contact your AAA administrator	
	Use the <b>end</b> mode.	I-policy command to	o end the definition of a route policy and exit route-policy configuration	
Task ID	Task ID	Operations		
	route-policy	read, write		
Examples	In the follow	ving example, the er	<b>ad-policy</b> command ends the definition of a route policy:	
	RP/0/RSP0/ RP/0/RSP0/ RP/0/RSP0/ RP/0/RSP0/ RP/0/RSP0/ RP/0/RSP0/	CPU0:router(confi CPU0:router(confi CPU0:router(confi CPU0:router(confi CPU0:router(confi CPU0:router(confi	g) #route-policy med-to-local-pref g-rpl) #if med eq 150 then g-rpl-if) # set local-preference 10 g-rpl-if) # elseif med eq 200 then g-elseif) # set local-preference 60 g-elseif) # elseif med eq 250 then g-elseif) # set local-preference 0	
		CPU0:router(confi CPU0:router(confi	g-elseif)# endif g-rpl)# end-policy	
Related Commands	Command		Description	
	route-policy	y (RPL), on page 132	Defines a route policy and enters route-policy configuration mode.	

### end-set

To end the definition of an AS path set, a prefix set, a community set, an extended community set, or an RD set and return to global configuration mode, use the **end-set** command in route-policy configuration mode.

	nd-set	
Syntax Description	his command has no arguments or keywords.	
Command Default	to default behavior or values	
Command Modes	AS path set configuration	
	refix set configuration	
	Community set configuration	
	extended community set configuration	
	coute distinguisher set configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a tas Ds. If the user group assignment is preventing you from using a common or assistance. Use the <b>end-set</b> command to end the definition of an AS path set, a pref ommunity set.	and, contact your AAA administrator
Task ID	Task ID Operations	
	route-policy read, write	
Examples	n the following example, the <b>end-set</b> command ends the definition of	an AS path set named aset1:
	<pre>P/0/RSP0/CPU0:router(config)# as-path-set aset1 P/0/RSP0/CPU0:router(config-as)# ios-regex '_42\$', P/0/RSP0/CPU0:router(config-as)# ios-regex '_127\$'</pre>	
	P/0/RSP0/CPU0:router(config-as)# <b>end-set</b> P/0/RSP0/CPU0:router(config)#	
	The following example shows how to create an RD set called my_rd_s ommand to end the definition:	et and use the <b>end-set</b>
	P/0/RSP0/CPU0:router(config)# rd-set my_rd_set	

```
RP/0/RSP0/CPU0:router(config-rd)# 172.16.0.0/16:*,
RP/0/RSP0/CPU0:router(config-rd)# 172.17.0.0/16:100,
RP/0/RSP0/CPU0:router(config-rd)# 192:*,
RP/0/RSP0/CPU0:router(config-rd)# 192:100
RP/0/RSP0/CPU0:router(config-rd)# end-set
```

### event prefix route-policy pass

To get additional trace information about a particular set of prefixes, use the **event prefix route-policy pass** command in global address family configuration mode.

#### event prefix route-policy pass

Syntax Description	This command has no arguments or keywords.		
Command Default	No default	behavior or values	
Command Modes	Global add	ress family	
Command History	Release	Modification	
	Release	This command was	

introduced.

**Usage Guidelines** Use this command for debugging purposes when general BGP traces are not sufficient. You will see more traces when this command is enabled. Do not enable this command to trace information about all prefixes since it will lead to decrease in information about the required prefixes.

#### Example

7.3.1

The following example shows how to gather additional trace information about a particular set of prefixes:

```
Router(config)# prefix-set prefix
Router(config-pfx)# 10.2.0.0/16
Router(config-pfx)# exit
Router(config)#
Router(config)# route-policy tracing
Router(config-rpl)# if destination in prefix then pass else drop endif
Router(config-rpl)# exit
Router(config-rpl)# router bgp 1
Router(config-bgp)# address-family ipv4 unicast
Router(config-bgp-af)# event prefix route-policy
/*If there are any changes related to the prefix
10.2.0.0/16, the same changes will be seen when
```

using the show bgp trace per-prefix command. \*/

### extcommunity rt is-empty

To check if a Border Gateway Protocol (BGP) route has route target (RT) extended community attributes associated with it, use the **extcommunity rt is-empty** command in route-policy configuration mode.

#### extcommunity rt is-empty

Syntax Description	This command has no arguments or keywords.
--------------------	--

**Command Default** No default behavior or value

Command Modes Route-policy configuration

Command History Release Modification

Release 3.7.2 This command was introduced.

#### **Usage Guidelines**

To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **extcommunity rt is-empty** command as a conditional expression within an **if** statement to check if a BGP route has extended community attributes associated with it.

Ŵ

Note For a list of all conditional expressions available within an **if** statement, see the **if** command.

The **is-empty** operator takes no arguments and evaluates to true if the route has no extended community attributes associated with it.

Task ID	Task ID	Operations
	route-policy	read, write

#### **Examples**

In the following example, if the extended community is empty, then the local preference is set to 100:

```
RP/0/RSP0/CPU0:router(config)# route-policy extcommunity-is-empty-example
RP/0/RSP0/CPU0:router(config-rpl)# if extcommunity rt is-empty then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
```

RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy

### extcommunity rt matches-any

To match any element of a Border Gateway Protocol (BGP) route target (RT) extended community set, use the **extcommunity rt matches-any** command in route-policy configuration mode.

**extcommunity rt matches-any** {*extcommunity-set-nameinline-extcommunity-setparameter*}

Syntax Description	extcommunity-set-name Name of an RT extended community set.
	<i>inline-extcommunity-set</i> Inline RT extended community set. The inline extended community set must be enclosed in parentheses.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>extcommunity rt matches-any</b> command as a conditional expression within an <b>if</b> statement to match elements of an extended community set.
	match elements of an extended community set.
	Note For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
	A simple condition using the <b>matches-any</b> operator evaluates as true if at least one extended community in the route matches an extended community specification in the named or inline set. If no extended community in the route matches any of the specifications in the named or inline set, then this simple condition evaluates to false. Likewise, when there is no extended community at all in the route, the condition evaluates to false.
	Matching an extended community in the route to a specification in a named or an inline set is intuitive. In inline sets, extended community specifications may be parameterized, in which case the relevant matching is done when the value of the parameter has been supplied.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, an extended community set named my-extcommunity-set and a parameterized route-policy named my-extcommunity-set-example(\$tag,\$ip) are defined. The

**extcommunity rt matches-any** command is used in an if statement such that if at least one extended community in the route matches an extended community specification in the named set, then the local preference is set to 100. If there is no extended community in the route that matches any of the specifications in the named set, then the condition evaluates as false and the extended community is compared to the inline extended sets.

RP/0/RSP0/CPU0:router(config)# extcommunity-set rt my-extcommunity-set RP/0/RSP0/CPU0:router(config-ext)# 10:615, RP/0/RSP0/CPU0:router(config-ext)# 10:6150, RP/0/RSP0/CPU0:router(config-ext)# 15.15.15:15 RP/0/RSP0/CPU0:router(config-ext)# end-set

RP/0/RSP0/CPU0:router(config) # route-policy my-extcommunity-set-example(\$tag,\$ip)
RP/0/RSP0/CPU0:router(config-rpl)# if extcommunity rt matches-any my-extcommunity-set then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 400
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 400
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 400
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif

Related Commands Con	mmand	Description
exto	5 57 1 0	Matches every element of a BGP RT extended community set.

### extcommunity rt matches-every

To match every element of a Border Gateway Protocol (BGP) route target (RT) extended community set, use the **extcommunity rt matches-every** command in route-policy configuration mode.

**extcommunity rt matches-every** {*extcommunity-set-nameinline-extcommunity-setparameter*}

Syntax Description	extcommunity-set-name Name of an RT extended community set.
	<i>inline-extcommunity-set</i> Inline RT extended community set. The inline extended community set must be enclosed in parentheses.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>extcommunity rt matches-every</b> command as a conditional expression within an <b>if</b> statement to match every element of an RT extended community set.
	Note For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
	A simple condition using the <b>matches-every</b> operator evaluates as true if every extended community value in the extended community attribute for the route matches at least one element of the extended community set or inline set. If no extended community in the route matches any of the specifications in the named or inline set, then this simple condition evaluates to false. Likewise, when there is no extended community at all in the route, the condition evaluates to false.
	Matching an extended community in the route to a specification in a named or an inline set is intuitive. In inline sets, extended community specifications may be parameterized, in which case the relevant matching is done when the value of the parameter has been supplied.
Task ID	Task ID Operations

#### **Examples**

In the following example, an extended community set named my-extcommunity-set and a parameterized route policy named extcommunity-matches-every-example (\$as, \$tag) are defined. The condition extcommunity rt matches-every is used in an if statement in this policy. If it evaluates to true, the local-preference value is set to 100. If it evaluates to false, the extended community is evaluated using an inline set. If that condition evaluates to true, the local-preference value is set to 200. If it evaluates to false, the local-preference value is set to 300.

```
RP/0/RSP0/CPU0:router(config) # extcommunity-set rt my-extcommunity-set
RP/0/RSP0/CPU0:router(config-ext) # 10:20,
RP/0/RSP0/CPU0:router(config-ext) # 10:30,
RP/0/RSP0/CPU0:router(config-ext) # 10:40
RP/0/RSP0/CPU0:router(config-ext) # end-set
RP/0/RSP0/CPU0:router(config) # route-policy extcommunity-matches-every-example($as,$tag)
RP/0/RSP0/CPU0:router(config-rpl)# if extcommunity rt matches-every my-extcommunity-set
then
RP/0/RSP0/CPU0:router(config-rpl-if) # set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# elseif extcommunity rt matches-every (10:20, 10:$tag,
$as:30) then
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl) # end-policy
```

Related Commands	Command	Description
	extcommunity rt matches-any, on page 60	Matches any element of a BGP RT extended community set.

### extcommunity rt matches-within

To match at least one element of an extended community set of a Border Gateway Protocol (BGP) route target (RT), use the **extcommunity rt matches-within** command in route-policy configuration mode.

**extcommunity rt matches-within** {*rt-type-extcommunity-set-name inline-extcommunity-set parameter* }

Syntax Description	<i>rt-type-extcommunity-set-name</i> Name of an RT extended community set.		
	<i>inline-extcommunity-set</i> Inline RT extended community set, enclosed in parentheses.		
	parameterParameter name preceded with a "\$" symbol.		
Command Default	None		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release This command was introduced. 4.2.0		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrato for assistance. Use the extcommunity rt matches-within command as a conditional expression within an if statement to match elements of an extended community set.		
	Note For a list of all conditional expressions available within an if statement, see the if command.		
	A simple condition using the matches-within operator evaluates as true if all the elements in extended community from the route match any element in the extended community set. For example, let 'c' be the RT from the route and 'm' be the RT set from the policy. With the <b>extcommunity rt matches-within</b> configuration each value in 'c' must match any (or at least one) value in 'm'.		
	Matching an extended community in the route to a specification in a named or an inline set is intuitive. In inline sets, extended community specifications may be parameterized, in which case the relevant matching i done when the value of the parameter has been supplied.		
Task ID	Task ID Operation		
	route-policy read, write		
	In the following around a on extended community set named you artecommunity set and a peremeterized		

In the following example, an extended community set named *my-extcommunity-set* and a parameterized route-policy named *my-extcommunity-set-example(\$tag,\$ip)* are defined. The **extcommunity rt** 

**matches-within** command is used in an if statement such that if all extended community values in the route match any element of the extended community specification in the named set, then the local preference is set to 100.

```
Router(config)#extcommunity-set rt my-extcommunity-set
Router(config-ext)#10:615,
Router(config-ext)#10:6150,
Router(config-ext)#15.15.15.15:15
Router(config-ext)#end-set
Router(config)#route-policy my-extcommunity-set-example($tag,$ip)
Router(config-rpl)#if extcommunity rt matches-within my-extcommunity-set then
Router(config-rpl-if)#set local-preference 100
```

### extcommunity-set bandwidth

To define a Border Gateway Protocol (BGP) route target (RT) extended community set, use the **extcommunity-set bandwidth** command in global configuration mode. To remove the RT community set, use the **no** form of this command.

extcommunity-set bandwidth name no extcommunity-set bandwidth name

- **Syntax Description** *name* Name of bandwidth extended community set.
- **Command Default** No default behavior or values

Command Modes Global configuration

 Command History
 Release
 Modification

 Release 3.7.2
 This command was introduced.

## Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

The **extcommunity-set bandwidth** extended community set advertises the bandwidth of an autonomous system exit link as an extended community for links between directly connected external BGP (eBGP) neighbors. The link bandwidth extended community attribute is propagated to iBGP peers when extended community exchange is enabled. The extended community is used with BGP multipath features to configure load balancing over links with unequal bandwidth. When this community set is enabled, the routes learned from the external neighbors are propagated through the internal BGP (iBGP) network with the bandwidth of the source external link.

The bandwidth extended community supports the following option:

• *X:Y*—*X* indicates the ASN of the router sending the extended community. This ASN is a 16-bit decimal number. *Y* indicates the bandwidth in bytes per second. The bandwidth is a 32-bit decimal number.

### **Examples** In the following example, a bandwidth extended community set named extcomm-bw is defined:

```
RP/0/RSP0/CPU0:router(config)# extcommunity-set bandwidth extcomm-bw
RP/0/RSP0/CPU0:router(config-ext)# 10002:777
RP/0/RSP0/CPU0:router(config-ext)# end-set
```

### extcommunity-set cost

To define a cost extended community set, use the **extcommunity-set cost** command in global configuration mode. To remove the cost extended community set, use the **no** form of this command.

extcommunity-set cost name no extcommunity-set cost name

**Syntax Description** *name* Name of a cost extended community set. The *name* argument is case sensitive, can contain any alphanumeric characters, and can be up to 63 characters in length.

**Command Default** No default behavior or values

Command Modes global configuration

\_\_\_\_\_

Command History Release Modification

Release 3.7.2 This command was introduced.

Release 3.9.0 Support was added for more cost extended community formats.

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the extcommunity-set cost command to define a cost extended community set.

An extended community set is analogous to a community set except that it contains extended community values instead of regular community values. Extended community values are 64-bit structured values. An extended community set also supports named forms and inline forms.

Cost extended communities can be entered in these formats:

- 0-255—Decimal number
- igp:—Cost Community with IGP as point of insertion
- pre-bestpath:—Cost Community with Pre-Bestpath as point of insertion

Multiple cost community set clauses can be configured in each route policy block or sequence. Each cost community set clause must have a different ID (0-255). The cost community set clause with the lowest cost-value is preferred by the best path selection process when all other attributes are equal.

As with community sets, the inline form supports parameterization within parameterized policies. Either portion of the extended community value can be parameterized.

Every extended community set must contain at least one extended community value. Empty extended community sets are invalid and the policy configuration system rejects them.

Wildcards (\*) and regular expressions are allowed for extended community set elements.

**Examples** In the following example, a cost extended community set named extcomm-cost is defined:

```
RP/0/RSP0/CPU0:router(config)# extcommunity-set cost extcomm-cost
RP/0/RSP0/CPU0:router(config-ext)# IGP:90:914,
RP/0/RSP0/CPU0:router(config-ext)# Pre-Bestpath:91:915
RP/0/RSP0/CPU0:router(config-ext)# end-set
```

### extcommunity-set opaque

To define a Border Gateway Protocol (BGP) Opaque extended community set, use the **extcommunity-set opaque** command in global configuration mode. To remove the Opaque extended community set, use the **no** form of this command.

	extcommunity-set opaque name no extcommunity-set opaque name			
Syntax Description	name Name of color extended community.			
Command Default	No default behavior or values			
Command Modes	Global configuration			
Command History	Release Modification			
	Release 6.2.1 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>extcommunity-set opaque</b> command to define an Opaque extended community set that contains color extended communities.			
	Opaque extended communities support these options:			
	• *—Wildcard (any community or part thereof)			
	• 1-4294967295—color value			
Examples	In the following example, an Opaque extended community set named $color78$ is defined for BGP extended communities. When RPL a_color is applied as import route-policy to VRF, the route with only color 7 is dropped while the route with both color 7 and color 8 is passed:			
	<pre>RP/0/RSP0/CPU0:router(config)# extcommunity-set opaque color78 RP/0/RSP0/CPU0:router(config-ext)# 7, RP/0/RSP0/CPU0:router(config-ext)# 8 RP/0/RSP0/CPU0:router(config-ext)# end-set</pre>			
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy a_color RP/0/RSP0/CPU0:router(config-rpl)# if extcommunity color matches-every mycolor78 then RP/0/RSP0/CPU0:router(config-rpl-if)# set extcommunity color color27128 RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>			

### extcommunity-set rt

To define a Border Gateway Protocol (BGP) route target (RT) extended community set, use the **extcommunity-set rt** command in global configuration mode. To remove the RT community set, use the **no** form of this command.

extcommunity-set rt name no extcommunity-set rt name

Syntax Description	name Name o	f an RT extended community set.	
Command Default	No default beł	navior or values	
Command Modes	Global configuration		
Command History	Release	Modification	
	Release 3.7.2	This command was introduced.	
	Release 3.9.0	Support was added for more rt extended community formats.	

## Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the extcommunity-set rt command to define an RT extended community set for BGP.

Regular expressions and ranges can be specified to match the extended communities. Regular expressions and ranges can be specified in an extended community set to support the matching of communities. An attempt to use an extended community set that contains a range or regular expression to set an extended community set value is rejected when an attempt to attach such a policy is made.

An extcommunity set RT holds RT extended community values to match against the Border Gateway Protocol (BGP) RT extended community attribute. RT extended communities can be entered in these formats:

- \*—Wildcard (any community or part thereof)
- 1-4294967295-32-bit decimal number
- 1-65535—16-bit decimal number
- A.B.C.D/M:N Extended community IPv4 prefix format
- A.B.C.D:N-Extended community IPv4 format
- ASN:N-Extended community ASPLAIN format
- X.Y:N—Extended community ASDOT format
- dfa-regex—DFA (deterministic finite automata) style regular expression
- ios-regex—Traditional IOS style regular expression
- match—Match option for the set. Default any

I

	<b>Note</b> The dfa-regex and ios-regex syntax for community set is "['][^':&<> $J^*:[^{'}: &<> J^*[']$ ". This means that regex starts with a single-quote (") followed by a string of any character (that does not include single-quote, colon, ampersand, less-than, greater-than, or space) followed by a colon, and a string of any characters (that does not include single-quote, colon, ampersand, less-than, greater-than, or space) followed by single-quote.			
	<i>N</i> is a number within the range of 1 to 65535.			
Examples	In the following example, an RT extended community set named extcommert is defined:			
	<pre>RP/0/RSP0/CPU0:router(config)# extcommunity-set rt extcomm-rt RP/0/RSP0/CPU0:router(config-ext)# 10002:666 RP/0/RSP0/CPU0:router(config-ext)# 10.0.0.2:666 RP/0/RSP0/CPU0:router(config-ext)# end-set</pre>			

### extcommunity-set seg-nh

To define a Point-to-Multipoint (P2MP) segmented next-hop extended community use the **extcommunity-set seg-nh** command in global configuration mode. To remove the seg-nh extended community set, use the **no** form of this command.

extcommunity-set seg-nh name no extcommunity-set seg-nh name

**Syntax Description** *name* Indicates the Point-to-Multipoint (P2MP) segmented next-hop extended community name to indicate segmented next hop.

**Command Default** No default behavior or values

Command Modes Global configuration

- Command History Release Modification
  - Release 3.7.2 This command was introduced.

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Segmented next hop extended community supports the following option:

• A.B.C.D-Extended community - IPv4 address format

**Examples** In the following example, a segmented next hop extended community set named extcomm-nh is defined for BGP extended communities.

RP/0/RSP0/CPU0:router(config)# extcommunity-set seg-nh extcomm-nh RP/0/RSP0/CPU0:router(config-ext)# 1.1.1.1 RP/0/RSP0/CPU0:router(config-ext)# end-set

# extcommunity-set soo

To define a Border Gateway Protocol (BGP) Site-of-Origin (SoO) extended community set, use the **extcommunity-set soo** command in global configuration mode. To remove the SoO extended community set, use the **no** form of this command.

extcommunity-set soo name no extcommunity-set soo name

Syntax Description	name Name of an SoO extended community set.		
Command Default	No default behavior or values		
Command Modes	Global configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
	Release 3.9.0 Support was added for more soo extended community formats.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the extcommunity-set soo command to define an SoO extended community set.		
	An extcommunity set soo holds SoO extended community values to match against the Border Gateway Protocol (BGP) SoO extended community attribute. SoO extended communities can be entered in these formats:		
	• *—Wildcard (any community or part thereof)		
	• 1-4294967295—32-bit decimal number		
	• 1-65535—16-bit decimal number		
	• A.B.C.D/M:N—Extended community - IPv4 prefix format		
	• A.B.C.D:N—Extended community - IPv4 format		
	ASN:N—Extended community - ASPLAIN format		
	• <i>X.Y:N</i> —Extended community - ASDOT format		
	dfa-regex—DFA style regular expression		
	ios-regex—Traditional IOS style regular expression		
	• match — Match option for the set. Default - any		
	<i>N</i> is a site-specific number.		

Routing Policy Language Commands

#### **Examples** In the following exa

In the following example, a SoO extended community set named extcomm-soo is defined:

RP/0/RSP0/CPU0:router(config)# extcommunity-set soo extcomm-soo RP/0/RSP0/CPU0:router(config-ext)# 66:60001, RP/0/RSP0/CPU0:router(config-ext)# 77:70001, RP/0/RSP0/CPU0:router(config-ext)# 88:80001, RP/0/RSP0/CPU0:router(config-ext)# 99:90001, RP/0/RSP0/CPU0:router(config-ext)# 100.100.11:153

RP/0/RSP0/CPU0:router(config-ext)# end-set

### extcommunity soo is-empty

To determine if a Border Gateway Protocol (BGP) route has any Site-of-Origin (SoO) extended communities associated with it, use the **extcommunity soo is-empty** command in route-policy configuration mode.

extcommunity	<b>SOO</b>	is-empty
--------------	------------	----------

Syntax Description This command has no arguments or keywords.

**Command Default** No default behavior or values

Command Modes Route-policy configuration

Command History Release Modification

Release 3.7.2 This command was introduced.

#### Usage Guidelines

To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **extcommunity soo is-empty** command as a conditional expression within an **if** statement to check if a BGP SoO route has extended community attributes associated with it.

Ŵ

Note For a list of all conditional expressions available within an **if** statement, see the **if** command.

The **is-empty** operator takes no arguments and evaluates to true if the route has no SoO extended community attributes associated with it.

Task ID	Operations
route-policy	read, write

#### Examples

In the following example, if a route has no SoO extended communities associated with it, the local preference is set to 100:

RP/0/RSP0/CPU0:router(config)# route-policy extcommunity-is-empty-example RP/0/RSP0/CPU0:router(config-rpl)# if extcommunity soo is-empty then RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100 RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy

## extcommunity soo matches-any

To match any element of a Border Gateway Protocol (BGP) Site-of-Origin (SoO) extended community set, use the **extcommunity soo matches-any** command in route-policy configuration mode.

**extcommunity soo matches-any** {*extcommunity-set-nameinline-extcommunity-setparameter*}

Syntax Description	extcommunity-set-name Name of a SoO extended community set.	
	<i>inline-extcommunity-set</i> Inline SoO extended community set. The enclosed in parentheses.	inline extended community set must be
	parameter Parameter name. The parameter name mu	st be preceded with a "\$."
Command Default	No default behavior or values	
Command Modes	Route-policy configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes IDs. If the user group assignment is preventing you from using a command, contact your AA for assistance.	
	Use the <b>extcommunity soo matches-any</b> command as a condition match elements of an extended community set.	nal expression within an <b>if</b> statement to
	match elements of an extended community set.	
	Note For a list of all conditional expressions available within an <b>if</b>	statement, see the <b>if</b> command.
	A simple condition using the <b>matches-any</b> operator evaluates as the route matches an extended community specification in the name in the route matches any of the specifications in the named or inline to false. Likewise, when there is no extended community at all in the term of the specification of the	d or inline set. If no extended community e set, then this simple condition evaluates
	Matching an extended community in the route to a specification in inline sets, extended community specifications may be parameterized done when the value of the parameter has been supplied.	
Task ID	Task ID Operations	
	route-policy read, write	
Examples	In the following example, an SoO extended community set named ex route policy named my-extcommunity-set-example(\$tag,\$ip) are de	

The condition route policy named extcommunity soo matches-any is used in an if statement in this policy. If it evaluates to true, the local preference value is set to 100.

If it evaluates to false, the SoO extended community is evaluated using an inline set. If it evaluates to true, the local preference value is set to 200.

If it evaluates to false, the SoO extended community is evaluated using a different inline set. If it evaluates to true, the local preference value is set to 300.

If it evaluates to false, the SoO extended community is evaluated using a different inline set. If it evaluates to true, the local preference value is set to 400.

```
RP/0/RSP0/CPU0:router(config)# extcommunity-set soo extcomm-soo
RP/0/RSP0/CPU0:router(config-ext) # 66:60001,
RP/0/RSP0/CPU0:router(config-ext) # 77:70001,
RP/0/RSP0/CPU0:router(config-ext) # 88:80001,
RP/0/RSP0/CPU0:router(config-ext) # 99:90001,
RP/0/RSP0/CPU0:router(config-ext) # 100.100.100.1:153
RP/0/RSP0/CPU0:router(config-ext) # end-set
RP/0/RSP0/CPU0:router(config) # route-policy my-extcommunity-set-example($tag,$ip)
RP/0/RSP0/CPU0:router(config-rpl)# if extcommunity soo matches-any extcomm-soo then
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# elseif extcommunity soo matches-any (10:20, 10:$tag)
 then
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif) # elseif extcommunity soo matches-any ($ip:$tag)
then
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif extcommunity soo matches-any (2.3.4.5:$tag)
 then
RP/0/RSP0/CPU0:router(config-rpl-elseif)# set local-preference 400
RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif
RP/0/RSP0/CPU0:router(config-rpl)# end-policy
```

Related Commands	Command
	autoonanaitu m

Command	Description
extcommunity rt matches-any, on page 60	Matches any element of a BGP RT extended community set.
extcommunity soo matches-every, on page 78	Matches every element of a BGP SoO extended community set.

## extcommunity soo matches-every

To match every element of a Border Gateway Protocol (BGP) Site-of-Origin (SoO) extended community set, use the **extcommunity soo matches-every** command in route-policy configuration mode.

**extcommunity soo matches-every** {*extcommunity-set-nameinline-extcommunity-setparameter*}

Syntax Description	tion <i>extcommunity-set-name</i> Name of a SoO extended community set.	
	<i>inline-extcommunity-set</i> Inline SoO extended community set. The inline extended community set must be enclosed in parentheses.	
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."	
Command Default	No default behavior or values	
Command Modes	Route-policy configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
	Use the <b>extcommunity soo matches-every</b> command as a conditional expression within an <b>if</b> statement to match every element of a SoO extended community set.	
	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.	
	A simple condition using the <b>matches-every</b> operator evaluates as true if every extended community value in the extended community attribute for the route matches at least one element of the extended community set or inline set. If no extended community in the route matches any of the specifications in the named or inline set, then this simple condition evaluates to false. Likewise, when there is no extended community at all in the route, the condition evaluates to false.	
	Matching an extended community in the route to a specification in a named or an inline set is intuitive. In inline sets, extended community specifications may be parameterized, in which case the relevant matching is done when the value of the parameter has been supplied.	
Examples	In the following example, an extended community set named my-extcomm-rt-set and a parameterized route policy named extcommunity-matches-every-example(\$as, \$tag) are defined. The condition extcommunity soo matches-every is used in an if statement in this policy and if it evaluates to true, the local-preference value is set to 100. If it evaluates to false, the extended community is evaluated using an inline set. If that condition evaluates to true, the local-preference value is set to 200. If it evaluates to false, the local-preference value is set to 300.	

```
RP/0/RSP0/CPU0:router(config)# extcommunity-set soo my-extcomm-rt-set
RP/0/RSP0/CPU0:router(config-ext)# 10:20,
RP/0/RSP0/CPU0:router(config-ext)# 10:30,
RP/0/RSP0/CPU0:router(config-ext)# 10:40
RP/0/RSP0/CPU0:router(config-ext)# end-set
```

RP/0/RSP0/CPU0:router(config) # route-policy extcommunity-matches-every-example(\$as, \$tag)
RP/0/RSP0/CPU0:router(config-rpl) # if extcommunity soo matches-every my-extcomm-rt-set then
RP/0/RSP0/CPU0:router(config-rpl-if) # set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if) # elseif extcommunity soo matches-every (10:20, 10:\$tag,
\$as:30) then
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 200
RP/0/RSP0/CPU0:router(config-rpl-elseif) # else
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif) # set local-preference 300
RP/0/RSP0/CPU0:router(config-rpl-elseif) # endif

RP/0/RSP0/CPU0:router(config-rpl) # end-policy

Related Commands	Command	Description
	extcommunity soo matches-any, on page 76	Matches any element of a BGP SoO extended community set.

## globalVar*N* is

To check the value of globalVarN value assigned through the **var globalVar**N command, use the **globalVar**N **is** command in router-policy configuration mode.

globalVarN is {number | parameter}

Syntax Description	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is from 1 to 4294967295.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	If the globalVarN is not assigned using the <b>var globalVar</b> N command, then the default value for globalVarN is zero.
Command Modes	Route-policy configuration
Command History	Release Modification
	ReleaseThis command was introduced.5.1.3
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	The scope of this variable is from the start of policy to end of policy attached under any attach-point. The variable can be assigned in any child policy and can check for value in parent policy or any other hierarchy of route-policy referred using apply statement.
Task ID	Task ID Operation
	route-policy read, write
	Example
	This example is to identify routes which has communities configured under community-sets internal_set and service2 and set different local-preference values based on the community values.
	<pre>community-set internal_set     1:1 end-set community-set service2</pre>
	3:3 end-set route-policy child1 var globalVar1 100 # user can add more actions or conditions

 $\# \dots$  user can add more actions or conditions... end-policy

route-policy child2
var globalVar2 200

```
#...user can add more actions or conditions ..
end-policy
route-policy inbound
 if community matches-any internal set then
   apply child1
  endif
  if community matches-any service2 then
   apply child2
  endif
 if globalVar1 is 100 and globalVar2 is 200 then
    set local-preference 250
  elseif globalVar1 is 100 then
    set local-preference 150
  elseif globalVar2 is 200 then
    set local-preference 50
  endif
end-policy
```

### if

if

	To decide which action configuration mode.	ons or dispositions sho	uld be taken for a given route, use the <b>if</b> command in route-policy
			atement [action-statement] [elseif conditional-expression then e action-statement [action-statement]] endif
Syntax Description	conditional-expression	on Expression to decide route.	de which actions or dispositions should be taken for the given
	then	Executes an action	statement if the <b>if</b> condition is true.
	elseif	Strings together a s	sequence of tests.
	else	Executes an action	statement if the <b>if</b> condition is false.
	endif	Ends the <b>if</b> statem	nent.
	action-statement	Sequence of opera	tions that modify a route.
Command Default	No default behavior or values		
Command Modes	Route-policy configu	iration	
Command History	Release Modification		
	Release 3.7.2 This	command was introduc	ed.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	The <b>if</b> command uses a conditional expression to decide which actions or dispositions should be a given route. Table 1: Conditional Expressions, on page 82 lists the conditional expressions.		
	An action statement is a sequence of operations that modify a route, most of which are distinguished by the <b>set</b> keyword. In a route policy, these operations can be grouped. Table 2: Action Statements, on page 84 lists the action statements.		
	Table 1: Conditional Expressions		
	Command		Description
	as-path in, on page	11	Matches the AS path of a route to an AS path set. The AS path is a sequence of autonomous system numbers traversed by a route.

Determines if the router (or another router within this autonomous system or confederation) originated the route.

I

as-path is-local, on page 13

Command	Description
as-path length, on page 14	Performs a conditional check based on the length of the AS path.
as-path neighbor-is, on page 16	Tests the autonomous system number or numbers at the head of the AS path against a sequence of one or more integral values or parameters.
as-path originates-from, on page 19	Tests an AS path against the AS sequence beginning with the AS number that originated a route.
as-path passes-through, on page 21	Tests to learn if the specified integer or parameter appears anywhere in the AS path or if the sequence of integers and parameters appears.
as-path unique-length, on page 27	Performs specific checks based on the length of the AS path.
community is-empty, on page 29	Learns if a route has community attributes associated with it.
community matches-any, on page 30	Matches any element of a community set.
community matches-every, on page 32	Matches every element of a community set.
destination in, on page 45	Matches a destination entry in a named prefix set or inline prefix set.
extcommunity rt is-empty, on page 59	Learns if a route has RT extended community attributes associated with it.
extcommunity rt matches-any, on page 60	Matches elements of an RT extended community set.
extcommunity rt matches-every, on page 62	Matches every element of an RT extended community set.
extcommunity soo is-empty, on page 75	Learns if a route has SoO extended community attributes associated with it.
extcommunity soo matches-any, on page 76	Matches elements of an SoO extended community set.
extcommunity soo matches-every, on page 78	Matches every element of an SoO extended community set.
local-preference, on page 92	Specifies BGP local-preference attribute
med, on page 102	Compares the MED to an integer value or a parameterized value.
next-hop in, on page 103	Compares the next-hop associated with the route to data contained in either a named or an inline prefix set.
orf prefix in, on page 105	Matches a prefix in a prefix set or an inline prefix set.
origin is, on page 107	Tests the value of the origin attribute.
path-type is, on page 115	Tests the path type.

Command	Description
protocol, on page 122	Checks if a protocol is installing the route.
rd in, on page 124	Compares the RD associated with the route to data contained in either a named or an inline RD set.
rib-has-route, on page 130	Checks if a route is in the RIB.
route-has-label, on page 131	Checks if a route has a Multiprotocol Label Switching (MPLS) label.
route-type is, on page 134	Compares route types when redistribution is being performed into BGP, OSPF, or IS-IS.
source in, on page 289	Tests the source of the route against the data in either a named or an inline prefix set.
tag, on page 293	Matches a specific tag value.
tag in, on page 294	Conditionally compares tag-route against tag-set.
vpn-distinguisher is, on page 300	Compares the VPN distinguisher against a specified value.

#### Table 2: Action Statements

Command	Description
abort (RPL), on page 5	Discards a route policy definition and returns to global configuration mode.
add, on page 7	Adds an offset to an existing value.
apply, on page 9	Executes a parameterized or an unparameterized policy from within another policy.
delete community, on page 39	Deletes community values from a community list in a route.
delete extcommunity rt, on page 43	Deletes extended community values from an extended community list in a route.
done, on page 47	Accepts this route with no further processing
drop, on page 49	Drops a route.
end-policy, on page 55	Ends the definition of a route policy and exits route-policy configuration mode.
pass, on page 113	Signifies that even though the route has not been modified, the user wants to continue executing in the policy block.
prepend as-path, on page 120	Prepends the AS path with additional autonomous system numbers.
replace as-path, on page 127	Replaces a sequence of AS numbers or private AS numbers in the AS path with the configured local AS.

Command	Description
set community, on page 143	Sets the BGP community attribute.
set dampening, on page 146	Configures BGP route dampening.
set eigrp-metric, on page 149	Sets the Enhanced Interior Gateway Routing Protocol (EIGRP) metric value.
set extcommunity cost, on page 152	Replaces or adds the extended communities for a cost on the route.
set extcommunity rt, on page 154	Replaces or adds the extended communities for an RT on the route.
set ip-precedence, on page 156	Sets the IP precedence to classify packets.
set isis-metric, on page 158	Sets the IS-IS metric attribute value.
set label, on page 159	Sets the BGP label attribute value.
set level, on page 164	Configures the IS-IS level in which redistributed routes should be sent.
set local-preference, on page 165	Specifies a preference value for the autonomous system path.
set med, on page 166	Sets the MED value.
set metric-type (IS-IS), on page 168	Controls whether IS-IS treats the metric as an internal or external metric.
set metric-type (OSPF), on page 169	Controls whether OSPF treats the cost as a Type 1 or Type 2 metric.
set next-hop, on page 170	Replaces the next-hop associated with a given route.
set origin, on page 172	Changes the origin attribute.
set ospf-metric, on page 173	Sets an OSPF protocol metric attribute value.
set qos-group (RPL), on page 176	Sets the QoS group to classify packets.
set rib-metric, on page 177	Sets a RIB metric attribute value for a table policy.
set rip-metric, on page 178	Sets RIP metric attributes.
set rip-tag, on page 179	Sets route tag attribute.
set tag, on page 184	Sets the tag attribute.
set traffic-index, on page 185	Sets the traffic index attribute.
set weight, on page 188	Sets the weight value for BGP routes.
suppress-route, on page 292	Indicates that a given component of an aggregate should be suppressed, that is, not advertised.
unsuppress-route, on page 297	Indicates that a given component of an aggregate should be unsuppressed.

	Command	Description			
	set vpn-distinguisher, on pag	ge 187 Sets the VPN distinguisher value.			
Task ID	Task ID Operations				
	route-policy read, write				
Examples	In the following example, an	y route whose AS path is in the set as-path-set-1 is dropped:			
	RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co	nfig-rpl-if)# endif			
	The contents of the <b>then</b> cla	ause may be an arbitrary sequence of action statements.			
	The following example show	s an <b>if</b> statement with two action statements:			
	RP/0/RSP0/CPU0:router(co	nfig-rpl-if)# <b>prepend as-path 73 5</b> nfig-rpl-if)# <b>endif</b>			
	The <b>if</b> command also permits an <b>else</b> clause to be executed if the expression is false, as follows:				
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# if med eq 200 then RP/0/RSP0/CPU0:router(config-rpl-if)# set community (12:34) additive RP/0/RSP0/CPU0:router(config-rpl-if)# else RP/0/RSP0/CPU0:router(config-rpl-else)# set community (12:56) additive RP/0/RSP0/CPU0:router(config-rpl-else)# endif RP/0/RSP0/CPU0:router(config-rpl)#</pre>				
	The routing policy language (RPL) also provides syntax using the <b>elseif</b> command to string together a sequence of tests, as shown in the following example:				
	RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co RP/0/RSP0/CPU0:router(co	<pre>nfig-rpl)# if med eq 150 then nfig-rpl-if)# set local-preference 10 nfig-rpl-if)# elseif med eq 200 then nfig-rpl-elseif)# set local-preference 60 nfig-rpl-elseif)# elseif med eq 250 then nfig-rpl-elseif)# set local-preference 110 nfig-rpl-elseif)# else nfig-rpl-elseif)# else</pre>			

The statements within an if statement may themselves be if statements, as shown in this example:

RP/0/RSP0/CPU0:router(config-rpl)# if community matches-any (12:34, 56:78) then

RP/0/RSP0/CPU0:router(config-rpl-else) # endif

RP/0/RSP0/CPU0:router(config-rpl)#

if

```
RP/0/RSP0/CPU0:router(config-rpl-if)# if med eq 150 then
RP/0/RSP0/CPU0:router(config-rpl-if)# drop
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 100
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

The policy configuration shown sets the value of the local preference attribute to 100 on any route that has a community value of 12:34 or 56:78 associated with it. However, if any of these routes has a Multi Exit Descriminator (MED) value of 150, then each route with both the community value of 12:34 or 56:78 and a MED of 150 is dropped.

# if route-aggregated

To match the aggregated routes from the other routes, use the **if route-aggregated** command in route policy configuration mode.

#### if route-aggregated

Syntax Description	route-aggregated Checks if route is an aggregation of multiple routes.		
Command Default			
Command Modes	Route-poli	cy configuration	on
Command History	Release		Modification
	Release 5	.2.0	This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
Task ID	Task ID	Operations	
	route-poli	cy read, write	
Examples	This exam	ple shows how	to match the aggregated routes from other routes:
	RP/0/RSP0 RP/0/RSP0 RP/0/RSP0 RP/0/RSP0	/CPU0:router /CPU0:router /CPU0:router	<pre># configure (config) # route-policy route-policy atomic_agg (config-rpl) # if route-aggregated then (config-rpl-if) # set extcommunity rt (1:1) (config-rpl-if) # endif (config-rpl) # end-policy</pre>

## is-best-path

To tag the path selected as the best path use the is-best-path command in route policy configuration mode.

	is-best-path			
Syntax Description	<b>is-best-path</b> Checks and tags the path selected as best-path.			
Command Default	No default beh	No default behavior or values.		
Command Modes	Route-policy of	configuration		
Command History	Release	Modification		
	Release 5.3.2		This command was introduced.	
Usage Guidelines	IDs. If the user for assistance.	r group assignment is pre-	user group associated with a task group that includes appropriate task venting you from using a command, contact your AAA administrator	
	route-policy			
	Example			
	WORD Route Polic RP/0/RSP0/CPU0:ro RP/0/RSP0/CPU0:ro	outer(config)# route-policy cy name outer(config)# route-policy sample outer(config-rp1)# if destination ; ath is-best-external is-best-path		
	if destination is set community c endif end-policy !			
	Copyright (c) 2015			

Built on Fri Jun 26 17:35:45 IST 2015 By router in RP/0/RSP0/CPU0

## is-backup-path

To tag all the paths equal to the back up path use, **is-backup-path** command in route policy configuration mode.

#### is-backup-path

Syntax Description	is-backup-path Checks and tags the path selected as backup path.			
Command Default	No default behavior or values.			
Command Modes	Route-policy configuration			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			

### Task ID Task ID Operation

route-policy read, write

#### Example

```
RP/0/RSP0/CPU0:router(config)# route-policy
WORD Route Policy name
RP/0/RSP0/CPU0:router(config)# route-policy sample
RP/0/RSP0/CPU0:router(config-rpl)# if destination i
in is-backup-path is-best-external is-best-path
```

```
RP/0/RSP0/CPU0:router(config) # route-policy
WORD Route Policy name
RP/0/RSP0/CPU0:router(config) # route-policy sample
RP/0/RSP0/CPU0:router(config-rpl) # if destination i
in is-backup-path is-best-external is-best-path
```

# is-multi-path

To tag all the paths equal to the best path based on multi-path context use, **is-multi-path** command in route policy configuration mode.

	is-multi-path
Syntax Description	<b>is-multi-path</b> Checks and tag all the path equal to the as best-path.
Command Default	No default behavior or values.
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 5.3.2This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
Task ID	Task ID Operation
	route-policy read, write
	Example
	<pre>RP/0/RSP0/CPU0:router(config)#route-policy WORD Route Policy name RP/0/RSP0/CPU0:router(config-rpl)#if destination i in is-backup-path is-best-external is-best-path is-multi-path RP/0/RSP0/CPU0:router(config-rpl)#if destination is- is-backup-path is-best-external is-best-path is-multi-path RP/0/RSP0/CPU0:router(config-rpl)#if destination is-best-path then RP/0/RSP0/CPU0:router(config-rpl)#if destination is-best-path then RP/0/RSP0/CPU0:router(config-rpl-if)#set 1 label label-index label-mode level community lsm-root RP/0/RSP0/CPU0:router(config-rpl-if)#set community community RP/0/RSP0/CPU0:router(config-rpl-if)#set community community RP/0/RSP0/CPU0:router(config-rpl-if)#endif RP/0/RSP0/CPU0:router(config-rpl)#end-policy RP/0/RSP0/CPU0:router(config)#commit Wed Jul 8 16:08:23.436 IST</pre>

# local-preference

To compare the local-preference attribute of a BGP route to an integer value or a parameterized value, use the local-preference command in route-policy configuration mode.

	<b>local-preference</b> {eq   is   ge   le} {numberparameter}			
Syntax Description	<b>eq</b>   <b>is</b>   <b>ge</b>   <b>le</b> Equal to; exact match; greater than or equal to; less than or equal to.			
	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is 0 to 4294967295.			
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."			
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the <b>local- preference</b> command as a conditional expression within an <b>if</b> statement to compare the local-preference attribute to an integer value or a parameterized value.			
	Note For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.			
	The MED is a 32-bit unsigned integer. The <b>eq</b> operation compares the local-preference to either a static value or a parameterized value passed to a parameterized policy for equality with that value. A greater than or equal to comparison can also be done with the <b>ge</b> operator, and a less than or equal to comparison can be performed using the <b>le</b> operator.			
Examples	The following example shows that if the local-preference is 10, local-preference is set to 100:			
	<pre>RP/0/RSP0RP0/CPU0:router(config-rpl)# if local-preference eq 10 then RP/0/RSP0RP0/CPU0:router(config-rpl-if)# set weight 100 RP/0/RSP0RP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0RP0/CPU0:router(config-rpl)#</pre>			

## large-community is-empty

To check if a route has no large community attributes associated with it, use the **large-community is-empty** command in route-policy configuration mode.

#### large-community is-empty

Syntax Description	This comm	This command has no arguments or keywords.		
Command Default	No default	No default behavior or values		
Command Modes	Route-poli	cy configuration	on	
Task ID	Task ID	Operations		
	route-polic	y read, write		
Command History	Release		Modification	
	Release 6.	.3.1	This command was introduced.	
Usage Guidelines		user group ass	u must be in a user group associated with a task group that includes appropriate task ignment is preventing you from using a command, contact your AAA administrator	
			<b>ty is-empty</b> command as a conditional expression within an <b>if</b> statement to check attributes associated with it.	
	Note For a	list of all cond	itional expressions available within an <b>if</b> statement, see the <b>if</b> command.	
	This comm with it.	and takes no a	rguments and evaluates to true only if the route has no community attributes associated	
Task ID	Task ID	Operations		
	route-polic	y read,		

write

The following example shows using the **large-community is-empty** clause to filter routes that do not have the large-community attribute set.

```
RP/0/RSP0/CPU0:router#config
RP/0/RSP0/CPU0:router(config)#route-policy lrg_comm_rp4
RP/0/RSP0/CPU0:router(config-rpl)#if large-community is-empty then
RP/0/RSP0/CPU0:router(config-rpl)#set local-preference 104
```

RP/0/RSP0/CPU0:router(config-rpl)#endif RP/0/RSP0/CPU0:router(config-rpl)#end-policy

# large-community matches-any

To configure the route policy to match any elements of a large-community set, use the **large-community matches-any** command in route-policy configuration mode.

large-community matches-any { large-community-set-name or inline-large-community-set |
parameter }

Syntax Description	large-com	nunity-set-name	Name of a large community set.
	inline-larg	e-community-set	Inline large community set. The inline large community set must be enclosedin parentheses.Parameter name. The parameter name must be preceded with a "\$."
	parameter		
Command Default	No default	behavior or valu	es
Command Modes	Route-polic	cy configuration	
Task ID	Task ID	Operations	
	route-polic	y read, write	
Command History	Release		Modification
	Release 6.	3.1	This command was introduced.
Usage Guidelines	IDs. If the r for assistan Use the <b>la</b>	user group assigr ce. <b>rge-community</b>	nust be in a user group associated with a task group that includes appropriate task ment is preventing you from using a command, contact your AAA administrator <b>matches-any</b> command as a conditional expression within an <b>if</b> statement in to match any element of a large-community set.
-	Note For a	list of all condition	onal expressions available within an <b>if</b> statement, see the <b>if</b> command.
			pecified as three non negative decimal integers separated by colons. For example, l in 32 bits. The possible range for each integer is 0 to 4294967295.
	In route-po expressions		each integer in the BGP large community can be replaced by any of the following
	• [xy]	— This expressi	on specifies a range between x and y, inclusive.

• \* — This expression stands for any number.

- peeras This expression is replaced by the AS number of the neighbor from which the community is received or to which the community is sent, as appropriate.
- not-peeras This expression matches any number other than the peeras.
- private-as This expression specifies any number in the private ASN range: [64512..65534] and [4200000000..4294967294].

Ø

**Note** The peeras and not-peeras expressions can only be used in large-community match statements that appear in route policies that are applied at the neighbor-in or neighbor-out attach points.

IOS regular expression (ios-regex) and DFA style regular expression (dfa-regex) can be used in any of the large-community policy match statements. For example, the IOS regular expression ios-regex '^5:.\*:7\$' is equivalent to the expression 5:\*:7.

Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	-community	set. This is a	hows how to configure a route policy to match any element of a large boolean condition and returns true if any of the large communities in the rge communities in the match condition.

```
RP/0/RSP0/CPU0:router#config
RP/0/RSP0/CPU0:router(config)#route-policy elbonia
RP/0/RSP0/CPU0:router(config-rpl)#if large-community matches-any (1:2:3, 4:5:*) then
RP/0/RSP0/CPU0:router(config-rpl)#set local-preference 94
RP/0/RSP0/CPU0:router(config-rpl)#endif
RP/0/RSP0/CPU0:router(config-rpl)#endif
```

## large-community matches-every

To configure the route policy to match every element of a large-community set, use the **large-community matches-every** command in route-policy configuration mode.

large-community matches-every { large-community-set-name or inline-large-community-set
| parameter }

Syntax Description	large-community-set-na	me Name of a large community set.
	inline-large-community-	<i>set</i> Inline large community set. The inline large community set must be enclosed in parentheses.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or v	values
Command Modes	Route-policy configurati	ion
Task ID	Task ID Operations	-
	route-policy read, write	· -
Command History	Release	Modification
	Release 6.3.1	This command was introduced.
		ou must be in a user group associated with a task group that includes appropriate task signment is preventing you from using a command, contact your AAA administrator
		<b>ity matches-every</b> command as a conditional expression within an <b>if</b> statement in nts to match every element of a large-community set.
	Note For a list of all cond	ditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
	The large communities are specified as three non negative decimal integers separated by colons. For exampl:2:3. Each integer is stored in 32 bits. The possible range for each integer is 0 to 4294967295.	
	In route-policy statemen expressions:	ts, each integer in the BGP large community can be replaced by any of the following

- [x..y] This expression specifies a range between x and y, inclusive.
- \* This expression stands for any number.
- peeras This expression is replaced by the AS number of the neighbor from which the community is received or to which the community is sent, as appropriate.

- not-peeras This expression matches any number other than the peeras.
- private-as This expression specifies any number in the private ASN range: [64512..65534] and [420000000..4294967294].

**Note** The peeras and not-peeras expressions can only be used in large-community match statements that appear in route policies that are applied at the neighbor-in or neighbor-out attach points.

IOS regular expression (ios-regex) and DFA style regular expression (dfa-regex) can be used in any of the large-community policy match statements. For example, the IOS regular expression ios-regex '^5:.\*:7\$' is equivalent to the expression 5:\*:7.

## Task ID Task ID Operations route-policy read, write

The following example shows how to configure a route policy where every match specification in the statement must be matched by at least one large community in the route.

```
RP/0/RSP0/CPU0:router#config
RP/0/RSP0/CPU0:router(config)#route-policy bob
RP/0/RSP0/CPU0:router(config-rpl)#if large-community matches-any (*:*:3, 4:5:*) then
RP/0/RSP0/CPU0:router(config-rpl)#set local-preference 94
RP/0/RSP0/CPU0:router(config-rpl)#endif
RP/0/RSP0/CPU0:router(config-rpl)#endif
```

In this example, routes with these sets of large communities return TRUE:

- (1:1:3, 4:5:10)
- (4:5:3) This single large community matches both specifications.
- (1:1:3, 4:5:10, 7:6:5)

Routes with the following set of large communities return FALSE:

(1:1:3, 5:5:10)—The specification (4:5:\*) is not matched.

I

# large-community matches-within

To configure a route policy to match within a large community set, use the **large-community matches-within** command in route-policy configuration mode.


large-community matches-within {large-community-set-name or inline-large-community-set
| parameter }

Syntax Description				
Sinar Bescription	large-community-set-name	Name of a large community set.		
	inline-large-community-set	Inline large community set. The inline large community set must be enclosed in parentheses.		
	parameter	Parameter name. The parameter name must be preceded with a "\$."		
Command Default	No default behavior or valu	es		
Command Modes	Route-policy configuration			
Task ID	Task ID Operations			
	route-policy read, write			
Command History	Release	Modification		
	Release 6.3.1	This command was introduced.		
Usage Guidelines	To use this command, you n	nust be in a user group associated with a task group that includes appropriate task		
Usage Guidelines	To use this command, you n IDs. If the user group assign for assistance. This command is similar to	nust be in a user group associated with a task group that includes appropriate tasl ment is preventing you from using a command, contact your AAA administrato		
Usage Guidelines	<ul> <li>To use this command, you n IDs. If the user group assign for assistance.</li> <li>This command is similar to route must match at least or matches.</li> <li>When large communities ar</li> </ul>	nust be in a user group associated with a task group that includes appropriate task ment is preventing you from using a command, contact your AAA administrato the <b>large-community matches-any</b> command but every large community in the me match specification. Note that if the route has no large communities, then it re specified in other commands, they are specified as three non negative decimal s. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for eacl		
Usage Guidelines	To use this command, you n IDs. If the user group assign for assistance. This command is similar to route must match at least or matches. When large communities ar integers separated by colons integer is 0 to 4294967295.	nust be in a user group associated with a task group that includes appropriate task ment is preventing you from using a command, contact your AAA administrato the <b>large-community matches-any</b> command but every large community in the ne match specification. Note that if the route has no large communities, then it e specified in other commands, they are specified as three non negative decimal s. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for each		
Usage Guidelines	To use this command, you n IDs. If the user group assign for assistance. This command is similar to route must match at least or matches. When large communities ar integers separated by colons integer is 0 to 4294967295. In route-policy statements, of expressions:	nust be in a user group associated with a task group that includes appropriate task ment is preventing you from using a command, contact your AAA administrato the <b>large-community matches-any</b> command but every large community in the me match specification. Note that if the route has no large communities, then it re specified in other commands, they are specified as three non negative decimal s. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for each		
Usage Guidelines	To use this command, you n IDs. If the user group assign for assistance. This command is similar to route must match at least or matches. When large communities ar integers separated by colons integer is 0 to 4294967295. In route-policy statements, of expressions:	nust be in a user group associated with a task group that includes appropriate tash ment is preventing you from using a command, contact your AAA administrato the <b>large-community matches-any</b> command but every large community in the me match specification. Note that if the route has no large communities, then it re specified in other commands, they are specified as three non negative decimal s. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for each each integer in the BGP large community can be replaced by any of the following on specifies a range between x and y, inclusive.		
Usage Guidelines	<ul> <li>To use this command, you n IDs. If the user group assign for assistance.</li> <li>This command is similar to route must match at least on matches.</li> <li>When large communities ar integers separated by colons integer is 0 to 4294967295.</li> <li>In route-policy statements, of expressions:</li> <li>[xy] — This expression * — This expression st • peeras — This express</li> </ul>	nust be in a user group associated with a task group that includes appropriate tash ment is preventing you from using a command, contact your AAA administrato the <b>large-community matches-any</b> command but every large community in the me match specification. Note that if the route has no large communities, then it re specified in other commands, they are specified as three non negative decimal s. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for each each integer in the BGP large community can be replaced by any of the following on specifies a range between x and y, inclusive.		

• private-as — This expression specifies any number in the private ASN range: [64512..65534] and [420000000..4294967294].

**Note** The peeras and not-peeras expressions can only be used in large-community match statements that appear in route policies that are applied at the neighbor-in or neighbor-out attach points.

IOS regular expression (ios-regex) and DFA style regular expression (dfa-regex) can be used in any of the large-community policy match statements. For example, the IOS regular expression ios-regex '^5:.\*:7\$' is equivalent to the expression 5:\*:7.



The following example shows how to configure a route policy to match within a large community set.

```
RP/0/RSP0/CPU0:router#config
RP/0/RSP0/CPU0:router(config)#route-policy bob
RP/0/RSP0/CPU0:router(config-rpl)#if large-community matches-within (*:*:3, 4:5:*) then
RP/0/RSP0/CPU0:router(config-rpl)#set local-preference 103
RP/0/RSP0/CPU0:router(config-rpl)#endif
RP/0/RSP0/CPU0:router(config-rpl)#endif
```

In this example, routes with these sets of large communities return TRUE:

- (1:1:3, 4:5:10)
- (4:5:3)
- (1:2:3, 6:6:3, 9:4:3)

Routes with the following set of large communities return FALSE:

(1:1:3, 4:5:10, 7:6:5) — The large community (7:6:5) does not match

### large-community-set

To define a set of large-communities, use the **large-community-set** command in global configuration mode. To remove the large-community set, use the **no** form of this command.

large-community-set name no large-community-set name

Syntax Description name Name of the large-community set. Named large-community sets are used in route-policy match and set statements.

No default behavior or values **Command Default** 

global configuration **Command Modes** 

**Command History** Release Modification Release This command was introduced. 6.3.1

To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

> The large communities are specified as three non negative decimal integers separated by colons. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for each integer is 0 to 4294967295.

> In route-policy statements, each integer in the BGP large community can be replaced by any of the following expressions:

- [x..y] This expression specifies a range between x and y, inclusive.
- \* This expression stands for any number.
- private-as This expression specifies any number in the private ASN range: [64512..65534] and [420000000..4294967294].

Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	This exampl	e shows hov	v to create a named large-community set:

RP/0/RSP0/CPU0:router#configure

```
RP/0/RSP0/CPU0:router(config) #large-community-set catbert
RP/0/RSP0/CPU0:router(config-largecomm)#1:2:3,
RP/0/RSP0/CPU0:router(config-largecomm) #[5..9]:2:3
RP/0/RSP0/CPU0:router(config-largecomm) #1:3:*
RP/0/RSP0/CPU0:router(config-largecomm) #end-set
```

### med

To compare the Multi Exit Discriminator (MED) to an integer value or a parameterized value or compare the MED attribute of a BGP route to an integer value, use the **med** command in route-policy configuration mode. **med** {eq | is | ge | le} {*numberparameter*} **Syntax Description** eq | is | ge | le Equal to; exact match; greater than or equal to; less than or equal to. Value assigned to a 32-bit unsigned integer. Range is 0 to 4294967295. number Parameter name. The parameter name must be preceded with a "\$." parameter No default behavior or values **Command Default** Route-policy configuration **Command Modes Command History** Modification Release Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **med** command as a conditional expression within an **if** statement to compare the MED to an integer value or a parameterized value. \$ Note For a list of all conditional expressions available within an **if** statement, see the **if** command. The MED is a 32-bit unsigned integer. The eq operation compares the MED to either a static value or a parameterized value passed to a parameterized policy for equality with that value. A greater than or equal to comparison can also be done with the ge operator, and a less than or equal to comparison can be performed using the le operator. Task ID Task ID Operations route-policy read, write **Examples** The following example shows that if the **med** commands match, the local preference is set to 100: RP/0/RSP0/CPU0:router(config-rpl) # if med eq 10 then RP/0/RSP0/CPU0:router(config-rpl-if) # set local-preference 100 RP/0/RSP0/CPU0:router(config-rpl-if) # endif RP/0/RSP0/CPU0:router(config-rpl)#

### next-hop in

To compare the next-hop associated with the route to data contained in either an inline or a named prefix set, use the **next-hop in** command in route-policy configuration mode.

**next-hop in** {*prefix-set-nameinline-prefix-setparameter*} **Syntax Description** prefix-set-name Name of a prefix set. *inline-prefix-set* Inline prefix set. The inline prefix set must be enclosed in parentheses. Parameter name. The parameter name must be preceded with a "\$." parameter No default behavior or values **Command Default** Route-policy configuration **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **next-hop** in command as a conditional expression within an if statement to compare the next-hop associated with the route to data contained in either an inline or a named prefix set. The result is true if any value in the prefix set matches the next-hop of the route. A comparison that refers to a named prefix set that has no elements in it returns false. Note For a list of all conditional expressions available within an **if** statement, see the **if** command. The next-hop is an IPv4 address entered as a dotted-decimal or an IPv6 address entered as a colon-separated hexadecimal. Task ID Task ID Operations route-policy read, write Examples The following example shows that if the **next-hop in** commands match, the local preference is set to 100 RP/0/RSP0/CPU0:router(config-rpl)# if next-hop in some-prefix-set then RP/0/RSP0/CPU0:router(config-rpl-if)# if next-hop in (10.0.0.5, fe80::230/64) then RP/0/RSP0/CPU0:router(config-rpl-if)# set local-preference 0

I

RP/0/RSP0/CPU0:router(config-rpl-if) # endif RP/0/RSP0/CPU0:router(config-rpl) #

# orf prefix in

To configure an outbound route filter (ORF), use the **orf prefix in** command in route-policy configuration mode.

	<b>orf prefix in</b> { <i>prefix-set-nameinline-prefix-set</i> }			
Syntax Description	prefix-set-name Name of a prefix set.			
	<i>inline-prefix-set</i> Inline prefix set. The inline prefix set must be enclosed in parentheses.			
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the orf prefix in command to match a prefix in a prefix set or an inline prefix set.			
	This command takes either a named prefix set or an inline prefix set value as an argument. It returns true if the destination NLRI matches any entry in the prefix set. An attempt to match destination using a prefix set that is defined but contains no elements returns false.			
	This command is used in the context of the orf route-policy attach point in BGP. The destination of a route is also known in Border Gateway Protocol (BGP) as its network-layer reachability information (NLRI). It comprises a prefix value and a mask length. The routing policy language (RPL) provides one operation on prefixes, testing them for matching against a list of prefix-match specifications using the <b>in</b> operator.			
Examples	In the following example, the prefix set orfpreset1 and the route policy named orfpolicy are defined. Next, the orfpolicy is applied to the neighbor orf attach point.			
	If the prefix of the route matches any of the prefixes specified in orfpreset1 (211.105.1.0/24, 211.105.5.0/24, 211.105.11.0/24), then the prefix is dropped. If the prefix matches in(211.105.3.0/24, 211.105.7.0/24, 211.105.13.0/24), then the prefix is accepted. In addition to this inbound filtering, BGP sends these prefix entries to the upstream neighbor indicating a permit or deny so that the neighbor can make the same filter updates.			
	<pre>RP/0/RSP0/CPU0:router(config)# prefix-set orfpreset1 RP/0/RSP0/CPU0:router(config-pfx)# 211.105.1.0/24, RP/0/RSP0/CPU0:router(config-pfx)# 211.105.5.0/24, RP/0/RSP0/CPU0:router(config-pfx)# 211.105.11.0/24 RP/0/RSP0/CPU0:router(config-pfx)# end-set ! RP/0/RSP0/CPU0:router(config)# route-policy orfpolicy</pre>			

```
RP/0/RSP0/CPU0:router(config-rpl)# if orf prefix in orfpreset1 then
RP/0/RSP0/CPU0:router(config-rpl-if)# drop
RP/0/RSP0/CPU0:router(config-rpl)# if orf prefix in (211.105.3.0/24, 211.105.7.0/24,
211.105.13.0/24) then
RP/0/RSP0/CPU0:router(config-rpl-if)# pass
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)# end-policy
!
!
RP/0/RSP0/CPU0:router(config)# router bgp 2
RP/0/RSP0/CPU0:router(config-bgp)# neighbor 1.1.1.1
RP/0/RSP0/CPU0:router(config-bgp)# remote-as 3
RP/0/RSP0/CPU0:router(config-bgp-nbr)# address-family ipv4 unicast
RP/0/RSP0/CPU0:router(config-bgp-nbr-af)# orf route-policy orfpolicy
```

#### **Related Commands**

Command	Description	
orf	Specifies BGP ORF and inbound filtering criteria.	

# origin is

I

origin is	
	To match a specific origin type, use the <b>origin is</b> command in route-policy configuration mode.
	<b>origin</b> is {igp   egp   incomplete <i>parameter</i> }
Syntax Description	igp Specifies Interior Gateway Protocol.
	egp Specifies Exterior Gateway Protocol.
	<b>incomplete</b> Specifies that Border Gateway Protocol (BGP) first learned the route by means other than BGP or Interior Gateway Protocol (IGP); for example, the route is learned through configuration.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>origin is</b> command as a conditional expression within an <b>if</b> statement to test the value of the origin attribute.
-	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
	The origin of a BGP route is an enumeration; it is igp, egp, or incomplete.
	This command can be parameterized.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the origin is tested within an <b>if</b> statement to learn if it is either <b>igp</b> or <b>egp</b> :

RP/0/RSP0/CPU0:router(config-rpl) # if origin is igp or origin is egp then

In the following example, a parameter is used to match a specific origin type:

```
RP/0/RSP0/CPU0:router(config)# route-policy bar($origin)
RP/0/RSP0/CPU0:router(config-rpl)# if origin is $origin then
RP/0/RSP0/CPU0:router(config-rpl-if)# set med 20
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

### ospf-area

To match a specific ospf area, use the ospf-area command in route-policy configuration mode.

	ospf-area [all-paths] $\{in \mid is\}$		
Syntax Description	is Specify the explicit <i>area-id</i> .		
	in Specify a list of <i>area-id</i> or <i>area-set</i> . Multiple areas can be specified separated by a comma (,).		
	<b>all-paths</b> Used for routes with multiple paths. A match is made if area for every path of the route is configured in the route-policy.		
Command Default	None		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 5.2.2 This command was introduced.		
Usage Guidelines	<ul> <li>To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.</li> <li>The route policy define by using <b>ospf-area</b> is useful in redistributing routes from a specific area of a routing domain into OSPF. After the route policy is crated, use the <b>redistribute ospf route-policy</b> command for route redistribution.</li> </ul>		
Task ID	Task ID Operations		
	route-policy read, write		
	Example		
	In the following example, an explicit area is specified as the matching criteria.		
	RP/0/RSP0/CPU0:router(config-rpl)# if ospf-area is 10 then pass else drop endif		
	In the following example, a collection of areas is specified as the matching criteria.		
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# if ospf-area in (5,6,255.255.10.2) then pass else drop endif</pre>		
	To the Call sector with the sector sector sector and the sector birst sector is the sector sector is the sector		

In the following example, an area set is specified as the matching criteria. As a pre-requisite, the area set must be defined.

RP/0/RSP0/CPU0:router(config)# ospf-area-set S1
RP/0/RSP0/CPU0:router(config-ospf-area)# 1 , 2.2.2.2 end-set
RP/0/RSP0/CPU0:router(config)# route-policy P1
RP/0/RSP0/CPU0:router(config-rpl)# if ospf-area in S1 then pass else drop endif

L

### ospf-area-set

Defines an OSPF area set to be used in routing policy statements.

```
ospf-area-setname {<0-4294967295><A.B.C.D> | abort | end-set | exit | show} noospf-area-setname
```

Syntax Description	name	Name of the OSPF area set.
	<0-4294967295	> 32-bit decimal number to identify the set.
	<a.b.c.d></a.b.c.d>	IPv4 Address used to identify the set, or the IPv4 address of the ACL.
	abort	Exits the OSPF area set configuration without committing.
	end-set	Exits the set configuration mode.
		You can commit the set after this option.
	show Displays the partial RPL configuration.	
Command Default	No default behav	vior or values
Command Modes	Global configura	ation
Command History	Release N	Modification
	Release 5.1.1 T	This command was introduced.
Task ID	Task ID Op	erations
	route-policy rea wr	
	Example	
	The example sho	ows how you can configure OSPF area sets with wildcards in routing polic

```
RP/0/RSP0/CPU0:router(config)# ospf-area-set ospf_area_set_demo1
RP/0/RSP0/CPU0:router(config-ospf-area)# 10.0.0.1,
RP/0/RSP0/CPU0:router(config-ospf-area)# 3553
RP/0/RSP0/CPU0:router(config-ospf-area)# end-set
RP/0/RSP0/CPU0:router(config)# ospf-area-set ospf_area_set_demo2
RP/0/RSP0/CPU0:router(config-ospf-area)# 20.0.0.2,
RP/0/RSP0/CPU0:router(config-ospf-area)# 3673
RP/0/RSP0/CPU0:router(config-ospf-area)# ad-set
```

```
RP/0/RSP0/CPU0:router(config)# route-policy use_ospf_area_set
RP/0/RSP0/CPU0:router(config-rpl)# if ospf-area in ospf-area-set* then set ospf-metric 200
RP/0/RSP0/CPU0:router(config-rpl-if)# elseif ospf-area in( 10.0.0.1, 10.0.0.2 )then set
```

ospf-metric 300

RP/0/RSP0/CPU0:router(config-rpl-elseif)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy

### pass

To pass a route for further processing, use the **pass** command in route-policy configuration mode.

	pass		
Syntax Description	This command has no arguments or keywords.		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>pass</b> command to signify that even though this route has not been modified, the user wants to continue executing in this policy block.		
	Note The pass command can be used as an action statement within an if statement. For a list of all action statements available within an if statement, see the if command. When a policy block has finished executing, any route that has been modified in this policy block or has received a pass disposition in this policy block passes the policy and execution finishes for that policy. If this policy block is applied from within another policy block and the route is either passed or modified, then execution continues in the policy block that applied this policy block.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	The following example shows how to accept the route unconditionally without modifying it:		
	RP/0/RSP0/CPU0:router(config-rpl)# <b>pass</b>		
	This example accepts the route unconditionally, without modifying it, if the destination is in prefix-set permitted:		
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# if destination in permitted then RP/0/RSP0/CPU0:router(config-rpl-if)# pass RP/0/RSP0/CPU0:router(config-rpl-if)# endif</pre>		

I

RP/0/RSP0/CPU0:router(config-rpl)#

## path-type is

To match path types, use the **path-type is** command in route-policy configuration mode.

	<pre>path-type is {ibgp   ebgpparameter}</pre>
Syntax Description	<b>ibgp</b> Specifies an internal BGP path.
	ebgp Specifies an external BGP path.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.         Use the <b>path-type is</b> command as a conditional expression within an <b>if</b> statement to match path types.         Note         For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, if the path is an external BGP path the route is accepted:
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_A RP/0/RSP0/CPU0:router(config-rpl)# if path-type is ebgp then RP/0/RSP0/CPU0:router(config-rpl-if)# pass RP/0/RSP0/CPU0:router(config-rpl-if)# else RP/0/RSP0/CPU0:router(config-rpl-else)# drop RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>

## policy-global

To define global parameters and enter global parameter configuration mode, use the **policy-global** command in global configuration mode. To remove global parameters, use the **no** form of this command.

	policy-global no policy-global		
Syntax Description	This command has no arguments or keywords.		
Command Default	No default behavior or values		
Command Modes	Global configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>policy-global</b> command to define global parameters and enter global parameter configuration mode.		
	RPL supports the definition of systemwide global parameters that can be used inside a policy definition. The global parameter values can be used directly inside a policy definition similar to the local parameters of parameterized policy. When a parameterized policy has a parameter name "collision" with a global parameter name, parameters local to policy definition take precedence, effectively 'masking off" global parameters. In addition, a validation mechanism is in place to prevent the deletion of a particular global parameter if it is referred by any policy. For more information on global parameters and parameterization, see the <i>Implementing Routing Policy</i> module of the <i>Routing Configuration Guide for Cisco ASR 9000 Series Routers</i>		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	The following example shows how to configure global parameters:		
	RP/0/RSP0/CPU0:router(config)# <b>policy-global</b> RP/0/RSP0/CPU0:router(config-rp-gl)# <b>glbpathtype `ebgp'</b> RP/0/RSP0/CPU0:router(config-rp-gl)# <b>glbtag `100'</b> RP/0/RSP0/CPU0:router(config-rp-gl)# <b>end-global</b>		
	In the following example, the <i>globalparam</i> argument makes use of the global parameters gbpathtype and glbtag defined above and is defined for a nonparameterized policy:		
	RP/0/RSP0/CPU0:router(config)# route-policy globalparam RP/0/RSP0/CPU0:router(config-rpl)# if path-type is \$glbpathtype then		

RP/0/RSP0/CPU0:router(config-rpl)# set tag \$glbtag RP/0/RSP0/CPU0:router(config-rpl)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy

Related	Commands

Command	Description
end-global, on page 54	Ends the definition of global parameters.

### prefix-set

To enter prefix set configuration mode and define a prefix set for contiguous and non-contiguous set of bits, use the **prefix-set** command in global configuration mode. To remove a named prefix set, use the **no** form of this command.

prefix-set name no prefix-set name

Syntax Description	name			Name of a prefix set.
Command Default	None			
Command Modes	Global confi	iguration		
Command History	Release	Modificat	tion	_
	Release 3.7	.2 This com	mand was introduced	- · -
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>prefix-set</b> command to enter prefix set configuration mode and define a prefix set.			
	specification maximum m standard fou mask length 128 for IPv6 length follow greater than to 128 for IF le (mnemor from 0 to 32	ns, each of we natching leng r-part, dottect, if present, i prefixes foll ws the address or equal to), Pv6. The opti- nic for less the for IPv4 or	hich has four parts: a th. The address is re l-decimal numeric IF s a nonnegative deci owing the address an s and optional mask followed by a nonno onal maximum mate an or <b>e</b> qual to), follo	ix match specifications. It holds IPv4 or IPv6 prefix match in address, a mask length, a minimum matching length, and a quired, but the other three parts are optional. The address is a v4 address or a colon-separated hexadecimal IPv6 address. The mal integer in the range from 0 to 32 for IPv4 prefixes or 0 to ad separated from it by a slash. The optional minimum matching length and is expressed as the keyword <b>ge</b> (mnemonic for egative decimal integer in the range from 0 to 32 for IPv4 or 0 hing length follows the rest and is expressed by the keyword wed by yet another nonnegative decimal integer in the range syntactic shortcut for specifying an exact length for prefixes to tal to.
	The default the default m	minimum ma aximum mat	atching length is the ching length must be	ngth, then the default mask length is 32 for IPv4 or 128 for IPv6. mask length. If a minimum matching length is specified, then less than 32 for IPv4 prefixes or 128 for IPv6 prefixes. Otherwise, specified, the default maximum length is the mask length.
Task ID	Task ID	Operations		
	route-policy	read, write		

#### **Examples**

The following example shows a prefix set named legal-ipv4-prefix-examples:

```
RP/0/RSP0/CPU0:router(config)# prefix-set legal-ipv4-prefix-examples
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.1.1,
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.2.0/24,
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.3.0/24 ge 28,
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.4.0/24 le 28,
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.5.0/24 ge 26 le 30,
RP/0/RSP0/CPU0:router(config-pfx)# 10.0.6.0/24 eq 28
RP/0/RSP0/CPU0:router(config-pfx)# end-set
```

The first element of the prefix set matches only one possible value, 10.0.1.1/32 or the host address 10.0.1.1. The second element matches only one possible value, 10.0.2.0/24. The third element matches a range of prefix values, from 10.0.3.0/28 to 10.0.3.255/32. The fourth element matches a range of values, from 10.0.4.0/24 to 10.0.4.240/28. The fifth element matches prefixes in the range from 10.0.5.0/26 to 10.0.5.252/30. The sixth element matches any prefix of length 28 in the range from 10.0.6.0/28 through 10.0.6.240/28.

The following prefix set consists entirely of invalid prefix match specifications:

```
RP/0/RSP0/CPU0:router(config)# prefix-set INVALID-PREFIX-EXAMPLES
RP/0/RSP0/CPU0:router(config-pfx)# 10.1.1.1 ge 16,
RP/0/RSP0/CPU0:router(config-pfx)# 10.1.2.1 le 16,
RP/0/RSP0/CPU0:router(config-pfx)# 10.1.3.0/24 le 23,
RP/0/RSP0/CPU0:router(config-pfx)# 10.1.4.0/24 ge 33,
RP/0/RSP0/CPU0:router(config-pfx)# 10.1.5.0/25 ge 29 le 28
RP/0/RSP0/CPU0:router(config-pfx)# end-set
```

Neither the minimum length nor the maximum length is legal without a mask length. The maximum length must be at least the mask length. The minimum length must be less than 32, the maximum length of an IPv4 prefix. The maximum length must be equal to or greater than the minimum length.

The following example shows a valid IPv6 prefix set named legal-ipv6-prefix-examples:

```
RP/0/RSP0/CPU0:router(config)# prefix-set legal-ipv6-prefix-examples
RP/0/RSP0/CPU0:router(config-pfx)# 2001:0:0:1::/64,
RP/0/RSP0/CPU0:router(config-pfx)# 2001:0:0:2::/64,
RP/0/RSP0/CPU0:router(config-pfx)# 2001:0:0:3::/64,
RP/0/RSP0/CPU0:router(config-pfx)# 2001:0:0:4::/64
RP/0/RSP0/CPU0:router(config-pfx)# end-set
```

### prepend as-path

To prepend the AS path with additional autonomous system numbers, use the **prepend as-path** command in route-policy configuration mode.

**prepend as-path** {as-numberparameter | **most-recent**} [numberparameter] **Syntax Description** as-number Autonomous system number to prepend to the path. • Range for 2-byte Autonomous system numbers (ASNs) is 1 to 65535. • Range for 4-byte Autonomous system numbers (ASNs) in asplain format is 1 to 4294967295. • Range for 4-byte Autonomous system numbers (ASNs) is asdot format is 1.0 to 65535.65535. Parameter name. The parameter name must be preceded with a "\$." parameter Specifies that the most recent autonomous system number should be prepended. most-recent number (Optional) Number of times the autonomous system number should be prepended. Range is 1 to 63. The default number is 1. **Command Default** Route-policy configuration **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. Release 3.9.0 Asplain format for 4-byte Autonomous system numbers notation was supported. Use the **prepend as-path** command to prepend the AS path with additional autonomous system numbers. **Usage Guidelines** Note The prepend as-path command can be used as an action statement within an if statement. For a list of all action statements available within an if statement, see the if command. This command can take one or two arguments. The first argument (either a number or parameter) is the autonomous system number to prepend to the path. The optional second argument (either a number or parameter) is the number of times the autonomous system number should be prepended. Task ID Task ID Operations

> route-policy read, write

#### **Examples**

The following example shows how to prepend the autonomous system number 666.1 to the AS path three times:

```
RP/0/RSP0/CPU0:router(config-rpl)# prepend as-path 666.1 3
```

The following example shows how to prepend the autonomous system number 666.0 to the AS path one time:

```
RP/0/RSP0/CPU0:router(config-rpl) # prepend as-path 666.0 1
```

## protocol

To check the protocol that installs the route, use the **protocol** command in route-policy configuration mode.

**protocol** {**in**(*protocol-set*) | **is***protocol-name*}

Syntax Description	in (protocol-set)	Specifies a member of a set. The <i>protocol-set</i> argument accepts the following keywords within parentheses:			
		<ul> <li>bgp —Border Gateway Protocol (BGP)</li> <li>connected —Connected routes</li> </ul>			
		• eigrp —Enhanced Interior Gateway Routing Protocol (EIGRP)			
		<ul> <li>isis —ISO Intermediate System-to-Intermediate System (IS-IS)</li> <li>ospf —Open Shortest Path First (OSPF)</li> </ul>			
		• ospfv3 —Open Shortest Path First version 3 (OSPFv3)			
	• <b>rip</b> —Routing Information Protocol (RIP)				
		• static —Static routes			
	Keywords must be separated by a comma.				
	is protocol-name	Specifies a single protocol name, and accepted keywords are similar to the <i>protocol-set</i> argument.			
Command Default	No default behavior or values				
Command Modes	Route-policy configuration				
Command History	Release Mod	ification			
	Release 3.7.2 This	command was introduced.			
Usage Guidelines		d, you must be in a user group associated with a task group that includes appropriate task p assignment is preventing you from using a command, contact your AAA administrator			
	Use the <b>protocol</b> command as a conditional expression within an if statement to specify a protocol to install a route.				
	Use the <b>in</b> keyword to determine if a protocol listed in the <i>protocol-set</i> is the originator of the route being filtered.				
	Use the <b>is</b> keyword to determine if <i>protocol-name</i> is an exact match.				
-	<b>Note</b> For a list of all	conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.			

y read, write

**Examples** 

L

The following example shows how to use the **protocol** command as a conditional expression within if statements:

RP/0/RSP0/CPU0:router(config)# route-policy rip1 RP/0/RSP0/CPU0:router(config-rpl)# if protocol in (connected, static) then RP/0/RSP0/CPU0:router(config-rpl-if)# add rip-metric 2 RP/0/RSP0/CPU0:router(config-rpl-if)# elseif protocol is bgp 1 then RP/0/RSP0/CPU0:router(config-rpl-elseif)# add rip-metric 3 RP/0/RSP0/CPU0:router(config-rpl-elseif)# elseif protocol is ospf 2 then RP/0/RSP0/CPU0:router(config-rpl-elseif)# add rip-metric 4 RP/0/RSP0/CPU0:router(config-rpl-elseif)# else RP/0/RSP0/CPU0:router(config-rpl-elseif)# else RP/0/RSP0/CPU0:router(config-rpl-else)# add rip-metric 5 RP/0/RSP0/CPU0:router(config-rpl-else)# endif RP/0/RSP0/CPU0:router(config-rpl-else)# endif

RP/0/RSP0/CPU0:router(config)# router rip RP/0/RSP0/CPU0:router(config-rip)# interface GigabitEthernet0/1/0/1 RP/0/RSP0/CPU0:router(config-rip-if)# route-policy rip1 out

I

# rd in

To compare the route distinguisher (RD) associated with the route to RDs contained in either a named or an inline RD set, use the **rd in** command in route-policy configuration mode.

	<b>rd in</b> { <i>rd-set-nameinline-rd-setparameter</i> }
Syntax Description	rd-set-name Name of an RD set.
	<i>inline-rd-set</i> Inline RD set. The inline RD set must be enclosed in parentheses.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	<ul> <li>To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.</li> <li>Use the <b>rd in</b> command as a conditional expression within an <b>if</b> statement to match a destination entry in a named prefix set or inline prefix set.</li> </ul>
-	Note         For a list of all conditional expressions available within an if statement, see the if command.
	This command takes either a named RD set or an inline RD set value as an argument. The condition returns true if the destination entry matches any entry in the RD set or inline RD set. An attempt to match an RD using an RD set that is defined but contains no elements returns false.
Task ID	Task ID Operations
	route-policy read, write
Examples	The following example shows the <b>rd in</b> command with an inline RD set value as an argument:
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy RP/0/RSP0/CPU0:router(config-rpl)# if rd in (128.1.0.0/16:100) then RP/0/RSP0/CPU0:router(config-rpl-if)# pass RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>

To define a route distinguisher (RD) set and enter RD configuration mode, use the **rd-set** command in global configuration mode.

rd-set name no rd-set name

 Syntax Description
 name
 Name of an RD community set.

 Command Default
 No default behavior or values

**Command Modes** Global configuration

Command History Release Modification

Release 3.7.2 This command was introduced.

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.


Use the **rd-set** command to create a set with RD elements and enter RD configuration mode. An RD set is a 64-bit value prepended to an IPv4 address to create a globally unique Border Gateway Protocol (BGP) VPN IPv4 address.

Note

For *m*, the mask length is supported.

You can define RD values with the following commands:

- a.b.c.d/m:\*-BGP VPN RD in IPv4 format with a wildcard character. For example, 10.0.0.2/24.0:\*.
- *a.b.c.d/m:n*—BGP VPN RD in IPv4 format with a mask. For example, 10.0.0.2/24:666.
- a.b.c.d:\* -BGP VPN RD in IPv4 format with a wildcard character. For example, 10.0.0.2:\*.
- a.b.c.d:n—BGP VPN RD in IPv4 format. For example, 10.0.0.2:666.
- asn: \*-BGP VPN RD in ASN format with a wildcard character. For example, 10002:\*.
- asn:n-BGP VPN RD in ASN format. For example, 10002:666.
- x.y:\*—BGP VPN RD in 4-byte ASN format with a wildcard character. For example, 10002.101:\*.
- x.y:n—BGP VPN RD in 4-byte ASN format. For example, 10002.101:666.



**Examples** 

The following example shows how to create an RD set called my\_rd\_set:

RP/0/RSP0/CPU0:router(config)# rd-set my\_rd\_set RP/0/RSP0/CPU0:router(config-rd)# 172.16.0.0/16:\*, RP/0/RSP0/CPU0:router(config-rd)# 172.17.0.0/16:100, RP/0/RSP0/CPU0:router(config-rd)# 192:\*, RP/0/RSP0/CPU0:router(config-rd)# 192:100 RP/0/RSP0/CPU0:router(config-rd)# end-set


### replace as-path

To replace a sequence of AS numbers or private AS numbers in the AS path with the configured local AS number, use the **replace as-path** command in route-policy configuration mode.

**replace as-path** {[*as-number-list parameter*] | **private-as**}

Syntax Description	as-number-li	<i>ist</i> (Optional) Sequence of AS numbers to replace. The sequence must be enclosed in single quotes (' '). You can use 2-byte or 4-byte AS numbers.				
		<ul> <li>The 2-byte value is entered as a 16-bit unsigned decimal value. The range is 0 to 65535.</li> <li>The 4-byte value is entered as two 16-bit unsigned decimal values separated by a period. The range is 1.0 to 65535.65535.</li> </ul>				
	parameter	<i>parameter</i> (Optional) Parameter name. The parameter name must be preceded with a "\$."				
	private-as	Matches within the BGP private AS range. Range is from 64512 to 65534.				
Command Default	None.					
Command Modes	Route-policy	configuration				
Command History	Release	Modification				
	Release 3.7.2	2 This command was introduced.				
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.					
	Use the <b>replace as-path</b> command to replace a sequence of AS numbers or private AS numbers in the AS path with the local AS numbers. For example, if the AS path is '67 65534 100 65533 5 78 89 90' and the local AS number is 900, then:					
	replace as-path `5 78'					
	replaces' 578' in the AS path with 900 (from the local AS), and the new path would be 67 65534 100 65533 900 89 90'.					
	Consider following statement:					
	replace a	s-path private-as				
		34 and 65533 are within the private AS range, they are replaced with 900. The path is '67 900 89 90'. The length of the path remains the same.				

The **replace as-path** command can be used as an action statement within an **if** statement. For a list of all action statements available within an **if** statement, see the **if** command.

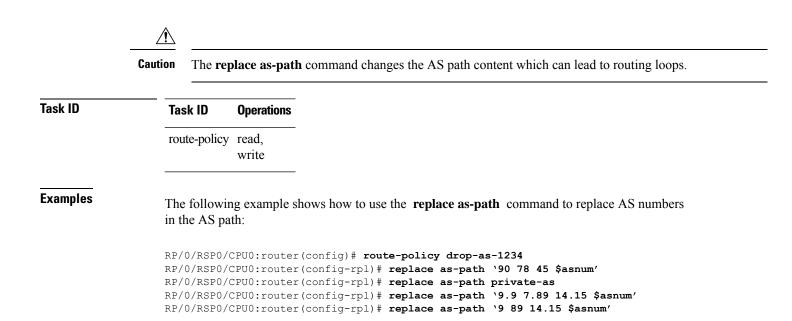

## remove as-path private-as

To remove BGP private AS numbers from as-path structure used by BGP, use the **remove as-path private-as** command under route policy configuration mode.

remove as-path private-as [entire-aspath]

Syntax Description	<b>entire-aspath</b> (Optional) Removes the entire private autonomous system numbers from an autonomous system path only if all the autonomous systems in the path are private.		
Command Default	No default be	ehavior or val	ues
Command Modes	Route-policy	configuration	n
Command History	Release		Modification
	Release 5.2.	0	This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	This example	e shows how	to remove BGP private AS numbers from as-path structure:
	RP/0/RSP0/C	CPU0:router( CPU0:router(	<pre>configure (config) # route-policy rm_private_as (config-rpl) # remove as-path private-as entire-aspath (config-rpl) # end-policy</pre>

### rib-has-route

To check if a route listed in the prefix set exists in the Routing Information Base (RIB), use the **rib-has-route** command in route-policy configuration mode.

	<b>rib-has-route</b> in { <i>prefix-set-name inline-prefix-set parameter</i> }
Syntax Description	prefix-set-name Name of a prefix set.
	inline-prefix-set Inline prefix set. The inline prefix set must be enclosed in parentheses.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	If routes are active, then they are advertised. Routes are considered active if they are already installed in the Routing Information Base (RIB).
	The prefix sets used in the <b>rib-has-route</b> command contain two match specifications. The first is where an exact route match is requested (for example, 10.10.0.0/16 will match exactly one route) and the second is where a route match or any more-specific route match is allowed (for example, 10.10.0.0/16 ge 32 will match the 10.10.0.0/16 route and any longer prefix).
	Use the <b>rib-has-route</b> command as a conditional expression within an <b>if</b> statement to check if there is an active route with a specific prefix contained in the RIB. If the statement reveals an active route that meets that criteria, additional actions are executed.
	For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, an <b>if</b> statement is used to learn if a route contained in a prefix set $10.10.0.0/16$ is in the RIB:
	<pre>RP/0/RSP0/CPU0:router(config) # route-policy SAMPLE RP/0/RSP0/CPU0:router(config-rpl) # if rib-has-route in (10.10.0.0/16 ge 16) then RP/0/RSP0/CPU0:router(config-rpl-if) # pass RP/0/RSP0/CPU0:router(config-rpl-if) # endif RP/0/RSP0/CPU0:router(config-rpl) # end-policy</pre>

### route-has-label

To check if there is a Multiprotocol Label Switching (MPLS) label in a route during redistribution, use the **route-has-label** command in route-policy configuration mode.

#### route-has-label

Syntax Description This command has no arguments or keywords.

**Command Default** No default behavior or values

Command Modes Route-policy configuration

# Command History Release Modification Release 3.7.2 This command was introduced.

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **route-has-label** command as a conditional expression within an **if** statement to check if there is an MPLS label in a route during redistribution.

For a list of all conditional expressions available within an **if** statement, see the **if** command.

# Task ID Task ID Operations route-policy read, write

Examples

In the following example, an if statement learns if an MPLS label is present in a route:

RP/0/RSP0/CPU0:router(config-rpl)# if route-has-label then
RP/0/RSP0/CPU0:router(config-rpl-if)# pass
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#

I

## route-policy (RPL)

To define a route policy and enter route-policy configuration mode, use the **route-policy** command in global configuration mode. To remove a policy definition, use the **no** form of this command.

	<b>route-policy</b> <i>name</i> [(parameter1, parameter2,, parameterN)]			
	<b>no route-policy</b> name (parameter1, parameter2,, parameterN)			
Syntax Description	<i>name</i> Name of a route policy.			
	<i>parameter</i> (Optional) Parameter name. The parameter name must be preceded with a "\$." The <i>parameters</i> must be enclosed in parenthesis "()".			
Command Default	No default behavior or values			
Command Modes	Global configuration			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>route-policy</b> command to define a route policy and enter route-policy configuration mode.			
	Policy definitions create named bundles of policy statements. A policy definition consists of the <b>route-policy</b> command followed by a name, a group of policy statements, and the <b>end-policy</b> command.			
	The policy name serves as a handle for binding the policy to protocols.			
Task ID	Task ID Operations			
	route-policy read, write			
Examples	The following example shows a simple policy named drop-everything that drops any route it encounters:			
	RP/0/RSP0/CPU0:router(config)# route-policy drop-everything RP/0/RSP0/CPU0:router(config-rpl)# drop RP/0/RSP0/CPU0:router(config-rpl)# end-policy			
	Policies may also refer to other policies such that common blocks of policy can be reused. This reference to other policies is accomplished by using the <b>apply</b> command. The following is a simple asymptotic			

example:

```
RP/0/RSP0/CPU0:router(config)# route-policy drop-as-1234
RP/0/RSP0/CPU0:router(config-rpl)# if as-path passes-through '1234' then
RP/0/RSP0/CPU0:router(config-rpl-if)# apply check-communities
RP/0/RSP0/CPU0:router(config-rpl-if)# else
RP/0/RSP0/CPU0:router(config-rpl-else)# pass
RP/0/RSP0/CPU0:router(config-rpl-else)# endif
RP/0/RSP0/CPU0:router(config-rpl)# end-policy
```

The **apply** command indicates that the policy check-communities should be executed if the route under consideration passed through autonomous system 1234 before it was received. If so, the communities of the route are checked, and based on the findings the route may be accepted unmodified, accepted with changes, or dropped.

Related Commands	Command	Description
	end-policy, on page 55	Ends the definition of a route policy.

### route-type is

To match route types when redistribution is being performed into Border Gateway Protocol (BGP), Open Shortest Path First (OSPF), or Integrated Intermediate System-to-Intermediate System (IS-IS), use the **route-type is** command in route-policy configuration mode.

route-type is {local | interarea | internal | type-1 | type-2 | level-1 | level-2*parameter*}

Syntax Description	<b>local</b> Uses a local value to match locally generated BGP routes.				
	interarea Uses an interarea value to match IS-IS interarea routes.				
	<b>internal</b> Uses an internal value to match OSPF intra- and interarea routes.				
	<b>type-1</b> Uses a Type 1 value to match Type 1 OSPF routes.				
	<b>type-2</b> Uses a Type 2 value to match Type 2 OSPF routes.				
	level-1 Uses a Level 1 value to match Level 1 IS-IS routes.				
	level-2 Uses a Level 2 value to match Level 2 IS-IS routes.				
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."				
Command Default	No default behavior or values				
Command Modes	Route-policy configuration				
Command History	Release Modification				
	Release 3.7.2 This command was introduced.				
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.				
	Use the <b>route-type is</b> command as a conditional expression within an <b>if</b> statement to compare route types when redistribution is being performed into BGP, OSPF, or IS-IS.				
-	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.				

The valid keywords are **local**, **internal**, **interarea**, **type-1**, **type-2**, **level-1**, and **level-2**. A parameterized value that fills in one of these values may also be used. The **local** value is used to match locally generated BGP routes. The internal value is used to match OSPF intra- and interarea routes. The **type-1** and **type-2** values are used to match Type 1 and Type 2 OSPF external routes. The **level-1**, **level-2**, and **interarea** values are used to match IS-IS routes of those respective types.

Because the route type is a matching operator, it appears in conditional clauses of if and then statements.

Task ID	Task ID	Operations
	route-policy	read, write
Examples	In the follow	ving example, no

In the following example, non-local routes are dropped:

RP/0/RSP0/CPU0:router(config)# route-policy policy\_A RP/0/RSP0/CPU0:router(config-rpl)# if route-type is local then RP/0/RSP0/CPU0:router(config-rpl-if)# pass RP/0/RSP0/CPU0:router(config-rpl-if)# else RP/0/RSP0/CPU0:router(config-rpl-else)# drop RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# endif

# rpl editor

To set the default routing policy language (RPL) editor, use the **rpl editor** command in global configuration mode.

	rpl editor {nano   emacs   vim}
Syntax Description	nano Sets the default RPL editor to GNU nano.
	emacs Sets the default RPL editor to EMACS.
	vim Sets the default RPL editor to VIM.
Command Default	The Nano editor is the default.
Command Modes	Global configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
	ReleaseThis command was deprecated.7.11.1
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the default RPL editor is set to Nano:
	RP/0/RSP0/CPU0:router# <b>configure</b> RP/0/RSP0/CPU0:router(config)# <b>rpl editor nano</b>
	In the following example, the default RPL editor is set to EMACS:
	RP/0/RSP0/CPU0:router# <b>configure</b> RP/0/RSP0/CPU0:router(config)# <b>rpl editor emacs</b>
	In the following example, the default RPL editor is set to VIM:
	RP/0/RSP0/CPU0:router# configure

RP/0/RSP0/CPU0:router(config) # rpl editor vim

# rpl maximum

To configure system limits on the routing policy subsystem, use the **rpl maximum** command in global configuration mode.

**rpl maximum** {**lines** | **policies**} *number* 

Syntax Description	<b>lines</b> <i>number</i> Configures the number of lines of configuration limit. Range is from 1 to 131072.				
	<b>policies</b> <i>number</i> Configures the number of policies limit. Range is from 1 to 5000.				
Command Default	lines number : 65536 policies numbers : 3500				
Command Modes	global configuration				
Command History	Release Modification				
	Release 3.7.2 This command was introduced.				
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.				
	Use the <b>rpl maximum</b> command to configure system limits on the routing policy subsystem. As such, <b>rpl maximum</b> configuration lines do not appear as statements within a routing policy. This command places resource limits on the routing policy subsystem. Use the <b>rpl maximum</b> command to configure the maximum number of lines of configuration and number of policies.				
	The number of lines of configuration includes the beginning and ending statements, for example, <b>route-policy</b> and <b>end-policy</b> . Each line of configuration for sets is also counted.				
	A line of configuration is counted only once; it is not counted each time it is used. Similarly, any multiple use of policy in an apply statement counts only as one policy.				
	A user can change the default values for lines and policies but cannot exceed the maximum value, nor can the value for lines and policies be configured lower than the number of lines or policies that are currently configured.				
Task ID	Task ID Operations				
	route-policy read, write				
Examples	In the following example, the maximum number of RPL system limits are modified:				
	RP/0/RSP0/CPU0:router# configure RP/0/RSP0/CPU0:router(config)# rpl maximum lines 50 RP/0/RSP0/CPU0:router(config)# rpl maximum policies 6				

Related Commands	Command	Description
	1 7 1 0	Displays the maximum limits for lines of configuration and number of policies.

# rpl set-exit-as-abort

To change the default exit behavior under RPL configuration mode to abort from the RPL configuration mode without saving the configuration, use the **rpl set-exit-as-abort** command in global configuration mode.

#### rpl set-exit-as-abort

Syntax Description	This command has no keywords or arguments.		
Command Modes	Global con	figuration	
Command History	Release		Modification
	Release 5.	2.0	This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	The default <b>exit</b> command acts as end-policy, end-set, or end-if. If the <b>exit</b> command is executed under route policy configuration mode, the changes are applied and configuration is updated. This destructs the existing policy. The <b>rpl set-exit-as-abort</b> command allows to overwrite the default behavior of the <b>exit</b> command under the route policy configuration mode.		
Task ID	Task ID	Operations	
	route-polic	cy read, write	
Examples	This examp	ple shows how	change the default exit behavior:
		/CPU0:router /CPU0:router	<pre># configure (config)# rpl set-exit-as-abort</pre>

**Routing Policy Language Commands** 

### set administrative-distance

To set a route with lower administrative distance such that it is preferred to a route with higher administrative distance, use the **set administrative-distance** command in route policy configuration mode.

set administrative-distance [number | parameter]

Syntax Description	number	Value assigned to a 8-bit unsigned integer. Range is from 1 to 255.		
	parameter	Parameter name. The parameter name must be preceded with a "\$".		
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release	Modification		
	Release 5.2.0	This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
Task ID	Task IDOperationsroute-policyread, write			
Examples	This example shows how to set a route with higher administrative distance.	with an administrative value such that it is preferred to a route		
	RP/0/RSP0/CPU0:router# configure RP/0/RSP0/CPU0:router(config)# rc RP/0/RSP0/CPU0:router(config-rpl) RP/0/RSP0/CPU0:router(config-rpl) RP/0/RSP0/CPU0:router(config-rpl) RP/0/RSP0/CPU0:router(config-bgp) RP/0/RSP0/CPU0:router(config-bgp- RP/0/RSP0/CPU0:router(config-bgp- RP/0/RSP0/CPU0:router(config-bgp- RP/0/RSP0/CPU0:router(config-bgp) RP/0/RSP0/CPU0:router(config-bgp) RP/0/RSP0/CPU0:router(config-bgp)	<pre># set administrative-distance 34 # end-policy # exit pute bgp 100 # address family ipv4 unicast -af)# table-policy sample -af)# exit # exit</pre>		

## set aigp-metric

To set originating prefixes with accumulated interior gateway protocol (AiGP) attribute information, use the set aigp-metric command in route-policy configuration mode.

set aig-metric {igp-costvalue}

Syntax Description	<b>igp-cost</b> Specifies the internal routing protocol cost.		
	<i>value</i> Specifies the aigp-metric value. 32- bit decimal number. Range is 0-4294967295.		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 4.0.0 This command was introduced.		
	Release 5.0.0 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
Task ID	Task ID Operation		
	route-polcy read, write		
Examples	The following example shows how to set the aigp metric as the igp cost for route-policy aigp_policy:		
	RP/0/RSP0/CPU0:router# <b>configure</b> RP/0/RSP0/CPU0:router(config)# <b>route-policy aigp_policy</b> RP/0/RSP0/CPU0:router(config-rpl)# <b>set aigp-metric igp-cost</b>		

Related Commands	Commad	Description
	aigp	Enables sending and receiving of accumulated interior gateway protocol (AiGP) attribute per neighbor.
	aigp send-cost-community	Sends accumulated interior gateway protocol (AiGP) value in cost community.

### set community

To set the Border Gateway Protocol (BGP) community attributes in a route, use the **set community** command in route-policy configuration mode.

**set community** {*community-set-nameinline-community-setparameter*} [**additive**]

Syntax Description	community-set-name Community set name.	
	<i>inline-community-set</i> Inline community set. The inline community set must be enclosed in parentheses.	
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."	
	additive (Optional) Adds communities to communities in the route.	
Command Default	No default behavior or values	
Command Modes	Route-policy configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the <b>set community</b> command to set the BGP community attribute.	
_	<b>Note</b> The <b>set community</b> command can be used as an action statement within an <b>if</b> statement. For a list of a action statements available within an <b>if</b> statement, see the <b>if</b> command.	
	Communities are 32-bit values carried in BGP routes. Each route may have zero or more communities in an unordered list.	
	Use this command to replace the communities in a route or add to them using the optional <b>additive</b> keyword.	
	As with the other community forms that support inline sets, either or both 16-bit portions of the community can be parameterized. Likewise, the names of the well-known communities <b>internet</b> (0:0), <b>no-advertise</b> (65535:65281), <b>no-export</b> (65535:65282), and <b>local-AS</b> (65535:65283) can also be used. In an inline community set, each 16-bit portion can also be specified as the <b>peeras</b> to express the AS number of the neighbor from which the route was received. If the neighbor AS employs a 4-byte ASN, the IANA-assigned 16-bit value 23456 (AS_TRANS) is used as <b>peeras</b> instead.	
	Without the <b>additive</b> keyword, any existing communities (other than the well-known communities) are removed and replaced with the given communities. The <b>additive</b> keyword specifies that all communities already present in the route be maintained and the list of communities be added to them.	

# Task ID Task ID Operations route-policy read, write Examples The following are incomplete of the

The following are incomplete configuration examples using the set community command:

RP/0/RSP0/CPU0:router(config-rpl)# set community (10:24)
RP/0/RSP0/CPU0:router(config-rpl)# set community (10:24, \$as:24, \$as:\$tag)
RP/0/RSP0/CPU0:router(config-rpl)# set community (10:24, internet) additive
RP/0/RSP0/CPU0:router(config-rpl)# set community (10:24, \$as:24) additive
RP/0/RSP0/CPU0:router(config-rpl)# set community (10:24, peeras:24) additive

#### set core-tree

To set a Multicast Distribution Tree (MDT) type, use the **set core-tree** command in route-policy configuration mode.

set core-tree {gre-rosen | mldp-inband | mldp-partitioned-mp2mp | mldp-partitioned-p2mp | mldp-rosen | rsvp-te-partitioned-p2mp*parameter*}

Syntax Description	gre-rosen Specifies the IP GRE Rosen core MDT type
	mldp-inband Specifies the MLDP InBand core MDT type
	mldp-partitioned-mp2mp Specifies theMLDP Partitioned MP2MP core MDT type
	mldp-partitioned-p2mp Specifies the MLDP Partitioned P2MP core MDT type
	mldp-rosen         Specifies the MLDP Rosen core MDT type
	rsvp-te-partitioned-p2mp Specifies the RSVP TE core core MDT type
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	None
Command Modes	Route-policy configuration
Command History	Release Modification
	Release This command was introduced. 4.1.0
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
Task ID	Task ID Operation
	route-policy read, write
	In this example, the Multicast Distribution Tree type is set to IP GRE Rosen core:

RP/0/RSP0/CPU0:router#configure
RP/0/RSP0/CPU0:router(config)#route-policy policy\_mdt\_type
RP/0/RSP0/CPU0:router(config-rpl)#set core-tree gre-rosen

## set dampening

To configure Border Gateway Protocol (BGP) route dampening, use the **set dampening** command in route-policy configuration mode.

**set dampening** {**halflife** {*minutesparameter*} | **max-suppress** {*minutesparameter*} | **reuse** {*secondsparameter*} | **suppress** {*penalty-unitsparameter*} | **others default**}

Syntax Description	halflife minutes	Specifies the time (in minutes) after which a penalty is decreased. After the route has been assigned a penalty, the penalty is decreased by half after the half-life period. The process of reducing the penalty happens every 5 seconds. Range is 1 to 45 minutes.				
	parameter	Parameter name. The parameter name must be preceded with a "\$."				
	max-suppress minutes	Specifies the maximum time (in minutes) a route can be suppressed. Range is 1 to 20000. If the half-life value is allowed to default, the maximum suppress time defaults to 60 minutes.				
	reuse seconds	Unsuppresses a route if the penalty for flapping the route decreases enough to fall below the configured value (in seconds). The process of unsuppressing routes occurs at 10-second increments. Range is 1 to 20000.				
	suppress penalty-units	suppress <i>penalty-units</i> Specifies a penalty of 1000 each time a route flaps. When a route penalty exceeds the configured limit, it is suppressed. Range is 1 to 20000.				
	others default	If all four keyword values are not specified in the command, then the command <i>must</i> end with <b>others default</b> . This designation indicates that any keyword not defined is set to its default.				
Command Default	half-life : 15 minutes					
	max-suppress : 60 minute	es (four times the half-life)				
	reuse : 750 seconds					
	suppress : 2000 penalty u	nits				
Command Modes	Route-policy configuratio	n				
Command History	Release Modificati	 on				
	Release 3.7.2 This comm	hand was introduced.				
Usage Guidelines		must be in a user group associated with a task group that includes appropriate task gnment is preventing you from using a command, contact your AAA administrator				
	controlled by setting the fe	ts route dampening using an exponential backoff algorithm. The algorithm is our supported BGP values: half-life, max-suppress, reuse, and suppress. Use the l to configure BGP route dampening.				

I

	<b>Note</b> The <b>set dampening</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
	A value for at least one of the four keywords must be set. If the <b>set dampening</b> command defines values for three or fewer of the supported keywords, then the configuration must end with the <b>others default</b> , which indicates that any keyword value not defined in the command is set to its default value.
	The keywords may appear in the command in any order.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following examples, the half-life is set to 20 minutes and the maximum suppress time is set to
	90 minutes. Each command must end with <b>others default</b> because three or fewer keywords are defined.
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# set dampening halflife 20 others default RP/0/RSP0/CPU0:router(config-rpl)# set dampening max-suppress 90 others default</pre>
	In this example, all four keywords are defined, which means the command does not use <b>others default</b> .
	<pre>RP/0/RSP0/CPU0:router(config-rpl) # set dampening halflife 15 max-suppress 60 reuse 750 suppress 2000</pre>
	The following command is invalid because it is missing others default.
	<pre>RP/0/RSP0/CPU0:router(config-rpl) # set dampening reuse 700</pre>
	In the following example, the parameters are used.
	RP/0/RSP0/CPU0:router(config-rpl)# set dampening halflife \$p1 suppress \$p4 reuse \$p3

max-suppress \$p2

#### set fallback-vrf-lookup

To force forwarding lookup in source VRF for a leaked route, use the **set fallback-vrf-lookup** command in route-policy configuration mode.

#### set fallback-vrf-lookup

Syntax Description	This command has no keywords or arguments.			
Command Default	None			
Command Modes	Route-polic	ey configuration		
Command History	Release	Modification		
	Release 6.6.2	This command was introduced.		

Usage Guidelines When L3VPN and EVPN prefixes are imported to a VRF (source VRF) and leaked to an another VRF (destination VRF) with set fallback-vrf-lookup command configured, the prefixes are advertised to L3VPN and EVPN peers. When traffic is received from the opposite direction to the destination VRF, first a lookup is performed in the destination VRF, which forces a second lookup in the source VRF. To force this second lookup in the source VRF, use the set fallback-vrf-lookup command in route-policy configuration mode.

The set fallback-vrf-lookup command has the following route-policy attach points:

- Import from non-default VRF to non-default VRF (use in importing VRF)
- Import from default-VRF to non-default VRF (use in non-default VRF)
- Export to default-VRF from non-default VRF (use in non-default VRF)

Task ID	Task ID	Operation
	route-policy	read,
		write

RP/0/RSP0/CPU0:router# configure
RP/0/RSP0/CPU0:router(config)# route-policy rpl
RP/0/RSP0/CPU0:router(config-rpl)# set fallback-vrf-lookup

# set eigrp-metric

To set Enhanced Interior Gateway Routing Protocol (EIGRP) route metrics, use the **set eigrp-metric** command in route-policy configuration mode.

set eigrp-metric bandwidth delay reliability loading mtu

Syntax Description	bandwidth Minimum bandwidth of the route in kilobits per second. Range is 1 to 4294967295.
	<i>delay</i> Route delay in tens of microseconds. Delay is 1 or any positive number that is a multiple of 39.1 nanoseconds. Range is 1 to 4294967295.
	<i>reliability</i> Likelihood of successful packet transmission expressed as a number between 0 and 255. The value 255 means 100 percent reliability; 0 means no reliability.
	<i>loading</i> Effective bandwidth of the route expressed as a number from 1 to 255 (255 is 100 percent loading).
	<i>mtu</i> Minimum maximum transmission unit (MTU) size of the route in bytes. Range is from 1 to 65535.
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	You can use the <b>add</b> command to further offset an existing EIGRP metric value.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the EIGRP metrics are adjusted for route policy policy_1:
	RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# set eigrp-metric 1400 120 250 100 1500 RP/0/RSP0/CPU0:router(config-rpl)# end-policy

Related Commands	Command	Description
	add, on page 7	Adds an offset to an existing value.

# set extcommunity color

To set the Border Gateway Protocol (BGP) color extended community attributes, use the **set extcommunity color** command in route-policy configuration mode.

	set extcommunity color color-value
Syntax Description	color     Color Extended       Community.
	color-value Color Community value.
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 6.2.1 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the <b>set extcommunity color</b> command to set the color extended community in the overlay prefixes, such as IPv4-unicast SAFI updates between the BGP routers. This command can be used to mark the prefixes with the intended color value.
	Note The set extcommunity color command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
Task ID	Task ID Operations
	route-policy read, write
Examples	The following is an incomplete configuration example using the set extcommunity color command:
	RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity color color1

#### set extcommunity cost

To set the Border Gateway Protocol (BGP) cost extended community attributes, use the **set extcommunity cost** command in route-policy configuration mode.

**set extcommunity cost** {*cost-extcommunity-set-namecost-inline-extcommunity-setparameter*} [**additive**]

Syntax Description	cost-extcomn	nunity-set-name	P Cost extended community set name.
	cost-inline-ex	tcommunity-set	t Inline cost extended community set. The inline cost extended community set must be enclosed in parentheses.
	parameter		Parameter name. The parameter name must be preceded with a "\$."
	additive		(Optional) Adds extended communities for cost to extended communities in the route.
Command Default	No default be	havior or values	S
Command Modes	Route-policy	configuration	
Command History	Release	Modification	
	Release 3.7.2	This command	d was introduced.
Usage Guidelines		er group assignn	ust be in a user group associated with a task group that includes appropriate task ment is preventing you from using a command, contact your AAA administrator

Use the **set extcommunity cost** command to either replace the extended communities on the route or add to them using the optional **additive** keyword. Cost community is an extended community used to tie break the best path selection process in BGP so as to have a localized custom decision for packet forwarding. The extended community format defines generic points of insertion (POI) that influence the decision at different points of the bestpath algorithm.

The set extcommunity cost command can be used as an action statement within an **if** statement. For a list of all action statements available within an **if** statement, see the **if** command.

As with the other extended community forms that support inline sets, either or both portions of the community can be parameterized. Similarly to regular communities, the **additive** keyword can be used to signify adding these extended communities to those that are already present, as opposed to replacing them. Without the **additive** keyword, any existing extended communities for cost (other than the well-known communities) are removed and replaced with the given communities. The **additive** keyword specifies that all extended communities for cost already present in the route be maintained and the set of extended communities be added to them. Well-known communities include internet, local-AS, no-advertise, and no-export.

Note

# Task IDOperationsroute-policyread,<br/>write

#### **Examples**

The following are incomplete configuration examples using the set extcommunity cost command:

RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity cost (IGP:10:20)
RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity cost (Pre-Bestpath:33:44)
RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity cost (IGP:11:21)

# set extcommunity rt

To set the Border Gateway Protocol (BGP) route target (RT) extended community attributes, use the **set extcommunity rt** command in route-policy configuration mode.

set extcommunity rt {rt-extcommunity-set-namert-inline-extcommunity-setparameter} additive

Syntax Description	rt-extcommunity-set-	name Route target extended community set name.
	rt-inline-extcommun	<i>ity-set</i> Inline route target extended community set. The inline route target extended community set must be enclosed in parentheses.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
	additive	(Optional) Adds extended communities for an RT to extended communities in the route.
Command Default	No default behavior	or values
Command Modes	Route-policy configu	uration
Command History	Release Modi	fication
	Release 3.7.2 This c	command was introduced.
Usage Guidelines	IDs. If the user group for assistance. Use the <b>set extcomr</b>	l, you must be in a user group associated with a task group that includes appropriate task o assignment is preventing you from using a command, contact your AAA administrator <b>nunity rt</b> command to either replace the extended communities on the route or add to nal <b>additive</b> keyword.
-		<b>munity rt</b> command can be used as an action statement within an <b>if</b> statement. For a list of nents available within an <b>if</b> statement, see the <b>if</b> command.
	can be parameterized	ended community forms that support inline sets, either or both portions of the community I. Similarly to regular communities, the <b>additive</b> keyword can be used to signify adding nunities to those that are already present, as opposed to replacing them.
Task ID	Task ID Operation	DNS
	route-policy read, write	
Examples	The following are inc	complete configuration examples using the set extcommunity rt command:

```
RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity rt (10:24)
RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity rt (10:24, $as:24, $as:$tag)
RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity rt (10:24, internet) additive
RP/0/RSP0/CPU0:router(config-rpl)# set extcommunity rt (10:24, $as:24) additive
```

Without the **additive** keyword, any existing extended communities for cost (other than the well-known communities) are removed and replaced with the given communities. The **additive** keyword specifies that all extended communities for cost already present in the route be maintained and the list of extended communities be added to them.

# set ip-precedence

To set the IP precedence, use the set ip-precedence command in route-policy configuration mode.

set ip-precedence {numberparameter}

Syntax Description	number	Value of the precedence. The precedence value can be a number from 0 to 7:
		• 7 —network (set packets with network control precedence)
		• 6 — internet (set packets with internetwork control precedence)
		• 5 — critical (set packets with critical precedence)
		• 4 — flash-override (set packets with flash override precedence)
		• 3 —flash (set packets with flash precedence)
		• 2 — immediate (set packets with immediate precedence)
		• 1 — priority (set packets with priority precedence)
		• 0 —routine (set packets with routine precedence)
	parameter	Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default	behavior or values
<u> </u>	Poute polic	y configuration
Command Modes	Koute-point	y conniguration
Command History	Release	Modification
	Release 3.7	7.2 This command was introduced.
Usage Guidelines		command, you must be in a user group associated with a task group that includes appropriate task user group assignment is preventing you from using a command, contact your AAA administrator ce.
	at the BGP After QoS I correspondi	<b>ip-precedence</b> command to set the IP precedence to classify packets. This command is supported table-policy attachpoint. Prefixes are marked for subsequent processing in the forwarding plane. Policy Propagation through Border Gateway Protocol (BGP) (QPPB) is enabled on an interface, ng traffic shaping and policing is completed using packet classification based on the IP precedence up ID. See <i>Modular QoS Configuration Guide for Cisco ASR 9000 Series Routers</i> for information
Task ID	Task ID	Operations
	route-policy	v read, write
Examples	This examp	le shows how use <b>set ip-precedence</b> command:
		<pre>'CPU0:router(config)# route-policy policy_1 'CPU0:router(config-rpl)# set ip-precedence 3</pre>

RP/0/RSP0/CPU0:router(config-rpl) # end-policy

I

#### set isis-metric

To set the Intermediate System-to-Intermediate System (IS-IS) metric attribute value, use the **set is-is metric** command in route-policy configuration mode.

	set isis-metric {numberparameter}	
Syntax Description	<i>number</i> 24-bit integer number. Range is from 0 to 16777215.	
	parameter Parameter name. The parameter name must be preceded with a "\$."	
Command Default	No default behavior or values	
Command Modes	Route-policy configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
	Use the <b>set isis-metric</b> command to set the IS-IS metric attribute value for routes that are redistributed into IS-IS.	
Task ID	Task ID Operations	
	route-policy read, write	
Examples	In the following example, the IS-IS metric attribute value is set to 1000:	
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# set isis-metric 1000 RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>	

## set label

To set the Border Gateway Protocol (BGP) label attribute value, use the **set label** command in route-policy configuration mode.

**set label** {**explicit-null** | **implicit-null***parameter*}

Syntax Description	<b>explicit-null</b> Sets the label to the well-known explicit value of 0.
	<b>implicit-null</b> Sets the label to the well-known implicit value of 3.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>set label</b> command in a route policy at the allocate label attachpoint to set the label to explicit-null or implicit-null based on deployment preference. During inter-AS operation, the ASBR sends some of its own loopbacks to other its peers and labels them either implicit null or explicit null.
Examples	The following example shows how to set the labels:
	<pre>RP/0/RSP0/CPU0:router(config) # route-policy labelpolicy RP/0/RSP0/CPU0:router(config-rpl) # if destination in (206.141.1.0/24) then RP/0/RSP0/CPU0:router(config-rpl) # set label explicit-null RP/0/RSP0/CPU0:router(config-rpl) # elseif destination in (206.141.3.0/24) then RP/0/RSP0/CPU0:router(config-rpl) # drop RP/0/RSP0/CPU0:router(config-rpl) # elseif destination in (206.141.4.0/24) then RP/0/RSP0/CPU0:router(config-rpl) # set label explicit-null RP/0/RSP0/CPU0:router(config-rpl) # set label explicit-null RP/0/RSP0/CPU0:router(config-rpl) # endif RP/0/RSP0/CPU0:router(config-rpl) # endif RP/0/RSP0/CPU0:router(config-rpl) # endif</pre>

I

#### set label-mode

To set the type of Border Gateway Protocol (BGP) label mode, use the **set label-mode** command in route-policy configuration mode. This command does not have a **no** form.

	set label-mode { per-ce   per-vrf   per-prefix }
Syntax Description	<b>per-ce</b> Specifies that the same label is used for all routes advertised from a unique customer edge (CE) peer or router.
	<b>per-vrf</b> Specifies that the same label is used for all routes advertised from a unique VRF.
	<b>per-prefix</b> Specifies that the same label is used for all routes advertised from a unique prefix.
Command Default	Per-prefix label mode.
	If a policy attached at label-mode attachpoint evaluates to pass and a <b>label mode</b> is not explicitly set, <b>per-prefix</b> is used as a default label mode.
Command Modes	Route-policy configuration
Command History	Release Modification
	ReleaseThis command was introduced.4.3.1
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>set label-mode</b> command in a route policy at the label-mode attachpoint to set the type of label mode to per-ce or per-vrf or per-prefix, based on deployment preference.
	Per-vrf label mode is not supported for Carrier Supporting Carrier (CSC) network with internal and external BGP multipath setup.
Task ID	Task ID Operation
	route-policy read, write
	This example shows how to set the type of label-mode to per-ce:
	Router(config)# route-policy set_label_mode Router(config-rpl)# set label-mode per-ce Router(config-rpl)# end-policy
	This example shows how to set the type of label-mode to per-vrf:
	Router(config)# route-policy set_label_mode

Router(config-rpl)# set label-mode per-vrf
Router(config-rpl)# end-policy

This example shows how to set the type of label-mode to per-prefix:

```
Router(config)# route-policy set_label_mode
Router(config-rpl)# set label-mode per-prefix
Router(config-rpl)# end-policy
```

# Related Commands Command Description route-policy (RPL) Defines a route policy and enters route-policy configuration mode.

#### set large-community

To set the Border Gateway Protocol (BGP) large-community attributes in a route, use the **set large-community** command in route-policy configuration mode.

large-community { large-community-set-name inline-large-community-set parameter } additive set 1 Syntax Description *large-community-set-name* Large-community set name. inline-large-community-set Inline large-community set. The inline large-community set must be enclosed in parentheses. Parameter name. The parameter name must be preceded with a "\$." parameter additive (Optional) Adds large-communities to large-communities in the route. No default behavior or values **Command Default** Route-policy configuration **Command Modes Command History Modification** Release Release 6.3.1 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. The large communities are specified as three non negative decimal integers separated by colons. For example, 1:2:3. Each integer is stored in 32 bits. The possible range for each integer is 0 to 4294967295. In route-policy statements, each integer in the BGP large community can be replaced by the following expression: • peeras — This expression is replaced by the AS number of the neighbor from which the community is received or to which the community is sent, as appropriate.

• The set large-community command can be used as an action statement within an if statement. For a list of all action statements available within an if statement, see the if command.

Without the **additive** keyword, any existing large communities are removed and replaced with the given large communities. The **additive** keyword specifies that all communities already present in the route be maintained and the list of communities be added to them. However the **additive** keyword does not result in duplicate entries. If a particular large community is attached to a route and you specify the same large community again with the **additive** keyword in the set statement, then the specified large community is not added again. The merging operation removes duplicate entries. This also applies to the **peeras** keyword.

Note

# Task ID Task ID Operations

route-policy read, write

The peeras expression in this example is replaced by the AS number of the neighbor from which the BGP large community is received or to which the community is sent, as appropriate.

In this example, if the route-policy mordac is applied to a neighbor, the ASN of which is 1, then the large community (1:2:3) is set only once.

```
RP/0/RP/0/RSP0/CPU0:router#config
RP/0/RSP0/CPU0:router(config)#route-policy mordac
RP/0/RSP0/CPU0:router(config-rpl)#set large-community (1:2:3, peeras:2:3)
RP/0/RSP0/CPU0:router(config)#large-community-set catbert
RP/0/RSP0/CPU0:router(config-largecomm)#1:2:3,
RP/0/RSP0/CPU0:router(config-largecomm)#5:2:3
RP/0/RSP0/CPU0:router(config-largecomm)#end-set
RP/0/RSP0/CPU0:router(config)#route-policy wally
RP/0/RSP0/CPU0:router(config-rpl)#set large-community catbert additive
RP/0/RSP0/CPU0:router(config-rpl)#end-set
```



Note You should configure the send-community-ebgp command to send large communities to ebgp neighbors.

#### set level

To configure the Intermediate System-to-Intermediate System (IS-IS) link-state packet (LSP) level advertised to redistributed routes, use the **set level** command in route-policy configuration mode.

set level {level-1 | level-2 | level-1-2parameter}

Syntax Description	<b>level-</b> 1 Specifies that redistributed routes are advertised in the Level 1 LSP of the router.
	<b>level-2</b> Specifies that redistributed routes are advertised in the Level 2 LSP of the router.
	level-1-2 Specifies that redistributed routes are advertised in Level 1 and Level 2 LSPs of the router.
	parameter Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the IS-IS set level command to configure the LSP level advertised to redistributed routes.
-	<b>Note</b> The <b>set level</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
	This command supports parameterization of the level keyword.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the level is set to Level 2:
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy bgp_isis_redist RP/0/RSP0/CPU0:router(config-rpl)# if destination in (172.2.0.0/16 ge 16) then RP/0/RSP0/CPU0:router(config-rpl)# set level level-2 RP/0/RSP0/CPU0:router(config-rpl)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>

# set local-preference

To set the Border Gateway Protocol (BGP) local preference attribute in a route, use the **set local-preference** command in route-policy configuration mode.

**set local-preference** {*numberparameter*}

Syntax Description	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is 0 to 4294967295.	
	parameter Parameter name. The parameter name must be preceded with a "\$."	
Command Default	Default value is 100.	
Command Modes	Route-policy configuration	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
	Use the <b>set local-preference</b> command to specify a preference value for the autonomous system path. Local preference is a nontransitive (does not cross autonomous system boundaries) attribute and is the second metric considered in the BGP best path calculation (the highest local preference is chosen). Weight is the first metric evaluated for best path, but it is local to the router and propagates only to iBGP peers. See the <i>Implementing BGP</i> module of the <i>Routing Configuration Guide for Cisco ASR 9000 Series Routers</i> for information on the BGP best path calculation.	
-	<u>×</u>	
	<b>Note</b> The <b>set local-preference</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.	
	-	
Task ID	all action statements available within an <b>if</b> statement, see the <b>if</b> command.	
Task ID	all action statements available within an if statement, see the if command.         The local preference is a 32-bit unsigned integer.	
Task ID Examples	all action statements available within an if statement, see the if command.         The local preference is a 32-bit unsigned integer.         Task ID       Operations         route-policy       read,	

#### set med

To set the Border Gateway Protocol (BGP) Multi Exit Discriminator (MED) attribute, use the **set med** command in route-policy configuration mode.

**set med** {*numberparameter* | **igp-cost** | {+ | {*numberparameter*} | - | {*numberparameter*} } | **max-reachable**}

Syntax Description	number	Value assigned to a 32-bit unsigned integer. Range is 0 to 4294967295.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
	igp-cost	Sets the MED value to the cost for the Interior Gateway Protocol (IGP) route to resolve the next-hop of the BGP route.
	+   -	Sets the MED to the MED plus or minus a static offset. An integer or parameter must follow the plus or minus.
	max-reachable	Sets the MED value to the maximum possible value of 4294967295.
Command Default	No default beha	vior or values
Command Modes	Route-policy co	nfiguration
Command History	Release	Modification
	Release 3.7.2	This command was introduced.
Usage Guidelines		mand, you must be in a user group associated with a task group that includes appropriate task group assignment is preventing you from using a command, contact your AAA administrator
	Use the set me	d command to set the MED value, which is a 32-bit unsigned integer.
		ed command can be used as an action statement within an <b>if</b> statement. For a list of all action available within an <b>if</b> statement, see the <b>if</b> command.
	a mathematical of IGP cost is supp	can take the following as argument values: an integer, a parameter, the <b>igp-cost</b> keyword, or operator (either plus or minus) followed by an integer or a parameter. Setting the MED to the ported on outbound BGP policies only. The MED cannot be set to the IGP cost in policies BGP attach points.
	The max-reach	able keyword sets the MED to the maximum value while leaving the route reachable.
	-	is variants allow the user to set the MED to the MED plus or minus a static offset. The variants to add or subtract offsets to the MED value are also range checked for underflow or overflow

that allow a user to add or subtract offsets to the MED value are also range checked for underflow or overflow. If the value underflows as a result of subtraction, then the MED value is set to zero. If the value overflows, the value is set to 4294967295, which is the maximum value for MED. when MED is set to 4294967295, the route is unreachable.

Task ID	Task ID	Operations
	route-policy	read, write

#### **Examples**

The following two examples show how to set the MED to a value that is either specified directly (using the integer 156) or passed to the policy as a parameter:

RP/0/RSP0/CPU0:router(config-rpl)# set med 156
RP/0/RSP0/CPU0:router(config-rpl)# set med \$med\_param

The following example shows how to instruct BGP to automatically set the MED value to the cost of the IGP route that resolves the next-hop of the BGP route:

RP/0/RSP0/CPU0:router(config-rpl)# set med igp-cost

# set metric-type (IS-IS)

To configure the integrated Intermediate System-to-Intermediate System (IS-IS) metric type, use the **set metric-type** command in route-policy configuration mode.

set metric-type {internal | externalparameter}

<b>internal</b> Sets metric type to internal.
<b>external</b> Sets the metric type to external.
<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
No default behavior or values
Route-policy configuration
Release Modification
Release 3.7.2 This command was introduced.
To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
Use the IS-IS <b>set metric-type</b> command to control whether IS-IS treats the metric as an internal or external metric.
<b>Note</b> The set metric-type command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
This command does not support parameterization.
Task ID Operations
route-policy read, write
In the following example, the IS-IS metric type is set to internal:
<pre>RP/0/RSP0/CPU0:router(config-rpl) # set metric-type internal</pre>

# set metric-type (OSPF)

To control how Open Shortest Path First (OSPF) computes the cost for a route, use the **set metric-type** command in route-policy configuration mode.

set metric-type {type-1 | type-2parameter}

Syntax Description	<b>type-1</b> Uses the cost set on the route plus the topology-related costs in the calculation for Type 1 metrics.
	<b>type-2</b> Uses only the cost set on the route in the calculation for Type 2 metrics.
	parameter Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the OSPF <b>set metric-type</b> command to control whether OSPF treats the cost as a Type 1 or Type 2 metric.
	<b>Note</b> The <b>set metric-type</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
	The value of Type 1 or Type 2 controls how OSPF computes the cost for this route. For Type 2 metrics, only the cost set on the route is used. For Type 1 metrics, the cost set on the route plus the topology- related costs are used in the calculation.
	This command does not support parameterization.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the OSPF metric type is set to Type 1:
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# set metric-type type-1</pre>

# set next-hop

To replace the next-hop associated with a given route, use the **set next-hop** command in route-policy configuration mode.

**set next-hop** {*ipv4-address* [ *destination-vrf* ]| *ipv6-address* [ *destination-vrf* ] | **discard** | **ipv6-global** *parameter* | **peer-address** | **self**}

Syntax Description	ipv4-address	Valid IPv4 address.
	ipv6-address	Valid IPv6 address.
	destination-vrf	(Optional) Specifies that the next-hop of the route should be resolved in destination VRF context. This keyword is available when an IPv4 or IPv6 address or parameter is used.
	discard	Sets next-hop as Null0 interface.
	parameter	Parameter name. The parameter name must be preceded with a "\$."
	peer-address	Sets the next-hop to the IP address of the remote Border Gateway Protocol (BGP) peer.
	self	Sets itself as the next-hop.
	unchanged	Sets next-hop unchanged
Command Default Command Modes Command History		
		he <b>discard</b> keyword was added.
Usage Guidelines	Use the set next	<b>.hop</b> command to replace the next-hop associated with a specific address.
	-	tination is selected according to the address family. Example: for ipv4 address-family, the sed and for ipv6 address-family, the IPv6 address is used.
		<b>t-hop</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action vailable within an <b>if</b> statement, see the <b>if</b> command.
	Use the <b>set next</b> - this policy is attac	hop peer-address command to set the next-hop to the address of the BGP neighbor, where ched.

The next-hop is a valid IPv4 address entered as a dotted decimal or an IPv6 address entered as a colon-separated hexadecimal.

It is not possible to use this command to set the BGP IPv6 link-local next-hop.

The **destination-vrf** keyword is used mainly in Layer 3 VPN networks when importing routes.

The **set next-hop discard** configuration is used in the neighbor inbound policy. When this config is applied to a path, the primary next-hop is still be associated with the actual path but the RIB is updated with next-hop set to Nullo. Even if the primary received nexthop is unreachable, the Remotely Triggered Blackhole (RTBH) path will be considered reachable and will be a candidate in the bestpath selection process. The RTBH path is readvertised to other peers with either the received next-hop or nexthop-self based on normal BGP advertisement rules.

Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the next-hop is set to a valid IPv4 address:
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# set next-hop 10.0.0.5</pre>
	In this example, the next-hop is set to a parameter value \$nexthop:
	<pre>RP/0/RSP0/CPU0:router(config-rpl) # set next-hop \$nexthop</pre>
	In this example, the next-hop is set to a valid IPv4 address with a destination VRF context:
	<pre>RP/0/RSP0/CPU0:router(config-rpl)# set next-hop 10.0.0.5 destination-vrf</pre>

I

# set origin

To change the Border Gateway Protocol (BGP) origin attribute, use the **set origin** command in route-policy configuration mode.

set origin	{ <b>igp</b>   <b>incomplete</b>   <b>egp</b> <i>parameter</i> }	
------------	--	--

Syntax Description	igp Sets the origin type to Interior Gateway Protocol (IGP).
	<b>incomplete</b> Sets the origin type to incomplete.
	egp Sets the origin type to Exterior Gateway Protocol (EGP).
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the <b>set origin</b> command to change the origin attribute.
	<b>Note</b> The <b>set origin</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
	The origin of a Border Gateway Protocol (BGP) route is igp, egp, or incomplete.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the origin attribute is set to EGP:
	RP/0/RSP0/CPU0:router(config-rpl)# set origin egp

# set ospf-metric

To set an Open Shortest Path First (OSPF) protocol metric attribute value, use the **set ospf-metric** command in route-policy configuration mode.

	set ospf-metric {numberparameter}
Syntax Description	<i>number</i> Value assigned to a 24-bit unsigned integer. Range is 0 to 4294967295.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the <b>set ospf-metric</b> command to set the metric for routes that are redistributed into OSPF. The OSPF metric operator accepts either an integer value or a parameter.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the OSPF metric attribute value is set to 1000:
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# set ospf-metric 1000 RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>

## set path-selection

Sets Border Gateway Protocol (BGP) path selection criteria.

To set path selection criteria and install or advertise the path for the Border Gateway Protocol, use the **set path-selection** command in route-policy configuration mode.

set path-selection { backup number | group-best | all | best-path } [install [multipath-protect]]
[advertise] [multipath-protect-advertise]

backup		Specifies the BGP backup path.			
number		Specif	fies the BGP backup path number, which must be a value of 1.		
group-bes	t	Specif	fies all the BGP group best paths.		
			up best path is the best path received from an AS. For example, if paths ceived from 3 ASes, then there are 3 group best paths.		
all		Specifies all BGP paths.			
best-path install		Specifies the BGP best path. Installs the path.			
					multipath-protect
		have t selecte	All selected paths should have unique next hops. For example, if two paths have the same next hop, then one of them is not selected. The backup path is selected such that it does not have the same next hop as any other path that is a multipath.		
		Note	Multipaths are configured with the <b>maximum-paths</b> command.		
advertise multipath-protect-advertise		Advertises the path. Installs and advertises the multipath protection along the multipath.			
					multipath-j
None					
Route-polic	cy configuration				
Release	Modification				
Release 4.0.0	This command	l was ir	ntroduced.		
Release	T1 14 41		ct keyword was added.		
	number         number         group-bes         all         best-path         install         multipath         multipath-         multipath-         None         Route-polic         Release         Release         4.0.0	number         group-best         all         best-path         install         multipath-protect         advertise         multipath-protect-advertise         multipath-protect-advertise         multipath-protect-advertise         Mone         Route-policy configuration         Release       This command         4.0.0       This command	number       Special         group-best       Special         all       Special         best-path       Special         install       Install         multipath-protect       Select         All se       have t         have t       select         advertise       Advert         multipath-protect-advertise       Install         multipath-protect-advertise       Note         Release       Modification         Release       This command was in         4.0.0       This command was in		

	Release	Modification				
	ReleaseThe multipath-protect-advertise keyword was added7.3.1					
Usage Guidelines	This command is used with the <b>additional-path selection</b> command within an appropriate route-policy to calculate backup paths and to enable Prefix Independent Convergence (PIC) functionality. See the <i>BGP Prefix Independent Convergence Unipath Primary/Backup</i> section in <i>Routing Configuration Guide for Cisco ASR</i> 9000 Series Routers for details on the PIC functionality. The group-best is the set of paths that are the best paths from the paths of the same autonomous system (AS). All the paths that are selected as the group-best set should be advertised to peers, however, if there are multiple paths that are selected as group-best because they come from different ASs but having the same next-hop the XR router advertises only one path from these paths to the peer device.					
	The following example shows how to set the backup path for a route-policy:					
	Router# <b>configure</b> Router(config)# <b>route-policy path_selection_policy</b> Router(config-rpl)# <b>set path-selection backup 1 advertise</b>					
	The following example shows how to set the backup path for a route-policy and how to installs and advertise the multipath protection along the multipath:					
	Router# configure Router(config)# route-policy path_selection_policy Router(config-rpl)# set path-selection backup 1 multipathprotect-advertise					
	Related Commands	Command		Description		
	additional	-paths selection	Configures additional paths selection capability for a prefix			
	additional	-paths send	Configures send capability of multiple paths for a prefix to the capable peers,			
	additional	-paths receive	Configures receive capability of multiple paths for a			

advertise best-external

Advertises the best-external path to the iBGP and

prefix to the capable peers.

route-reflector peers,

# set qos-group (RPL)

To set the quality of service (QoS) group, use the **set qos-group** command in route-policy configuration mode:

	set qos-grou	<b>p</b> {numbe	erparameter}
Syntax Description	number QoS group ID. Range is from 0 to 31.		
	parameter Pa	arameter na	ame. The parameter name must be preceded with a "\$."
Command Default	No default be	havior or v	ralues
Command Modes	Route-policy	configurati	ion
Command History	Release	Modifica	tion
	Release 3.7.2	This com	mand was introduced.
Usage Guidelines		r group ass	ou must be in a user group associated with a task group that includes appropriate task signment is preventing you from using a command, contact your AAA administrator
	Use the set q	os-group	command to set the QoS group to classify packets.
	in the forward enabled on an based on the I	ling plane. interface, P preceden	ted at the BGP table-policy attachpoint. Prefixes are marked for subsequent processing After QoS Policy Propagation through Border Gateway Protocol (BGP) (QPPB) is corresponding traffic shaping and policing is completed using packet classification are or QoS group ID. See the <i>Modular QoS Configuration Guide for Cisco ASR 9000</i> nation on QPPB.
Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	This example	shows how	w to use <b>set qos-group</b> command:
	RP/0/RSP0/CH	PU0:router	r(config)# route-policy policy_1 r(config-rpl)# set qos-group 12 r(config-rpl)# end-policy

#### set rib-metric

To set the Routing Information Base (RIB) metric attribute value for a table policy, use the **set rib-metric** command in route-policy configuration mode:

**set rib-metric** {*numberparameter*}

Syntax Description	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is 0 to 4294967295.
	parameter Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the set rib-metric command set the RIB metric attribute value for BGP routes.
	Every route in the RIB has a metric associated with it, signifying the cost to reach a specific destination based on link characteristics. The <b>set rib-metric</b> command modifies the RIB metric while installing BGP routes into RIB, enabling the upgrading or downgrading of the BGP route installed in RIB.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the RIB metric attribute is set to 1000:
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# set rib-metric 1000 RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>

I

# set rip-metric

To set Routing Information Protocol (RIP) metric attributes, use the **set rip-metric** command in route-policy configuration mode.

	set rip-metric	{numberparameter}	
Syntax Description	<b>n</b> <i>number</i> Value assigned to a 4-bit unsigned integer. Range is from 0 to 16.		
	parameter Param	meter name. The parameter name mu	st be preceded with a "\$."
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release N	lodification	
	Release 3.7.2 T	his command was introduced.	
Usage Guidelines			sociated with a task group that includes appropriate task rom using a command, contact your AAA administrator
	Use the set rip-	metric command to set the cost attr	ibute for routes that are redistributed into RIP.
	You can use the	add command to increment the RIF	P metric value.
Task ID	Task ID Ope	erations	
	route-policy rea wr		
Examples	In the following	example, the RIP metric number is a	adjusted for route policy policy_1:
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# set rip-metric 10 RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>		
Related Commands	Command	Description	
	add, on page 7	Adds an offset to an existing value.	
	L	1	

# set rip-tag

To set a route tag attribute for Routing Information Protocol (RIP) routes, use the **set rip-tag** command in route-policy configuration mode.

	set rip-tag {numberparameter}		
Syntax Description	<i>number</i> Value assigned to a 16-bit unsigned integer. Range is from 0 to 65535.		
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>set rip-tag</b> command to set the RIP tag attribute for routes that are redistributed into RIP. The RIP tag operator accepts either an integer value or a parameter.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	In the following example, the RIP tag is adjusted for route policy policy_1:		
	<pre>RP/0/RSP0/CPU0:router(config)# route-policy policy_1 RP/0/RSP0/CPU0:router(config-rpl)# set rip-tag 1000 RP/0/RSP0/CPU0:router(config-rpl)# end-policy</pre>		

## set rpf-topology

To set reverse-path forwarding (RPF) to any default or nondefault tables for particular sources and groups, use the **set rpf-topology** command in routing policy configuration mode.

set rpf-topology [vrf vrf-name] {ipv4 | ipv6} {unicast | multicast parameter} topology table-name

Syntax Description	ipv4 [Optional] Specifies IPv4 address prefixes.						
	ipv6 [Optional] Specifies IPv6 address prefixes.						
	unicast Specifies unicast address prefixes.						
	multicast Specifies multicast address prefixes.						
	parameter Parameter name. The parameter name must be preceded with a "\$."						
	topology Specifies the default or non-default topology table for the source or group.						
	table-name Alphanumeric name string.						
Command Default	Default or current topology setting.						
Command Modes	Routing policy configuration						
Command History	Release Modification						
	Release 3.7.2 This command was introduced.						
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.						
Task ID	Task ID Operations						
	multicast read						
Examples	The following example shows how to execute the <b>set rpf-topology</b> command:						
	RP/0/RSP0/CPU0:router# config RP/0/RSP0/CPU0:router(config)# route-policy green RP/0/RSP0/CPU0:router(config-rpl)# set rpf-topology ipv6 multicast topology t12						
	The following example shows the use of <b>set rpf-topology</b> command in the context of creating an RPF for a topology table in multiple topologies:						
	route-policy mt4-p1 if destination in (225.0.0.1, 225.0.0.11) then						

```
set rpf-topology ipv4 multicast topology t201
 elseif destination in (225.0.0.2, 225.0.0.12) then
   set rpf-topology ipv4 multicast topology t202
  elseif destination in (225.0.0.3, 225.0.0.13) then
   pass
 endif
end-policy
1
route-policy mt4-p3
 if destination in (225.0.0.8) then
   set rpf-topology ipv4 multicast topology t208
 elseif destination in (225.0.0.9) then
   set rpf-topology ipv4 multicast topology t209
  elseif destination in (225.0.0.10) then
   set rpf-topology ipv4 multicast topology t210
  else
   drop
 endif
end-policy
!
```

Related Commands	Command	Description
	rpf topology	Assigns a route policy in PIM to select a reverse-path forwarding (RPF) topology.

### set rtset route-limit

To set limits on paths in the inbound neighbor policy in BGP, particularly when acting as a route-reflector, use the **set rtset route-limit** command in the global configuration mode. If such a path is accepted, BGP adds a flag to the path, BPATH\_RTSET\_NET\_COUNT, to indicate that the path is subjected to the limit.

To remove a limit, use the **no** form of this command.

set rtset route-limit

Syntax Description	limit-value	Displays the 32-unit quantity.
--------------------	-------------	--------------------------------

**Command Default** No default behavior or values.

Command Modes Global configuration

Command History Release Modification

Release 5.0 This command was introduced.

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

#### Task ID Task ID Operations

route-policy read

#### **Examples**

Based on service agreement, if a user AVPN advertises VPN prefixes with RT-set {1:1, 2:2} and user Team10 advertises VPN prefixes with RTs {3:3, 4:4}. On the DUT, the user wants to limit AVPN prefixes to 100, Team10 prefixes to 50, and for all other users, limit each of their prefixes to 80. Note that the fallback limit is per user, not a cumulative one. To achieve this, the user must configure the following route-policy:

```
route-policy RTSET-LIMIT
if extcommunity rt matches-every (1:1, 2:2) then
set rtset-route-limit 100
elseif extcommunity rt matches-every (3:3, 4:4) then
set reset-route-limit 50
else
set reset-route-limit 80
endif
end-policy
With this configuration, the RR will keep
(i) at most 100 prefixes that have a path with RT-set containing
{1:1, 2:2},
(ii) at most 50 prefixes that have a path with RT-set containing {3:3, 4:4},
and
```

(iii) at most 80 prefixes that only have paths with RT-set that do not contain either {1:1, 2:2} or {3:3, 4:4}

# set spf-priority

To set OSPF Shortest Path First (SPF) priority, use the set spf-priority command in route-policy configuration mode.

set spf-priority {critical | high | medium}

Syntax Description	critical	Sets critical pr	iority for SPF		
	high	Sets high prior	rity for SPF		
	medium	Sets medium p	riority for SPF		
Command Default	None				
Command Modes	Route-pol	icy configuratio	n		
Command History	Release	Modificatio	DN		
	Release 3.7.0	This comm	and was introduced.		
Usage Guidelines		user group assi		associated with a task group that inc a from using a command, contact yo	
Task ID	Task ID	Operation			
	route-polie	cy read, write			
	This example sets SPF priority as critical:				
	RP/0/RSP0		-	<pre>policy_spf_priority priority critical</pre>	
Related Commands	Command	1		Description	

Commands	Command	Description
	spf prefix-priority (OSPF)	Prioritizes OSPFv2 prefix installation into the global Routing Information Base (RIB) during Shortest Path First (SPF) run.

I

# set tag

To set the tag attribute, use the set tag command in route-policy configuration mode.

	set tag {numberparameter}
Syntax Description	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is from 0 to 4294967295.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the set tag command to set the tag attribute.
-	<b>Note</b> The <b>set tag</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.
	Tags are routing-protocol independent 32-bit integers that can be associated with a given route in the Routing Information Base (RIB).
	For the Border Gateway Protocol (BGP), the tag attribute can be set only at the table-policy attach point.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the tag attribute is set to 10:
	RP/0/RSP0/CPU0:router(config-rpl)# set tag 10
	In this example, the tag attribute is set to a parameter value \$tag_param:
	RP/0/RSP0/CPU0:router(config-rpl)# set tag \$tag param

## set traffic-index

To set the traffic index attribute, use the set traffic-index command in route-policy configuration mode.

set traffic-index {numberparameter | ignore} Syntax Description number Integer value assigned to the traffic index attribute. Range is 1 to 63. *parameter* Parameter name. The parameter name must be preceded with a "\$." ignore Specifies that Border Gateway Protocol (BGP) policy accounting is not done. No default behavior or values **Command Default** Route-policy configuration **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **set traffic-index** command to set the traffic index attribute. Note The set traffic-index command can be used as an action statement within an if statement. For a list of all action statements available within an if statement, see the if command. Traffic index is a special attribute for BGP. It is used as an index to a set of counters that are maintained by forwarding hardware. It is also used to track packet and byte counters that are forwarded using routes with specific attributes. These counters can be enabled and disabled on an individual interface basis. The traffic index attribute can be set only at the table-policy attach point, and can take a value from 1 to 63, or a value of **ignore**. If the traffic index is set to **ignore**, then BGP policy accounting is not done. Parameterization of this value is also supported. Task ID Task ID Operations route-policy read, write Examples In the following example, a policy is created in which the traffic index is set to 10 for all routes that originated in autonomous system 1234: RP/0/RSP0RP0/CPU0:router(config) # route-policy count-as-1234 RP/0/RSP0RP0/CPU0:router(config-rpl)# if as-path originates-from `1234' then

```
RP/0/RSP0RP0/CPU0:router(config-rpl-if)# set traffic-index 10
RP/0/RSP0RP0/CPU0:router(config-rpl-if)# else
RP/0/RSP0RP0/CPU0:router(config-rpl-if)# pass
RP/0/RSP0RP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0RP0/CPU0:router(config-rpl)# end-policy
```

This policy could then be attached using the BGP **table-policy** command. The counters could then be enabled on various interfaces with the appropriate commands.

# set vpn-distinguisher

To change the Border Gateway Protocol (BGP) VPN distinguisher attribute, use the **set vpn-distinguisher** command in route-policy configuration mode.

**set vpn-distinguisher** {*numberparameter*}

Syntax Description	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is from 1 to 4294967295.		
	parameter Parameter name. The parameter name must be preceded with a "\$."		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the set vpn-distinguisher command to change the VPN distinguisher attribute.		
-			
	<b>Note</b> The <b>set origin</b> command can be used as an action statement within an <b>if</b> statement. For a list of all action statements available within an <b>if</b> statement, see the <b>if</b> command.		
	A VPN distinguisher is used in Layer 3 VPN networks for enhanced individual VPN control and to avoid route target mapping at AS boundaries in inter-AS VPN networks. Route target extended communities are removed at neighbor outbound, and the VPN distinguisher value is applied on the BGP route as an extended community. When the route is received on a neighboring router in another AS, the VPN distinguisher is removed and mapped to a route target extended community.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	In the following example, the VPN distinguisher attribute is set to 456:		
	<pre>RP/0/RSP0/CPU0:router(config-rpl) # set vpn-distinguisher 456</pre>		

### set weight

To set the weight value for Border Gateway Protocol (BGP) routes, use the **set weight** command in route-policy configuration mode.

**set weight** {numberparameter}

Syntax Description	<i>number</i> Number assigned to the weight value for BGP routes. Weight is 16 bits. Range is 0 to 65535.			
	parameter Parameter name. The parameter name must be preceded with a "\$."			
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the set weight command to set the weight value for BGP routes.			
-	Note The set weight command can be used as an action statement within an if statement. For a list of all a			

statements available within an if statement, see the if command.

A weight is a value that can be applied to a route to override the BGP local preference. This is not a BGP attribute announced to BGP peer routers. RPL can be used to set the weight value.

Given two BGP routes with the same network layer reachability information (NLRI), a route with a higher weight is selected, no matter what the values of other BGP attributes may be. However, weight only has significance on the local router. It is not sent from one BGP speaker to another, even within the same autonomous system.

On Cisco routers, if a BGP route is sourced by the local router, its weight is automatically set to 32768; if the BGP route is learned from another router, its weight is automatically set to 0. Thus, by default, locally sourced routes are preferred over BGP learned routes.

	Task ID	Operations
-	route-policy	read, write

Examples

In the following example, the weight of the route is set to 10 and then to a parameter value \$weight\_param:

RP/0/RSP0/CPU0:router(config-rpl)# set weight 10
RP/0/RSP0/CPU0:router(config-rpl)# set weight \$weight\_param

# show rpl

To display system-wide RPL configuration, use the show rpl command in EXEC mode.

show [running-config] rpl [maximum {lines configuration-limit | policies policies-limit} | editor
{emacs | nano | vim}]

Syntax Description	running-config	(Optional) Displays configuration-limit argument.		
	maximum	(Optional) Displays the maximum number of lines of configuration and number of policies.		
	lines configuration-limit	t (Optional) Displays the number of lines to which configuration is limited. Range is 1 to 131072.		
		The <i>configuration-limit</i> argument is available if the <b>running-config</b> keyword is specified.		
	policies policies-limit	(Optional) Displays the limit on the number of policies. Range is 1 to 5000.		
		The <i>configuration-limit</i> argument is available if the <b>running-config</b> keyword is specified.		
	editor	(Optional) Specifies the default RPL editor. This keyword is available if the <b>running-config</b> keyword is specified.		
	emacs	(Optional) Displays the default RPL editor to Micro Emacs.		
	nano	(Optional) Displays the default RPL editor to nano.		
	vim	(Optional) Displays the default RPL editor to Vim.		
Command Default	No default behavior or val	ues		
Command Modes	- EXEC			
Command History	Release Modification	on		
	Release 3.7.2 This comm	hand was introduced.		
	Release The Nano a 7.11.1	and <b>Emacs</b> keyword was deprecated.		
Usage Guidelines		must be in a user group associated with a task group that includes appropriate task gnment is preventing you from using a command, contact your AAA administrator		
Task ID	Task ID Operations			

### **Examples** The following shows the output of the **show running-config rpl** command:

```
RP/0/RSP0/CPU0:router# show running-config rpl
extcommunity-set rt ext_comm_set_rt_ex1
 1.2.3.4:34
end-set
!
prefix-set prefix_set_ex1
 10.0.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
!
route-policy policy_2
 if destination in prefix_set_ex1 then
    if (community matches-any com_set_exl) then
     set community (10:666) additive
   endif
   if (extcommunity rt matches-any ext comm set rt ex1) then
     set community (10:999) additive
    endif
 endif
end-policy
!
```

Related Commands	Command	Description
	show rpl maximum, on page 242	Displays the maximum limits for lines of configuration and number of policies.

### show rpl active as-path-set

To display the AS path sets that are referenced by at least one policy that is being used at an attach point, use the **show rpl active as-path-set** command in EXEC mode.

show rpl active as-path-set [detail]

 Syntax Description
 detail (Optional) Displays the content of the object and all referenced objects for active AS path sets.

 Command Default
 No default behavior or values

 Command Modes
 EXEC

 Command History
 Release

Release 3.7.2 This command was introduced.

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl active as-path-set** command to display all AS path sets that are in use in the system and referenced either directly or indirectly at a policy attach point.

### Task ID Task ID Operations

route-policy read

#### **Examples**

This example shows the following sample configuration:

```
router bgp 2
address-family ipv4 unicast
neighbor 10.0.101.2
 remote-as 100
  address-family ipv4 unicast
   route-policy policy_1 in
  !
 1
neighbor 10.0.101.3
 remote-as 12
  address-family ipv4 unicast
   route-policy policy 2 in
  1
 Т
ļ
RP/0/RSP0/CPU0:router# show rpl route-policy policy_2 detail
prefix-set prefix set ex1
  10.0.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
  0.0.0/0
```

```
end-set
1
community-set comm_set_ex1
  65500:1,
  65500:2,
  65500:3
end-set
extcommunity-set rt ext comm set rt ex1
  1.2.3.4:34
end-set
!
route-policy policy 2
   if destination in prefix_set_ex1 then
     if (community matches-any comm set ex1) then
       set community (10:666) additive
     endif
     if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_1 detail
prefix-set prefix_set_ex1
 10.0.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
!
as-path-set as_path_set_ex1
 ios-regex '^_655--$',
ios-regex '^_65501_$'
end-set
!
route-policy policy_1
 if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex1) then
   set community (10:333) additive
  endif
end-policy
```

Given this sample configuration, the **show rpl active as-path-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl active as-path-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following as-path-sets are ACTIVE
------as_path_set_ex1
```

I

Related Commands	Command	Description
	show rpl active community-set, on page 195	Displays the community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active extcommunity-set, on page 198	Displays the extended community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the route policies that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the prefix sets that are referenced by at least one policy that is being used at an attach point.

# show rpl active community-set

To display the community sets that are referenced by at least one policy that is being used at an attach point, use the **show rpl active community-set** command in EXEC mode.

show rpl active community-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for active community sets.		
Command Default	No default behavior or values		
Command Modes	EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>show rpl active community-set</b> command to display all community sets that are in use in the system and referenced either directly or indirectly at a policy attach point.		
Task ID	Task ID Operations		
	route-policy read		
Examples	This example shows the following sample configuration:		
	router bgp 2 address-family ipv4 unicast !		
	neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in !		
	! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in ! !		
	! RP/0/RSP0/CPU0:router# show rpl route-policy policy 2 detail		
	prefix-set prefix_set_ex1 10.0.0/16 ge 16 le 32, 0.0.0/0 ge 25 le 32,		

```
0.0.0.0/0
end-set
1
community-set comm set ex1
 65500:1,
  65500:2,
 65500:3
end-set
extcommunity-set rt ext_comm_set_rt_ex1
  1.2.3.4:34
end-set
!
route-policy policy 2
   if destination in prefix set ex1 then
    if (community matches-any comm set ex1) then
      set community (10:666) additive
     endif
    if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
    endif
   endif
end-policy
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_1 detail
prefix-set prefix set ex1
 10.0.0.0/16 ge 16 le 32,
 0.0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
!
as-path-set as path set ex1
 ios-regex '^ 655--$',
 ios-regex '^ 65501 $'
end-set
1
route-policy policy 1
 if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
!
```

Given this sample configuration, the **show rpl active community-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl active community-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

Related Commands	Command	Description	
	show rpl active as-path-set, on page 192	Displays the AS path sets that are referenced by at least one policy that is being used at an attach point.	
	show rpl active extcommunity-set, on page 198	Displays the extended community sets that are referenced by at least one policy that is being used at an attach point.	
	show rpl active prefix-set, on page 201	Displays the route policies that are referenced by at least one policy that is being used at an attach point.	
	show rpl active prefix-set, on page 201	Displays the prefix sets that are referenced by at least one policy that is being used at an attach point.	
	show rpl active rd-set, on page 204	Displays the route distinguisher sets that are referenced by at least one policy that is being used at an attach point.	

# show rpl active extcommunity-set

To display the extended community sets for cost, route target (RT), and Site-of-Origin (SoO) that are referenced by at least one route policy used at an attach point, use the **show rpl active extcommunity-set** command in EXEC mode.

show rpl active extcommunity-set [cost | rt | soo] [detail]

Syntax Description	<b>cost</b> (Optional) Displays all extended community cost sets.		
	rt (Optional) Displays all extended community RT sets.		
	soo (Optional) Displays all extended community SoO sets.		
	<b>detail</b> (Optional) Displays the content of the object and all referenced objects for active extended community sets.		
Command Default	All extended community sets are displayed.		
Command Modes	EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>show rpl active extcommunity-set</b> command to display all extended community sets that are in use in the system and referenced either directly or indirectly at a policy attach point.		
Task ID	Task ID Operations		
	route-policy read		
Examples	This example shows the following sample configuration:		
	<pre>router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in !</pre>		
	! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast		

```
route-policy policy 2 in
 1
 !
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_2 detail
prefix-set prefix set ex1
 10.0.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
1
community-set comm_set_ex1
  65500:1,
  65500:2,
 65500:3
end-set
extcommunity-set rt ext_comm_set_rt_ex1
  1.2.3.4:34
end-set
!
route-policy policy 2
   if destination in prefix set ex1 then
     if (community matches-any comm_set_ex1) then
       set community (10:666) additive
     endif
     if (extcommunity rt matches-any ext_comm_set_rt_ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy 1 detail
prefix-set prefix_set_ex1
 10.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
1
as-path-set as_path_set_ex1
ios-regex '^_655--$',
 ios-regex '^ 65501 $'
end-set
1
route-policy policy_1
 if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
 if (as-path in as path set ex1) then
   set community (10:333) additive
 endif
end-policy
1
```

Given this sample configuration, the **show rpl active extcommunity-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl active extcommunity-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached

UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following extcommunity-sets are ACTIVE
```

```
ext_comm_set_rt_ex1
```

Related Commands	Command	Description
	show rpl active as-path-set, on page 192	Displays the AS path sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active community-set, on page 195	Displays the community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the route policies that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the prefix sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active rd-set, on page 204	Displays the route distinguisher sets that are referenced by at least one policy that is being used at an attach point.

# show rpl active prefix-set

To display the prefix sets that are referenced by at least one policy that is being used at an attach point, use the **show rpl active prefix-set** command in EXEC mode.

show rpl active prefix-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for active prefix sets.         No default behavior or values		
Command Default			
Command Modes	- EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>show rpl active prefix-set</b> command to display all prefix sets that are in use in the system and referenced either directly or indirectly at a policy attach point.		
Task ID	Task ID Operations		
	route-policy read		
Examples	This example shows the following sample configuration:		
	<pre>router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in ! ! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in ! !</pre>		
	<pre>RP/0/RSP0/CPU0:router# show rpl route-policy policy_2 detail</pre>		
	prefix-set prefix_set_ex1 10.0.0/16 ge 16 le 32, 0.0.0/0 ge 25 le 32,		

```
0.0.0.0/0
end-set
1
community-set comm set ex1
 65500:1,
  65500:2,
 65500:3
end-set
1
extcommunity-set rt ext_comm_set_rt_ex1
  1.2.3.4:34
end-set
1
route-policy policy 2
   if destination in prefix_set_ex1 then
     if (community matches-any comm set ex1) then
      set community (10:666) additive
     endif
    if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
    endif
   endif
end-policy
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_1 detail
prefix-set prefix_set_ex1
 10.0.0.0/16 ge 16 le 32,
 0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
as-path-set as_path_set_ex1
 ios-regex '^ 655--$',
 ios-regex '^_65501_$'
end-set
route-policy policy_1
 if (destination in prefix_set_ex1) then
   set local-preference 100
 endif
 if (as-path in as_path_set_ex1) then
   set community (10:333) additive
 endif
end-policy
!
```

The following example displays active prefix sets:

RP/0/RSP0/CPU0:router# show rpl active prefix-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following prefix-sets are ACTIVE
prefix set 1
```

Command	Description
show rpl active as-path-set, on page 19.	2 Displays the AS path sets that are referenced by at least one policy that is being used at an attach point.
show rpl active community-set, on page 195	Displays the community sets that are referenced by at least one policy that is being used at an attach point.
show rpl active extcommunity-set, on page 198	Displays the extended community sets that are referenced by at least one policy that is being used at an attach point.
show rpl route-policy attachpoints, on page 262	Displays the route policies that are referenced by at least one policy that is being used at an attach point.
show rpl active rd-set, on page 204	Displays the route distinguisher sets that are referenced by at least one policy that is being used at an attach point.

### show rpl active rd-set

To display the route distinguisher (RD) sets that are referenced by at least one policy that is being used at an attach point, use the **show rpl active rd-set** command in EXEC mode.

show rpl active rd-set [detail]

**Syntax Description** detail (Optional) Displays the content of the object and all referenced objects for active route policies.

Command Default No default behavior or values

Release

Command Modes EXEC

**Command History** 

Release 3.7.2 This command was introduced.

Modification

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl active rd-set** command to display all RD sets that are in use in the system and that are referenced either directly or indirectly at a policy attach point.

### Task ID Task ID Operations

route-policy read

**Examples** 

This example shows the following sample configuration:

```
rd-set rdset1
   10:151,
   100.100.100.1:153,
   100.100.100.62/31:63
end-set
1
rd-set rdset2
   10:152,
   100.100.100.1:154,
   100.100.100.62/31:89
end-set
route-policy rdsetmatch
   if rd in rdset1 then
     set community (10:112)
   elseif rd in rdset2 then
    set community (10:223)
   endif
end-policy
T
router bgp 10
  bgp router-id 10.0.0.1
```

```
address-family vpnv4 unicast
neighbor 10.10.10.1
  remote-as 10
  address-family ipv4 unicast
   route-policy rdsetmatch in
 !
!
```

Given this sample configuration, the **show rpl active rd-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl active rd-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

Related Commands	Command	Description
	show rpl active as-path-set, on page 192	Displays the AS path sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active community-set, on page 195	Displays the community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active extcommunity-set, on page 198	Displays the extended community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the prefix sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the route policies that are referenced by at least one policy that is being used at an attach point.

### show rpl active route-policy

To display the route policies that are referenced by at least one policy that is being used at an attach point, use the **show rpl active route-policy** command in EXEC mode.

show rpl active route-policy [detail]

**Syntax Description detail** (Optional) Displays the content of the object and all referenced objects for active route policies. No default behavior or values **Command Default** EXEC **Command Modes Command History** Modification Release Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **show rpl active route-policy** command to display all policies that are in use in the system and that are referenced either directly or indirectly at a policy attach point.

#### Task ID Task ID Operations

route-policy read

#### **Examples**

This example shows the following sample configuration:

```
router bgp 2
address-family ipv4 unicast
neighbor 10.0.101.2
 remote-as 100
  address-family ipv4 unicast
   route-policy policy_1 in
  !
 Т
neighbor 10.0.101.3
 remote-as 12
 address-family ipv4 unicast
   route-policy policy 2 in
  1
 Т
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_1
route-policy policy 1
  if (destination in prefix set ex1) then
    set local-preference 100
```

```
endif
  if (as-path in as_path_set_ex1) then
   set community (10:333) additive
  endif
end-policy
1
RP/0/RSP0/CPU0:router# show rpl route-policy policy_2
route-policy policy 2
   if destination in prefix set ex1 then
     if (community matches-any comm_set_ex1) then
      set community (10:666) additive
     endif
     if (extcommunity rt matches-any ext_comm_set_rt_ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
1
```

Given this sample configuration, the **show rpl active route-policy** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl active route-policy

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following policies are (ACTIVE)
policy_1
policy_2
```

Related Commands	Command	Description
	show rpl active as-path-set, on page 192	Displays the AS path sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active community-set, on page 195	Displays the community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active extcommunity-set, on page 198	Displays the extended community sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active prefix-set, on page 201	Displays the prefix sets that are referenced by at least one policy that is being used at an attach point.
	show rpl active rd-set, on page 204	Displays the route distinguisher sets that are referenced by at least one policy that is being used at an attach point.

# show rpl as-path-set

	To display the contents of AS path sets, use the <b>show rpl as-path-set</b> command in EXEC mode. <b>show rpl as-path-set</b> [ <i>name</i>   <b>states</b>   <b>brief</b> ]				
Syntax Description	name (Optional) Name of the AS path set.				
	states (Optional) Displays all unused, inactive, and active states.				
	<b>brief</b> (Optional) Limits the display to a list of the names of all AS path sets without their configurations.				
Command Default	No default behavior or values				
Command Modes	EXEC				
Command History	Release Modification				
	Release 3.7.2 This command was introduced.				
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.				
	Use the optional <b>brief</b> keyword to limit the display to a list of the names of all AS path sets without their configurations.				
Task ID	Task ID Operations				
	route-policy read				
Examples	This example shows the following sample configuration:				
	RP/0/RSP0/CPU0:router# show rpl route-policy policy_1				
	<pre>route-policy policy_1     if (destination in prefix_set_exl) then         set local-preference 100     endif     if (as-path in as_path_set_exl) then         set community (10:333) additive     endif end-policy</pre>				
	Given this sample configuration, the <b>show rpl as-path-set as_path_set_ex1</b> command displays the following information:				
	RP/0/RSP0/CPU0:router# show rpl as-path-set as path set ex1				

RP/0/RSP0/CPU0:router# show rpl as-path-set as\_path\_set\_ex1 as-path-set as\_path\_set\_ex1

```
ios-regex '^_65500_$',
ios-regex '^_65501_$'
end-set
```

### Related Commands

Command	Description	
show rpl community-set, on page 215	Displays the configuration of a named community set.	
show rpl extcommunity-set, on page 222	Displays the configuration of a named extended community set.	
show rpl route-policy, on page 259	Displays the configuration of a named route policy.	
show rpl prefix-set, on page 246	Displays the configuration of a named prefix set.	

### show rpl as-path-set attachpoints

To display all of the policies used at an attach point that reference the named AS path set, use the **show rpl as-path-set attachpoints** command in EXEC mode.

 show rpl as-path-set name attachpoints

 Syntax Description
 name Name of an AS path set.

 Command Default
 No default behavior or values

Command Modes EXEC

Release

Release 3.7.2 This command was introduced.

Modification

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl as-path-set attachpoints** command to display all policies used at an attach point that reference the named set either directly or indirectly.

The AS path set name is required.

#### Task ID Task ID Operations

route-policy read

Examples

**Command History** 

This example shows the following sample configuration:

```
router bgp 2
 address-family ipv4 unicast
 !
neighbor 10.0.101.2
 remote-as 100
  address-family ipv4 unicast
   route-policy policy 1 in
  !
 T
 neighbor 10.0.101.3
 remote-as 12
  address-family ipv4 unicast
   route-policy policy 2 in
  1
 1
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_1
route-policy policy_1
```

```
if (destination in prefix set ex1) then
    set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
RP/0/RSP0/CPU0:router# show rpl route-policy policy_2
route-policy policy_2
 if (destination in prefix set ex1) then
    if (community matches-any comm set ex1) then
     set community (10:666) additive
    endif
   if (extcommunity matches-any ext_comm_set_rt_ex1) then
     set community (10:999) additive
    endif
  endif
end-policy
!
```

Given this sample configuration, the **show rpl as-path-set as\_path\_set\_ex1 attachpoints** command displays the following information:

```
RP/0/RSP0/CPU0:router# show rpl as-path-set as_path_set_ex1 attachpoints
```

BGP Attachpoint:Neighbor

Neighbor/Group	type	afi/safi	in/out	referring po	olicy attached policy
10.0.101.2		IPv4/uni	in	policy_1	policy_1
10.0.101.3		IPv4/uni	in	policy_2	policy_2

This table describes the significant fields shown in the display.

Field	Description
BGP Attachpoint	Location of the attach point.
Neighbor/Group	IP address of the attach point on the neighbor.
type	Displays the address family mode.
afi/safi	Address family identifier or subsequent address family identifier.
in/out	Import or export policy.
referring policy	Policy that refers to the AS path set.
attached policy	Policy used at the attach point.

Related Commands	Command	Description
	show rpl community-set attachpoints, on page 217	Displays all the policies used at an attach point that reference the named community set.
	show rpl route-policy attachpoints, on page 262	Displays all the policies used at an attach point that reference the named policy.
	show rpl prefix-set attachpoints, on page 248	Displays all the policies used at an attach point that reference the named prefix set.

# show rpl as-path-set references

To list all of the policies that reference the named AS path set, use the **show rpl as-path-set references** command in EXEC mode.

show rpl as-path-set name references [brief]

Syntax Description	<i>name</i> Name of the prefix set.			
	<b>brief</b> (Optional) Limits the output to just the brief table and not the detailed information for the named AS path set.			
Command Default	No default behavior or values			
Command Modes	EXEC			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>show rpl as-path-set references</b> command to display all policies that reference the named AS path set either directly or indirectly.			
	Use the optional <b>brief</b> keyword to limit the output to just a summary table and not the detailed information for the AS path set.			
Task ID	Task ID Operations			
	route-policy read			
Examples	This example shows the following sample configuration:			
	router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in !			
	! RP/0/RSP0/CPU0:router# <b>show rpl route-policy policy_1</b>			
	route-policy policy_1 if (destination in prefix_set_ex1) then set local-preference 100 endif			

```
if (as-path in as_path_set_ex1) then
    set community (10:333) additive
    endif
end-policy
```

Given this sample configuration, the **show rpl as-path-set as\_path\_set\_ex1 references** command displays the following information:

```
RP/0/RSP0/CPU0:router# show rpl as-path-set as_path_set_ex1 references
Usage Direct -- Reference occurs in this policy
Usage Indirect -- Reference occurs via an apply statement
Status UNUSED -- Policy is not in use at an attachpoint (unattached)
Status ACTIVE -- Policy is actively used at an attachpoint
Status INACTIVE -- Policy is applied by an unattached policy
   Usage/Status
                 count
_____
                  1
   Direct
   Indirect
                  0
                1
0
   ACTIVE
   INACTIVE
   UNUSED
                   0
   route-policy
                           policy status
                  usage
_____
                  Direct ACTIVE
  policy 1
```

This table describes the significant fields shown in the display.

Table 4: show rpl as-path-set references Field Descriptions

Field	Description		
Usage/Status	Displays the usage and status of all policies that reference the AS path s		
	Values for usage are Direct or Indirect.		
	Values for policy status are ACTIVE, INACTIVE, or UNUSED.		
count	Number of policies that match each usage and status option.		
route-policy	Name of the route policies that reference the AS path set.		
usage	Type of usage for the policy.		
policy status	Status of the policy.		

### **Related Commands**

nds	Command	Description
	show rpl community-set references, on page 219	Lists all policies that reference the named community set.
	show rpl route-policy references, on page 267	Lists all policies that reference the named policy.
	show rpl prefix-set references, on page 251	Lists all policies that reference the named prefix set.

I

# show rpl community-set

-	To display the	e configurat	ion of community sets, use the show rpl community-set command in EXEC mode.	
	show rpl community-set [name   states   brief]			
Syntax Description	name (Optio	name (Optional) Name of the community set.		
	states (Optio	onal) Shows	s all unused, inactive, and active states.	
	<b>brief</b> (Optional) Limits the display to a list of the names of all community sets without their configurations.			
Command Default	No default behavior or values			
Command Modes	EXEC			
Command History	Release	Modifica	tion	
	Release 3.7.2	2 This com	mand was introduced.	
	Release 5.3.2	2 The com	nand output was modified to display graceful maintenance feature information.	
Usage Guidelines		er group ass	the unuse of a user group associated with a task group that includes appropriate task signment is preventing you from using a command, contact your AAA administrator	
	Use the optic configuration		keyword to limit the display to a list of the names of community sets without their	
Task ID	Task ID	Operations		
	route-policy	read		
	The following feature attrib		le output of the show rpl community-set command with graceful maintenance ed:	
	Thu Jan 29	17:55:04.7	rpl community-set 792 PST unity Set objects	
	community-s graceful- end-set			
Examples	This example	e shows the	following sample configuration:	
	if (com	nation in munity mat	prefix_set_ex2) then tches-any comm_set_ex2) then (10:666) additive	

```
endif
if (extcommunity matches-any ext_comm_set_rt_ex2) then
set community (10:999) additive
endif
endif
endif
end-policy
```

Given this sample configuration, the **show rpl community-set comm\_set\_ex2** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl community-set comm\_set\_ex2

```
community-set comm_set_ex2
  65501:1,
  65501:2,
  65501:3
end-set
```

### Related Commands C

Command	Description
show rpl as-path-set, on page 208	Displays the configuration of a named AS path set.
show rpl extcommunity-set, on page 222	Displays the configuration of a named extended community set.
show rpl prefix-set, on page 246	Displays the configuration of a named prefix set.
show rpl rd-set, on page 253	Displays the configuration of a named RD set.
show rpl route-policy, on page 259	Displays the configuration of a named route policy.

## show rpl community-set attachpoints

To display all the policies used at an attach point that reference the named community set, use the **show rpl community-set attachpoints** command in EXEC mode.

show rpl community-set name attachpoints Syntax Description name Name of a community set. No default behavior or values **Command Default** EXEC **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **show rpl community-set attachpoints** command to display all the policies used at an attach point that reference the named community set either directly or indirectly. The community set name is required. Task ID Task ID Operations route-policy read Examples This example shows the following sample configuration: router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy 2 in 1 1 1 ! route-policy policy 2 if destination in prefix\_set\_ex1 then if (community matches-any comm set ex1) then set community (10:666) additive endif if (extcommunity rt matches-any ext comm set rt ex1) then <<<<< set community (10:999) additive endif endif end-policy

!

Given this sample configuration, the **show rpl community-set attachpoints** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl community-set ext\_comm\_set\_rt\_ex1 attachpoints
BGP Attachpoint:Neighbor
Neighbor/Group type afi/safi in/out referring policy attached policy
10.0.101.3 -- IPv4/uni in policy\_2 policy\_2

This table describes the significant fields shown in the display.

Table 5: show rpl community-set attachpoints Field Descriptions

Field	Description
BGP Attachpoint	Location of the attach point.
Neighbor/Group	IP address of the attach point on the neighbor.
type	Displays the address family mode.
afi/safi	Address family identifier or subsequent address family identifier.
in/out	Import or export policy.
referring policy	Policy that refers to the AS path set.
attached policy	Policy used at the attach point.

Related Commands	Command	Description
	show rpl as-path-set attachpoints, on page 210	Displays all the policies used at an attach point that reference the named AS path set.
	show rpl prefix-set attachpoints, on page 248	Displays all the policies used at an attach point that reference the named prefix set.
	show rpl rd-set attachpoints, on page 255	Displays all the policies used at an attach point that reference the named RD set.
	show rpl route-policy attachpoints, on page 262	Displays all the policies used at an attach point that reference the named policy.

# show rpl community-set references

To list all the policies that reference the named community set, use the **show rpl community-set references** command in EXEC mode.

	show rpl community-set name references [brief]	
Syntax Description	<i>name</i> Name of a community set.	
	<b>brief</b> (Optional) Limits the output to just the summary table and not the detailed information for the community set.	
Command Default	No default behavior or values	
Command Modes	EXEC	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
	Use the <b>show rpl community-set references</b> command to display all the policies that reference the named community set.	
	Use the optional <b>brief</b> keyword to limit the output to just a summary table and not the detailed information for the community set.	
Task ID	Task ID Operations	
	route-policy read	
Examples	This example shows the following sample configuration:	
	router bgp 2 address-family ipv4 unicast	
	: neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in	
	· ! !	
	route-policy policy_2 if (destination in prefix_set_ex1) then if (community matches-any comm_set_ex1) then set community (10:666) additive endif	

```
if (extcommunity matches-any ext_comm_set_rt_ex1) then
    set community (10:999) additive
    endif
endif
end-policy
```

Given this sample configuration, the **show rpl extcommunity-set comm\_set\_ex1 references** command displays the following information:

```
RP/0/RSP0/CPU0:router# show rpl extcommunity-set comm_set_ex1 references
Usage Direct -- Reference occurs in this policy
Usage Indirect -- Reference occurs via an apply statement
Status UNUSED -- Policy is not in use at an attachpoint (unattached)
Status ACTIVE -- Policy is actively used at an attachpoint
Status INACTIVE -- Policy is applied by an unattached policy
   Usage/Status
              count
_____
           1
0
   Direct
   Indirect
                  1
   ACTIVE
                 0
   INACTIVE
                  0
   UNUSED
   route-policy usage policy status
------
                         -------
  policy_2 Direct ACTIVE
```

This table describes the significant fields shown in the display.

#### Table 6: show rpl community-set references Field Descriptions

Field	Description	
Usage/Status	Displays the usage and status of all policies that reference the community set.	
	Values for usage are Direct or Indirect.	
	Values for status are ACTIVE, INACTIVE, and UNUSED.	
count	Number of policies that match each usage and status option.	
route-policy	Name of the route policies that reference the community set.	
usage	Type of usage for the policy.	
policy status	Status of the policy.	

### **Related Commands**

s	Command	Description
	show rpl as-path-set references, on page 213	Lists all policies that reference the named AS path set.
	show rpl prefix-set references, on page 251	Lists all policies that reference the named prefix set.

Command	Description
show rpl rd-set references, on page 257	Lists all policies that reference the named RD set.
show rpl route-policy references, on page 267	Lists all policies that reference the named policy.

# show rpl extcommunity-set

To display the configuration of extended community sets, use the **show rpl extcommunity-set** command in EXEC mode.

show rpl extcommunity-set [name [attachpoints|references]] [cost | rt | soo] [name] [brief] [states]

<i>name</i> (Optional) Name of the community set.	
attachpoints (Optional) Displays all attach points for this community set.	
references (Optional) Displays all policies that use this community set.	
<b>cost</b> (Optional) Displays all extended community cost sets.	
rt (Optional) Displays all extended community RT sets.	
soo (Optional) Displays all extended community SoO sets.	
<b>brief</b> (Optional) Limits the display to a list of the names of all extended community sets without their configurations.	
states (Optional) Displays all unused, inactive, and active states.	
If an attachpoint or reference is not specified, all configured extended community sets are displayed If a cost, RT, or SoO sets is not specified, all configured extended community sets are displayed	
EXEC	
Release Modification	
Release 3.7.2 This command was introduced.	
To use this command, you must be in a user group associated with a task group that includes appropria IDs. If the user group assignment is preventing you from using a command, contact your AAA admin for assistance.	
Use the optional <b>brief</b> keyword to limit the display to a list of the names of extended community sets without their configurations.	
Task ID Operations	
route-policy read	
In the following example, the configuration of an extended community is displayed for the RT community set named ext_comm_set_rt_ex1:	

```
ext_comm_set_rt_ex1
   1.2.3.4:34
end-set
!
```

In the following example, the configuration of an extended community is displayed with all RT set objects:

RP/0/RSP0/CPU0:router# show rpl extcommunity-set rt Listing for all Extended Community RT Set objects extcommunity-set rt extrt1 66:60001 end-set 1 extcommunity-set rt rtset1 10:615, 10:6150, 15.15.15.15:15 end-set ! extcommunity-set rt rtset3 11:11, 11.1.1.1:3 end-set 1 extcommunity-set rt extsool 66:70001 end-set 1 extcommunity-set rt rtsetl1 100:121, 100:122, 100:123, 100:124, 100:125, 100:126, 100:127, 100:128, 7.7.7.7:21 end-set !

In the following example, the configuration of an extended community is displayed with all cost set objects:

RP/0/RSP0/CPU0:router# show rpl extcommunity-set cost Listing for all Extended Community COST Set objects extcommunity-set cost costset1 IGP:90:914, Pre-Bestpath:91:915 end-set ! extcommunity-set cost costset2 IGP:92:916, Pre-Bestpath:93:917, IGP:94:918, Pre-Bestpath:95:919

#### end-set !

In the following example, the configuration of an extended community is displayed with all SoO set objects:

Extended Community SOO Set objects extcommunity-set soo sooset1 10:151, 100.100.100.1:153

```
end-set
!
extcommunity-set soo sooset3
   11:11,
   11.1.1.1:3
end-set
!
```

### Related Commands

Command	Description
show rpl as-path-set, on page 208	Displays the configuration of a named AS path set.
show rpl community-set, on page 215	Displays the configuration of a named community set.
show rpl prefix-set, on page 246	Displays the configuration of a named prefix set.
show rpl rd-set, on page 253	Displays the configuration of a named RD set.
show rpl route-policy, on page 259	Displays the configuration of a named route policy.

## show rpl inactive as-path-set

To display the AS path sets that are referenced by a policy but not in any policy that is used at an attach point, use the **show rpl inactive as-path-set** command in EXEC mode.

show rpl inactive as-path-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for inactive AS path sets.	
Command Default	No default behavior or values	
Command Modes	EXEC	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate to IDs. If the user group assignment is preventing you from using a command, contact your AAA administration for assistance.	
	Use the <b>show rpl inactive as-path-set</b> command to display all AS path sets that are not in use at an attach point either directly or indirectly but are referenced by at least one policy in the system.	
Task ID	Task ID Operations	
	route-policy read	
Examples	This example shows the following sample configuration:	
	<pre>router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in ! ! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in ! ! route-policy sample if (destination in sample) then drop endif end-policy !</pre>	

```
route-policy policy 1
  if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
route-policy policy_2
  if destination in prefix_set_ex1 then
     if (community matches-any comm set ex1) then
      set community (10:666) additive
     endif
    if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
1
route-policy policy 3
 if (destination in prefix_set_ex2) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy_4
  if (destination in prefix set ex2) then
   if (community matches-any comm set ex2) then
     set community (10:666) additive
    endif
   if (extcommunity matches-any ext_comm_set_rt_ex2) then
     set community (10:999) additive
   endif
  endif
end-policy
route-policy policy 5
 apply sample1
  apply policy 3
end-policy
```

Given this sample configuration, the **show rpl inactive as-path-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl inactive as-path-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

The following as-path-sets are INACTIVE

as path set ex2

Г

Related Commands	
------------------	--

Command	Description
show rpl inactive community-set, on page 228	Displays the community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive extcommunity-set, on page 231	Displays the extended community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive prefix-set, on page 234	Displays the prefix sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive rd-set, on page 237	Displays the RD sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive route-policy, on page 239	Displays the route policies that are referenced by a policy but not in any policy that is used at an attach point.

Т

## show rpl inactive community-set

To display the community sets that are referenced by a policy but not any policy that is used at an attach point, use the **show rpl inactive community-set** command in EXEC mode.

show rpl inactive community-set [detail]

**Syntax Description** detail (Optional) Displays the content of the object and all referenced objects for inactive community sets.

Command Default No default behavior or values

Release

Command Modes EXEC

**Command History** 

Release 3.7.2 This command was introduced.

Modification

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl inactive community-set** command to display all community sets that are not in use at an attach point either directly or indirectly but are referenced by at least one policy in the system.

### Task ID Task ID Operations

route-policy read

### **Examples**

This example shows the following sample configuration:

```
router bgp 2
address-family ipv4 unicast
neighbor 10.0.101.2
 remote-as 100
  address-family ipv4 unicast
   route-policy policy_1 in
  !
 1
neighbor 10.0.101.3
 remote-as 12
  address-family ipv4 unicast
   route-policy policy 2 in
  1
 Т
1
route-policy sample2
  if (destination in sample2) then
    drop
  endif
end-policy
!
```

```
route-policy policy 1
  if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
!
route-policy policy_2
   if destination in prefix_set_ex1 then
     if (community matches-any comm set ex1) then
       set community (10:666) additive
     endif
     if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
1
route-policy policy 3
  if (destination in prefix_set_ex2) then
   set local-preference 100
  endif
  if (as-path in as path set ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy_4
  if (destination in prefix set ex2) then
    if (community matches-any comm set ex2) then
     set community (10:666) additive
    endif
   if (extcommunity matches-any ext_comm_set_rt_ex2) then
     set community (10:999) additive
   endif
  endif
end-policy
route-policy policy_5
 apply sample2
  apply policy 3
end-policy
```

Given this sample configuration, the **show rpl inactive community-set** command displays the following information:

Related Commands	Command	Description
	show rpl inactive as-path-set, on page 225	Displays the AS path sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive extcommunity-set, on page 231	Displays the extended community sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive prefix-set, on page 234	Displays the prefix sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive rd-set, on page 237	Displays the RD sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive route-policy, on page 239	Displays the route policies that are referenced by a policy but not in any policy that is used at an attach point.

## show rpl inactive extcommunity-set

To display the extended community sets that are referenced by a policy but not in any policy that is used at an attach point, use the **show rpl inactive extcommunity-set** command in EXEC mode.

show rpl inactive extcommunity-set [detail]

**Syntax Description** detail (Optional) Displays the content of the object and all referenced objects for inactive extended community sets.

Command Default No default behavior or values

Command Modes EXEC

Command History Release Modification

Release 3.7.2 This command was introduced.

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl inactive extcommunity-set** command to display all extended community sets that are not in use at an attach point either directly or indirectly but are referenced by at least one policy in the system.

Task ID Task ID Operations

route-policy read

Examples

This example shows the following sample configuration:

```
router bgp 2
address-family ipv4 unicast
 neighbor 10.0.101.2
 remote-as 100
 address-family ipv4 unicast
  route-policy policy 1 in
  1
 Т
 neighbor 10.0.101.3
 remote-as 12
 address-family ipv4 unicast
  route-policy policy_2 in
  1
1
route-policy sample3
  if (destination in sample3) then
    drop
  endif
```

```
end-policy
1
route-policy policy 1
 if (destination in prefix set ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
1
route-policy policy 2
   if destination in prefix set ex1 then
     if (community matches-any comm set ex1) then
      set community (10:666) additive
     endif
    if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
1
route-policy policy 3
  if (destination in prefix set ex2) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy 4
  if (destination in prefix set ex2) then
    if (community matches-any comm set ex2) then
     set community (10:666) additive
   endif
   if (extcommunity matches-any ext comm set rt ex2) then
     set community (10:999) additive
   endif
  endif
end-policy
1
route-policy policy 5
 apply sample3
  apply policy 3
end-policy
```

Given this sample configuration, the **show rpl inactive extcommunity-set** command displays the following information:

Related Co	ommands
------------	---------

Command	Description
show rpl inactive as-path-set, on page 225	Displays the AS path sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive community-set, on page 228	Displays the community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive prefix-set, on page 234	Displays the prefix sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive rd-set, on page 237	Displays the RD sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive route-policy, on page 239	Displays the route policies that are referenced by a policy but not in any policy that is used at an attach point.

## show rpl inactive prefix-set

To display the prefix sets that are referenced by a policy but not in any policy that is used at an attach point, use the **show rpl inactive prefix-set** command in EXEC mode.

show rpl inactive prefix-set [detail]

 Syntax Description
 detail (Optional) Displays the content of the object and all referenced objects for inactive prefix sets.

 Command Default
 No default behavior or values

 Command Modes
 EXEC

 Command History
 Release
 Modification

Release 3.7.2 This command was introduced.

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl inactive prefix-set** command to display all prefix sets that are not in use at an attach point either directly or indirectly but are referenced by at least one policy in the system.

### Task ID Task ID Operations

route-policy read

### **Examples**

This example shows the following sample configuration:

```
router bgp 2
address-family ipv4 unicast
neighbor 10.0.101.2
 remote-as 100
  address-family ipv4 unicast
   route-policy policy_1 in
  !
 1
neighbor 10.0.101.3
 remote-as 12
  address-family ipv4 unicast
   route-policy policy 2 in
  1
 Т
1
route-policy sample4
  if (destination in sample4) then
    drop
  endif
end-policy
!
```

```
route-policy policy 1
  if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
!
route-policy policy_2
   if destination in prefix_set_ex1 then
     if (community matches-any comm set ex1) then
       set community (10:666) additive
     endif
     if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
1
route-policy policy 3
  if (destination in prefix_set_ex2) then
   set local-preference 100
  endif
  if (as-path in as path set ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy_4
  if (destination in prefix set ex2) then
    if (community matches-any comm set ex2) then
     set community (10:666) additive
    endif
   if (extcommunity matches-any ext_comm_set_rt_ex2) then
     set community (10:999) additive
   endif
  endif
end-policy
route-policy policy_5
 apply sample4
  apply policy 3
end-policy
```

Given this sample configuration, the **show rpl inactive prefix-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl inactive prefix-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

The following prefix-sets are INACTIVE

sample4
prefix\_set\_ex2

Related Commands	Command	Description
	show rpl inactive as-path-set, on page 225	Displays the AS path sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive community-set, on page 228	Displays the community sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive extcommunity-set, on page 231	Displays the extended community sets that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive route-policy, on page 239	Displays the route policies that are referenced by a policy but not in any policy that is used at an attach point.
	show rpl inactive rd-set, on page 237	Displays the RD sets that are referenced by a policy but not in any policy that is used at an attach point.

## show rpl inactive rd-set

To display the route distinguisher (RD) sets that are referenced by a policy but not in any policy that is used at an attach point, use the **show rpl inactive rd-set** command in EXEC mode.

show rpl inactive rd-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for inactive RD sets.		
Command Default	No default behavior or values		
Command Modes	EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>show rpl inactive rd-set</b> command to display all RD sets that are not in use at an attach point either directly or indirectly but are referenced by at least one policy in the system.		
Task ID	Task ID Operations		
	route-policy read		
Examples	This example shows the following sample configuration:		
	rd-set rdset1 10:151, 100.100.100.1:153, 100.100.62/31:63 end-set		
	! rd-set rdset2 10:152, 100.100.100.1:154, 100.100.062/31:89 end-set !		
	Given this sample configuration, the <b>show rpl inactive rd-set</b> command displays the following information:		
	RP/0/RSP0/CPU0:router# show rpl inactive rd-set		

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following rd-sets are INACTIVE
-----
 rdset1
  rdset2
```

## **Related Commands**

Command	Description
show rpl inactive as-path-set, on page 225	Displays the AS path sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive community-set, on page 228	Displays the community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive extcommunity-set, on page 231	Displays the extended community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive prefix-set, on page 234	Displays the prefix sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive route-policy, on page 239	Displays the route policies that are referenced by a policy but not in any policy that is used at an attach point.

# show rpl inactive route-policy

To display the route policies that are referenced by a policy but not in any policy that is used at an attach point, use the **show rpl inactive route-policy** command in EXEC mode.

show rpl inactive route-policy [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for inactive route policies.	
Command Default	No default behavior or values	
Command Modes	- EXEC	
Commanu Moues		
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
	Use the <b>show rpl inactive route-policy</b> command to display all policies that are not in use at an attach point either directly or indirectly but are referenced by at least one other policy in the system.	
Task ID	Task ID Operations	
	route-policy read	
Examples	This example shows the following sample configuration:	
	router bgp 2 address-family ipv4 unicast	
	: neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in !	
	! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in !	
	! ! route-policy sample3	
	if (destination in sample3) then drop endif end-policy	
	i	

```
route-policy policy 1
  if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
route-policy policy_2
  if destination in prefix_set_ex1 then
     if (community matches-any comm set ex1) then
      set community (10:666) additive
     endif
    if (extcommunity rt matches-any ext comm set rt ex1) then
      set community (10:999) additive
     endif
   endif
end-policy
1
route-policy policy 3
 if (destination in prefix_set_ex2) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy_4
  if (destination in prefix set ex2) then
   if (community matches-any comm set ex2) then
     set community (10:666) additive
    endif
   if (extcommunity matches-any ext_comm_set_rt_ex2) then
     set community (10:999) additive
   endif
  endif
end-policy
route-policy policy 5
 apply sample3
 apply policy 3
end-policy
```

Given this sample configuration, the **show rpl inactive route-policy** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl inactive route-policy

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

The following policies are (INACTIVE)

sample3
policy\_3

Related Commands	C
------------------	---

Command	Description
show rpl inactive as-path-set, on page 225	Displays the AS path sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive community-set, on page 228	Displays the community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive extcommunity-set, on page 231	Displays the extended community sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive prefix-set, on page 234	Displays the prefix sets that are referenced by a policy but not in any policy that is used at an attach point.
show rpl inactive rd-set, on page 237	Displays the RD sets that are referenced by a policy but not in any policy that is used at an attach point.

# show rpl maximum

To display the maximum limits for lines of configuration and number of policies, use the **show rpl maximum** command in EXEC mode.

	show rpl maximum [lines   policies]		
Syntax Description	<b>lines</b> (Optional) Displays the number of lines of configuration limit.		
	<b>policies</b> (Optional) Displays the number of policies limit.		
Command Default	No default behavior or values		
Command Modes	EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate tas IDs. If the user group assignment is preventing you from using a command, contact your AAA administrate for assistance.		
	Use the <b>show rpl maximum</b> command to display the current total, current limit, and maximum limit for lines of configuration and policies.		
	Use the optional <b>lines</b> keyword to limit the display to the number of lines of configuration limits. Use the optional <b>policies</b> keyword to limit the display to the number of policies limits.		
Task ID	Task ID Operations		
	route-policy read		
Examples	The following example shows sample output from the show rpl maximum command:		
	RP/0/RSP0/CPU0:router# <b>show rpl maximum</b> Current Current Max Total Limit Limit		
	Lines of configuration 3 65536 131072 Policies 1 3500 5000 Compiled policies size (kB) 0		
	Table 7. down will we income Field Descriptions on a 242 downik or the size (Grant Galda down		

Table 7: show rpl maximum Field Descriptions, on page 243 describes the significant fields shown in the display.

### Table 7: show rpl maximum Field Descriptions

Field	Description
Lines of configuration	Displays the current total, current limit, and maximum limit of lines for the policy.
Policies	Displays the current total, current limit, and maximum limit of policies.
Compiled policies size (kB)	Displays the current compiled total for policies in kilobytes.

ls	Command	Description
	rpl maximum, on page 138	Configures the maximum number of lines of configuration and number of policies.

## show rpl policy-global references

To display policy-global definitions, use the show rpl policy-global references command in EXEC mode.

show rpl policy-global references [brief] Syntax Description **brief** (Optional) Limits the display to a list of the policy names. No default behavior or values **Command Default** EXEC **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Task ID Task ID Operations route-policy read **Examples** This example shows the following sample configuration: policy-global infinity '16' end-global route-policy set-rip-unreachable set rip-metric \$infinity end-policy ! Given this sample configuration, the show rpl policy-global references command displays the following information: RP/0/RSP0/CPU0:router# show rpl policy-global references Usage Direct -- Reference occurs in this policy Usage Indirect -- Reference occurs via an apply statement Status UNUSED -- Policy is not in use at an attachpoint (unattached) Status ACTIVE -- Policy is actively used at an attachpoint Status INACTIVE -- Policy is applied by an unattached policy

> Usage/Status count Direct 1

Indirect		0
ACTIVE INACTIVE UNUSED		0 0 1
 Usage	Status	Route-policy
Direct	UNUSED	set-rip-unreachable

## show rpl prefix-set

To display the configuration of prefix sets, use the **show rpl prefix-set** command in EXEC mode. show rpl prefix-set [name | states | brief] Syntax Description (Optional) Name of the prefix set. пате (Optional) Shows all unused, inactive, and active states. states brief (Optional) Limits the display to a list of the names of all extended community sets without their configurations. No default behavior or values **Command Default** EXEC **Command Modes Command History** Modification Release Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Because sets cannot hierarchically reference other sets or policies, no **detail** keyword exists as with the show rpl policy command. Task ID Task ID Operations route-policy read **Examples** In the following example, the configuration of prefix set pset1 is displayed: RP/0/RSP0/CPU0:router# show rpl prefix-set pset1 prefix-set pset1 10.0.0.1/0, 10.0.0.2/0 ge 25 le 32, 10.0.0.5/8 ge 8 le 32, 10.168.0.0/16 ge 16 le 32, 172.16.0.9/20 ge 20 le 32, 192.168.0.5/20 ge 20 le 32 end-set

Related Commands	Command	Description
	show rpl as-path-set, on page 208	Displays the configuration of a named AS path set.

Command	Description
show rpl community-set, on page 215	Displays the configuration of a named community set.
show rpl extcommunity-set, on page 222	Displays the configuration of a named extended community set.
show rpl route-policy, on page 259	Displays the configuration of a named route policy.

## show rpl prefix-set attachpoints

To display all the policies used at an attach point that reference the named prefix set, use the **show rpl prefix-set attachpoints** command in EXEC mode.

show rpl prefix-set name attachpoints **Syntax Description** name Name of a prefix set. No default behavior or values **Command Default** EXEC **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **show rpl prefix-set attachpoints** command to display all the policies used at an attach point that reference the named prefix set either directly or indirectly. The prefix set name is required. Task ID Task ID Operations route-policy read Examples This example shows the following sample configuration: router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy 1 in ! T neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy 2 in 1 1 ! route-policy policy\_1

if (destination in prefix\_set\_ex1) then

```
if (as-path in as_path_set_ex1) then
    set community (10:333) additive
    endif
end-policy
!
route-policy policy_2
    if (destination in prefix_set_ex1) then
        if (community matches-any comm_set_ex1) then
        set community (10:666) additive
        endif
        if (extcommunity matches-any ext_comm_set_rt_ex1) then
            set community (10:999) additive
        endif
    endif
```

Given this sample configuration, the **show rpl prefix-set prefix\_set\_ex1 attachpoints** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl prefix-set prefix\_set\_ex1 attachpoints
BGP Attachpoint:Neighbor
Neighbor/Group type afi/safi in/out referring policy attached policy
10.0.101.2 -- IPv4/uni in policy\_1 policy\_1
10.0.101.3 -- IPv4/uni in policy\_2 policy\_2

This table describes the significant fields shown in the display.

Table 8: show rpl prefix-set attachpoints Field Descriptions

Field	Description
BGP Attachpoint	Location of the attach point.
Neighbor/Group	IP address of the attach point on the neighbor.
type	Address family mode.
afi/safi	Address family identifier or subsequent address family identifier.
in/out	Import or export policy.
referring policy	Policy that refers to the AS path set.
attached policy	Policy used at the attach point.

Related Commands	Command	Description
		Displays all the policies used at an attach point that reference the named AS path set.
		Displays all the policies used at an attach point that reference the named community set.

Command	Description
	Displays all the policies used at an attach point that reference the named policy.

# show rpl prefix-set references

To list all the policies that reference the named prefix set, use the **show rpl prefix-set references** command in EXEC mode.

show rpl prefix-set name references [brief]

Syntax Description	name Name of the prefix set.		
	<b>brief</b> (Optional) Limits the output to just a summary table and not the detailed information for the named prefix set.		
Command Default	No default behavior or values		
Command Modes	EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>show rpl prefix-set references</b> command to list all the policies that reference the named prefix set.		
	Use the optional <b>brief</b> keyword to limit the output to just a summary table and not the detailed information for the named prefix set.		
Task ID	Task ID Operations		
	route-policy read		
Examples	This example shows the following sample configuration:		
	<pre>prefix-set ten-net 10.0.0/16 le 32 end-set prefix-set too-specific 0.0.0.0/0 ge 25 le 32 end-set route-policy example-one if destination in ten-net then drop else set local-preference 200 apply set-comms</pre>		
	endif end-policy		
	route-policy set-comms		

end-policy
route-policy example-three
if destination in too-specific then
drop
else
apply example-one
pass
endif
end-policy

The following example displays information showing the usage and status of each policy that references the prefix set ten-net. The **brief** keyword limits the display to just a summary table and not the detailed information for the prefix set.

```
RP/0/RSP0/CPU0:router# show rpl prefix-set ten-net references brief
Usage Direct -- Reference occurs in this policy
Usage Indirect -- Reference occurs via an apply statement
Status UNUSED -- Policy is not in use at an attachpoint (unattached)
Status ACTIVE -- Policy is actively used at an attachpoint
Status INACTIVE -- Policy is applied by an unattached policy
   Usage/Status
                    count
_____
    Direct
                      1
    Indirect
                      1
    ACTIVE
                      0
                      1
    INACTIVE
    UNUSED
                       1
```

This table describes the significant fields shown in the display.

Field	Description	
Usage/Status	Displays the usage and status of all policies that reference the prefix set.	
count	Number of policies that match each usage and status option.	

Related Commands	Command	Description
	show rpl as-path-set references, on page 213	Lists all the policies that reference the named AS path set.
	show rpl community-set references, on page 219	Lists all the policies that reference the named community set.
	show rpl route-policy references, on page 267	Lists all the policies that reference the named policy.

# show rpl rd-set

To display the configuration of route distinguisher (RD) sets, use the **show rpl rd-set** command in EXEC mode.

show rpl rd-set [name | states | brief]

	-			
Syntax Description	name (Optional) Name of the RD set.			
	states (Optional) Shows all unused, inactive, and active states.			
	<b>brief</b> (Optional) Limits the display to a list of the names of all RD sets without their configurations.			
Command Default	No default behavior or values			
Command Modes	EXEC			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrato for assistance.			
	Because sets cannot hierarchically reference other sets or policies, no <b>detail</b> keyword exists as with the <b>show rpl policy</b> command.			
Task ID	Task ID Operations			
	route-policy read			
Examples	In the following example, the configuration of RD set rdset1 is displayed:			
	RP/0/RSP0/CPU0:router# show rpl rd-set rdset1			

Related Commands	Command	Description
	show rpl as-path-set, on page 208	Displays the configuration of a named AS path set.
	show rpl community-set, on page 215	Displays the configuration of a named community set.

Command	Description
show rpl extcommunity-set, on page 222	Displays the configuration of a named extended community set.
show rpl prefix-set, on page 246	Displays the configuration of a named prefix set.
show rpl route-policy, on page 259	Displays the configuration of a named route policy.

### show rpl rd-set attachpoints

To display all the policies used at an attach point that reference the named route distinguisher (RD) set, use the **show rpl rd-set attachpoints** command in EXEC mode.

show rpl rd-set name attachpoints Syntax Description name Name of an RD set. No default behavior or values **Command Default** EXEC **Command Modes Command History** Modification Release Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **show rpl rd-set attachpoints** command to display all the policies used at an attach point that reference the named RD set either directly or indirectly. Task ID Task ID Operations route-policy read **Examples** This example shows the following sample configuration: route-policy rdsetmatch if rd in rdset1 then set community (10:112) elseif rd in rdset2 then set community (10:223) endif end-policy router bgp 10 address-family vpnv4 unicast exit neighbor 10.0.101.1 remote-as 11 address-family vpnv4 unicast route-policy rdsetmatch in ļ

Given this sample configuration, the **show rpl rd-set rdset1 attachpoints** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl rd-set rdset attachpoints

BGP Attachpoint: Neighbor

Neighbor/Group	type	afi/safi	in/out	vrf name
10.0.101.1		IPv4/vpn	in	default

This table describes the significant fields shown in the display.

#### Table 10: show rpl rd-set attachpoints Field Descriptions

Field	Description
Neighbor/Group	BGP neighbor or neighbor group where the specified RD is used.
afi/safi	BGP address family or subaddress family where the RD set is used.
in/out	Direction
vrf name	VRF name where the RD set is used.

Related Commands	Command	Description
	show rpl as-path-set attachpoints, on page 210	Displays all the policies used at an attach point that reference the named AS path set.
	show rpl community-set attachpoints, on page 217	Displays all the policies used at an attach point that reference the named community set.
	show rpl prefix-set attachpoints, on page 248	Displays all the policies used at an attach point that reference the named prefix set.
	show rpl route-policy attachpoints, on page 262	Displays all the policies used at an attach point that reference the named policy.

# show rpl rd-set references

To list all the policies that reference the named route distinguisher (RD) set, use the **show rpl rd-set references** command in EXEC mode.

show rpl rd-set name references [brief]

Syntax Description	name Name of the RD set.
	<b>brief</b> (Optional) Limits the output to just a summary table and not the detailed information for the RD set.
Command Default	No default behavior or values
Command Modes	EXEC
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	Use the show rpl rd-set references command to list all the policies that reference the named RD set.
	Use the optional <b>brief</b> keyword to limit the output to just a summary table and not the detailed information for the named RD set.
Task ID	Task ID Operations
	route-policy read
Examples	This example shows the following sample configuration:
	<pre>route-policy rdsetmatch if rd in rdset1 then set community (10:112) elseif rd in rdset2 then set community (10:223) endif end-policy ! router bgp 10 address-family vpnv4 unicast ! neighbor 10.0.101.1 remote-as 11 address-family vpnv4 unicast route-policy rdsetmatch in</pre>

Given this sample configuration, the **show rpl rd-set rdset1 references** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl rd-set rdset1 references Usage Direct -- Reference occurs in this policy Usage Indirect -- Reference occurs via an apply statement Status UNUSED -- Policy is not in use at an attachpoint (unattached) Status ACTIVE -- Policy is actively used at an attachpoint Status INACTIVE -- Policy is applied by an unattached policy Usage/Status count \_\_\_\_\_ 1 0 Direct Indirect ACTIVE 1 0 INACTIVE 0 UNUSED route-policy usage policy status \_\_\_\_\_ rdsetmatch Direct ACTIVE

This table describes the significant fields shown in the display.

#### Table 11: show rpl rd-set name references Field Descriptions

Field	Description
route-policy	Name of the route policy.
usage	Type of reference usage for the route policy.
policy status	Status of the route policy.

#### **Related Commands**

S	Command	Description
	show rpl as-path-set references, on page 213	Lists all the policies that reference the named AS path set.
	show rpl community-set references, on page 219	Lists all the policies that reference the named community set.
	show rpl prefix-set references, on page 251	Lists all the policies that reference the named prefix set.
	show rpl route-policy references, on page 267	Lists all policies that reference the named policy.

### show rpl route-policy

To display the configuration of route policies, use the **show rpl route-policy** command in EXEC mode.

show rpl route-policy [name [detail] | states | brief] Syntax Description (Optional) Name of a route policy. пате detail (Optional) Displays the configuration of all policies and sets that a policy uses. states (Optional) Shows all unused, inactive, and active states. brief (Optional) Limits the display to a list of the names of all extended community sets without their configurations. No default behavior or values **Command Default** EXEC **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the optional **brief** keyword to limit the display to a list of the names of policies without their configurations. Task ID Task ID Operations route-policy read **Examples** In the following example, the configuration of a route policy named policy 1 is displayed. RP/0/RSP0/CPU0:router# show rpl route-policy policy 1 route-policy policy\_1 if destination in prefix set 1 and not destination in sample1 then if as-path in aspath set 1 then set local-preference 300 set origin igp elseif as-path in as allowed then set local-preference 400 set origin igp else set origin igp endif else drop

```
endif
set med 120
set community (8660:612) additive
apply set_lpref_from_comm
end-policy
```

If the optional **detail** keyword is used, all routing policy language (RPL) policies and sets that route policy policy\_1 uses are displayed, as shown in the following example.

```
RP/0/RSP0/CPU0:router# show rpl route-policy policy_1 detail
1
prefix-set sample1
  0.0.0.0/0,
  0.0.0/0 ge 25 le 32,
 10.0.0/8 ge 8 le 32,
  192.168.0.0/16 ge 16 le 32,
  224.0.0.0/20 ge 20 le 32,
  240.0.0/20 ge 20 le 32
end-set
1
prefix-set prefix set 1
 10.0.0.1/24 ge 24 le 32,
 10.0.0.5/24 ge 24 le 32,
 172.16.0.1/24 ge 24 le 32,
 172.16.5.5/24 ge 24 le 32,
 172.16.20.10/24 ge 24 le 32,
 172.30.0.1/24 ge 24 le 32,
 10.0.20.10/24 ge 24 le 32,
 172.18.0.5/24 ge 24 le 32,
 192.168.0.1/24 ge 24 le 32,
192.168.20.10/24 ge 24 le 32,
 192.168.200.10/24 ge 24 le 32,
192.168.255.254/24 ge 24 le 32
end-set
as-path-set as allowed
 ios-regex '.* _1239_ .*',
ios-regex '.* _3561_ .*',
ios-regex '.* _701_ .*',
ios-regex '.* _666_ .*',
 ios-regex '.* _666_ .*',
ios-regex '.* _1755_ .*'
ios-regex '.* _1756_ .*'
                        _ ·*',
end-set
as-path-set aspath set 1
 ios-regex ' 9148 ',
 ios-regex ' 5870 ',
 ios-regex ' 2408 ',
 ios-regex '_2531_',
 ios-regex '_197_',
ios-regex '_2992_'
end-set
1
route-policy set lpref from comm
 if community matches-any (2:50) then
    set local-preference 50
  elseif community matches-any (2:60) then
    set local-preference 60
  elseif community matches-any (2:70) then
    set local-preference 70
  elseif community matches-any (2:80) then
```

```
set local-preference 80
  elseif community matches-any (2:90) then
   set local-preference 90
  endif
end-policy
1
route-policy policy_1
  if destination in prefix_set_1 and not destination in sample1 then
    if as-path in aspath set 1 then
     set local-preference 300
     set origin igp
    elseif as-path in as allowed then
     set local-preference 400
     set origin igp
    else
     set origin igp
    endif
  else
   drop
  endif
  set med 120
  set community (8660:612) additive
  apply set_lpref_from_comm
end-policy
```

Related Commands	Command	Description
	show rpl as-path-set, on page 208	Displays the configuration of a named AS path set.
	show rpl community-set, on page 215	Displays the configuration of a named community set.
	show rpl extcommunity-set, on page 222	Displays the configuration of a named extended community set.
	show rpl prefix-set, on page 246	Displays the configuration of a named prefix set.

# show rpl route-policy attachpoints

To display all the policies used at an attach point that reference the named policy, use the **show rpl route-policy attachpoints** command in EXEC mode.

show rpl route-policy name attachpoints

name Name of a policy.
No default behavior or values
EXEC
Release Modification
Release 3.7.2 This command was introduced.
To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
Use the <b>show rpl route-policy attachpoints</b> command to display all the policies used at an attach point that reference the named policy either directly or indirectly.
The policy name is required.
Task ID Operations
route-policy read
This example shows the following sample configuration:
<pre>router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in ! ! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in ! !</pre>

L

```
route-policy policy 1
 if (destination in prefix_set_ex1) then
   set local-preference 10\overline{0}
  endif
 if (as-path in as_path_set_ex1) then
   set community (10:333) additive
  endif
end-policy
!
RP/0/RSP0/CPU0:router# show rpl route-policy policy_2
route-policy policy_2
  if (destination in prefix set ex1) then
    if (community matches-any comm_set_ex1) then
     set community (10:666) additive
    endif
    if (extcommunity matches-any ext comm set rt ex1) then
     set community (10:999) additive
    endif
 endif
end-policy
1
```

The following command displays the route policy attach points for policy\_2:

RP/0/RSP0/CPU0:router# show rpl route-policy policy\_2 attachpoints

BGP Attachpoint: Neighbor

This table describes the significant fields shown in the display.

Table 12: show rpl route-policy attachpoints Field Descriptions

Field	Description
BGP Attachpoint	Location of the attach point.
Neighbor/Group	IP address of the attach point on the neighbor.
type	Displays the address family mode.
afi/safi	Address family identifier or subsequent address family identifier.
vrf name	Name of the VPN routing and forwarding (VRF) instance.

Related Commands	Command	Description
		Displays all the policies used at an attach point that reference the named AS path set.

Command	Description
show rpl community-set attachpoints, on page 217	Displays all the policies used at an attach point that reference the named community set.
show rpl prefix-set attachpoints, on page 248	Displays all the policies used at an attach point that reference the named prefix set.

# show rpl route-policy inline

To display all policies and sets that a policy uses expanded inline, use the **show rpl route-policy inline** command in EXEC mode.

show rpl route-policy name inline

Syntax Description	name Name of a		
	policy.		
Command Default	No default behavior or values		
Command Modes	EXEC		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.		
	Use the <b>show rpl route-policy inline</b> command to examine the configuration of a specified route policy. All policies and sets that a policy uses are gathered together and displayed expanded inline.		
	The policy name is required.		
Task ID	Task ID Operations		
	route-policy read		
Examples	The following command displays the route policy policy_1:		
	RP/0/RSP0/CPU0:router# show rpl route-policy policy_1		
	<pre>route-policy policy_1 if destination in prefix_set_1 and not destination in martians then if as-path in aspath_set_1 then set local-preference 300 set origin igp elseif as-path in as_allowed then set local-preference 400 set origin igp else set origin igp endif else drop endif</pre>		
	set med 120 set community (8660:612) additive		

```
apply set_lpref_from_comm
end-policy
```

The following command displays the route policy policy\_1 and all the other sets or policies it refers too inline. Adding the inline keyword causes the configuration to be displayed inline for all RPL objects that the route-policy policy\_1 uses.

```
RP/0/RSP0/CPU0:router#show rpl policy policy_1 inline
```

```
route-policy policy 1
 if destination in (91.5.152.0/24 ge 24 le 32, 91.220.152.0/24 ge 24 le 32, 61.106.52.0/24
ge 24 le 32, 222.168.199.0/24
 ge 24 le 32, 93.76.114.0/24 ge 24 le 32, 41.195.116.0/24 ge 24 le 32, 35.92.152.0/24 ge
24 le 32, 143.144.96.0/24 ge 24
 le 32, 79.218.81.0/24 ge 24 le 32, 75.213.219.0/24 ge 24 le 32, 178.220.61.0/24 ge 24 le
 32, 27.195.65.0/24 ge 24 le 32)
  and not destination in (0.0.0.0/0, 0.0.0.0/0 ge 25 le 32, 10.0.0.0/8 ge 8 le 32,
192.168.0.0/16 ge 16 le 32, 224.0.0.0/20
  ge 20 le 32, 240.0.0/20 ge 20 le 32) then
   if as-path in (ios-regex '_9148_', ios-regex '_5870_', ios-regex '_2408_', ios-regex
'_2531_', ios-regex '_197_',
 ios-regex ' 2992 ') then
      set local-preference 300
      set origin igp
    elseif as-path in
 (ios-regex '.* _1239_ .*', ios-regex '.* _3561_ .*', ios-regex '.* _701_ .*', ios-regex
'.* 666 .*', ios-regex '.* 1755 .*',
ios-regex '.*
               1756 .*') then
      set local-preference 400
      set origin igp
    else
      set origin igp
    endif
  else
   drop
  endif
  set med 120
  set community (8660:612) additive
  # apply set lpref from comm
  if community matches-any (2:50) then
   set local-preference 50
  elseif community matches-any (2:60) then
    set local-preference 60
  elseif community matches-any (2:70) then
    set local-preference 70
  elseif community matches-any (2:80) then
   set local-preference 80
  elseif community matches-any (2:90) then
   set local-preference 90
  endif
  # end-apply set_lpref_from_comm
end-policy
```

# show rpl route-policy references

To list all the policies that reference the named policy, use the **show rpl route-policy references** command in EXEC mode.

show rpl route-policy name references [brief]

Syntax Description	name Name of a prefix set.			
	<b>brief</b> (Optional) Limits the output to just a summary table and not the detailed information for the named policy.			
Command Default	No default behavior or values			
Command Modes	EXEC			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>show rpl route-policy references</b> command to list all the policies that reference the named policy.			
	Use the optional <b>brief</b> keyword to limit the output to just a summary table and not the detailed information for the policy.			
Task ID	Task ID Operations			
	route-policy read			
Examples	This example shows the following sample configuration:			
	<pre>prefix-set ten-net 10.0.0/16 le 32 end-set prefix-set too-specific 0.0.0/0 ge 25 le 32 end-set route-policy example-one if destination in ten-net then drop else set local-preference 200 apply set-comms endif end-policy route-policy set-comms set community (10:1234) additive</pre>			

```
end-policy
route-policy example-three
if destination in too-specific then
drop
else
apply example-one
pass
endif
end-policy
```

The following command displays information about the policy set-comms and how it is referenced:

RP/0/RSP0/CPU0:router# show rpl route-policy set-comms references

Usage Direct -- Reference occurs in this policy Usage Indirect -- Reference occurs via an apply statement Status UNUSED -- Policy is not in use at an attachpoint (unattached) Status ACTIVE -- Policy is actively used at an attachpoint

Status INACTIVE -- Policy is applied by an unattached policy

Usage/Status	count
Direct	1
Indirect	1
ACTIVE	0
INACTIVE	1
UNUSED	1
route-policy	usage policy status
example-one	Direct INACTIVE
example-three	Indirect UNUSED

The direct usage indicates that the route policy example-one directly applies the policy set-comms, that is, example-one has a line in the form apply set-comms. The usage Indirect indicates that the route policy example-three does not directly apply the route policy set-comms. However, the route policy example-three does apply the policy example-one, which in turn applies the policy set-comms, so there is an indirect reference from example-three to the route policy set-comms.

The status column indicates one of three states. A policy is active if it is in use at an attach point. In the example provided, neither example-one nor example-three is in use at an attach point, which leaves two possible states: UNUSED or INACTIVE. The route policy example-one is inactive because it has some other policy (example-three) that references it, but neither example-one nor any of the policies that reference it (example-one) are in use at an attach point. The route policy example-three has a status of unused because it is not used at an attach point and no other route policies in the system refer to it.

This table describes the significant fields shown in the display.

#### Table 13: show rpl route-policy references Field Descriptions

Field	Description	
Usage/Status	Displays the usage and status of all policies that reference the specified policy.	
	Values for usage are Direct or Indirect.	
	Values for status are ACTIVE, INACTIVE, and UNUSED.	
count	Number of policies that match each usage and status option.	
route-policy	One name for multiple policies that reference the specified policy.	
usage	Type of usage for the policy.	
policy status	Status of the policy.	

#### **Related Commands**

Command	Description
show rpl as-path-set references, on page 213	Lists all policies that reference the named AS path set.
show rpl community-set references, on page 219	Lists all policies that reference the named community set.
show rpl prefix-set references, on page 251	Lists all policies that reference the named prefix set.

# show rpl route-policy uses

To display information about a specified named policy, use the **show rpl route-policy uses** command in EXEC mode.

show rpl route-policy *name* uses {policies | sets | all} [direct]

Syntax Description	name	Name of a po	licy.	
	<b>policies</b> Generates a list of all policies that the named policy uses.			
	sets	Lists all name	ed sets that are used by the policy.	
	all	Generates a li	ist of both sets and policies that the named policy references.	
	<i>direct</i> (Optional) Lists only the policies or sets used directly in the named policy block. Set or policy references that occur as a result of an <b>apply</b> statement are not listed.			
Command Default	No defaul	efault behavior or values		
Command Modes	EXEC			
Command History	Release	Modifica	tion	
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the s	how rpl route	-policy uses command to display information about a specified named policy.	
Task ID	Task ID	Operations		
	route-poli	icy read		
Examples	This exan	nple shows the	following sample configuration:	
	10.0.0. end-set prefix-s	et ten-net 0/16 le 32 et too-specif /0 ge 25 le 3		
	-	licy example- ination in te		
	set lo			

```
end-policy
route-policy set-comms
set community (10:1234) additive
end-policy
route-policy example-three
if destination in too-specific then
drop
else
apply example-one
pass
endif
end-policy
```

The following command lists the policies one and set-comms. It also lists the prefix sets too-specific and ten-net.

RP/0/RSP0/CPU0:router# show rpl route-policy example-three uses all

```
Policies directly and indirectly applied by this policy:

example-one set-comms

Sets referenced directly and indirectly

(via applied policies) in this policy:

type prefix-set:

ten-net too-specific
```

The sets example-one and set-comms are listed as policies that are used by the policy example-three. The policy example-one is listed because route policy example-three uses it in an **apply** statement. The policy set-comms is also listed because example-one applies it. Similarly, the prefix-set too-specific is used directly in the **if** statement in the policy example-three, and the prefix-set ten-net is used in the policy example-one. The optional **direct** keyword can be used to limit the output to just those sets and policies that are used within the example-three block itself, as shown in the following example:

As can be seen in the output, the route policy set-comms and the prefix set ten-net are no longer included in the output when the **direct** keyword is used. The **direct** form of the command considers only those sets or policies used in the specified route policy and any additional policies or sets that may be used if you follow the hierarchy of **apply** statements.

This table describes the significant fields shown in the display.

Table 14: show rpl route-policy uses Field Descriptions

<b>Field</b>	Description
type	Displays the type used in the policy configuration.
	Values for type are prefix-set, community-set, extcommunity-set, and as-path-set.

### show rpl unused as-path-set

To display the AS path sets that are defined but not used by a policy at an attach point or referenced in a policy using an **apply** statement, use the **show rpl unused as-path-set** command in EXEC mode.

show rpl unused as-path-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for unused AS path sets.			
Command Default	No default behavior or values			
Command Modes	EXEC			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrato for assistance.			
	Use the <b>show rpl unused as-path-set</b> command to display all AS path sets that are not used in a policy at an attach point either directly or indirectly and are not referenced by any policies in the system.			
Task ID	Task ID Operations			
	route-policy read			
Examples	This example shows the following sample configuration:			
	<pre>router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in ! ! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in ! ! as-path-set as_path_set_ex1 ios-regex '^_65500_\$', ios-regex '^_65501_\$' end-set ! as-path-set as_path_set_ex2</pre>			

```
ios-regex '^ 65502 $',
 ios-regex '^_65503_$'
end-set
1
as-path-set as_path_set_ex3
 ios-regex '^_65504_$',
ios-regex '^_65505_$'
end-set
route-policy sample
 if (destination in sample) then
   drop
  endif
end-policy
!
route-policy policy 1
 if (destination in prefix set ex1) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex1) then
   set community (10:333) additive
  endif
end-policy
1
route-policy policy 2
  if (destination in prefix set ex1) then
    if (community matches-any comm_set_ex1) then
     set community (10:666) additive
    endif
    if (extcommunity matches-any ext_comm_set_rt_ex1) then
     set community (10:999) additive
    endif
  endif
end-policy
Т
route-policy policy 3
  if (destination in prefix set ex2) then
   set local-preference 100
  endif
  if (as-path in as path set ex2) then
   set community (10:333) additive
 endif
end-policy
route-policy policy 4
  if (destination in prefix_set_ex2) then
    if (community matches-any comm set ex2) then
     set community (10:666) additive
    endif
    if (extcommunity matches-any ext comm set rt ex2) then
     set community (10:999) additive
    endif
 endif
end-policy
!
route-policy policy 5
 apply sample
 apply policy_3
end-policy
```

Given this sample configuration, the **show rpl unused as-path-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl unused as-path-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

The following as-path-sets are UNUSED as\_path\_set\_ex3

#### **Related Commands**

nds	show rpl unused community-set, on page 276	Displays the community sets that are not referenced at all.
	show rpl unused extcommunity-set, on page 279	Displays the extended community sets that are not referenced at all.
	show rpl unused prefix-set, on page 281	Displays the prefix sets that are not referenced at all.
	show rpl unused rd-set, on page 284	Displays the RD sets that are not referenced at all.
	show rpl unused route-policy, on page 286	Displays the route policies that are not referenced at all.

### show rpl unused community-set

To display the community sets that are defined but not used by a policy at an attach point or referenced in a policy using an **apply** statement, use the **show rpl unused community-set** command in EXEC mode.

show rpl unused community-set [detail]

**Syntax Description** detail (Optional) Displays the content of the object and all referenced objects for unused community sets.

Command Default No default behavior or values

Command Modes EXEC

 Command History
 Release
 Modification

 Release 3.7.2
 This command was introduced.

Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **show rpl unused community-set** command to display all the community sets that are not used in a policy at an attach point either directly or indirectly and are not referenced by any policies in the system.

#### Task ID Task ID Operations

route-policy read

#### **Examples**

This example shows the following sample configuration:

```
router bap 2
 address-family ipv4 unicast
neighbor 10.0.101.2
 remote-as 100
  address-family ipv4 unicast
   route-policy policy_1 in
  !
 1
neighbor 10.0.101.3
 remote-as 12
  address-family ipv4 unicast
   route-policy policy 2 in
  1
 Т
!
community-set comm set ex1
  65500:1,
  65500:2
  65500:3
end-set
```

!

L

```
community-set comm_set_ex2
  65501:1,
  65501:2,
  65501:3
end-set
community-set comm set ex3
 65502:1,
  65502:2,
  65502:3
end-set
1
route-policy sample
 if (destination in sample) then
   drop
 endif
end-policy
route-policy policy 1
 if (destination in prefix set ex1) then
   set local-preference 10\overline{0}
  endif
 if (as-path in as_path_set_ex1) then
   set community (10:333) additive
  endif
end-policy
1
route-policy policy 2
 if (destination in prefix_set_ex1) then
   if (community matches-any comm set ex1) then
     set community (10:666) additive
    endif
    if (extcommunity matches-any ext comm set rt ex1) then
     set community (10:999) additive
   endif
  endif
end-policy
1
route-policy policy 3
 if (destination in prefix_set_ex2) then
   set local-preference 100
  endif
 if (as-path in as_path_set_ex2) then
   set community (10:333) additive
  endif
end-policy
!
route-policy policy_4
 if (destination in prefix_set_ex2) then
    if (community matches-any comm set ex2) then
     set community (10:666) additive
    endif
   if (extcommunity matches-any ext_comm_set_rt_ex2) then
     set community (10:999) additive
   endif
  endif
end-policy
1
route-policy policy 5
 apply sample
 apply policy 3
end-policy
```

Given this sample configuration, the **show rpl unused community-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl unused community-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

#### **Related Commands**

Command	Description
show rpl unused as-path-set, on page 273	Displays the AS path sets that are not referenced at all.
show rpl unused extcommunity-set, on page 279	Displays the extended community sets that are not referenced at all.
show rpl unused prefix-set, on page 281	Displays the prefix sets that are not referenced at all.
show rpl unused rd-set, on page 284	Displays the RD sets that are not referenced at all.
show rpl unused route-policy, on page 286	Displays the route policies that are not referenced at all.

### show rpl unused extcommunity-set

To display the extended community sets that are defined but not used by a policy at an attach point or referenced in a policy using an **apply** statement, use the **show rpl unused extcommunity-set** command in EXEC mode.

show rpl unus	ed extcommunity-set	[cost   detail   rt   soo]
---------------	---------------------	----------------------------

Syntax Description	<b>cost</b> (Optional) Displays the unused extended-community cost objects.			
	rt (Optional) Displays the unused extended community RT objects.			
	soo (Optional) Displays the unused extended-community SoO objects.			
	<b>detail</b> (Optional) Displays the content of the object and all referenced objects for unused extended community sets.			
Command Default	No default behavior or values			
Command Modes	EXEC			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>show rpl unused extcommunity-set</b> command to display all extended community sets that are not used in a policy at an attach point either directly or indirectly and are not referenced by any policies in the system.			
Task ID	Task ID Operations			
	route-policy read			
Examples	The following is sample output for the show rpl unused extcommunity-set command:			
	RP/0/RSP0/CPU0:router:router# show rpl unused extcommunity-set			
	ACTIVE Referenced by at least one policy which is attached INACTIVE Only referenced by policies which are not attached UNUSED Not attached (directly or indirectly) and not referenced			
	The following extcommunity-sets are UNUSED			
	ext_comm_set_ex3			

r

Related	Commands
---------	----------

Command	Description
show rpl unused as-path-set, on page 273	Displays the AS path sets that are not referenced at all.
show rpl unused community-set, on page 276	Displays community sets that are not referenced at all.
show rpl unused prefix-set, on page 281	Displays prefix sets that are not referenced at all.
show rpl unused rd-set, on page 284	Displays the RD sets that are not referenced at all.
show rpl unused route-policy, on page 286	Displays the route policies that are not referenced at all.

### show rpl unused prefix-set

To display the prefix sets that are defined but not used by a policy at an attach point or referenced in a policy using an **apply** statement, use the **show rpl unused prefix-set** command in EXEC mode.

show rpl unused prefix-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for unused prefix sets.	
Command Default	No default behavior or values	
Command Modes	EXEC	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate tas IDs. If the user group assignment is preventing you from using a command, contact your AAA administrato for assistance.	
	Use the <b>show rpl unused prefix-set</b> command to display all prefix sets that are not used in a policy at an attach point either directly or indirectly and are not referenced by any policies in the system.	
Task ID	Task ID Operations	
	route-policy read	
Examples	This example shows the following sample configuration:	
	<pre>router bgp 2 address-family ipv4 unicast ! neighbor 10.0.101.2 remote-as 100 address-family ipv4 unicast route-policy policy_1 in ! ! neighbor 10.0.101.3 remote-as 12 address-family ipv4 unicast route-policy policy_2 in ! ! ! prefix-set sample 0.0.0.0/0, 0.0.0.0/0 ge 25 le 32, 10.0.0.0/8 ge 8 le 32, 192.168.0.0/16 ge 16 le 32,</pre>	

```
224.0.0.0/20 ge 20 le 32,
  240.0.0/20 ge 20 le 32
end-set
1
prefix-set prefix set ex1
 10.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
 0.0.0.0/0
end-set
T.
prefix-set prefix set ex2
  220.220.220.0/24 ge 24 le 32,
  220.220.120.0/24 ge 24 le 32,
 220.220.130.0/24 ge 24 le 32
end-set
1
prefix-set prefix set ex3
 221.221.220.0/24 ge 24 le 32,
  221.221.120.0/24 ge 24 le 32,
 221.221.130.0/24 ge 24 le 32
end-set
1
route-policy sample
 if (destination in sample) then
   drop
  endif
end-policy
1
route-policy policy_1
 if (destination in prefix_set_ex1) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex1) then
   set community (10:333) additive
  endif
end-policy
!
route-policy policy_2
 if (destination in prefix set ex1) then
    if (community matches-any comm set ex1) then
     set community (10:666) additive
    endif
    if (extcommunity matches-any ext comm set rt ex1) then
     set community (10:999) additive
   endif
  endif
end-policy
!
route-policy policy_3
 if (destination in prefix set ex2) then
   set local-preference 100
  endif
  if (as-path in as_path_set_ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy 4
  if (destination in prefix set ex2) then
   if (community matches-any comm_set_ex2) then
      set community (10:666) additive
    endif
   if (extcommunity matches-any ext comm set rt ex2) then
      set community (10:999) additive
```

Given this sample configuration, the **show rpl unused prefix-set** command displays the following information:

RP/0/RSP0/CPU0:router# show rpl unused prefix-set

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following prefix-sets are UNUSED ______
prefix_set_ex3
```

#### Related Commands

Command	Description
show rpl unused as-path-set, on page 273	Displays AS path sets that are not referenced at all.
show rpl unused community-set, on page 276	Displays community sets that are not referenced at all.
show rpl unused extcommunity-set, on page 279	Displays extended community sets that are not referenced at all.
show rpl unused rd-set, on page 284	Displays the RD sets that are not referenced at all.
show rpl unused route-policy, on page 286	Displays the route policies that are not referenced at all.

### show rpl unused rd-set

To display the route distinguisher (RD) sets that are defined but not used by a policy at an attach point or referenced in a policy using an **apply** statement, use the **show rpl unused rd-set** command in EXEC mode.

show rpl unused rd-set [detail]

Syntax Description	detail (Optional) Displays the content of the object and all referenced objects for unused RD sets.	
Command Default	No default behavior or values	
Command Modes	- EXEC	
Command History	Release Modification	
	Release 3.7.2 This command was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrato for assistance.	
	Use the <b>show rpl unused rd-set</b> command to display all of the RD sets that are not used in a policy at an attach point either directly or indirectly and are not referenced by any policies in the system.	
Task ID	Task ID Operations	
	route-policy read	
Examples	The show rpl unused rd-set command displays the following information:	
	RP/0/RSP0/CPU0:router# show rpl unused rd-set	
	ACTIVE Referenced by at least one policy which is attached INACTIVE Only referenced by policies which are not attached UNUSED Not attached (directly or indirectly) and not referenced The following rd-sets are UNUSED	
	None found with this status.	

Related Commands	Command	Description
	show rpl unused as-path-set, on page 273	Displays the AS path sets that are not referenced at all.
	show rpl unused community-set, on page 276	Displays the community sets that are not referenced at all.
	show rpl unused extcommunity-set, on page 279	Displays the extended community sets that are not referenced at all.

Command	Description
show rpl unused prefix-set, on page 281	Displays the prefix sets that are not referenced at all.
show rpl unused route-policy, on page 286	Displays the route policies that are not referenced at all.

### show rpl unused route-policy

To display the route policies that are defined but not used at an attach point or referenced using an **apply** statement, use the **show rpl unused route-policy** command in EXEC mode.

show rpl unused route-policy [detail]

Syntax Description **detail** (Optional) Displays the content of the object and all referenced objects for unused route policies. No default behavior or values **Command Default** EXEC **Command Modes Command History** Release Modification Release 3.7.2 This command was introduced. To use this command, you must be in a user group associated with a task group that includes appropriate task **Usage Guidelines** IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the **show rpl unused route-policy** command to display route policies that are defined but not used at an attach point or referenced from another policy using an **apply** statement. Task ID Task ID Operations route-policy read

**Examples** 

This example shows the following sample configuration:

RP/0/RSP0/CPU0:router# show run | begin prefix-set

```
Building configuration...
prefix-set prefix set ex1
 10.0.0/16 ge 16 le 32,
  0.0.0.0/0 ge 25 le 32,
  0.0.0.0/0
end-set
prefix-set prefix set ex2
  220.220.220.0/24 ge 24 le 32,
  220.220.120.0/24 ge 24 le 32,
  220.220.130.0/24 ge 24 le 32
end-set
as-path-set as_path_set_ex1
 ios-regex '^ 65500 $',
  ios-regex '^ 65501 $'
end-set
as-path-set as_path_set_ex2
  ios-regex '^ 65502 $',
```

ios-regex '^ 65503 \$'

L

```
end-set
1
as-path-set as path set ex3
 ios-regex '^_65504_$',
ios-regex '^_65505_$'
end-set
1
community-set comm set ex1
 65500:1,
  65500:2,
 65500:3
end-set
1
community-set comm set ex2
 65501:1,
  65501:2,
 65501:3
end-set
1
extcommunity-set rt ext comm set rt ex1
 1.2.3.4:34
end-set
1
extcommunity-set rt ext comm_set_rt_ex2
 2.3.4.5:36
end-set
1
route-policy sample
 if (destination in sample) then
   drop
 endif
end-policy
!
route-policy policy_1
 if (destination in prefix set ex1) then
   set local-preference 100
  endif
  if (as-path in as path set ex1) then
   set community (10:333) additive
  endif
end-policy
!
route-policy policy 2
  if (destination in prefix set ex1) then
    if (community matches-any comm_set_ex1) then
      set community (10:666) additive
    endif
    if (extcommunity rt matches-any ext_comm_set_rt_ex1) then
     set community (10:999) additive
    endif
  endif
end-policy
!
route-policy policy 3
  if (destination in prefix set ex2) then
    set local-preference 100
  endif
 if (as-path in as path set ex2) then
   set community (10:333) additive
  endif
end-policy
route-policy policy 4
```

```
if (destination in prefix set ex2) then
    if (community matches-any comm_set_ex2) then
     set community (10:666) additive
    endif
   if (extcommunity rt matches-any ext_comm_set_rt_ex2) then
     set community (10:999) additive
    endif
  endif
end-policy
1
route-policy policy_5
 apply sample
  apply policy 3
end-policy
!
route ipv4 0.0.0.0/0 10.91.37.129
route ipv4 10.91.36.0/23 10.91.37.129
route ipv4 10.91.38.0/24 10.91.37.129
end
```

In the following example, route policies that are defined but not used at an attach point or referenced from another policy using an **apply** statement are displayed using the **show rpl unused route-policy** command.

```
RP/0/RSP0/CPU0:router# show rpl unused route-policy
```

ACTIVE -- Referenced by at least one policy which is attached INACTIVE -- Only referenced by policies which are not attached UNUSED -- Not attached (directly or indirectly) and not referenced

```
The following policies are (UNUSED)

policy_1

policy_2

policy_4

policy_5
```

<b>Related Commands</b>	Command	Description
	show rpl unused as-path-set, on page 273	Displays AS path sets that are not referenced at all.
	show rpl unused community-set, on page 276	Displays community sets that are not referenced at all.
	show rpl unused extcommunity-set, on page 279	Displays extended community sets that are not referenced at all.
	show rpl unused prefix-set, on page 281	Displays prefix sets that are not referenced at all.
	show rpl unused rd-set, on page 284	Displays the RD sets that are not referenced at all.

## source in

To test the source of a Border Gateway Protocol (BGP) route against the address contained in either a named or an inline prefix set, use the **source in** command in route-policy configuration mode.

	<b>source in</b> { <i>prefix-set-nameinline-prefix-setparameter</i> }
Syntax Description	prefix-set-name Name of a prefix set.
	inline-prefix-set Inline prefix set. The inline prefix set must be enclosed in parentheses.
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."
Command Default	No default behavior or values
Command Modes	Route-policy configuration
Command History	Release Modification
	Release 3.7.2 This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance. Use the <b>source in</b> command as a conditional expression within an <b>if</b> statement to test the source of the route
	against the data in either a named or an inline prefix set. A comparison that references a prefix set with zero elements in it returns false.
-	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.
	The source of a BGP route is the IP peering address of the neighboring router from which the route was received.
	The prefix set can contain both IPv4 and IPv6 prefix specifications.
Task ID	Task ID Operations
	route-policy read, write
Examples	In the following example, the source of a BGP route is tested against the data in the prefix set my-prefix-set:
	RP/0/RSP0/CPU0:router(config)# route-policy policy-A RP/0/RSP0/CPU0:router(config-rpl)# if source in my-prefix-set then

In this example, the source of a BGP route is tested against the data in an inline IPv4 prefix set:

```
RP/0/RSP0/CPU0:router(config)# route-policy policy-B
RP/0/RSP0/CPU0:router(config-rpl)# if source in (10.0.0.8, 10.0.0.20) then
```

In this example, the source of a route is tested against the data in an inline IPv6 prefix set:

```
RP/0/RSP0/CPU0:router(config)# route-policy policy-C
RP/0/RSP0/CPU0:router(config-rpl)# if source in (2001:0:0:1::/64, 2001:0:0:2::/64) then
```

Related Commands	Command	Description
	prefix-set, on page 118	Enters a prefix set configuration mode and defines a prefix set.

## source rt

To perform import operation based solely on import route-policy by matching on route-targets (RTs) and other criteria specified within the policy, use the **source rt** command in BGP address-family VRF all mode.

	source rt import-policy		
Syntax Description	This command has no argume	nts or keywords.	
Command Modes	BGP address-family VRF all		
Command History	Release	Modification	
	Release 4.3.0	This command was introduced.	
Usage Guidelines	When you configure the <b>source rt</b> command, you need not explicitly configure import RTs under global VRF-address family configuration mode. If the import RTs and import route-policy are already defined, then the routes will be imported from RTs configured under import RT and then follows the route-policy attached at import route-policy. In other words, if the import RT is already defined, it will still add the RTs mentioned in the policy to the imported route-targets list but without the use of the <b>import route-policy</b> command		
Examples	The example shows how to co	nfigure the <b>source rt</b> command:	
	Router(config-bgp-af)#	ress-family vpnv4 unicast	

# suppress-route

To indicate that a given component of a BGP aggregate should be suppressed, use the **suppress-route** command in route-policy configuration mode.

#### suppress-route

Syntax Description	This command has no arguments or keywords.			
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release	Modification		
	Release 3.7.	2 This command	d was introduced.	
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	that is, not ad	vertised by BGP	nmand to indicate that a given component of an aggregate should be suppressed, 2. See the unsuppress-route, on page 297 command for information on overriding and for individual neighbors.	
	The <b>suppress-route</b> command can be used as an action statement within an <b>if</b> statement. For a list action statements available within an <b>if</b> statement, see the <b>if</b> command.			
Task ID	Task ID	Operations		
	route-policy	read, write		
Examples	In the following example, if the destination is in 10.1.0.0/16, then the route is not advertised:			
	RP/0/RSP0/CPU0:router(config)# <b>oute-policy check-aggregate</b> r RP/0/RSP0/CPU0:router(config-rpl)# <b>if destination in (10.1.0.0/16) then</b> RP/0/RSP0/CPU0:router(config-rpl-if)# <b>suppress-route</b>			
			nfig-rpl-if)# <b>endif</b> nfig-rpl-if)# <b>end-policy</b>	
Related Commands	Command		Description	

Indicates that a given component of an aggregate should be unsuppressed

unsuppress-route, on page 297

# tag

I

To match a specific tag value, use the tag command in route-policy configuration mode.

	tag {eq   ge   le   is} {integerparameter}		
Syntax Description	<b>eq</b>   <b>ge</b>   <b>le</b>   <b>is</b> Equal to; greater than or equal to; less than or equal to.		
	<i>integer</i> Integer value. Range is 0 to 4294967295.		
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."		
Command Default	No default behavior or values		
Command Modes	Route-policy configuration		
Command History	Release Modification		
	Release 3.7.2 This command was introduced.		
Usage Guidelines	<ul> <li>To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.</li> <li>Use the tag command as a conditional expression within an if statement to match a specific tag value.</li> </ul>		
	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.		
	A tag is a 32-bit integer that can be associated with a given route within the RIB.		
	The <b>eq</b> operator matches either a specific tag value or a parameter value. Its variants <b>ge</b> and <b>le</b> match a range of tag values that are either greater than or equal to or less than or equal to the supplied value or parameter.		
Task ID	Task ID Operations		
	route-policy read, write		
Examples	In the following example, if the tag equals 10, then the condition returns true:		
	RP/0/RSP0RP0/CPU0:router(config-rpl)# if tag eq 10 then		

# tag in

	To match a tag entry in a named tag set or inline tag set, use the <b>tag in</b> command in route-policy configuration mode.			
	<b>tag in</b> { <i>tag-set-nameinline-tag-setparameter</i> }			
Syntax Description	tag-set-name Name of a tag set. The tag-set accepts 32-bit Integer value. Range is 0 to 4294967295.			
	inline-tag-set Inline tag set. The inline tag set must be enclosed in parentheses.			
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$." parameter			
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release Modification			
	Release 4.3.0 This command was introduced.			
_	tag set or inline tag set.         Note         For a list of all conditional expressions available within an if statement, see the if command.			
	This command takes either a named tag set or an inline tag set value as an argument. The condition returns true if the tag entry matches any entry in the tag set or inline tag set. An attempt to match a tag using a tag set that is defined but contains no elements returns false.			
	The routing policy language (RPL) provides the ability to test tags for a match to a list of tag match specifications using the <b>in</b> operator. The <b>tag in</b> command is protocol-independent.			
Task ID	Task ID Operations			
	route-policy read, write			
Examples	In the following example, a tag set named my-tag-set is defined and a route policy named use-tag-in is created. Within the use-tag-in route policy, the <b>tag in</b> command is used within an <b>if</b> statement to learn if the tag is in the tag-set named my-tag-set. If it is, then local preference is set to 100. If it is not in my-tag-set but does match the next tag specifications, then local preference is set to 200.			
	RP///RSP0/CPII0·router(config-tag)#1000			

RP/0/RSP0/CPU0:router(config-tag) #1000

RP/0/RSP0/CPU0:router(config-tag)#3000
RP/0/RSP0/CPU0:router(config-tag)#end-set

RP/0/RSP0/CPU0:router(config)#route-policy use-tag-in RP/0/RSP0/CPU0:router(config-rpl)#if tag in my-tag-set then RP/0/RSP0/CPU0:router(config-rpl-if)#set local-preference 100 RP/0/RSP0/CPU0:router(config-rpl-if)#elseif tag in (2000, 4000) then RP/0/RSP0/CPU0:router(config-rpl-elseif)#set local-preference 200 RP/0/RSP0/CPU0:router(config-rpl-elseif)#endif RP/0/RSP0/CPU0:router(config-rpl)#end policy

Name of a tag set.

## tag-set

To enter tag set configuration mode and define a tag set, use the **tag-set** command in global configuration mode. To remove a named tag set, use the no form of this command.

tag-set name no tag-set name **Syntax Description** пате None **Command Default** Global configuration **Command Modes Command History** Modification Release Release 4.3.0 This command was introduced. Use the tag-set command to enter tag set configuration mode and define a tag set. A tag-set is a 32-bit integer **Usage Guidelines** that can be associated with a given route within the RIB.

#### Task ID Task ID Operations

route-policy read, write

Examples

In the following example, a tag set named my-tag-set is defined and a route policy named use-tag-in is created. Within the use-tag-in route policy, the tag in command is used within an if statement to learn if the tag is in the tag-set named my-tag-set. If it is, then local preference is set to 100. If it is not in my-tag-set but does match the next tag specifications, then local preference is set to 200.

RP/0/RSP0/CPU0:router(config) #tag-set my-tag-set RP/0/RSP0/CPU0:router(config-tag) #1000 RP/0/RSP0/CPU0:router(config-tag) #3000 RP/0/RSP0/CPU0:router(config-tag) #end-set

RP/0/RSP0/CPU0:router(config)#route-policy use-tag-in RP/0/RSP0/CPU0:router(config-rpl)#if tag in my-tag-set then RP/0/RSP0/CPU0:router(config-rpl-if) #set local-preference 100 RP/0/RSP0/CPU0:router(config-rpl-if)#elseif tag in (2000, 4000) then RP/0/RSP0/CPU0:router(config-rpl-elseif)#set local-preference 200 RP/0/RSP0/CPU0:router(config-rpl-elseif) #endif RP/0/RSP0/CPU0:router(config-rpl)#end policy

### unsuppress-route

To indicate that a given component of a BGP aggregate should be unsuppressed, use the **unsuppress-route** command in route-policy configuration mode.

#### unsuppress-route

Syntax Description This command has no arguments or keywords.

**Command Default** No default behavior or values

Command Modes Route-policy configuration

Command History Release Modification

Release 3.7.2 This command was introduced.

# Usage Guidelines To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

Use the **unsuppress-route** command to indicate that a given component of an aggregate should be unsuppressed, that is, allowed to be advertised by BGP again. This command affects routes that have been suppressed in the generation of BGP aggregates. If the request to unsuppress a route is encountered in a policy at a neighbor-out attach point, it guarantees that the routes that it affects are advertised to that neighbor even if that route was suppressed using the **suppress-route** command in a policy at the aggregation attach point.

The **unsuppress-route** command can be used as an action statement within an **if** statement. For a list of all action statements available within an **if** statement, see the **if** command.

Task ID	Task ID	Operations	
	route-policy	read, write	
Examples	In the follow	ving example	e, if the destination is in $10.1.0.0/16$ , then the route is not advertised:
	RP/0/RSP0/0	CPU0:router	c(config)# route-policy check-aggregate c(config-rpl)# if destination in (10.1.0.0/16) then c(config-rpl-if)# unsuppress-route

RP/0/RSP0/CPU0:router(config-rpl-if)# endif RP/0/RSP0/CPU0:router(config-rpl)# end-policy

Assuming that the policy is attached at a neighbor-out attach point, if the route 10.1.0.0/16 was suppressed in a policy at an aggregation attach point, 10.1.0.0/16 is advertised to the neighbor. Routes continue to be suppressed in advertisements to other BGP neighbors unless a specific policy is attached to unsuppress the route.

I

Related Commands	Command	Description
	suppress-route, on page 292	Indicates that a given component of a BGP aggregate should be suppressed.

# var globalVar*N*

To assign a value to route-policy global variable "globalVar1, globalVar2, globalVar3, globalVar4, and globalVar5", use the **var globalVar***N* command in route-policy configuration mode.

var globalVarN {number | parameter}

Syntax Description	<b>number</b> Value assigned to a 32-bit unsigned integer. Range is from 1 to 4294967295.
	<b>parameter</b> Parameter name. The parameter name must be preceded with a "\$."
Command Default	If the var globalVarN statement is not present then the value for globalVarN is zero.
Command Modes	Route-policy configuration
Command History	Release Modification
	ReleaseThis command was introduced.5.1.3
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.
	The globalVarN variables can be used to control policy execution flow. You can assign a weightage to mark the flow and check the value using an if statement.
-	<b>Note</b> The var globalVar <i>N</i> represents statements "var globalVar1", "var globalVar2", "var globalVar3", "var globalVar4" and "var globalVar5". This command can be used as an assignment statement within an <b>if</b> statement or in child policies and the value can be used to compare in an <b>if</b> statement.
Task ID	Task ID Operation
	route-policy read, write
	Example
	In the following example, the globalVar1 is set to 123 and globalVar2 is set to the value stored in parameter \$param.

```
RP/0/0/CPU0:ios(config-rpl)#var globalVar1 123
RP/0/0/CPU0:ios(config-rpl)#var globalVar2 $param
```

# vpn-distinguisher is

To match a specific Border Gateway Protocol (BGP) VPN distinguisher, use the **vpn-distinguisher is** command in route-policy configuration mode.

**vpn-distinguisher** is {numberparameter}

Syntax Description	<i>number</i> Value assigned to a 32-bit unsigned integer. Range is from 1 to 4294967295.			
	<i>parameter</i> Parameter name. The parameter name must be preceded with a "\$."			
Command Default	No default behavior or values			
Command Modes	Route-policy configuration			
Command History	Release Modification			
	Release 3.7.2 This command was introduced.			
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.			
	Use the <b>vpn-distinguisher is</b> command as a conditional expression within an <b>if</b> statement to test the value of the origin attribute.			
	A VPN distinguisher is used in Layer 3 VPN networks for enhanced individual VPN control and to avoi route target mapping at AS boundaries in inter-AS VPN networks. Route target extended communities a removed at neighbor outbound and the VPN distinguisher value is applied on the BGP route as an extend community. When the route is received on a neighboring router in another AS, the VPN distinguisher is removed and mapped to a route target extended community.			
	<b>Note</b> For a list of all conditional expressions available within an <b>if</b> statement, see the <b>if</b> command.			
	This command can be parameterized.			
Task ID	Task ID Operations			

route-policy read, write

**Examples** 

In the following example, the origin is tested within an **if** statement to learn if it is either **igp** or **egp**:

RP/0/RSP0/CPU0:router(config-rpl)# if origin is igp or origin is egp then

In the following example, a parameter is used to match a specific origin type:

```
RP/0/RSP0/CPU0:router(config)# route-policy bar($origin)
RP/0/RSP0/CPU0:router(config-rpl)# if origin is $origin then
RP/0/RSP0/CPU0:router(config-rpl-if)# set med 20
RP/0/RSP0/CPU0:router(config-rpl-if)# endif
RP/0/RSP0/CPU0:router(config-rpl)#
```

I