



Configure a Basic Policy

Configure licensing and add onto your default configuration using ASDM wizards.

- [\(Optional\) Change the IP Address, on page 1](#)
- [Log Into ASDM, on page 2](#)
- [Configure Licensing, on page 3](#)
- [Configure the ASA with the Startup Wizard, on page 6](#)

(Optional) Change the IP Address

By default, you can launch ASDM from the following interfaces:

- Ethernet 1/2 through Ethernet 1/8—192.168.1.1
- Management 1/1—192.168.45.1

If you cannot use the default IP address, you can set the IP address of the Management 1/1 interface at the ASA CLI.

Procedure

Step 1 Connect to the console port and access global configuration mode. See [Access the ASA CLI](#).

Step 2 Restore the default configuration with your chosen IP address.

```
configure factory-default [ip_address [mask]]
```

Example:

```
ciscoasa(config)# configure factory-default 10.1.1.151 255.255.255.0  
Based on the management IP address and mask, the DHCP address  
pool size is reduced to 103 from the platform limit 256
```

```
WARNING: The boot system configuration will be cleared.  
The first image found in disk0:/ will be used to boot the  
system on the next reload.  
Verify there is a valid image on disk0:/ or the system will  
not boot.
```

```
Begin to apply factory-default configuration:
```

```
Clear all configuration
Executing command: interface management1/1
Executing command: nameif management
INFO: Security level for "management" set to 0 by default.
Executing command: ip address 10.1.1.151 255.255.255.0
Executing command: security-level 100
Executing command: no shutdown
Executing command: exit
Executing command: http server enable
Executing command: http 10.1.1.0 255.255.255.0 management
Executing command: dhcpd address 10.1.1.152-10.1.1.254 management
Executing command: dhcpd enable management
Executing command: logging asdm informational
Factory-default configuration is completed
ciscoasa(config)#
```

- Step 3** Save the default configuration to flash memory.
write memory
-

Log Into ASDM

Launch ASDM so you can configure the ASA.

Procedure

- Step 1** Enter one of the following URLs in your browser.
- <https://192.168.1.1>—Inside interface IP address. You can connect to the inside address on any inside switch port (Ethernet1/2 through 1/8).
 - <https://192.168.45.1>—Management 1/1 interface IP address.

Note Be sure to specify **https://**.

The **Cisco ASDM** web page appears. You may see browser security warnings because the ASA does not have a certificate installed; you can safely ignore these warnings and visit the web page.

- Step 2** Click **Install ASDM Launcher**.
- Step 3** Follow the onscreen instructions to launch ASDM.
The **Cisco ASDM-IDM Launcher** appears.
- Step 4** Leave the username and password fields empty, and click **OK**.
The main ASDM window appears.
-

Configure Licensing

Register the firewall with the Smart Software Manager.


Before you begin

Obtain licenses for your firewall according to [Obtain Licenses](#).


Procedure

Step 1 In the [Cisco Smart Software Manager](#), request and copy a registration token for the virtual account to which you want to add this device.

a) Click **Inventory**.

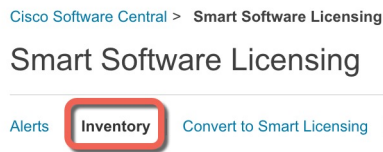

b) On the **General** tab, click **New Token**.

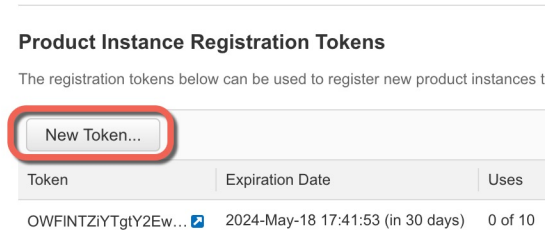

c) On the **Create Registration Token** dialog box enter the following settings, and then click **Create Token**:

Create Registration Token

This will create a token that is used to register product instances, so that they can use licenses from this virtual account. Once it's created, go to the Smart Licensing configuration for your products and enter the token, to register them with this virtual account.

Virtual Account:

Description:

* Expire After: Days
Between 1 - 365, 30 days recommended

Max. Number of Uses:

The token will be expired when either the expiration or the maximum uses is reached

Allow export-controlled functionality on the products registered with this token

• **Description**

- **Expire After**—Cisco recommends 30 days.
- **Max. Number of Uses**
- **Allow export-controlled functionality on the products registered with this token**—Enables the export-compliance flag.

The token is added to your inventory.

- d) Click the arrow icon to the right of the token to open the **Token** dialog box so you can copy the token ID to your clipboard. Keep this token ready for later in the procedure when you need to register the ASA.

Figure 1: View Token


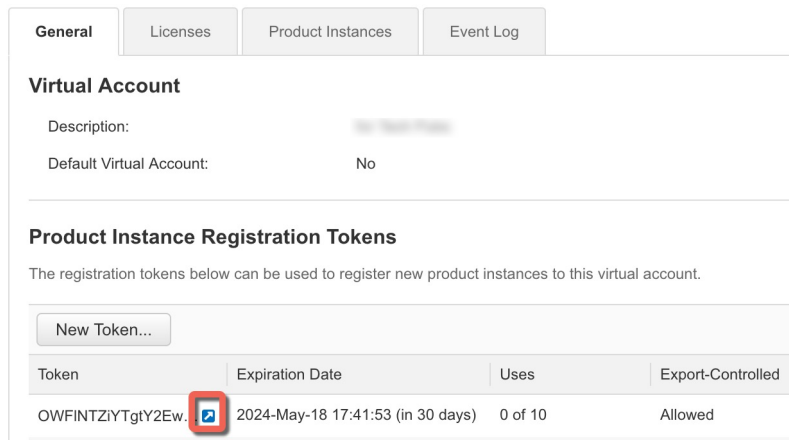


Figure 2: Copy Token

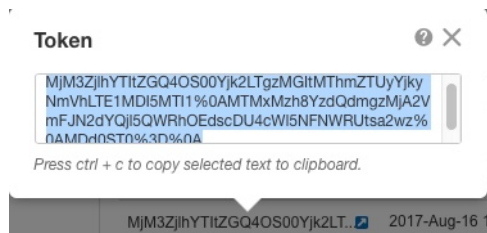

Step 2 In ASDM, choose **Configuration > Device Management > Licensing > Smart Licensing**.

Step 3 Set the licensing entitlements.

- Check **Enable Smart license configuration**.
- From the **Feature Tier** drop-down list, choose **Essentials**.


Only the Essentials tier is available.

- (Optional) Check the **Enable Security Plus** check box.


The Security Plus tier enables failover.

- Click **Apply**.
- Click the **Save** icon in the toolbar.

Step 4 Click **Register**.

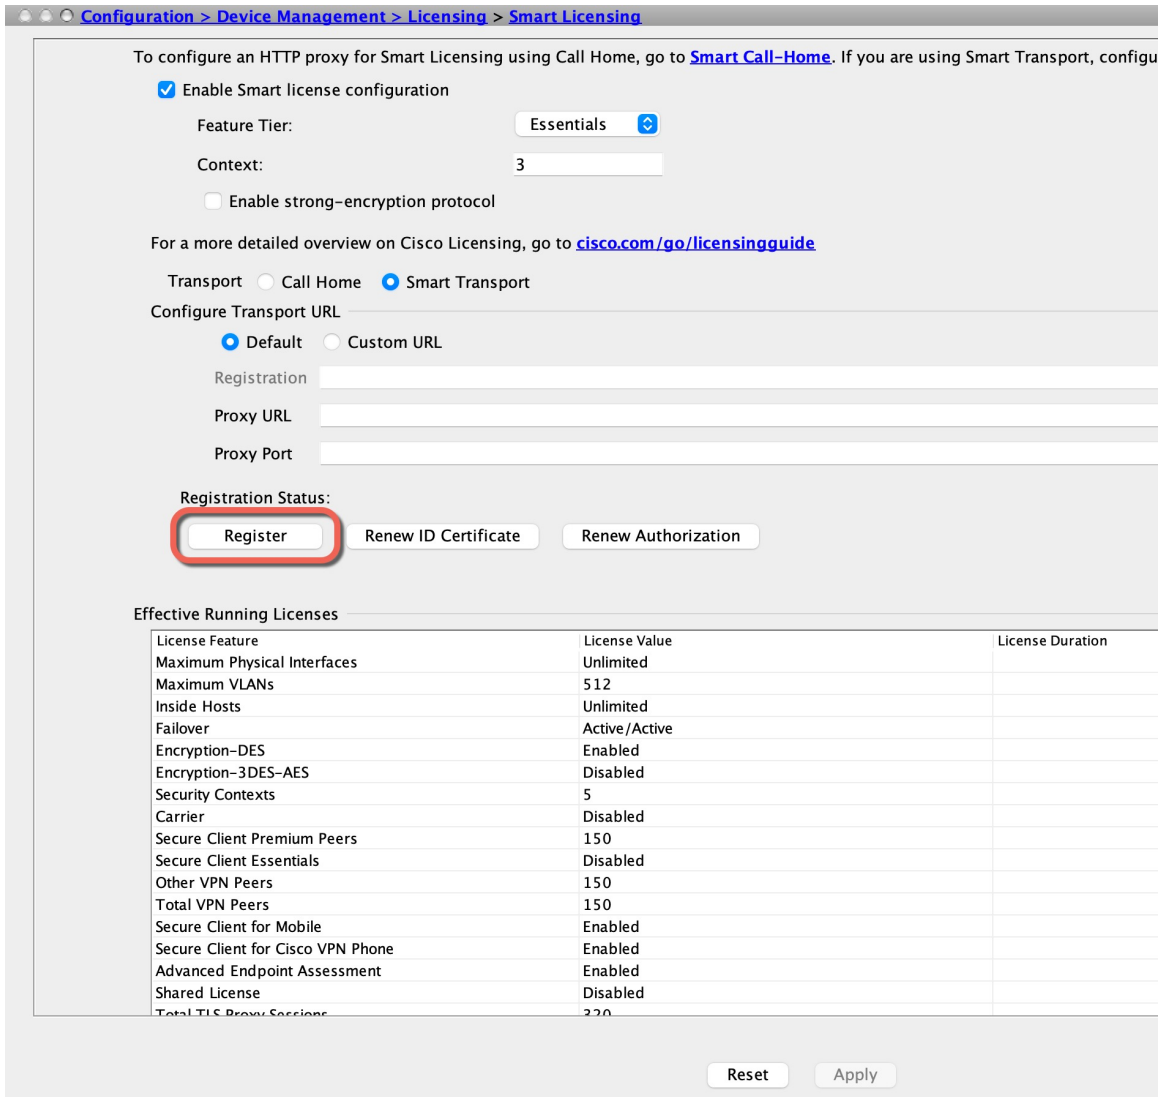


Step 5 Enter the registration token from the [Cisco Smart Software Manager](#) in the **ID Token** field.

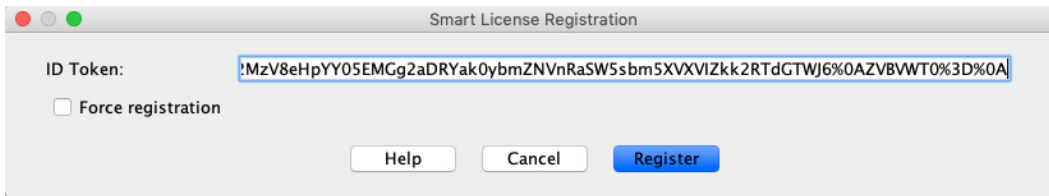

Step 6 Click **Register**.

ASDM refreshes the page when the license status is updated. You can also choose **Monitoring > Properties > Smart License** to check the license status, particularly if the registration fails.



Step 7 Quit ASDM and relaunch it.

When you change licenses, you need to relaunch ASDM to show updated screens.

Configure the ASA with the Startup Wizard

Using ASDM, you can use wizards to configure basic and advanced features. The Startup Wizard builds on the default configuration:


- inside→outside traffic flow
- Interface PAT for all traffic from inside to outside.

The Startup Wizard walks you through configuring:

- The enable password
- Interfaces, including setting the inside and outside interface IP addresses and enabling interfaces.
- Static routes
- The DHCP server
- And more...

Procedure

Step 1 Choose **Wizards > Startup Wizard**, and click the **Modify existing configuration** radio button.

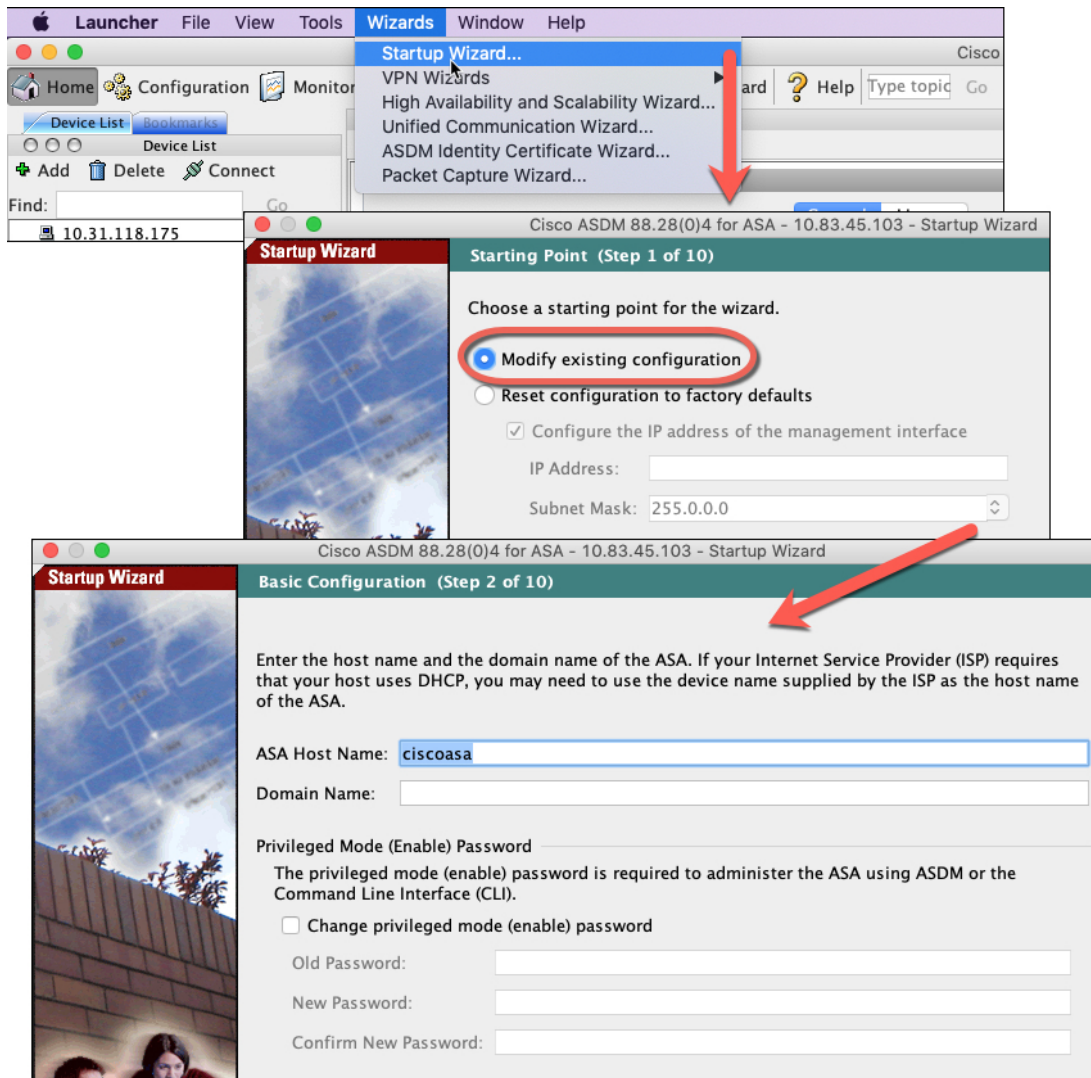

Step 2 Click **Next** on each page to configure the features you want.

Step 3 For other wizards, see the [ASDM general operations configuration guide](#).

