

Fonction d'annonce conditionnelle BGP

Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Components Used](#)

[Configuration](#)

[Diagramme du réseau](#)

[Configurations](#)

[Vérification](#)

[Dépannage](#)

Introduction

Ce document décrit la fonctionnalité d'annonce conditionnelle BGP (Border Gateway Protocol) qui fournit un contrôle supplémentaire des annonces de route, qui dépend de l'existence d'autres préfixes dans la table BGP.

Conditions préalables

Conditions requises

Cisco recommande que vous ayez une connaissance de ce sujet :

- Indépendant de la plate-forme

Components Used

Les informations contenues dans ce document sont basées sur les versions de matériel et de logiciel suivantes :


- IOS
- IOS-XE
- ASR1000

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. Si votre réseau est en ligne, assurez-vous de bien comprendre l'incidence possible des commandes.

Configuration

Configurez R1, R2 et R3. La configuration est donnée ici.

Diagramme du réseau

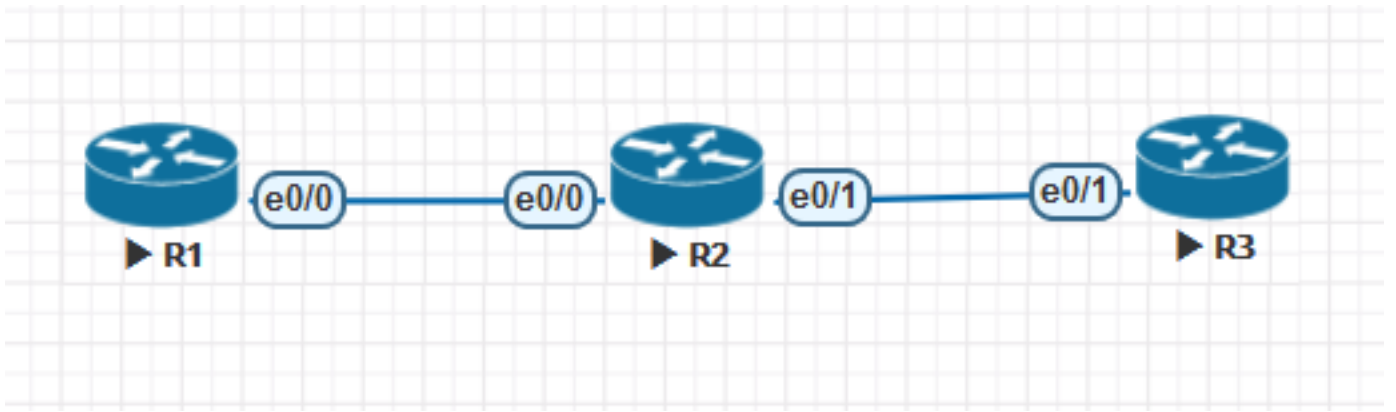

Configurations

Configuration de R1 :

```

!
hostname R1
!
ip cef
!
interface Loopback0
ip address 1.1.1.1 255.255.255.255
!
interface Loopback1
ip address 1.1.1.2 255.255.255.255
!
interface Loopback2
ip address 1.1.1.3 255.255.255.255
!
interface Loopback3
ip address 1.1.1.4 255.255.255.255
!
interface Loopback4
ip address 1.1.1.5 255.255.255.255
!
interface Loopback100
ip address 10.139.224.1 255.255.240.0
!
interface Ethernet0/0
ip address 10.10.12.1 255.255.255.0
!
router bgp 1
bgp log-neighbor-changes
neighbor 10.10.12.2 remote-as 2
!
address-family ipv4
network 0.0.0.0 route-map DEF
network 1.1.1.1 mask 255.255.255.255 route-map RM1
network 1.1.1.5 mask 255.255.255.255
redistribute connected route-map CUST
neighbor 10.10.12.2 activate
neighbor 10.10.12.2 send-community
neighbor 10.10.12.2 soft-reconfiguration inbound
exit-address-family
!
ip forward-protocol nd
!
ip bgp-community new-format

```

```

ip route 0.0.0.0 0.0.0.0 Null0
!
ip prefix-list CUST seq 5 permit 10.139.224.0/20
!
ip prefix-list DEFAULT seq 5 permit 0.0.0.0/0
!
ip prefix-list PL1 seq 5 permit 1.1.1.1/32
!
route-map CUST permit 10
match ip address prefix-list CUST
set community 64671:501
!
route-map RM1 permit 10
match ip address prefix-list PL1
set community 64952:3008
!
route-map DEF permit 10
match ip address prefix-list DEFAULT
set community 64848:3011 65011:200 65013:200
!
end

```

Configuration de R2 :

```

!
hostname R2
!
ip cef
!
interface Loopback0
 ip address 2.2.2.2 255.255.255.255
!
interface Ethernet0/0
 ip address 10.10.12.2 255.255.255.0
!
interface Ethernet0/1
 ip address 10.10.23.2 255.255.255.0
!
router bgp 2
 bgp log-neighbor-changes
 neighbor 10.10.12.1 remote-as 1
 neighbor 10.10.23.3 remote-as 3
!
 address-family ipv4
  neighbor 10.10.12.1 activate
  neighbor 10.10.12.1 soft-reconfiguration inbound
  neighbor 10.10.23.3 activate
  neighbor 10.10.23.3 send-community
 neighbor 10.10.23.3 advertise-map ADV-MAP exist-map EXIST-MAP <<< This statement changes in
non-exist-map
  neighbor 10.10.23.3 soft-reconfiguration inbound
 exit-address-family
!
ip forward-protocol nd
!
ip bgp-community new-format
ip community-list standard DEFAULT-ROUTE permit 65013:200
ip community-list standard DC1-ROUTES permit 64952:3008
ip community-list standard DC2-ROUTES permit 64671:501
ip community-list standard DC3-ROUTES permit 64950:3009
ip community-list standard DEFAULT-ROUTE-DENY deny 65013:200
!
!

```

```

ip prefix-list DEFAULT seq 5 permit 1.1.1.5/32
ip prefix-list DEFAULT seq 10 permit 1.1.1.1/32
!
ip prefix-list EXIST seq 5 permit 10.10.10.10/32
!
ip prefix-list DEFAULT-ROUTE seq 5 permit 0.0.0.0/0
!
ip prefix-list DEFAULT-ROUTE-DENY seq 5 deny 0.0.0.0/0
!
ip prefix-list IP1 seq 5 permit 10.139.224.0/20
!
ip prefix-list T2 seq 5 permit 1.1.1.5/32
!
route-map ADV-MAP permit 10
  match ip address prefix-list IP1
!
route-map ADV-MAP permit 20
  match community DC1-ROUTES DC2-ROUTES DC3-ROUTES
!
route-map EXIST-MAP permit 10
  description Verify Default Route from MDC-SWG
  match ip address prefix-list DEFAULT-ROUTE IP1
  match community DEFAULT-ROUTE
!
!
end

```

Configuration de R3 :

```

!
hostname R3
!
ip cef
!
interface Loopback0
  ip address 3.3.3.3 255.255.255.255
!
interface Ethernet0/1
  ip address 10.10.23.3 255.255.255.0
  shutdown
!
router bgp 3
  bgp log-neighbor-changes
  neighbor 10.10.23.2 remote-as 2
  !
  address-family ipv4
    neighbor 10.10.23.2 activate
    neighbor 10.10.23.2 send-community
    neighbor 10.10.23.2 soft-reconfiguration inbound
  exit-address-family
!
ip forward-protocol nd
!
ip bgp-community new-format
!
end

```

Vérification

Condition 1 :

Si la route par défaut n'est pas présente dans le RIB BGP, R2 ne doit pas annoncer certaines routes.

Si la route par défaut est présente dans le RIB BGP, R2 doit annoncer toutes les routes.

Utiliser la topologie existante

Condition 2 :

Si la route par défaut n'est pas présente dans le RIB BGP, R2 doit annoncer toutes les routes.

Si la route par défaut est présente dans le RIB BGP, R2 ne doit pas annoncer certaines routes.

Utiliser une carte non existante

```
R1#show ip bgp
BGP table version is 7, local router ID is 10.139.224.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	0.0.0.0	0.0.0.0	0		32768	i
*>	1.1.1.1/32	0.0.0.0	0		32768	i
*>	1.1.1.5/32	0.0.0.0	0		32768	i
*>	10.139.224.0/20	0.0.0.0	0		32768	?

```
R2#show ip bgp
BGP table version is 11, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	0.0.0.0	10.10.12.1	0		0 1	i
*>	1.1.1.1/32	10.10.12.1	0		0 1	i
*>	1.1.1.5/32	10.10.12.1	0		0 1	i
*>	10.139.224.0/20	10.10.12.1	0		0 1	?

```
R2#show ip bgp 0.0.0.0
```

```
BGP routing table entry for 0.0.0.0/0, version 9
Paths: (1 available, best #1, table default)
  Advertised to update-groups:
    1
  Refresh Epoch 1
  1, (received & used)
    10.10.12.1 from 10.10.12.1 (10.139.224.1)
      Origin IGP, metric 0, localpref 100, valid, external, best
      Community: 64848:3011 65011:200 65013:200
      rx pathid: 0, tx pathid: 0x0
```

```
R2#show ip bgp neighbors 10.10.23.3 advertised-routes
BGP table version is 11, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
```

RPKI validation codes: V valid, I invalid, N Not found

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	0.0.0.0	10.10.12.1	0		0	1 i
*>	1.1.1.1/32	10.10.12.1	0		0	1 i
*>	1.1.1.5/32	10.10.12.1	0		0	1 i
*>	10.139.224.0/20	10.10.12.1	0		0	1 ?

Total number of prefixes 4

Condition1 Verification:

=====

If default route is not present in BGP RIB, R2 should not advertise certain routes.
If default route is present in BGP RIB, R2 should advertise all the routes. Use exist-map

R2's BGP Configuration:

=====

```
R2#show running-config | sec bgp
router bgp 2
  bgp log-neighbor-changes
  neighbor 10.10.12.1 remote-as 1
  neighbor 10.10.23.3 remote-as 3
  !
  address-family ipv4
    neighbor 10.10.12.1 activate
    neighbor 10.10.12.1 soft-reconfiguration inbound
    neighbor 10.10.23.3 activate
    neighbor 10.10.23.3 send-community
  neighbor 10.10.23.3 advertise-map ADV-MAP exist-map EXIST-MAP
  neighbor 10.10.23.3 soft-reconfiguration inbound
  exit-address-family
  ip bgp-community new-format
```

When Default route is removed from R2's BGP RIB:

=====

```
*Mar 6 09:07:08.833: BGP(0): 10.10.12.1 rcv UPDATE about 0.0.0.0/0 -- withdrawn
*Mar 6 09:07:08.833: BGP(0): no valid path for 0.0.0.0/0
*Mar 6 09:07:08.833: BGP: topo global:IPv4 Unicast:base Remove_fwdroute for 0.0.0.0/0
*Mar 6 09:07:08.833: BGP(0): (base) 10.10.23.3 send unreachable (format) 0.0.0.0/0
*Mar 6 09:07:21.280: BPG(0): Condition EXIST-MAP changes to Withdraw
*Mar 6 09:07:21.353: BGP(0): net 1.1.1.1/32 matches ADV MAP ADV-MAP: bump version to 13
*Mar 6 09:07:21.353: BGP(0): net 10.139.224.0/20 matches ADV MAP ADV-MAP: bump version to 14
*Mar 6 09:07:21.362: BGP(0): Revise route installing 1 of 1 routes for 1.1.1.1/32 ->
10.10.12.1(global) to main IP table
*Mar 6 09:07:21.362: BGP(0): Revise route installing 1 of 1 routes for 10.139.224.0/20 ->
10.10.12.1(global) to main IP table
*Mar 6 09:07:38.933: BGP(0): (base) 10.10.23.3 send unreachable (format) 1.1.1.1/32
*Mar 6 09:07:38.933: BGP(0): (base) 10.10.23.3 send unreachable (format) 10.139.224.0/20
```

```
R2#show ip bgp neighbors 10.10.23.3 advertised-routes
BGP table version is 14, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	1.1.1.5/32	10.10.12.1	0		0	1 i

Total number of prefixes 1

When Default route is added back into R2's BGP RIB:

```
=====
*Mar 6 09:15:22.883: BGP(0): 10.10.12.1 rcvd UPDATE w/ attr: nexthop 10.10.12.1, origin i,
metric 0, merged path 1, AS_PATH , community 64848:3011 65011:200 65013:200
*Mar 6 09:15:22.883: BGP(0): 10.10.12.1 rcvd 0.0.0.0/0
*Mar 6 09:15:22.883: BGP(0): Revise route installing 1 of 1 routes for 0.0.0.0/0 ->
10.10.12.1(global) to main IP table
*Mar 6 09:15:22.883: BGP(0): (base) 10.10.23.3 send UPDATE (format) 0.0.0.0/0, next 10.10.23.2,
metric 0, path 1
*Mar 6 09:16:21.759: BGP(0): Condition EXIST-MAP changes to Advertise
*Mar 6 09:16:21.759: BGP(0): net 1.1.1.1/32 matches ADV MAP ADV-MAP: bump version to 16
*Mar 6 09:16:21.759: BGP(0): net 10.139.224.0/20 matches ADV MAP ADV-MAP: bump version to 17
*Mar 6 09:16:21.768: BGP(0): Revise route installing 1 of 1 routes for 1.1.1.1/32 ->
10.10.12.1(global) to main IP table
*Mar 6 09:16:21.769: BGP(0): Revise route installing 1 of 1 routes for 10.139.224.0/20 ->
10.10.12.1(global) to main IP table
*Mar 6 09:16:21.769: BGP(0): (base) 10.10.23.3 send UPDATE (format) 1.1.1.1/32, next
10.10.23.2, metric 0, path 1
*Mar 6 09:16:21.769: BGP(0): (base) 10.10.23.3 send UPDATE (format) 10.139.224.0/20, next
10.10.23.2, metric 0, path 1
```

```
R2#show ip bgp neighbors 10.10.23.3 advertised-routes
BGP table version is 17, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 0.0.0.0	10.10.12.1	0		0	1 i
*> 1.1.1.1/32	10.10.12.1	0		0	1 i
*> 1.1.1.5/32	10.10.12.1	0		0	1 i
*> 10.139.224.0/20	10.10.12.1	0		0	1 ?

Total number of prefixes 4

Condition2 Verification:

```
=====
If default route is not present in BGP RIB, R2 should advertise all the routes.
If default route is present in BGP RIB, R2 should not advertise certain routes. Use non-exist-
map
```

R2's BGP Configuration:

```
=====
R2#show running-config | sec bgp
router bgp 2
  bgp log-neighbor-changes
  neighbor 10.10.12.1 remote-as 1
  neighbor 10.10.23.3 remote-as 3
  !
  address-family ipv4
  neighbor 10.10.12.1 activate
  neighbor 10.10.12.1 soft-reconfiguration inbound
  neighbor 10.10.23.3 activate
  neighbor 10.10.23.3 send-community
  neighbor 10.10.23.3 advertise-map ADV-MAP non-exist-map EXIST-MAP
  neighbor 10.10.23.3 soft-reconfiguration inbound
  exit-address-family
ip bgp-community new-format
```

When Default route is removed from R2's BGP RIB:

```
=====
*Mar 6 09:21:24.445: BGP(0): 10.10.12.1 rcv UPDATE about 0.0.0.0/0 -- withdrawn
*Mar 6 09:21:24.445: BGP(0): no valid path for 0.0.0.0/0
*Mar 6 09:21:24.445: BGP: topo global:IPv4 Unicast:base Remove_fwdroute for 0.0.0.0/0
*Mar 6 09:21:24.445: BGP(0): (base) 10.10.23.3 send unreachable (format) 0.0.0.0/0
*Mar 6 09:22:22.050: BGP(0): Condition EXIST-MAP changes to Advertise
*Mar 6 09:22:22.050: BGP(0): net 1.1.1.1/32 matches ADV MAP ADV-MAP: bump version to 21
*Mar 6 09:22:22.050: BGP(0): net 10.139.224.0/20 matches ADV MAP ADV-MAP: bump version to 22
*Mar 6 09:22:22.060: BGP(0): Revise route installing 1 of 1 routes for 1.1.1.1/32 ->
10.10.12.1(global) to main IP table
*Mar 6 09:22:22.060: BGP(0): Revise route installing 1 of 1 routes for 10.139.224.0/20 ->
10.10.12.1(global) to main IP table
*Mar 6 09:22:22.060: BGP(0): (base) 10.10.23.3 send UPDATE (format) 1.1.1.1/32, next
10.10.23.2, metric 0, path 1
*Mar 6 09:22:22.060: BGP(0): (base) 10.10.23.3 send UPDATE (format) 10.139.224.0/20, next
10.10.23.2, metric 0, path 1
```

```
R2#show ip bgp neighbors 10.10.23.3 advertised-routes
BGP table version is 22, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	1.1.1.1/32	10.10.12.1	0		0	1 i
*>	1.1.1.5/32	10.10.12.1	0		0	1 i
*>	10.139.224.0/20	10.10.12.1	0		0	1 ?

Total number of prefixes 3

When Default route is added back into R2's BGP RIB:

```
=====
*Mar 6 09:23:04.461: BGP(0): 10.10.12.1 rcvd UPDATE w/ attr: nexthop 10.10.12.1, origin i,
metric 0, merged path 1, AS_PATH , community 64848:3011 65011:200 65013:200
*Mar 6 09:23:04.461: BGP(0): 10.10.12.1 rcvd 0.0.0.0/0
*Mar 6 09:23:04.461: BGP(0): Revise route installing 1 of 1 routes for 0.0.0.0/0 ->
10.10.12.1(global) to main IP table
*Mar 6 09:23:04.461: BGP(0): (base) 10.10.23.3 send UPDATE (format) 0.0.0.0/0, next 10.10.23.2,
metric 0, path 1
*Mar 6 09:23:22.090: BGP(0): Condition EXIST-MAP changes to Withdraw
*Mar 6 09:23:22.090: BGP(0): net 1.1.1.1/32 matches ADV MAP ADV-MAP: bump version to 24
*Mar 6 09:23:22.090: BGP(0): net 10.139.224.0/20 matches ADV MAP ADV-MAP: bump version to 25
*Mar 6 09:23:22.103: BGP(0): Revise route installing 1 of 1 routes for 1.1.1.1/32 ->
10.10.12.1(global) to main IP table
*Mar 6 09:23:22.103: BGP(0): Revise route installing 1 of 1 routes for 10.139.224.0/20 ->
10.10.12.1(global) to main IP table
*Mar 6 09:23:35.248: BGP(0): (base) 10.10.23.3 send unreachable (format) 1.1.1.1/32
*Mar 6 09:23:35.248: BGP(0): (base) 10.10.23.3 send unreachable (format) 10.139.224.0/20
```

```
R2#show ip bgp neighbors 10.10.23.3 advertised-routes
BGP table version is 25, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	0.0.0.0	10.10.12.1	0		0	1 i

*> 1.1.1.5/32 10.10.12.1 0 0 1 i

Total number of prefixes 2

	État Exist-map	État de la carte d'annonce
Si la route par défaut est présente.	Condition correspondante	Annoncer
Si aucune route par défaut n'est présente.	Condition non trouvée	Retiré
	État de la carte non existante	État de la carte d'annonce
Si la route par défaut est présente.	Condition correspondante	Retirer
Si aucune route par défaut n'est présente.	Condition non trouvée	Annoncer

Dépannage

La commande importante est **debug ip bgp update** qui vous donne un mouvement principal de route-maps associé à la carte conditionnelle BGP. Dans le grand réseau, exécutez le débogage conditionnel avec ACL.

Note: Le processus du scanneur BGP s'exécute toutes les 60 secondes, donc dès que nous obtenons les mises à jour de la carte existante/non-existante, Advertise-map prend 60 secondes pour être déclenché.