

# 両面仮想vPCの設定と確認

## 内容

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[設定](#)

[ネットワーク図](#)

[リーフ1](#)

[スパイン1](#)

[リーフ2](#)

[リーフ3](#)

[リーフ4](#)

[リーフ5](#)

[ホストA](#)

[ホストB](#)

[確認](#)

[トラブルシュート](#)

## 概要

このドキュメントでは、Nexus 9000でL2イーサネットVPN(EVPN)Virtual Extensible LAN(VXLAN)両面仮想vPCを導入する方法について説明します。

## 前提条件

### 要件

次の項目に関する知識があることが推奨されます。

- ボーダー ゲートウェイ プロトコル ( BGP )
- Open Shortest Path First ( OSPF )
- EVPN
- 仮想vPC
- vPC

### 使用するコンポーネント

このドキュメントの情報は、次のソフトウェアとハードウェアのバージョンに基づいています。


- リリース10.2(3)が稼働するCisco Nexus 93180YC-FX
- リリース10.2(3)が稼働するCisco Nexus 93180YC-FX

このドキュメントの情報は、特定のラボ環境にあるデバイスに基づいて作成されました。このド

キュメントで使用するすべてのデバイスは、初期（デフォルト）設定の状態から起動しています。本稼働中のネットワークでは、各コマンドによって起こる可能性がある影響を十分確認してください。

## 設定

### ネットワーク図

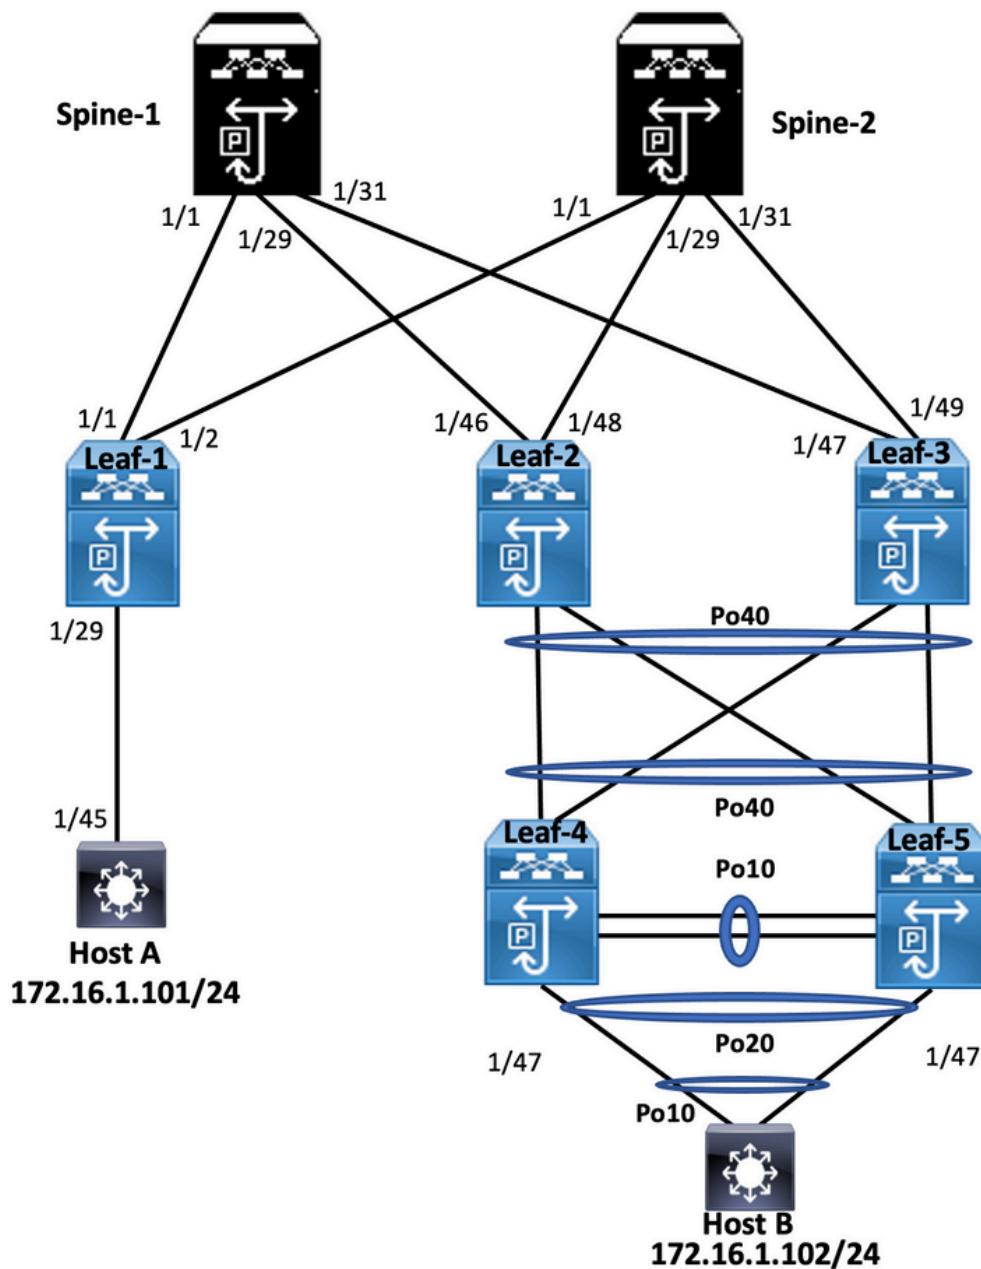

### リーフ1

```
Leaf-1# show run
hostname Leaf-1

cfs eth distribute
nv overlay evpn
feature ospf
feature bgp
```

```
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 10.10.10.10 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1-10
vlan 2
vn-segment 10002
vlan 10
vn-segment 10010

route-map PERMIT-ALL permit 10
vrf context test
vni 10002
rd auto
address-family ipv4 unicast
  route-target both auto
  route-target both auto evpn

interface Vlan2
no shutdown
vrf member test
no ip redirects
ip forward
no ipv6 redirects

interface Vlan10
no shutdown
vrf member test
no ip redirects
ip address 172.16.2.100/25
fabric forwarding mode anycast-gateway

interface nve1
no shutdown
host-reachability protocol bgp
source-interface loopback1
member vni 10002 associate-vrf
member vni 10010
suppress-arp
mcast-group 239.1.1.1

interface Ethernet1/1
mtu 9216
ip address 172.16.0.1/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/29
switchport
switchport mode trunk
no shutdown

interface loopback0
ip address 10.1.1.1/32
ip router ospf 100 area 0.0.0.0
```

```

ip pim sparse-mode

interface loopback1
 ip address 10.2.1.1/32
 ip router ospf 100 area 0.0.0.0
 ip pim sparse-mode

router ospf 100
 router-id 10.1.1.1
router bgp 6500
 router-id 10.1.1.1
address-family ipv4 unicast
address-family l2vpn evpn
 advertise-pip
neighbor 10.10.10.10
 remote-as 6500
 update-source loopback0
 address-family ipv4 unicast
address-family l2vpn evpn
 send-community
 send-community extended
vrf test
 address-family ipv4 unicast
evpn
vni 10010 12
 rd auto
 route-target import auto
 route-target export auto

```

## スパイン1

```

Spine-1# show run
cfs eth distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 10.10.10.10 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8
vlan 1,100

route-map PERMIT-ALL permit 10
vrf context management

interface Ethernet1/1
 mtu 9216
 ip address 172.16.0.2/24
 ip ospf network point-to-point
 ip router ospf 100 area 0.0.0.0
 ip pim sparse-mode
 no shutdown

interface Ethernet1/29
 mtu 9216

```

```

ip address 172.16.2.2/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/31
mtu 9216
ip address 172.16.1.2/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface loopback0
ip address 10.10.10.10/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

router ospf 100
router-id 10.10.10.10
router bgp 6500
router-id 10.10.10.10
address-family ipv4 unicast
address-family l2vpn evpn
neighbor 10.1.1.1
remote-as 6500
update-source loopback0
address-family l2vpn evpn
send-community
send-community extended
route-reflector-client
neighbor 10.1.1.3
remote-as 6500
update-source loopback0
address-family l2vpn evpn
send-community
send-community extended
route-reflector-client
neighbor 10.1.1.4
remote-as 6500
update-source loopback0
address-family l2vpn evpn
send-community
send-community extended
route-reflector-client

```

## リーフ2

```

Leaf-2(config)# show run
hostname Leaf-2

cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based

```

```
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 10.10.10.10 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1-2,10
vlan 2
vn-segment 10002
vlan 10
vn-segment 10010

route-map PERMIT-ALL permit 10
vrf context management
vrf context test
vni 10002
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn

vpc domain 1
peer-switch
peer-keepalive destination 10.201.182.26
virtual peer-link destination 10.1.1.3 source 10.1.1.4 dscp 56
peer-gateway
ip arp synchronize

interface Vlan1
no ip redirects
no ipv6 redirects

interface Vlan2
no shutdown
vrf member test
no ip redirects
ip forward
no ipv6 redirects

interface Vlan10
no shutdown
vrf member test
no ip redirects
ip address 172.16.2.100/25
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
spanning-tree port type network
vpc peer-link

interface port-channel120
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 20

interface port-channel140
switchport
```

```
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 40

interface nvel
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 10002 associate-vrf
member vni 10010
suppress-arp
mcast-group 239.1.1.1

interface Ethernet1/7
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/8
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/46
mtu 9216
port-type fabric
ip address 172.16.2.1/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface loopback0
ip address 10.1.1.4/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.2.1.4/32
ip address 10.2.1.10/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
router-id 10.1.1.4
router bgp 6500
router-id 10.1.1.4
address-family ipv4 unicast
address-family l2vpn evpn
advertise-pip
neighbor 10.10.10.10
remote-as 6500
update-source loopback0
address-family l2vpn evpn
send-community
send-community extended
vrf test
address-family ipv4 unicast
```

```
evpn
vni 10010 12
rd auto
route-target import auto
route-target export auto
```

## リーフ3

```
Leaf-3(config-if-range)# show run
hostname Leaf-3

cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.2222.3333
ip pim rp-address 10.10.10.10 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1-2,10
vlan 2
vn-segment 10002
vlan 10
vn-segment 10010

route-map PERMIT-ALL permit 10
vrf context management
vrf context test
vni 10002
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn

vpc domain 1
peer-switch
peer-keepalive destination 10.201.182.25
virtual peer-link destination 10.1.1.4 source 10.1.1.3 dscp 56
peer-gateway
ip arp synchronize

interface Vlan1
no ip redirects
no ipv6 redirects

interface Vlan2
no shutdown
vrf member test
no ip redirects
ip forward
no ipv6 redirects

interface Vlan10
no shutdown
```

```
vrf member test
no ip redirects
ip address 172.16.2.100/25
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
spanning-tree port type network
vpc peer-link

interface port-channel20
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 20

interface port-channel40
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 40

interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 10002 associate-vrf
member vni 10010
suppress-arp
mcast-group 239.1.1.1

interface Ethernet1/7
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/8
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/47
mtu 9216
port-type fabric
ip address 172.16.1.1/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/48
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 20 mode active
no shutdown
```

```

interface loopback0
 ip address 10.1.1.3/32
 ip router ospf 100 area 0.0.0.0
 ip pim sparse-mod

interface loopback1
 ip address 10.2.1.3/32
 ip address 10.2.1.10/32 secondary
 ip router ospf 100 area 0.0.0.0
 ip pim sparse-mode
 icam monitor scale

router ospf 100
 router-id 10.1.1.3
router bgp 6500
 router-id 10.1.1.3
 address-family ipv4 unicast
 address-family l2vpn evpn
   advertise-pip
neighbor 10.10.10.10
 remote-as 6500
 update-source loopback0
 address-family l2vpn evpn
   send-community
   send-community extended
vrf test
   address-family ipv4 unicast
evpn
 vni 10010 12
 rd auto
 route-target import auto
 route-target export auto

```

## リーフ4

```

Leaf-4(config-if)# show run
hostname Leaf-4

cfs eth distribute
feature lacp
feature vpc

vlan 1,10,20

vpc domain 2
 peer-switch
 peer-keepalive destination 10.201.182.29 source 10.201.182.28
 peer-gateway

interface port-channel10
 switchport
 switchport mode trunk
 switchport trunk allowed vlan 10,20
 spanning-tree port type network
 vpc peer-link

interface port-channel120
 switchport
 switchport mode trunk
 switchport trunk allowed vlan 10,20
 vpc 20

```

```

interface port-channel140
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 40

interface Ethernet1/7
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/8
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/45
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 10 mode active
no shutdown

```

```

interface Ethernet1/47
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 20 mode active
no shutdown

```

## リーフ5

```

Leaf-5(config-if)# show run
cfs eth distribute
feature lacp
feature vpc

vlan 1,10,20

vpc domain 2
peer-switch
peer-keepalive destination 10.201.182.28 source 10.201.182.29
peer-gateway

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
spanning-tree port type network
vpc peer-link

interface port-channel120
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 20

```

```

interface port-channel140
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
vpc 40

interface Ethernet1/7
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/8
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 40 mode active
no shutdown

interface Ethernet1/45
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 10 mode active
no shutdown

interface Ethernet1/47
switchport
switchport mode trunk
switchport trunk allowed vlan 10,20
channel-group 20 mode active
no shutdown

```

## ホストA

```

Host-A(config-if)# show run
hostname Host-A

```

```

nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay

```

```
vlan 1-2,10,20
```

```
vrf context test
```

```

interface Vlan10
no shutdown
vrf member test
ip address 172.16.1.101/25

```

```

interface Ethernet1/45
switchport

```

```
switchport mode trunk
no shutdown
```

## ホストB

```
HOST-B(config-if)# show run
hostname HOST-B
```

```
feature ospf
feature bgp
feature pim
feature interface-vlan
feature lacp
```

```
vlan 1-2,10,20
```

```
vrf context test
```

```
interface Vlan10
no shutdown
vrf member test
ip address 172.16.1.102/25
```

```
interface port-channel10
switchport
switchport mode trunk
```

```
interface Ethernet1/3
switchport
switchport mode trunk
channel-group 10 mode active
no shutdown
```

```
interface Ethernet1/4
switchport
switchport mode trunk
channel-group 10 mode active
no shutdown
```

## 確認

ここでは、設定が正常に機能しているかどうかを確認します。

```
HOST-B(config-if)# ping 172.16.1.101 vrf test
PING 172.16.1.101 (172.16.1.101): 56 data bytes
64 bytes from 172.16.1.101: icmp_seq=0 ttl=254 time=1.007 ms
64 bytes from 172.16.1.101: icmp_seq=1 ttl=254 time=0.608 ms
64 bytes from 172.16.1.101: icmp_seq=2 ttl=254 time=0.539 ms
64 bytes from 172.16.1.101: icmp_seq=3 ttl=254 time=0.522 ms
64 bytes from 172.16.1.101: icmp_seq=4 ttl=254 time=0.514 ms
```

```
--- 172.16.1.101 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.514/0.638/1.007 ms
```

```
HOST-B(config-if)# show ip arp 172.16.1.101 vrf test
Flags: * - Adjacencies learnt on non-active FHRP router
      + - Adjacencies synced via CFSoE
      # - Adjacencies Throttled for Glean
      CP - Added via L2RIB, Control plane Adjacencies
```

```
PS - Added via L2RIB, Peer Sync  
RO - Re-Originated Peer Sync Entry  
D - Static Adjacencies attached to down interface
```

#### IP ARP Table

```
Total number of entries: 1  
Address      Age      MAC Address      Interface      Flags  
172.16.1.101 00:00:04  4cel.7638.2f37  Vlan10
```

```
Host-A(config-if)# ping 172.16.1.102 vrf tes  
PING 172.16.1.102 (172.16.1.102): 56 data bytes  
64 bytes from 172.16.1.102: icmp_seq=0 ttl=254 time=1.047 ms  
64 bytes from 172.16.1.102: icmp_seq=1 ttl=254 time=0.86 ms  
64 bytes from 172.16.1.102: icmp_seq=2 ttl=254 time=0.708 ms  
64 bytes from 172.16.1.102: icmp_seq=3 ttl=254 time=0.509 ms  
64 bytes from 172.16.1.102: icmp_seq=4 ttl=254 time=0.485 ms
```

```
--- 172.16.1.102 ping statistics ---  
5 packets transmitted, 5 packets received, 0.00% packet loss  
round-trip min/avg/max = 0.485/0.721/1.047 ms  
Host-A(config-if)#

```

```
Host-A(config-if)# show ip arp 172.16.1.102 vrf test  
Flags: * - Adjacencies learnt on non-active FHRP router  
+ - Adjacencies synced via CFSoE  
# - Adjacencies Throttled for Glean  
CP - Added via L2RIB, Control plane Adjacencies  
PS - Added via L2RIB, Peer Sync  
RO - Re-Originated Peer Sync Entry  
D - Static Adjacencies attached to down interface
```

#### IP ARP Table

```
Total number of entries: 1  
Address      Age      MAC Address      Interface      Flags  
172.16.1.102 00:05:07  4cel.7638.3257  Vlan10  
Host-A(config-if)#

```

## トラブルシュート

ここでは、設定のトラブルシーティングに使用できる情報を示します。

```
Leaf-2(config-if-range)# show spanning-tree  
VLAN0001  
Spanning tree enabled protocol rstp  
Root ID    Priority    32769  
            Address     0023.04ee.be01  
            Cost        0  
            Port        0 ()  
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec  
  
Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)  
            Address     003a.9c28.2cc7  
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec  
  
Interface      Role Sts Cost      Prio.Nbr Type  
-----  
Eth1/47        Desg FWD 4          128.185  P2p  
  
VLAN0002  
Spanning tree enabled protocol rstp  
Root ID    Priority    32770  
            Address     0023.04ee.be01
```

```

This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority      32770 (priority 32768 sys-id-ext 2)
Address          0023.04ee.be01
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Interface      Role Sts Cost      Prio.Nbr Type
-----  -----
Eth1/47        Desg FWD 4           128.185  P2p

VLAN0010
Spanning tree enabled protocol rstp
Root ID      Priority      32778
Address          0023.04ee.be01
This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority      32778 (priority 32768 sys-id-ext 10)
Address          0023.04ee.be01
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Interface      Role Sts Cost      Prio.Nbr Type
-----  -----
Po10          Desg FWD 4           128.4105 (vPC peer-link) Network P2p
Po40          Desg FWD 1           128.4135 (vPC) P2p
Eth1/47        Desg FWD 4           128.185  P2p

Leaf-2(config-if-range)# show port-channel summary
Flags: D - Down          P - Up in port-channel (members)
I - Individual    H - Hot-standby (LACP only)
s - Suspended      r - Module-removed
b - BFD Session Wait
S - Switched       R - Routed
U - Up (port-channel)
p - Up in delay-lacp mode (member)
M - Not in use. Min-links not met
-----
Group Port-      Type      Protocol Member Ports
channel
-----
10   Po10(SU)     Eth      NONE      --
20   Po20(SD)     Eth      LACP      Eth1/5(D)
40   Po40(SU)     Eth      LACP      Eth1/7(P)   Eth1/8(P)

Leaf-2(config-if-range)# show vpc brief
Legend:
(*) - local vPC is down, forwarding via vPC peer-link
vPC domain id                  : 1
Peer status                     : peer adjacency formed ok
vPC keep-alive status          : peer is alive
Configuration consistency status: success
Per-vlan consistency status    : success
Type-2 consistency status     : success
vPC role                        : primary
Number of vPCs configured      : 2
Peer Gateway                    : Enabled
Dual-active excluded VLANs     : -
Graceful Consistency Check    : Enabled
Auto-recovery status           : Disabled
Delay-restore status            : Timer is off.(timeout = 30s)
Delay-restore SVI status        : Timer is off.(timeout = 10s)
Delay-restore Orphan-port status: Timer is off.(timeout = 0s)
Operational Layer3 Peer-router : Disabled

```

```

Virtual-peerlink mode : Enabled

vPC Peer-link status
-----
id Port Status Active vlans
-- -- --
1 Po10 up 10

vPC status
-----
Id Port Status Consistency Reason Active vlans
-- -- --
20 Po20 down* success success -
40 Po40 up success success 10

Leaf-3(config-if-range)# show spanning-tree
VLAN0010
Spanning tree enabled protocol rstp
Root ID Priority 32778
Address 0023.04ee.be01
This bridge is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32778 (priority 32768 sys-id-ext 10)
Address 0023.04ee.be01
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Interface Role Sts Cost Prio.Nbr Type
----- -----
Po10 Root FWD 4 128.4105 (vPC peer-link) Network P2p
Po40 Desg FWD 1 128.4135 (vPC) P2p

Leaf-3(config-if-range)# show vpc brief
Legend:
(*) - local vPC is down, forwarding via vPC peer-link
vPC domain id : 1
Peer status : peer adjacency formed ok
vPC keep-alive status : peer is alive
Configuration consistency status : success
Per-vlan consistency status : success
Type-2 consistency status : success
vPC role : secondary
Number of vPCs configured : 2
Peer Gateway : Enabled
Dual-active excluded VLANs : -
Graceful Consistency Check : Enabled
Auto-recovery status : Disabled
Delay-restore status : Timer is off.(timeout = 30s)
Delay-restore SVI status : Timer is off.(timeout = 10s)
Delay-restore Orphan-port status : Timer is off.(timeout = 0s)
Operational Layer3 Peer-router : Disabled
Virtual-peerlink mode : Enabled

vPC Peer-link status
-----
id Port Status Active vlans
-- -- --
1 Po10 up 10

vPC status
-----
Id Port Status Consistency Reason Active vlans
-- -- --

```

```

20    Po20          down*   success   success      -
40    Po40          up      success   success      10

```

Please check "show vpc consistency-parameters vpc <vpc-num>" for the consistency reason of down vpc and for type-2 consistency reasons for any vpc.

```

Leaf-4(config-if)# show spanning-tree
VLAN0010
  Spanning tree enabled protocol rstp
  Root ID    Priority    32778
              Address     0023.04ee.be01
              Cost        5
              Port        4105 (port-channel10)
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

```

```

  Bridge ID  Priority    32778 (priority 32768 sys-id-ext 10)
              Address     0023.04ee.be02
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po10			4	128.4105	(vPC peer-link) Network P2p
Po20	Desg	FWD	1	128.4115	(vPC) P2p
Po40			1	128.4135	(vPC) P2p

VLAN0020

```

  Spanning tree enabled protocol rstp
  Root ID    Priority    32788
              Address     0023.04ee.be02
              This bridge is the root
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

```

```

  Bridge ID  Priority    32788 (priority 32768 sys-id-ext 20)
              Address     0023.04ee.be02
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po10			4	128.4105	(vPC peer-link) Network P2p
Po20	Desg	FWD	1	128.4115	(vPC) P2p
Po40			1	128.4135	(vPC) P2p

Leaf-4(config-if)# show vpc brief

Legend:

(\* ) - local vPC is down, forwarding via vPC peer-link

vPC domain id	:	2
Peer status	:	peer adjacency formed ok
vPC keep-alive status	:	peer is alive
Configuration consistency status	:	success
Per-vlan consistency status	:	success
Type-2 consistency status	:	success
vPC role	:	secondary
Number of vPCs configured	:	2
Peer Gateway	:	Enabled
Dual-active excluded VLANs	:	-
Graceful Consistency Check	:	Enabled
Auto-recovery status	:	Disabled
Delay-restore status	:	Timer is off.(timeout = 30s)
Delay-restore SVI status	:	Timer is off.(timeout = 10s)
Operational Layer3 Peer-router	:	Disabled
Virtual-peerlink mode	:	Disabled

```
vPC Peer-link status
-----
id   Port   Status Active vlans
--   ---   -----
1    Po10   up     10,20
```

vPC status

```
-----
Id   Port       Status Consistency Reason      Active vlans
--   ---       ----- ----- -----
20   Po20       up     success      success    10,20
40   Po40       up     success      success    10,20
```

Please check "show vpc consistency-parameters vpc <vpc-num>" for the consistency reason of down vpc and for type-2 consistency reasons for any vpc.

```
Leaf-4(config-if)# show port-channel summary
Flags: D - Down          P - Up in port-channel (members)
      I - Individual    H - Hot-standby (LACP only)
      S - Suspended      R - Module-removed
      b - BFD Session Wait
      S - Switched       R - Routed
      U - Up (port-channel)
      p - Up in delay-lacp mode (member)
      M - Not in use. Min-links not met
```

```
-----
Group Port-      Type      Protocol Member Ports
      Channel
-----
```

Group	Port- Channel	Type	Protocol	Member Ports
10	Po10(SU)	Eth	LACP	Eth1/45(P)
20	Po20(SU)	Eth	LACP	Eth1/47(P)
40	Po40(SU)	Eth	LACP	Eth1/7(P)     Eth1/8(P)

```
Leaf-5(config-if)# show spanning-tree
VLAN0010
Spanning tree enabled protocol rstp
Root ID    Priority    32778
            Address     0023.04ee.be01
            Cost        1
            Port        4135 (port-channel40)
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

Bridge ID  Priority    32778 (priority 32768 sys-id-ext 10)
            Address     0023.04ee.be02
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
-----
Interface      Role Sts Cost      Prio.Nbr Type
-----
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po10	Desg	FWD	4	128.4105	(vPC peer-link) Network P2p
Po20	Desg	FWD	1	128.4115	(vPC) P2p
Po40	Root	FWD	1	128.4135	(vPC) P2p

```
VLAN0020
Spanning tree enabled protocol rstp
Root ID    Priority    32788
            Address     0023.04ee.be02
            This bridge is the root
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Bridge ID  Priority    32788 (priority 32768 sys-id-ext 20)
            Address     0023.04ee.be02
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po10	Desg	FWD	4	128.4105	(vPC peer-link) Network P2p
Po20	Desg	FWD	1	128.4115	(vPC) P2p
Po40	Desg	FWD	1	128.4135	(vPC) P2p

```
Leaf-5(config-if)# show vpc brief
```

Legend:

(\* ) - local vPC is down, forwarding via vPC peer-link

vPC domain id	:	2
Peer status	:	peer adjacency formed ok
vPC keep-alive status	:	peer is alive
Configuration consistency status	:	success
Per-vlan consistency status	:	success
Type-2 consistency status	:	success
vPC role	:	primary
Number of vPCs configured	:	2
Peer Gateway	:	Enabled
Dual-active excluded VLANs	:	-
Graceful Consistency Check	:	Enabled
Auto-recovery status	:	Disabled
Delay-restore status	:	Timer is off.(timeout = 30s)
Delay-restore SVI status	:	Timer is off.(timeout = 10s)
Operational Layer3 Peer-router	:	Disabled
Virtual-peerlink mode	:	Disabled

vPC Peer-link status

id	Port	Status	Active vlans
1	Po10	up	10,20

vPC status

Id	Port	Status	Consistency	Reason	Active vlans
20	Po20	up	success	success	10,20
40	Po40	up	success	success	10,20

Please check "show vpc consistency-parameters vpc <vpc-num>" for the consistency reason of down vpc and for type-2 consistency reasons for any vpc.

```
Leaf-1# show bgp 12vpn evpn
```

BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 558, Local Router ID is 10.1.1.1  
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.1.1.1:32777 (L2VNI 10010)					
*>i[2]:[0]:[0]:[48]:[003a.9c28.2cc7]:[0]:[0.0.0.0]/216	10.2.1.10	100		0	i
*>i[2]:[0]:[0]:[48]:[003a.9c28.2f67]:[0]:[0.0.0.0]/216	10.2.1.10	100		0	i
*>l[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[0]:[0.0.0.0]/216	10.2.1.1	100		32768	i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[0]:[0.0.0.0]/216	10.2.1.10	100		0	i

```

* i 10.2.1.10 100 0 i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272
    10.2.1.1 100 32768 i
* i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[32]:[172.16.1.102]/272
    10.2.1.10 100 0 i
*>i 10.2.1.10 100 0 i

Route Distinguisher: 10.1.1.3:3
*>i[2]:[0]:[0]:[48]:[003a.9c28.2f67]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i

Route Distinguisher: 10.1.1.3:32777
*>i[2]:[0]:[0]:[48]:[003a.9c28.2f67]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[32]:[172.16.1.102]/272
    10.2.1.10 100 0 i

Route Distinguisher: 10.1.1.4:3
*>i[2]:[0]:[0]:[48]:[003a.9c28.2cc7]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i

Route Distinguisher: 10.1.1.4:32777
*>i[2]:[0]:[0]:[48]:[003a.9c28.2cc7]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[32]:[172.16.1.102]/272
    10.2.1.10 100 0 i

Route Distinguisher: 10.1.1.1:3 (L3VNI 10002)
*>i[2]:[0]:[0]:[48]:[003a.9c28.2cc7]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i
*>i[2]:[0]:[0]:[48]:[003a.9c28.2f67]:[0]:[0.0.0.0]/216
    10.2.1.10 100 0 i
*>l[2]:[0]:[0]:[48]:[005d.73b2.9647]:[0]:[0.0.0.0]/216
    10.2.1.1 100 32768 i
* i[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[32]:[172.16.1.102]/272
    10.2.1.10 100 0 i
*>i 10.2.1.10 100 0 i

```

Leaf-1#

Leaf-1# show mac address-table

Legend:

\* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC  
age - seconds since last seen,+ - primary entry using vPC Peer-Link,  
(T) - True, (F) - False, C - ControlPlane MAC, ~ - vsan,  
(NA)- Not Applicable

VLAN	MAC Address	Type	age	Secure	NTFY	Ports
*	10 4ce1.7638.2f37	dynamic	NA	F	F	Eth1/29
<b>C</b>	<b>10 4ce1.7638.3257</b>	<b>dynamic</b>	<b>NA</b>	<b>F</b>	<b>F</b>	<b>nve1(10.2.1.10)</b>
G	- 0000.2222.3333	static	-	F	F	sup-eth1(R)
G	- 005d.73b2.9647	static	-	F	F	sup-eth1(R)
G	2 005d.73b2.9647	static	-	F	F	sup-eth1(R)
G	10 005d.73b2.9647	static	-	F	F	sup-eth1(R)

Leaf-1#

Leaf-2(config-if-range)#

Leaf-2(config-if-range)# show bgp l2vpn evpn

BGP routing table information for VRF default, address family L2VPN EVPN

BGP table version is 45, Local Router ID is 10.1.1.4

Status: s-suppressed, x-deleted, S-stale, d-damped, h-history, \*-valid, >-best

Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.1.1.1:3					
*>i[2]:[0]:[0]:[48]:[005d.73b2.9647]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
Route Distinguisher: 10.1.1.1:32777					
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272	10.2.1.1	100	0	i	
Route Distinguisher: 10.1.1.4:32777 (L2VNI 10010)					
*>l[2]:[0]:[0]:[48]:[003a.9c28.2cc7]:[0]:[0.0.0.0]/216	10.2.1.10	100	32768	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
*>l[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[0]:[0.0.0.0]/216	10.2.1.10	100	32768	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272	10.2.1.1	100	0	i	
<b>*&gt;l[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[32]:[172.16.1.102]/272</b>	10.2.1.10	100	32768	i	
Route Distinguisher: 10.1.1.4:3 (L3VNI 10002)					
*>l[2]:[0]:[0]:[48]:[003a.9c28.2cc7]:[0]:[0.0.0.0]/216	10.2.1.10	100	32768	i	
*>i[2]:[0]:[0]:[48]:[005d.73b2.9647]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272	10.2.1.1	100	0	i	

Leaf-2(config-if-range)#

Leaf-3(config-if-range)# show bgp l2vpn evpn  
BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 89, Local Router ID is 10.1.1.3  
Status: s-suppressed, x-deleted, S-stale, d-damped, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.1.1.1:3					
*>i[2]:[0]:[0]:[48]:[005d.73b2.9647]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
Route Distinguisher: 10.1.1.1:32777					
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272	10.2.1.1	100	0	i	
Route Distinguisher: 10.1.1.3:32777 (L2VNI 10010)					
*>l[2]:[0]:[0]:[48]:[003a.9c28.2f67]:[0]:[0.0.0.0]/216	10.2.1.10	100	32768	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[0]:[0.0.0.0]/216	10.2.1.1	100	0	i	
*>l[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[0]:[0.0.0.0]/216	10.2.1.10	100	32768	i	
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272	10.2.1.1	100	0	i	
<b>*&gt;l[2]:[0]:[0]:[48]:[4ce1.7638.3257]:[32]:[172.16.1.102]/272</b>	10.2.1.10	100	32768	i	

```
Route Distinguisher: 10.1.1.3:3      (L3VNI 10002)
*>l[2]:[0]:[0]:[48]:[003a.9c28.2f67]:[0]:[0.0.0.0]/216
          10.2.1.10           100       32768 i
*>i[2]:[0]:[0]:[48]:[005d.73b2.9647]:[0]:[0.0.0.0]/216
          10.2.1.1           100       0 i
*>i[2]:[0]:[0]:[48]:[4ce1.7638.2f37]:[32]:[172.16.1.101]/272
          10.2.1.1           100       0 i
```

## 翻訳について

シスコは世界中のユーザにそれぞれの言語でサポート コンテンツを提供するために、機械と人による翻訳を組み合わせて、本ドキュメントを翻訳しています。ただし、最高度の機械翻訳であっても、専門家による翻訳のような正確性は確保されません。シスコは、これら翻訳の正確性について法的責任を負いません。原典である英語版（リンクからアクセス可能）もあわせて参照することを推奨します。