

Advanced Routing

IPv4 | **IPv6**

Dynamic Routing

Working Mode : Gateway Router

RIP : Enabled Disabled

Receive RIP versions :

Transmit RIP versions :

Static Routing

Destination IP :

Subnet Mask :

Default Gateway :

Hop Count (Metric, max. is 15) :

Interface :

Advanced Routing

IPv4 | **IPv6**

Dynamic Routing

Working Mode : Gateway Router

RIP : Enabled Disabled

Receive RIP versions :


Transmit RIP versions :

»

RIPv2 » Both RIP v1 and

» Both RIP v1 and

RIPv2 » Both RIP v1 and

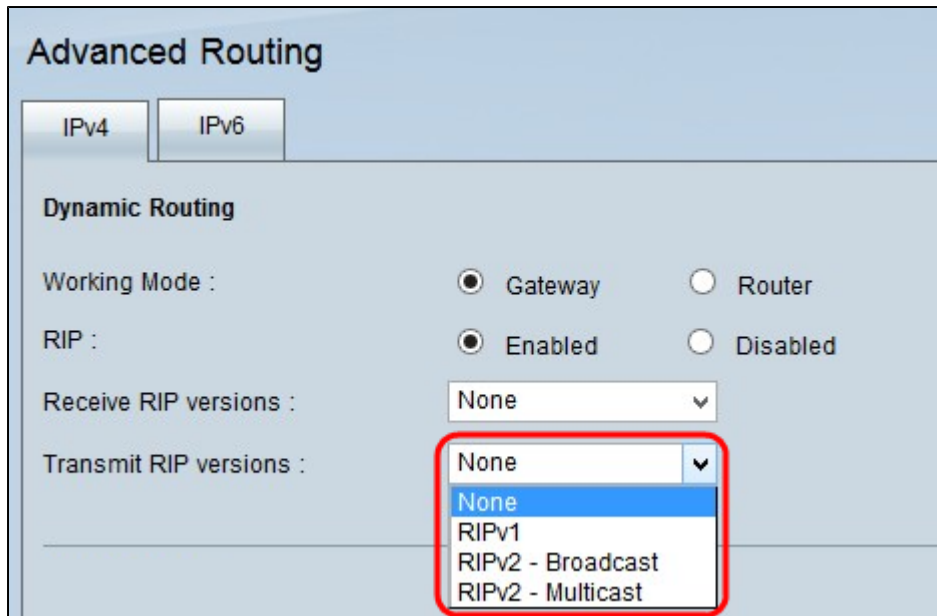

» Both RIP v1 and

RIPv2 » Both RIP v1 and

RIPv2 » Both RIP v1 and

»

RIPv2 » Both RIP v1 and

»

RIPv2 » Both RIP v1 and

RIPv2 » Both RIP v1 and

RIPv2 -

RIPv2 » Both RIP v1 and


RIPv2 »

RIPv2 » Both RIP v1 and

RIPv2 » Both RIP v1 and

RIPv2 » Both RIP v1 and

RIPv2 » Both RIP v1 and

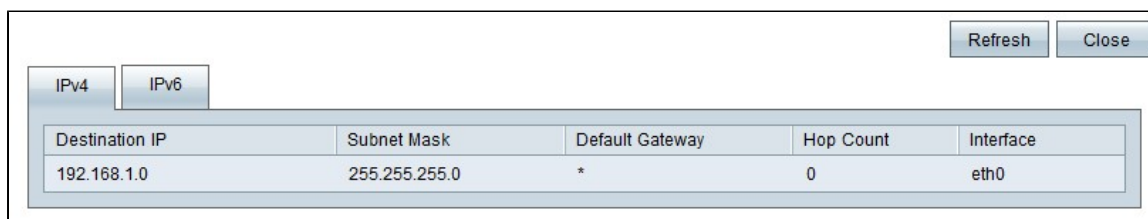

ä, Šè~ã ®ãf•ã, £ãf¼ãf«ãf%õã «ã ¢ã „ã | æ-|ã «èª-æ~Žã —ã ¾ã ™ã€,

ãf»ã®>ã...^IPi¼šã®>ã...^IPã, ¢ãf%õãf-ã, ¹ã€, ă"ã ®ã, ¢ãf%õãf-ã, ¹ã -ã€ãfãf¼ã, ¸ãfã, ±ãffãf^ã

ãf»ã, ãf-ãf ãffãf^ãfžã, ¹ã, ¯i¼šãf ãffãf^ãf^ãf¼ã, ¯ã ®ã, µãf-ãf ãffãf^ãfžã, ¹ã, ¯ã€,

ãf»ãf‡ãf•ã, ©ãf«ãf^ã, ²ãf¼ãf^ã, |ã, šã, ¢i¼šãf ãffãf^ãf^ãf¼ã, ¯ã šã½¸ç" ã •ã, Ąã, <ãfãf•ã, ©ãf«ãf

ãf»ãf>ãfãf—ã, «ã, |ãf³ãf^i¼šã®>ã...^IPã «ã^°é"ã ™ã, <ã Ÿã, ă «çµĄç"±ã —ã Ÿãf>ãffãf-

ãf» Interface:RIPã, "ãf³ãf^ãfã, 'ã —ã¸jã ™ã, <ã, ¢ãf³ã, ¸ãf¼ãf•ã, šã, ¢ã, ¹ã€,

ã, ¹ãf‡ãffãf—7:i¼^ã, ³ãf—ã, •ãfšãf³i¼%õãf‡ãf ã, ¢ã, ¹ã, 'æ-°ã —ã „ãf«ãf¼ãftã, £ãf³ã, °ãftãf¼ãf-ã

ã, 'ã, ¯ãfªãffã, ¯ã —ã ¾ã ™ã€, Closeã, 'ã, ¯ãfªãffã, ¯ã —ã |ã€ãf«ãf¼ãftã, £ãf³ã, °ãftãf¼ãf-ãf

ã, ¹ãf‡ãffãf—

8i¼šSaveã, 'ã, ¯ãfªãffã, ¯ã —ã |ã€ã ™ã ¹ã |ã ®ãª%õæ'ã, 'ã¸ã ã —ã ¾ã ™ã€,

翻訳について

シスコは世界中のユーザにそれぞれの言語でサポート コンテンツを提供するために、機械と人による翻訳を組み合わせて、本ドキュメントを翻訳しています。ただし、最高度の機械翻訳であっても、専門家による翻訳のような正確性は確保されません。シスコは、これら翻訳の正確性について法的責任を負いません。原典である英語版（リンクからアクセス可能）もあわせて参照することを推奨します。