

# Exemplo de Configuração de Sobreposição de IPV6 EVPN Vxlan

## Contents

[Introduction](#)

[Prerequisites](#)

[Componentes Utilizados](#)

[Diagrama de Rede](#)

[Configuração de alto nível](#)

[Configuração](#)

[Verificar](#)

[Troubleshoot](#)

## Introduction

Este documento descreve como implantar a sobreposição IPv6 de LAN extensível virtual (VXLAN) de VPN Ethernet L2 (EVPN) no Nexus 9000.

## Prerequisites

### Requirements

A Cisco recomenda que você tenha conhecimento destes tópicos:

- Protocolo BGP
- Abra o protocolo OSPF
- EVPN
- IPV6


## Componentes Utilizados

As informações neste documento são baseadas nestas versões de software e hardware:

- Cisco N9K-C93180YC-FX que executa a Versão 9.3.(9)
- Cisco N9K-C93216TC-FX2 que executa a versão 9.3(7)
- Cisco Aggregation Service Router (ASR) com host final habilitado para IPv4 e IPv6
- Cisco N9K-C93180YC-EX que executa a Versão 9.3(8)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. Se a rede estiver ativa, certifique-se de que você entenda o impacto potencial de qualquer comando.

## Diagrama de Rede

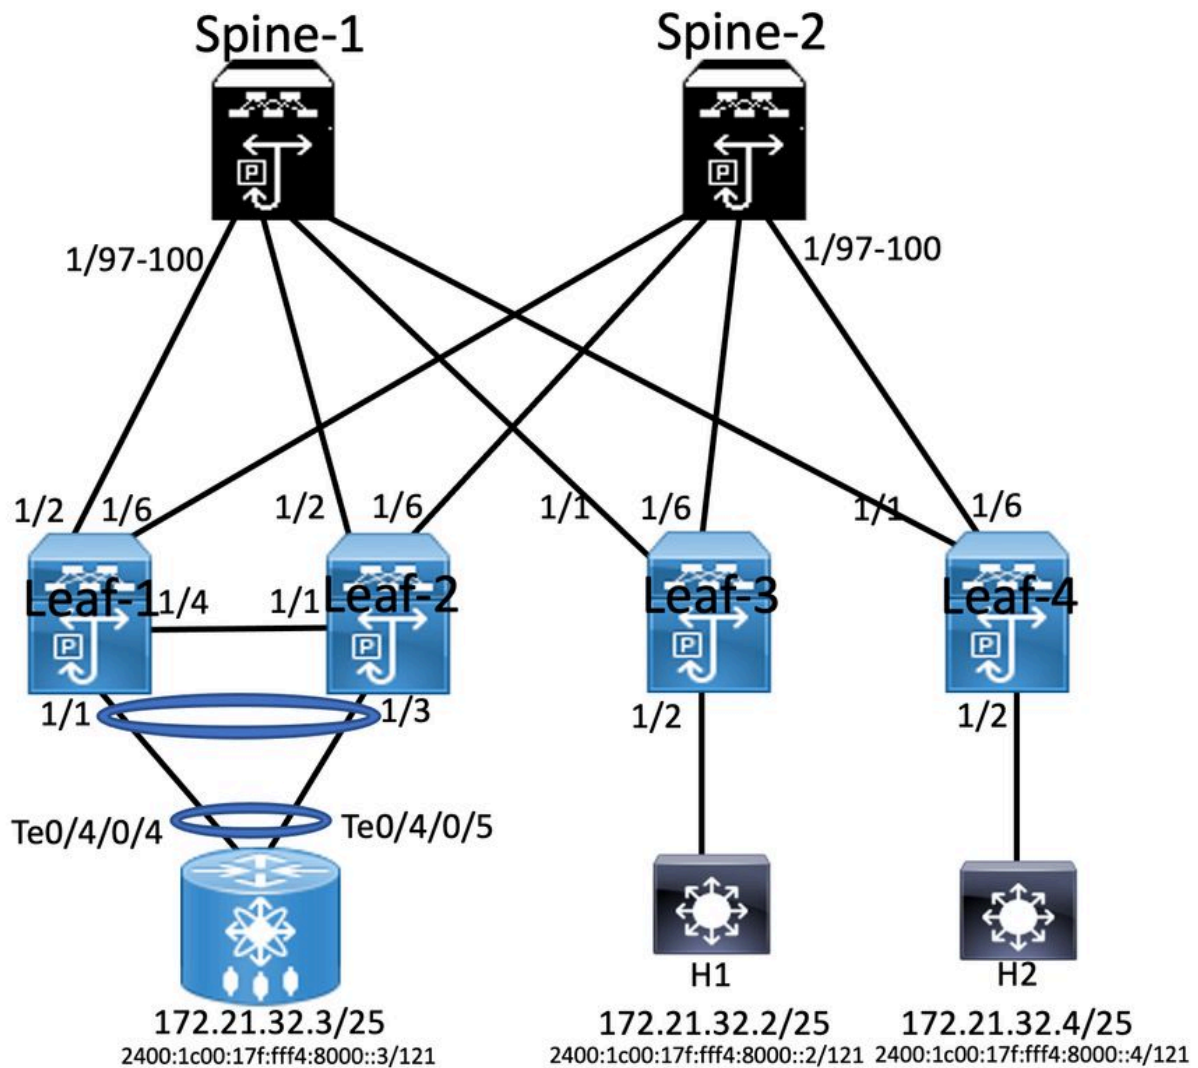

## Configuração de alto nível

1. Instalar recursos
2. Configurar o endereço IP - Subjacente
3. Configurar IGP - OSPF
4. Configurar MP - BGP
5. Configurar a sobreposição de VLAN e EVPN
6. Configurar o e-BGP entre hosts e LEAFs

## Configuração

Enabling Features	Interface Configuration	BGP/EVPN Configuration	VPC Configuration	VTEP Configuration
<pre> nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature l3cp feature vpc feature nv overlay fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 10.3.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 vlan 100 vn-segment 10100 vlan 511 vn-segment 10511  route-map PERMIT-ALL permit 10 router ospf 100 router-id 10.1.1.1           </pre>	<pre> interface loopback0 ip address 10.1.1.1/32 ip address 10.10.10.10/32 secondary ip router ospf 100 area 0.0.0.0 ip pim sparse-mode ipam monitor scale  interface ethernet1/2 mtu 9216 ip address 192.168.0.1/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  vrf context SGI_IAC vni 10100 rd auto address-family ipv4 unicast route-target both auto route-target both auto evpn address-family ipv6 unicast route-target both auto route-target auto evpn           </pre>	<pre> router bgp 6500 router-id 10.1.1.1 address-family ipv4 unicast address-family ipv6 evpn address-family l2vpn evpn advertise-pip neighbour 10.3.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended  vrf SGI_IAC Address-family ipv4 unicast  evpn vni 10511 l2 rd auto route-target import auto route-target export auto           </pre>	<pre> vpc domain 10 peer-switch peer-keepalive destination 10.122.163.140 source 10.122.176.45 peer-gateway ipv6 nd synchronize ip arp synchronize interface port-channel10 switchport switchport mode trunk spanning-tree port type network vpc peer-link interface ethernet 1/4 switchport switchport mode trunk channel-group 10 mode trunk interface port-channel 20 switchport switchport mode trunk switchport trunk allowed vlan 511 vpc 10 interface ethernet1/1 switchport switchport mode trunk switchport trunk allowed vlan 511 channel-group 20           </pre>	<pre> interface vlan100 vrf member SGI_IAC no ip redirects ip forward no ipv6 redirects  interface vlan511 vrf member SGI_IAC no ip redirects ip address 172.21.32.6/25 ipv6 address 2400:1c00:17f:fff4:8000::4/121 no ipv6 redirects fabric forwarding mode any-cast-gateway  interface vte1 advertise virtual-rmac host-reachability-protocol bgp source-interface loopback0 member vni 10100 associate-vhf member vni 10511 suppress-arp mcast-group 239.1.1.1           </pre>

Leaf-2				
Enabling Feature	Interface Configuration	BGP/EVPN Configuration	Vpc Configuration	VTEP Configuration
<pre> nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature lacp feature vpc feature nv overlay fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 1.1.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 vlan 100 vn-segment 10100 vlan 511 vn-segment 10511  route-map PERMIT-ALL permit 10 router ospf 100 router-id 10.2.1.1 </pre>	<pre> interface loopback0 ip address 10.2.1.1/32 ip address 10.10.10.10/32 secondary ip router ospf 100 area 0.0.0.0 ip pim sparse-mode icam monitor scale  interface ethernet1/2 mtu 9216 ip address 192.168.3.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  vrf context SGI_IAC vni 10100 rd auto address-family ipv4 unicast route-target both auto evpn address-family ipv6 unicast route-target both auto route-target auto evpn </pre>	<pre> router bgp 6500 router-id 10.2.1.1 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn advertise-pip neighbour 10.3.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended  vrf SGI_IAC Address-family ipv4 unicast  evpn vni 10511 l2 rd auto route-target import auto route-target export auto </pre>	<pre> vpc domain 10 peer-switch peer-keepalive destination 10.122.176.45 source 10.122.163.140 peer-gateway ipv6 rd synchronize ip arp synchronize interface port-channel10 switchport switchport mode trunk spanning-tree port type network vpc peer-link interface ethernet 1/4 switchport switchport mode trunk channel-group 10 mode trunk interface port-channel 20 switchport switchport mode trunk switchport trunk allowed vlan 511 vpc 10 interface ethernet1/1 switchport switchport mode trunk switchport trunk allowed vlan 511 channel-group 20 </pre>	<pre> interface vian100 vrf member SGI_IAC no ip redirects ip forward no ipv6 redirects  interface vian511 vrf member SGI_IAC no ip redirects ip address 172.21.32.6/25 ipv6 address 2400:1c00:17f:fff4:8000::4/121 no ipv6 redirects fabric forwarding mode any cast-gateway  interface vne1 advertise virtual-rmac host-reachability protocol bgp source-interface loopback0 member vni 10100 associate-vhf member vni 10511 suppress-arp mcast-group 239.1.1.1 </pre>

Spine-1 Configuration		
Enabling Features	Interface Configuration	BGP/EVPN Configuration
<pre> nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature lacp feature nv overlay  ip pim rp-address 10.3.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894  Interface loopback0 IP address 1.1.1.1/32 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode icam monitor scale  Router ospf 100 Router-id 10.3.1.1 Router bgp 6500 Router-id 10.3.1.1 </pre>	<pre> interface Ethernet1/97 mtu 9216 ip address 172.168.0.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface Ethernet1/98 mtu 9216 ip address 172.168.2.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface Ethernet1/99 mtu 9216 ip address 192.168.1.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface Ethernet1/100 mtu 9216 ip address 172.168.3.1/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode </pre>	<pre> router bgp 6500 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn neighbour 10.1.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended route-reflector-client neighbour 10.2.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended route-reflector-client neighbour 10.4.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended route-reflector-client </pre>

Leaf-3			
Enabling Features	Interface Configuration	BGP/EVPN Configuration	VTEP Configuration
<pre> nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature lacp feature nv overlay  fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 10.3.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 vlan 100 vn-segment 10100 vlan 511 vn-segment 10511  route-map PERMIT-ALL permit 10 router ospf 100 router-id 10.4.1.1 </pre>	<pre> interface loopback0 ip address 10.4.1.1/32 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode icam monitor scale  interface ethernet1/1 mtu 9216 ip address 192.168.1.1/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  vrf context SGI_IAC vni 10100 rd auto address-family ipv4 unicast route-target both auto route-target both auto evpn address-family ipv6 unicast route-target both auto route-target auto evpn </pre>	<pre> router bgp 6500 router-id 10.4.1.1 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn neighbour 10.3.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended  vrf SGI_IAC address-family ipv4 unicast address-family ipv6 unicast  evpn vni 10511 l2 rd auto route-target import auto route-target export auto </pre>	<pre> interface vian100 vrf member SGI_IAC no ip redirects ip forward no ipv6 redirects  interface vian511 vrf member SGI_IAC no ip redirects ip address 172.21.32.6/25 ipv6 address 2400:1c00:17f:fff4:8000::4/121 no ipv6 redirects fabric forwarding mode any cast-gateway  interface vne1 no shutdown host-reachability protocol bgp source-interface loopback0 member vni 10100 associate-vhf member vni 10511 suppress-arp mcast-group 239.1.1.1 </pre>

Host 1 Configuration	ASR Router	Host 2 Configuration
<pre> interface Bundle-Ether1.511 description JE-PCN01-PC-UP-SGI_IAC vrf SGI_IAC ipv4 address 172.21.32.2 255.255.255.128 ipv6 address 2400:1c00:17f:fff4:8000::2/121 encapsulation dot1q511 </pre>	<pre> interface Bundle-Ether1.511 description JE-PCN01-PC-UP-SGI_IAC vrf SGI_IAC ipv4 address 172.21.32.3 255.255.255.128 ipv6 address 2400:1c00:17f:fff4:8000::3/121 encapsulation dot1q511 </pre>	<pre> interface Bundle-Ether1.511 description JE-PCN01-PC-UP-SGI_IAC vrf SGI_IAC ipv4 address 172.21.32.4 255.255.255.128 ipv6 address 2400:1c00:17f:fff4:8000::5/121 encapsulation dot1q511 </pre>

## Verificar

Use esta seção para confirmar se a sua configuração funciona corretamente.

<pre>RP/0/RSP1/CPU0:ASR-9906-A#ping vrf SGI_IAC 172.21.32.2 Tue Jul 12 03:35:33.528 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 172.21.32.2, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/3 ms RP/0/RSP1/CPU0:ASR-9906- A#ping vrf SGI_IAC 2400:1c00:17f:fff4:8000::2 Tue Jul 12 03:35:36.536 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 2400:1c00:17f:fff4:8000::2, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms</pre>	<pre>H1#ping 172.21.32.3 Tue Jul 12 03:36:00.993 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 172.21.32.3, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms H1#ping vrf SGI_IAC 2400:1c00:17f:fff4:8000::3 Tue Jul 12 03:36:03.789 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 2400:1c00:17f:fff4:8000::3, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/2/3 ms</pre>
---	--

## Troubleshoot

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

Use estes comandos para solucionar problemas de configuração:

**#show bgp l2vpn evpn**

**#show nve peer**

**#show nve vni**

**# show ip arp <> >> On host side**

## Sobre esta tradução

A Cisco traduziu este documento com a ajuda de tecnologias de tradução automática e humana para oferecer conteúdo de suporte aos seus usuários no seu próprio idioma, independentemente da localização.

Observe que mesmo a melhor tradução automática não será tão precisa quanto as realizadas por um tradutor profissional.

A Cisco Systems, Inc. não se responsabiliza pela precisão destas traduções e recomenda que o documento original em inglês ([link fornecido](#)) seja sempre consultado.