

Como configurar a autenticação do protocolo de túnel da camada 2 com TACACS+

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Conventions](#)

[Configurar](#)

[Diagrama de Rede](#)

[TACACS+ Configurações do servidor](#)

[Configurações do Roteador](#)

[Verificar](#)

[Resultado do comando show em ambos os roteadores](#)

[Mostrar saída da versão dos dois roteadores](#)

[O que pode dar errado - debug ruim a partir do LAC](#)

[O que pode dar errado – Depuração inadequada a partir do LNS](#)

[Registros de relatório de LNS](#)

[Troubleshoot](#)

[Comandos para Troubleshooting](#)

[Saída de depurações](#)

[Informações Relacionadas](#)

[Introduction](#)

Este documento descreve como configurar o L2TP (Layer 2 Tunnel Protocol) com TACACS+. Inclui configurações de exemplo para servidores TACACS+ L2TP (LAC), servidores TACACS+ L2TP Network Server (LNS) TACACS+ e roteadores.

[Prerequisites](#)

[Requirements](#)

Não existem requisitos específicos para este documento.

[Componentes Utilizados](#)

As informações neste documento são baseadas nestas versões de software e hardware:

- Dois roteadores Cisco 2511
- Software Cisco IOS® versão 12.0(2).T
- Cisco Secure UNIX, Cisco Secure Windows ou TACACS+ Freeware

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

Para obter mais informações sobre convenções de documento, consulte as [Convenções de dicas técnicas Cisco](#).


Configurar

Nesta seção, você encontrará informações para configurar os recursos descritos neste documento.

Observação: para encontrar informações adicionais sobre os comandos usados neste documento, use a [ferramenta Command Lookup Tool](#) (somente clientes [registrados](#)).

Diagrama de Rede

Este documento utiliza a configuração de rede mostrada neste diagrama.

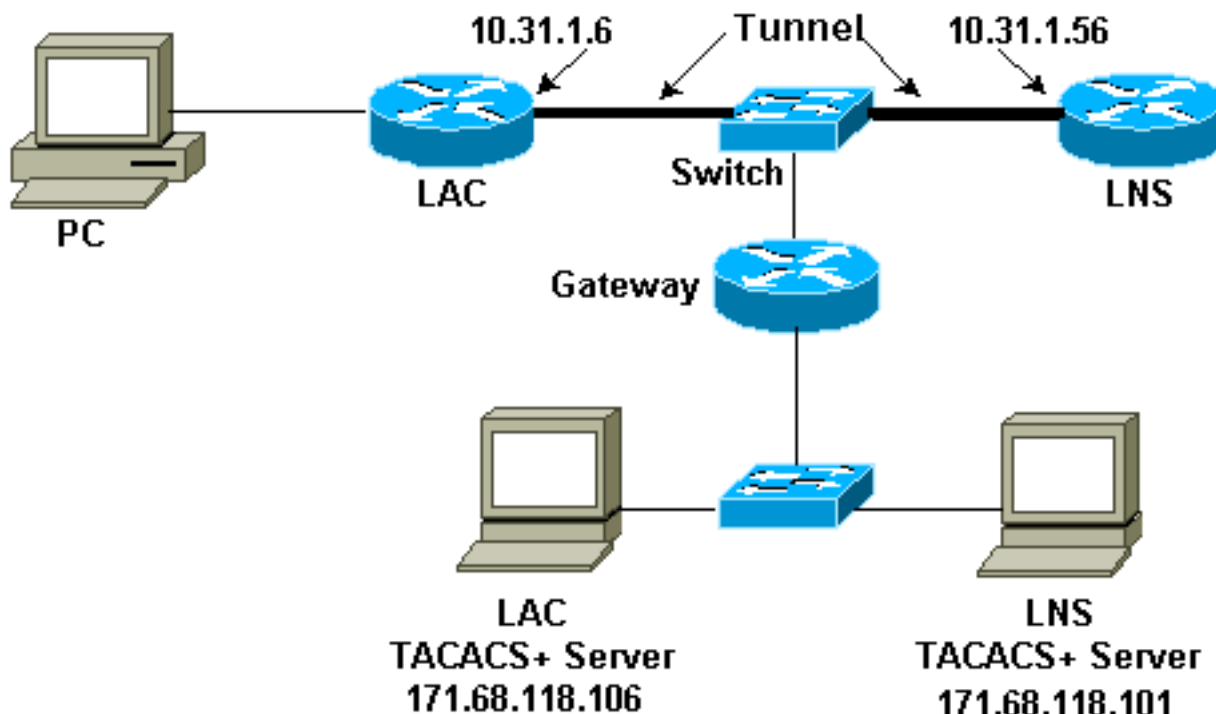

TACACS+ Configurações do servidor

Configuração de LAC - Cisco Secure UNIX

```

# ./ViewProfile -p 9900 -u rtp.cisco.com user = rtp.cisco.com{
service=ppp {
protocol=vpdn {
set tunnel-type=l2tp
set tunnel-id=rtp_tunnel
set ip-addresses="10.31.1.56"
}
}

}

# ./ViewProfile -p 9900 -u rtp_tunnel
user = rtp_tunnel{
password = chap "FGHIJ"
service=ppp {
protocol=lcp {
}
protocol=ip {
}
}
}
}

```

[Configuração de LNS - Cisco Secure UNIX](#)

```

# ./ViewProfile -p 9900 -u janedoe@rtp.cisco.com
user = janedoe@rtp.cisco.com{
password = chap "rtprules"
service=ppp {
protocol=lcp {
}
protocol=ip {
}
}
}

# ./ViewProfile -p 9900 -u ABCDE
user = ABCDE{
password = chap "FGHIJ"
service=ppp {
protocol=lcp {
}
protocol=ip {
}
}
}
}

```

[Configuração de LAC - Cisco Secure Windows](#)

Conclua estes passos para configurar o LAC em um Cisco Secure Windows:

1. Configure o usuário rtp_tunnel como um usuário PPP normal (senha e/ou senha CHAP na Configuração do usuário).
2. Coloque o usuário em group_1 e verifique o serviço **PPP/IP**. Marque **PPP/LCP** se essa caixa for exibida.
3. Configure o usuário rtp.cisco.com. A senha é "não se importa".
4. Se algumas opções não forem exibidas em Configurações do grupo, vá para **Configuração da interface** e selecione as caixas para que elas apareçam.

5. Coloque o usuário em group_2 e verifique o serviço **PPP/VPDN**. O tunnel-id é **rtp_tunnel**, a lista de endereços ip é **10.31.1.56**, e na caixa de atributo personalizado retangular abaixo, digite **tunnel-type=l2tp**.

Configuração de LNS - Cisco Secure Windows

Conclua estes passos para configurar o LNS para o Cisco Secure Windows:

1. Configure os usuários 'ABCDE' e 'janedoe@rtp.cisco.com' como usuários PPP normais (senha e/ou senha CHAP na configuração do usuário).
2. Coloque os usuários em group_3 e verifique o serviço **PPP/IP**. Marque **PPP/LCP** se essa caixa for exibida.

Configuração de Freeware TACACS+ do LAC

```
user = rtp.cisco.com {
service = ppp protocol = vpdn {
tunnel-type = l2tp
tunnel-id = rtp_tunnel
ip-addresses = "10.31.1.56"
}
}
```

```
user = rtp_tunnel {
chap = cleartext "FGHIJ"
service = ppp protocol = ip {
default attribute = permit
}
}
```

Configuração do Freeware TACACS+ do LNS

```
key = "cisco"
```

```
user = janedoe@rtp.cisco.com {
chap = cleartext "rtprules"
service = ppp protocol = ip {
default attribute = permit
}
}
```

```
user = ABCDE {
chap = cleartext "FGHIJ"
service = ppp protocol = ip {
default attribute = permit
}
}
```

Configurações do Roteador

Configuração do roteador de LAC
version 12.0 service timestamps debug datetime service timestamps log uptime

```
no service password-encryption
!
hostname LAC
!
aaa new-model
aaa authentication ppp default if-needed tacacs+
aaa authorization network default tacacs+
aaa accounting network default start-stop tacacs+
enable secret level 7 5 $1$Dj3K$9jkyuJR6fJV2JO./Qt01C1
enable password ww
!
username john password 0 doe
ip subnet-zero
no ip domain-lookup
!
vpdn enable
!
vpdn search-order domain
!
interface Loopback0
no ip address
no ip directed-broadcast
!
interface Ethernet0
ip address 10.31.1.144 255.255.255.0
no ip directed-broadcast
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
shutdown
!
interface Serial1
no ip address
no ip directed-broadcast
shutdown
!
interface Async1
ip unnumbered Ethernet0
no ip directed-broadcast
ip tcp header-compression passive
encapsulation ppp
async mode dedicated
peer default ip address pool default
ppp authentication chap
!
ip local pool default 10.5.5.5 10.5.5.50
ip classless
ip route 0.0.0.0 0.0.0.0 10.31.1.1
!
tacacs-server host 171.68.118.106
tacacs-server key cisco
!
line con 0
transport input none
line 1
exec-timeout 0 0
autoselect during-login
autoselect ppp
modem Dialin
transport preferred none
transport output none
speed 38400
```

```
flowcontrol hardware
line 2 16
modem InOut
transport input all
speed 38400
flowcontrol hardware
line aux 0
line vty 0 4
password WW
!
end
```

Configuração do roteador de LNS

```
version 12.0
service timestamps debug datetime
service timestamps log uptime
no service password-encryption
!
hostname LNS
!
aaa new-model
aaa authentication ppp default if-needed tacacs+
aaa authorization network default tacacs+
aaa accounting network default start-stop tacacs+
enable secret 5 $1$wfMI$ixUG9hw7yhmsv.87.krpZ1
enable password WW
!
username john password 0 doe
ip subnet-zero
no ip domain-lookup
!
vpdn enable
!
vpdn-group 1
accept dialin l2tp virtual-template 1 remote rtp_tunnel
local name ABCDE
!
interface Ethernet0
ip address 10.31.1.56 255.255.255.0
no ip directed-broadcast
!
interface Virtual-Templat1
ip unnumbered Ethernet0
no ip directed-broadcast
peer default ip address pool default
ppp authentication chap
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
shutdown
!
interface Serial1
no ip address
no ip directed-broadcast
shutdown
!
interface Async1
ip unnumbered Ethernet0
no ip directed-broadcast
```

```
ip tcp header-compression passive
encapsulation ppp
async mode dedicated
peer default ip address pool setup_pool
ppp authentication chap pap
!
!
!
!
ip local pool default 10.6.1.1 10.6.1.2
ip classless
ip route 0.0.0.0 0.0.0.0 10.31.1.1
!
tacacs-server host 171.68.118.101
tacacs-server key cisco
!
line con 0
transport input none
line 1 8
autoselect during-login
autoselect ppp
modem Dialin
speed 115200
flowcontrol hardware
line aux 0
line vty 0 4
password WW
!
end
```

Verificar

Resultado do comando show em ambos os roteadores

Esta seção fornece informações que você pode usar para confirmar se sua configuração está funcionando adequadamente.

A [Output Interpreter Tool \(somente clientes registrados\)](#) oferece suporte a determinados comandos show, o que permite exibir uma análise da saída do comando show.

Roteador LAC

LAC#**show vpdn session**

L2TP Session Information (Total tunnels=1 sessions=1)

LocID	RemID	TunID	Intf	Username	State	Last	Chg
1	1	76	As1	janedoe@rtp.c	est	00:00:32	

% No active L2F tunnels

LAC#**show vpdn tunnel**

L2TP Tunnel Information (Total tunnels=1 sessions=1)

LocID	RemID	Remote	Name	State	Remote	Address	Port	Sessions
76	58	ABCDE	est	10.31.1.56	1701	1		

% No active L2F tunnels

Roteador LNS

LNS#**show vpdn session**

L2TP Session Information (Total tunnels=1 sessions=1)

LocID	RemID	TunID	Intf	Username	State	Last	Chg
1	1	58	Vi1	janedoe@rtp.c	est	00:01:55	

% No active L2F tunnels

LNS#**show vpdn tunnel**

L2TP Tunnel Information (Total tunnels=1 sessions=1)

LocID	RemID	Remote	Name	State	Remote	Address	Port	Sessions
58	76	rtp_tunnel	est	10.31.1.144	1701	1		

% No active L2F tunnels

Mostrar saída da versão dos dois roteadores

LAC#**show version**

Cisco Internetwork Operating System Software
IOS (tm) 2500 Software (C2500-IS-L), Version 12.0(2)T, RELEASE SOFTWARE (fc1)
Copyright (c) 1986-1998 by cisco Systems, Inc.
Compiled Wed 09-Dec-98 02:31 by dschwart
Image text-base: 0x030403B0, data-base: 0x00001000

ROM: System Bootstrap, Version 11.0(10c), SOFTWARE
BOOTFLASH: 3000 Bootstrap Software (IGS-BOOT-R), Version 11.0(10c), RELEASE SOFTWARE (fc1)

LAC uptime is 20 hours, 22 minutes
System restarted by reload at 16:13:55 UTC Fri Jan 29 1999
System image file is "flash:c2500-is-l.120-2.T"

cisco 2511 (68030) processor (revision M) with 14336K/2048K bytes of memory.
Processor board ID 07041186, with hardware revision 00000000
Bridging software.
X.25 software, Version 3.0.0.
1 Ethernet/IEEE 802.3 interface(s)
2 Serial network interface(s)
16 terminal line(s)
32K bytes of non-volatile configuration memory.
16384K bytes of processor board System flash (Read ONLY)
Configuration register is 0x2102

O que pode dar errado - debug ruim a partir do LAC

Esta saída de depuração inclui comentários sobre onde a sequência para quando o roteador está configurado incorretamente.

LAC#**show debug**

General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:


```

L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LAC#
Jan 30 12:17:09: As1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
20:03:18: %LINK-3-UPDOWN: Interface Async1, changed state to up
Jan 30 12:17:09: As1 VPDN: Looking for tunnel -- rtp.cisco.com --
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x278B90) user='rtp.cisco.com'
ruser='' port='Async1'
rem_addr='' authn_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447): Port='Async1'
list='default' service=NET
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) user='rtp.cisco.com'
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447) found list "default"
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) Method=TACACS+
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): user=rtp.cisco.com
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV protocol=vpdn
Jan 30 12:17:09: TAC+: (898425447): received author response status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR (898425447): Post authorization status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-id=rtp_tunnel
!--- If the wrong tunnel termination IP address !--- is in the profile: Jan 30 12:56:30:
AAA/AUTHOR/VPDN: Processing AV ip-addresses=1.1.1.1
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.31.1.56
Jan 30 12:17:09: As1 VPDN: Get tunnel info for rtp.cisco.com with LAC
rtp_tunnel, IP 10.31.1.56
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x278B90) user='rtp.cisco.com'
ruser='' port='Async1'
rem_addr='' authn_type=NONE service=LOGIN priv=0
!--- If the wrong tunnel termination IP !--- address is in the profile: Jan 30 12:56:30: As1
VPDN: Forward to address 1.1.1.1
!--- The connection eventually drops on this end and no !--- debug is seen on the other end. Jan
Jan 30 12:17:09: As1 VPDN: Forward to address 10.31.1.56 Jan 30 12:17:09: As1 VPDN: Forwarding...
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1 Jan 30 12:17:09: AAA: name=Async1
flags=0x11 type=4 shelf=0 slot=0 adapter=0 port=1 channel=0 Jan 30 12:17:09: AAA/AUTHEN:
create_user (0x22CDEC) user='janedoe@rtp.cisco.com' ruser='' port='Async1' rem_addr='async'
authn_type=CHAP service=PPP priv=1 Jan 30 12:17:09: As1 VPDN: Bind interface direction=1 Jan 30
12:17:09: Tnl/Cl 74/1 L2TP: Session FS enabled Jan 30 12:17:09: Tnl/Cl 74/1 L2TP: Session state
change from idle to wait-for-tunnel Jan 30 12:17:09: As1 74/1 L2TP: Create session Jan 30
12:17:09: Tnl 74 L2TP: SM State idle Jan 30 12:17:09: Tnl 74 L2TP: O SCCRQ Jan 30 12:17:09: Tnl
74 L2TP: Tunnel state change from idle to wait-ctl-reply Jan 30 12:17:09: Tnl 74 L2TP: SM State
wait-ctl-reply Jan 30 12:17:09: As1 VPDN: janedoe@rtp.cisco.com is forwarded Jan 30 12:17:10:
Tnl 74 L2TP: I SCCRP from ABCDE Jan 30 12:17:10: Tnl 74 L2TP: Got a challenge from remote peer,
ABCDE Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1 Jan 30 12:17:10: AAA/AUTHEN:
create_user (0x23232C) user='rtp_tunnel' ruser='' port='' rem_addr='' authn_type=CHAP
service=PPP priv=1 Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): port='' list='default'
action=SENDAUTH service=PPP Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): found list default
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = UNKNOWN Jan 30 12:17:10: AAA/AUTHEN/START
(1598999635): Method=TACACS+ Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193
id=1598999635 Jan 30 12:17:10: TAC+: ver=192 id=1598999635 received AUTHEN status = ERROR Jan 30
12:17:10: AAA: parse name= idb type=-1 tty=-1 Jan 30 12:17:10: AAA/AUTHEN: create_user
(0x232470) user='rtp_tunnel' ruser='' port='' rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:10: TAC+: ver=192 id=3400389836 received AUTHEN status = PASS Jan 30 12:17:10:

```

```

AAA/AUTHEN: free_user (0x232470) user='rtp_tunnel' ruser='' port='' rem_addr='' authen_type=CHAP
service=PPP priv=1 Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = PASS Jan 30 12:17:10:
AAA/AUTHEN: free_user (0x23232C) user='rtp_tunnel' ruser='' port='' rem_addr='' authen_type=CHAP
service=PPP priv=1 !--- Change the CHAP passwords. The password rtp_tunnel !--- in the LAC
TACACS+ users' file does not match the !--- password for "local name ABCDE" from the router !---
in the LNS TACACS+ users' file: Jan 30 13:24:23: Tnl 88 L2TP: Tunnel Authentication fails for
ABCDE
Jan 30 13:24:23: Tnl 88 L2TP: Expected 7C959CA96C1E4AAA68BB3D481249488B
Jan 30 13:24:23: Tnl 88 L2TP: Got E4118FB4C8C4467EA4BF8872276C20B2

Jan 30 12:17:10: Tnl 74 L2TP: Got a response from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): found list default
Jan 30 12:17:10: AAA/AUTHEN (2964849625): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=2964849625
20:03:20: %LINEPROTO-5-UPDOWN: Line protocol on Interface Async1,
changed state to up
Jan 30 12:17:11: TAC+: ver=192 id=2964849625 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel is not open
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel is not open
Jan 30 12:17:11: TAC+: ver=192 id=1474818051 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FC8C) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (2964849625): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FBA4) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel state change from wait-ctl-reply to
established
Jan 30 12:17:11: Tnl 74 L2TP: O SCCCN to ABCDE tnlid 56
Jan 30 12:17:11: Tnl 74 L2TP: SM State established
Jan 30 12:17:11: As1 74/1 L2TP: O ICRQ to ABCDE 56/0
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-for-tunnel
to wait-reply
Jan 30 12:17:11: Tnl 74 L2TP: Dropping old CM, Ns 0, expected 1
Jan 30 12:17:11: As1 74/1 L2TP: O ICCN to ABCDE 56/1
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-reply to
established
LAC#

```

[O que pode dar errado – Depuração inadequada a partir do LNS](#)

Esta saída de depuração inclui comentários sobre onde a sequência para quando o roteador está configurado incorretamente.

LNS#**show debug**

General OS:

AAA Authentication debugging is on

AAA Authorization debugging is on

AAA Accounting debugging is on

```
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LNS#
Jan 30 12:17:09: L2TP: I SCCRQ from rtp_tunnel tnl 74
Jan 30 12:17:09: Tnl 56 L2TP: New tunnel created for remote rtp_tunnel,
address 10.31.1.144

!--- Instead of the LAC sending the "rtp_tunnel" !--- (see the user profile on the TACACS+
server), it sends "junk". !--- We are expecting "rtp_tunnel" as in "accept dialin l2tp !---
virtual-template 1 remote rtp_tunnel" in this configuration: Jan 30 13:05:16: L2TP: I SCCRQ from
junk tnl 81
Jan 30 13:05:16: L2X: Never heard of junk
Jan 30 13:05:16: L2TP: Could not find info block for junk
Jan 30 12:17:09: Tnl 56 L2TP: Got a challenge in SCCRQ, rtp_tunnel
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x21F6D0) user='ABCDE'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): found list default
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = UNKNOWN
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): Method=TACACS+
Jan 30 12:17:09: TAC+: send AUTHEN/START packet ver=193 id=3194595626
Jan 30 12:17:09: TAC+: ver=192 id=3194595626 received AUTHEN status = ERROR
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: TAC+: ver=192 id=3639011179 received AUTHEN status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x21F6D0) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: Tnl 56 L2TP: O SCCRP to rtp_tunnel tnlid 74
Jan 30 12:17:09: Tnl 56 L2TP: Tunnel state change from idle to wait-ctl-reply
Jan 30 12:17:10: Tnl 56 L2TP: O Resend SCCRP, flg TLF, ver 2, len 152,
tnl 74, cl 0, ns 0, nr 1
Jan 30 12:17:10: Tnl 56 L2TP: I SCCCN from rtp_tunnel tnl 74
Jan 30 12:17:10: Tnl 56 L2TP: Got a Challenge Response in SCCCN from rtp_tunnel
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/STARTTranslating "rtp.cisco.com"
(4117701992): port='' list='default' action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): found list default
Jan 30 12:17:10: AAA/AUTHEN (4117701992): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=4117701992
Jan 30 12:17:11: TAC+: ver=192 id=4117701992 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: TAC+: ver=192 id=2827432721 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (4117701992): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
```

```

Jan 30 12:17:11: Tnl 56 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel state change from wait-ctl-reply
to established
Jan 30 12:17:11: Tnl 56 L2TP: SM State established
Jan 30 12:17:11: Tnl 56 L2TP: I ICRQ from rtp_tunnel tnl 74
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session FS enabled
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: New session created
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: O ICRP to rtp_tunnel 74/1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-for-tunnel
to wait-connect
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: I ICCN from rtp_tunnel tnl 74, cl 1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-connect
to established
Jan 30 12:17:11: Vtl VTEMPLATE: Reuse Vtl, recycle queue size 0
Jan 30 12:17:11: Vtl VTEMPLATE: Hardware address 00e0.1e68.942c
Jan 30 12:17:11: Vtl VPDN: Virtual interface created for janedoe@rtp.cisco.com
Jan 30 12:17:11: Vtl VPDN: Set to Async interface
Jan 30 12:17:11: Vtl VPDN: Clone from Vtemplate 1 filterPPP=0 blocking
Jan 30 12:17:11: Vtl VTEMPLATE: Has a new cloneblk vtemplate, now it has
vtemplate
Jan 30 12:17:11: Vtl VTEMPLATE: ***** CLONE VACCESS1 *****
Jan 30 12:17:11: Vtl VTEMPLATE: Clone from Virtual-Templatel
interface Virtual-Access1
default ip address
no ip address
encap ppp
ip unnumbered Ethernet0
peer default ip address pool default
ppp authentication chap
ip unnum ethernet0
peer def ip address pool default
ppp authen chap
end

Jan 30 12:17:12: janedoe@rtp.cisco.com 56/1 L2TP: Session with no hwidb
20:12:14: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
Jan 30 12:17:13: Vtl AAA/AUTHOR/FSM: (0): LCP succeeds trivially
Jan 30 12:17:13: Vtl VPDN: Bind interface direction=2
Jan 30 12:17:13: Vtl VPDN: PPP LCP accepted rcv CONFACK
Jan 30 12:17:13: Vtl VPDN: PPP LCP accepted sent CONFACK
Jan 30 12:17:13: Vtl L2X: Discarding packet because of no mid/session
Jan 30 12:17:13: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
Jan 30 12:17:13: AAA: name=Virtual-Access1 flags=0x11 type=5 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:13: AAA/AUTHEN: create_user (0x1F5100) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): port='Virtual-Access1' list=''
action=LOGIN service=PPP
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): using "default" list
Jan 30 12:17:13: AAA/AUTHEN (562517969): status = UNKNOWN
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): Method=TACACS+
Jan 30 12:17:13: TAC+: send AUTHEN/START packet ver=193 id=562517969
Jan 30 12:17:14: TAC+: ver=192 id=562517969 received AUTHEN status = GETPASS
Jan 30 12:17:14: AAA: parse name=Virtual-Access1 idb type=-1 tty=-1
Jan 30 12:17:14: AAA: name=Virtual-Access1 flags=0x11 type=6 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:14: AAA/AUTHEN: create_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: TAC+: ver=192 id=2384902384 received AUTHEN status = PASS
Jan 30 12:17:14: AAA/AUTHEN: free_user (0x1F5270) user='janedoe@rtp.cisco.com'

```

ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1

!--- Here, the tunnel is ok, but the user !--- enters a bad password in dialing: Jan 30

13:39:44: AAA/AUTHEN (1958732267): status = FAIL

21:34:45: %VPDN-6-AUTHENFAIL: L2F HGW 10.31.1.144, AAA authentication failure for Vii user

janedoe@rtp.cisco.com; Authentication failure

Jan 30 12:17:14: AAA/AUTHEN (562517969): status = PASS

Jan 30 12:17:14: Vii AAA/AUTHOR/LCP: Authorize LCP

Jan 30 12:17:14: AAA/AUTHOR/LCP Vii (413543389): Port='Virtual-Access1'
list='' service=NET

Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) user='janedoe@rtp.cisco.com'

Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) send AV service=ppp

Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) send AV protocol=lcp

Jan 30 12:17:14: AAA/AUTHOR/LCP (413543389) found list "default"

Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) Method=TACACS+

Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): user=janedoe@rtp.cisco.com

Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV service=ppp

Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV protocol=lcp

Jan 30 12:17:14: TAC+: (413543389): received author response status = PASS_ADD

Jan 30 12:17:14: AAA/AUTHOR (413543389): Post authorization status = PASS_ADD

Jan 30 12:17:14: AAA/ACCT/NET/START User janedoe@rtp.cisco.com, Port
Virtual-Access1, List ""

Jan 30 12:17:14: AAA/ACCT/NET: Found list "default"

Jan 30 12:17:14: Vii AAA/AUTHOR/FSM: (0): Can we start IPCP?

Jan 30 12:17:14: AAA/AUTHOR/FSM Vii (1358526470): Port='Virtual-Access1'
list='' service=NET

Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) user='janedoe@rtp.cisco.com'

Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) send AV service=ppp

Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) send AV protocol=ip

Jan 30 12:17:14: AAA/AUTHOR/FSM (1358526470) found list "default"

Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) Method=TACACS+

Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): user=janedoe@rtp.cisco.com

Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV service=ppp

Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV protocol=ip

Jan 30 12:17:14: TAC+: (1358526470): received author response status = PASS_ADD

Jan 30 12:17:14: AAA/AUTHOR (1358526470): Post authorization status = PASS_ADD

Jan 30 12:17:14: Vii AAA/AUTHOR/FSM: We can start IPCP

Jan 30 12:17:14: TAC+: (1442592025): received acct response status = UNKNOWN

20:12:16: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV service=ppp

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV protocol=ip

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Authorization succeeded

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,
we want 0.0.0.0

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0,
we want 10.6.1.1

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV service=ppp

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV protocol=ip

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Authorization succeeded

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,
we want 10.6.1.1

Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Start. Her address 10.6.1.1,
we want 10.6.1.1

Jan 30 12:17:16: AAA/AUTHOR/IPCP Vii (3572380713): Port='Virtual-Access1'
list='' service=NET

Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) user='janedoe@rtp.cisco.com'

Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) send AV service=ppp

Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) send AV protocol=ip

Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) send AV addr*10.6.1.1

Jan 30 12:17:16: AAA/AUTHOR/IPCP (3572380713) found list "default"

```
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) Method=TACACS+
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): user=janedoe@rtp.cisco.com
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV addr*10.6.1.1
Jan 30 12:17:17: TAC+: (3572380713): received author response status = PASS_ADD
Jan 30 12:17:17: AAA/AUTHOR (3572380713): Post authorization status = PASS_ADD
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV addr*10.6.1.1
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Done. Her address 10.6.1.1,
                    we want 10.6.1.1
LNS#
```

Registros de relatório de LNS

Isso está no servidor LNS TACACS+.

```
Sat Jan 30 05:27:01 1999 10.31.1.56 janedoe@rtp.cisco.com
Virtual-Access1 unknown
start task_id=4 start_time=917700054 timezone=UTC service=ppp
```

```
Sat Jan 30 05:27:27 1999 10.31.1.56 janedoe@rtp.cisco.com
Virtual-Access1 unknown
stop task_id=4 start_time=917700054 timezone=UTC service=ppp
protocol=ip addr=10.6.1.1 disc-cause=2 disc-cause-ext=1011
pre-bytes-in=0 pre-bytes-out=8
pre-paks-in=0 pre-paks-out=2 bytes_in=862 bytes_out=142
paks_in=19 paks_out=8 pre-session-time=1
```

Troubleshoot

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

Comandos para Troubleshooting

Observação: antes de emitir comandos **debug**, consulte [Informações importantes sobre comandos debug](#).

- **debug aaa authentication** — Exibe informações sobre autenticação AAA/TACACS+.
- **debug aaa authorization** — Exibe informações sobre autorização AAA/TACACS+.
- **debug aaa accounting** — Exibe informações sobre eventos explicáveis à medida que ocorrem. As informações exibidas por esse comando são independentes do protocolo de relatório usado para transferência das informações de relatório para um servidor.
- **debug tacacs+** — Exibe informações detalhadas de depuração associadas ao TACACS+.
- **debug vtemplate** — Exibe informações de clonagem para uma interface de acesso virtual a partir do tempo em que elas são clonadas de um molde virtual até o tempo em que a interface de acesso virtual cai, quando a ligação termina.
- **debug vpdn error** — Exibe erros que evitam que um túnel de PPP seja estabelecido ou erros que fazem com que um túnel estabelecido seja fechado.
- **debug vpdn events** — Exibe mensagens sobre eventos que fazem parte do estabelecimento ou encerramento normal de túneis PPP.

- **debug vpdn l2x-errors** — Exibe erros de protocolo da Camada 2 que impedem o estabelecimento da Camada 2 ou impedem sua operação normal.
- **debug vpdn l2x-events** — Exibe mensagens sobre eventos que fazem parte do estabelecimento ou encerramento normal do túnel PPP para a Camada 2.

Saída de depurações

Boa depuração a partir do roteador LAC

```
LAC#show debug
General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LAC#
Jan 30 12:17:09: As1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
20:03:18: %LINK-3-UPDOWN: Interface Async1, changed state to up
Jan 30 12:17:09: As1 VPDN: Looking for tunnel -- rtp.cisco.com --
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x278B90) user='rtp.cisco.com'
ruser=''
port='Async1' rem_addr='' authen_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447): Port='Async1' list='default'
service=NET
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) user='rtp.cisco.com'
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447) found list "default"
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) Method=TACACS+
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): user=rtp.cisco.com
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV protocol=vpdn
Jan 30 12:17:09: TAC+: (898425447): received author response status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR (898425447): Post authorization status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-id=rtp_tunnel
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.31.1.56
Jan 30 12:17:09: As1 VPDN: Get tunnel info for rtp.cisco.com with LAC
rtp_tunnel, IP 10.31.1.56
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x278B90) user='rtp.cisco.com' ruser=''
port='Async1' rem_addr='' authen_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: As1 VPDN: Forward to address 10.31.1.56
Jan 30 12:17:09: As1 VPDN: Forwarding...
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x22CDEC) user='janedoe@rtp.cisco.com'
ruser='' port='Async1' rem_addr='async' authen_type=CHAP
```

```
service=PPP priv=1
Jan 30 12:17:09: As1 VPDN: Bind interface direction=1
Jan 30 12:17:09: Tnl/C1 74/1 L2TP: Session FS enabled
Jan 30 12:17:09: Tnl/C1 74/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:09: As1 74/1 L2TP: Create session
Jan 30 12:17:09: Tnl 74 L2TP: SM State idle
Jan 30 12:17:09: Tnl 74 L2TP: O SCCRQ
Jan 30 12:17:09: Tnl 74 L2TP: Tunnel state change from idle to wait-ctl-reply
Jan 30 12:17:09: Tnl 74 L2TP: SM State wait-ctl-reply
Jan 30 12:17:09: As1 VPDN: janedoe@rtp.cisco.com is forwarded
Jan 30 12:17:10: Tnl 74 L2TP: I SCCRP from ABCDE
Jan 30 12:17:10: Tnl 74 L2TP: Got a challenge from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): found list default
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=1598999635
Jan 30 12:17:10: TAC+: ver=192 id=1598999635 received AUTHEN status = ERROR
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: TAC+: ver=192 id=3400389836 received AUTHEN status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: Tnl 74 L2TP: Got a response from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): found list default
Jan 30 12:17:10: AAA/AUTHEN (2964849625): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=2964849625
20:03:20: %LINEPROTO-5-UPDOWN: Line protocol on Interface Async1,
changed state to up
Jan 30 12:17:11: TAC+: ver=192 id=2964849625 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel
is not open
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel
is not open
Jan 30 12:17:11: TAC+: ver=192 id=1474818051 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (2964849625): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FBA4) user='rtp_tunnel'
```



```
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel state change from wait-ctl-reply to
established
Jan 30 12:17:11: Tnl 74 L2TP: O SCCCN to ABCDE tnlid 56
Jan 30 12:17:11: Tnl 74 L2TP: SM State established
Jan 30 12:17:11: As1 74/1 L2TP: O ICRQ to ABCDE 56/0
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-for-tunnel
to wait-reply
Jan 30 12:17:11: Tnl 74 L2TP: Dropping old CM, Ns 0, expected 1
Jan 30 12:17:11: As1 74/1 L2TP: O ICCN to ABCDE 56/1
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-reply to
established
LAC#
```

[Boa depuração a partir do roteador LNS](#)

LNS#**show debug**

General OS:

AAA Authentication debugging is on

AAA Authorization debugging is on

AAA Accounting debugging is on

VPN:

L2X protocol events debugging is on

L2X protocol errors debugging is on

VPDN events debugging is on

VPDN errors debugging is on

VTEMPLATE:

Virtual Template debugging is on

LNS#

```
Jan 30 12:17:09: L2TP: I SCCRQ from rtp_tunnel tnl 74
```

```
Jan 30 12:17:09: Tnl 56 L2TP: New tunnel created for remote
rtp_tunnel, address 10.31.1.144
```

```
Jan 30 12:17:09: Tnl 56 L2TP: Got a challenge in SCCRQ, rtp_tunnel
```

```
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
```

```
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x21F6D0) user='ABCDE'
```

```
ruser='' port=''
```

```
rem_addr='' authen_type=CHAP service=PPP priv=1
```

```
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): port='' list='default'
action=SENDAUTH service=PPP
```

```
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): found list default
```

```
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = UNKNOWN
```

```
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): Method=TACACS+
```

```
Jan 30 12:17:09: TAC+: send AUTHEN/START packet ver=193 id=3194595626
```

```
Jan 30 12:17:09: TAC+: ver=192 id=3194595626 received AUTHEN status = ERROR
```

```
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
```

```
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x2281AC) user='ABCDE'
```

```
ruser='' port=''
```

```
rem_addr='' authen_type=CHAP service=PPP priv=1
```

```
Jan 30 12:17:09: TAC+: ver=192 id=3639011179 received AUTHEN status = PASS
```

```
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x2281AC) user='ABCDE' ruser='' port=''
```

```
rem_addr='' authen_type=CHAP service=PPP priv=1
```

```
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = PASS
```

```
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x21F6D0) user='ABCDE' ruser='' port=''
```

```
rem_addr='' authen_type=CHAP service=PPP priv=1
```

```
Jan 30 12:17:09: Tnl 56 L2TP: O SCCRP to rtp_tunnel tnlid 74
```

```
Jan 30 12:17:09: Tnl 56 L2TP: Tunnel state change from idle to
```

```
wait-ctl-reply
```

```
Jan 30 12:17:10: Tnl 56 L2TP: O Resend SCCRP, flg TLF, ver 2, len 152,
tnl 74, cl 0, ns 0, nr 1
```

```
Jan 30 12:17:10: Tnl 56 L2TP: I SCCCN from rtp_tunnel tnl 74
```

```
Jan 30 12:17:10: Tnl 56 L2TP: Got a Challenge Response in SCCCN from rtp_tunnel
```

```
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x227F3C) user='ABCDE'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/STARTTranslating "rtp.cisco.com"
(4117701992): port='' list='default' action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): found list default
Jan 30 12:17:10: AAA/AUTHEN (4117701992): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=4117701992
Jan 30 12:17:11: TAC+: ver=192 id=4117701992 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: TAC+: ver=192 id=2827432721 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (4117701992): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel state change from wait-ctl-reply
to established
Jan 30 12:17:11: Tnl 56 L2TP: SM State established
Jan 30 12:17:11: Tnl 56 L2TP: I ICRQ from rtp_tunnel tnl 74
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session FS enabled
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: New session created
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: O ICRP to rtp_tunnel 74/1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-for-tunnel
to wait-connect
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: I ICCN from rtp_tunnel tnl 74, cl 1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-connect
to established
Jan 30 12:17:11: Vif VTEMPLATE: Reuse Vif, recycle queue size 0
Jan 30 12:17:11: Vif VTEMPLATE: Hardware address 00e0.1e68.942c
Jan 30 12:17:11: Vif VPDN: Virtual interface created for janedoe@rtp.cisco.com
Jan 30 12:17:11: Vif VPDN: Set to Async interface
Jan 30 12:17:11: Vif VPDN: Clone from Vtemplate 1 filterPPP=0 blocking
Jan 30 12:17:11: Vif VTEMPLATE: Has a new cloneblk vtemplate, now it has vtemplate
Jan 30 12:17:11: Vif VTEMPLATE: ***** CLONE VACCESS1 *****
Jan 30 12:17:11: Vif VTEMPLATE: Clone from Virtual-Templatel
interface Virtual-Access1
default ip address
no ip address
encap ppp
ip unnumbered Ethernet0
peer default ip address pool default
ppp authentication chap
ip unnum ethernet0
peer def ip address pool default
ppp authen chap
end

Jan 30 12:17:12: janedoe@rtp.cisco.com 56/1 L2TP: Session with no hwidb
20:12:14: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
Jan 30 12:17:13: Vif AAA/AUTHOR/FSM: (0): LCP succeeds trivially
Jan 30 12:17:13: Vif VPDN: Bind interface direction=2
Jan 30 12:17:13: Vif VPDN: PPP LCP accepted rcv CONFACK
Jan 30 12:17:13: Vif VPDN: PPP LCP accepted sent CONFACK
Jan 30 12:17:13: Vif L2X: Discarding packet because of no mid/session
Jan 30 12:17:13: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
Jan 30 12:17:13: AAA: name=Virtual-Access1 flags=0x11 type=5 shelf=0 slot=0
```

```
adapter=0 port=1 channel=0
Jan 30 12:17:13: AAA/AUTHEN: create_user (0x1F5100) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): port='Virtual-Access1' list=''
action=LOGIN service=PPP
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): using "default" list
Jan 30 12:17:13: AAA/AUTHEN (562517969): status = UNKNOWN
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): Method=TACACS+
Jan 30 12:17:13: TAC+: send AUTHEN/START packet ver=193 id=562517969
Jan 30 12:17:14: TAC+: ver=192 id=562517969 received AUTHEN status = GETPASS
Jan 30 12:17:14: AAA: parse name=Virtual-Access1 idb type=-1 tty=-1
Jan 30 12:17:14: AAA: name=Virtual-Access1 flags=0x11 type=6 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:14: AAA/AUTHEN: create_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: TAC+: ver=192 id=2384902384 received AUTHEN status = PASS
Jan 30 12:17:14: AAA/AUTHEN: free_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: AAA/AUTHEN (562517969): status = PASS
Jan 30 12:17:14: Vi1 AAA/AUTHOR/LCP: Authorize LCP
Jan 30 12:17:14: AAA/AUTHOR/LCP Vi1 (413543389): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV protocol=lcp
Jan 30 12:17:14: AAA/AUTHOR/LCP (413543389) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV protocol=lcp
Jan 30 12:17:14: TAC+: (413543389): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (413543389): Post authorization status = PASS_ADD
Jan 30 12:17:14: AAA/ACCT/NET/START User janedoe@rtp.cisco.com,
Port Virtual-Access1, List ""
Jan 30 12:17:14: AAA/ACCT/NET: Found list "default"
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: (0): Can we start IPCP?
Jan 30 12:17:14: AAA/AUTHOR/FSM Vi1 (1358526470): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV protocol=ip
Jan 30 12:17:14: AAA/AUTHOR/FSM (1358526470) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV protocol=ip
Jan 30 12:17:14: TAC+: (1358526470): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (1358526470): Post authorization status = PASS_ADD
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: We can start IPCP
Jan 30 12:17:14: TAC+: (1442592025): received acct response status = UNKNOWN
20:12:16: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
```

```
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 10.6.1.1, we want 10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP Vi1 (3572380713): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) user='janedoe@rtp.cisco.com'
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV addr*10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP (3572380713) found list "default"
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) Method=TACACS+
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): user=janedoe@rtp.cisco.com
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV addr*10.6.1.1
Jan 30 12:17:17: TAC+: (3572380713): received author response status = PASS_ADD
Jan 30 12:17:17: AAA/AUTHOR (3572380713): Post authorization status = PASS_ADD
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV addr*10.6.1.1
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Done. Her address 10.6.1.1, we want 10.6.1.1
LNS#
```

[Informações Relacionadas](#)

- [Página de suporte de UNIX Cisco Secure](#)
- [Página de Suporte do TACACS/TACACS+](#)
- [TACACS+ na documentação do Cisco IOS](#)
- [Cisco Secure ACS para página de suporte do Windows](#)
- [Suporte Técnico - Cisco Systems](#)