

200/300ç³»â^—ç®;ç?†âž<ä°¤æ?Çæœ°ä,Šçš,,RADIUS

ç>®æ ‡

è¿œç<æŽ^æ?fæ<”â...¥ç””æ^·æœ?âŠj(RADIUS)æ~ä,ççš?â®%â...”æœ?âŠj¼Çç””ä°Žæ””â...æœ%

é€,ç””è®¾¼â¤‡ | è½~ä»¶ç%œ^æœ¬

- SF/SG 200ç³»â^— â€” 1.2.9.x
- SF/SG 300ç³»â^— â€” 1.2.9.x

RADIUSé»~è®¤é...?ç½®

æœ¬èš,æœ‡¼æ,â®œæ^?RADIUSæœ?âŠjâ™” çš,,é»~è®¤é...?ç½®â€,è¿™ä°>é»~è®¤â€¼â?ç””ä°Žè

ç¬† 1 æŸ

ç™»â½·â°Webé...?ç½®â®žç””ç<â°?â¹¶é%œæ©Security >

RADIUSâ€,â°†æ%“â¼œRADIUSé¼?ç¼š

RADIUS

RADIUS Accounting: Port Based Access Control (802.1X, MAC Based)
 Management Access
 Both Port Based Access Control and Management Access
 None

Use Default Parameters

IP Version: Version 6 Version 4

Retries: (Range: 1 - 10, Default: 3)

Timeout for Reply: sec. (Range: 1 - 30, Default: 3)

Dead Time: min. (Range: 0 - 2000, Default: 0)

Key String: Encrypted
 Plaintext (0/128 Characters Used)

RADIUS Table

<input type="checkbox"/>	Server	Priority	Key String(Encrypted)	Timeout for Reply	Authentication Port	Accounting Port	Retries	Dead Time	Usage Type
0 results found.									

æœ¬æ¬¼ä,çš,,â¾ç%¼æ?¥è†ªSG300âž<â°·ä°¤æ?Çæœ°â€,

æŸéª 2

åœ“RADIUS Accountingå—æ@µ, i¼Œç, 1á†»ä»Ÿä, <é€%œj 1ä1ä, €1¼š

- åŸªªŸç«-åŸçš,,èŒžé—Œæššâ^Œi¼^åŸªªŸ802.1xã€ŒMACi¼%œ â€”
ä½žç”“RADIUSæœŸšjâ™” èž>èjŒ802.1xç«-åŸèè°ä, Ÿã€,
- çŒjçŸŸ†èŒžé—Œ â€” ä½žç”“RADIUSæœŸšjâ™” èž>èjŒçŸ™»â½•èè°ä, Ÿã€,
- åŸªªŸç«-åŸçš,,èŒžé—Œæššâ^ŒâŸçŒjçŸŸ†èŒžé—Œ â€”
â-1802.1xâŸçŸ™»â½•èè°ä, Ÿä½žç”“RADIUSæœŸšjâ™” ã€,
- æ— â€” ä, Ÿä½žç”“RADIUSæœŸšjâ™” èž>èjŒèè°ä, Ÿã€,

Radiusèè°ä, Ÿåœ”SG200ç³»â^—äªæŸçæœ°ä, šä, ŸåŸç””ã€,

æŸéª 3

åœ”ä½žç””é»èŒªŸŸ,æ°(Use Default Parameters)éf”â†çš,,é†Ÿè-æ-ja°(Retries)å—æ@µ, i¼Œçè¼”â...ŸäªæŸçæœ°â-1RADIUSæœŸšjâ™”

æŸéª 4

åœ”Timeout for Replyå—æ@µ, i¼Œçè¼”â...Ÿæ-æ-ja°Ÿè-â-1RADIUSæœŸšjâ™” èž>èjŒè°«ä½žéªŒè-çš,,æ—Œé—i¼”

æŸéª 5

åœ”Dead Timeå—æ@µ, i¼Œçè¼”â...ŸäªæŸçæœ°âª†æ— å”Ÿâ”RADIUSæœŸšjâ™” âŸæ~žä, °deadâŸçš»è†³ä, ä

æŸéª 6

åœ”Key Stringå—æ@µ, i¼Œçè¼”â...Ÿç””âžšªæŸçæœ°âŸRADIUSæœŸšjâ™” â¹<é—çš,,è°«ä½žéªŒè-âŸçšš å

- åš å† â€”
âl,æžœæ, æœ%œŸè†ªâ...Œâ»-èŒ¼âªçš,,åš å†â†éŸi¼Œçè-è¼”â...ŸèŸâ†éŸã€,
- æžæ-† â€”
âl,æžœæ, æ²jæœ%œŸè†ªâ...Œâ»-èŒ¼âªçš,,åš å†â†éŸi¼Œçè-â»ŸçŸ-æ-†æœ-â½çâ¼Ÿè¼”â...

æŸéª 7

åŸªªŸ»Applyå»Ÿä, ŸåŸèžªªªœ”èŒªœ€¼â¹Œä½žç”â...ŒåŸç”” âžšRADIUSæœŸšjâ™” ã€,

æ»»åš /ç¼-è¼”RADIUSæœŸšjâ™”

æœ-éf”â†æŸŸä¼ªªª, €ä,ªªªæŸèžçŸ”i¼Œçè-æžšâ, ä½ªªŸ200/300ç³»â^—çŒjçŸŸ†âžªªªæŸçæœ°

ç™»â½•â°Webé... ç½®â®žç”” ç” ‘â°â¹¶lé%æ©Security >

RADIUSâ€„,â°†æ%“â¼RADIUSé;â€”ç¼š

<input type="checkbox"/>	Server	Priority	Key String(Encrypted)	Timeout for Reply	Authentication Port	Accounting Port	Retries	Dead Time	Usage Type
0 results found.									
<input type="button" value="Add..."/> <input type="button" value="Edit..."/> <input type="button" value="Delete"/>									
<input type="button" value="Display Sensitive Data As Plaintext"/>									

æŸéª 2

â€”RADIUS Tableé”â^†i¼Eâ€”â†»Addâ€„,â†°çŽAdd Radius Serverçª—â€”Eã€„,

è¼ç¼–è¼¼â½”â%â€”Radiusæœâ€”âš;â™”i¼Eè–â€”â†»Editâ€”ç¼–è¼¼‘æ%œœçš,,RADIUSæœâ€”âš;â™”â

Server Definition: By IP address By name

IP Version: Version 6 Version 4

IPv6 Address Type: Link Local Global

Link Local Interface:

Server IP Address/Name:

Priority: (Range: 0 - 65535)

Key String: Use Default
 User Defined (Encrypted)
 User Defined (Plaintext) (0/128 Characters Used)

Timeout for Reply: Use Default
 User Defined sec. (Range: 1 - 30, Default: 10)

Authentication Port: (Range: 0 - 65535, Default: 1812)

Accounting Port: (Range: 0 - 65535, Default: 1813)

Retries: Use Default
 User Defined (Range: 1 - 10, Default: 5)

Dead Time: Use Default
 User Defined min. (Range: 0 - 2000, Default: 5)

Usage Type: Login
 802.1x
 All

æŸéª 3

â€”Server Definitionâ€”â€”â€”i¼Eç,â†»â»Ÿâ, <é%œé;â¹<â, ç¼š

- By Name â€”â€”â€”RADIUSæœâ€”âš;â™”â@šâ¹%â°tä,â€”â€”çš°ã€„,
- By IP Address â€”â€”â€”â½ç””IPâœ°â€”â€”â€”â€”â€”RADIUSæœâ€”âš;â™”â€„,

Accounting Port—æ@µ, i¼Eè¾“á...¥RADIUSæœ•áŠjã™“ ç”“ äžè°á, çš,,UDPç«-á£ã€,

æŸéª 13

Retriesá—æ@µ, i¼Eá•á†»ä»¥ä, ä»»ä, éj¹i¼š

- ä½ç””é»è°á¼ â€” ä½ç””é»è°á¼ã€,
 - ç””æ^âšä¹%o â€”
- ä½ç””ä, á•çš,,á¼ã€, è¾”á...¥ä°æœ•çæœ°áœ” èç«èštä, °á²á’ç””Yä, ŽRADIUSæœ•áŠjã™“ çš

æŸéª 14

Dead Timeá—æ@µ, i¼Eá•á†»ä»¥ä, ä»»ä, éj¹i¼š

- ä½çç””é»è°á¼ â€” ä½çç””é»è°á¼ã€,
 - ç””æ^âšä¹%o â€”
- ä½çç””ä, á•çš,,á¼ã€, è¾”á...¥ä°æœ•çæœ°áœ£áŠšæ— á”á”RADIUSæœ•áŠjã™“ ä, á±æ•

æŸéª 15

Usage Typeá—æ@µ, i¼Eç, á†»ä»¥ä, <é%oéj¹á¹, éi¼š

- ç™»á½• â€” á¹ä°æœ•çæœ°çš,,ç@jç†á~èçè°«ä»½éªEè-ã€,
 - 802.1x -
- RADIUSæœ•áŠjã™” á°tæ£æY¥æ¹æ®802.1xáY°äžç«-á£çš,,ç½’ç»œèçé—®æŽšá^¶(PNAC
- All â€” ä½çç””ä, çšè«ä»½éªEè-ç±»ážã€,

æŸéª 16

•á†» Applyã€,

RADIUS

RADIUS Accounting: Port Based Access Control (802.1X, MAC Based)
 Management Access
 Both Port Based Access Control and Management Access
 None

Use Default Parameters

IP Version: Version 6 Version 4

Retries: (Range: 1 - 10, Default: 3)

Timeout for Reply: sec. (Range: 1 - 30, Default: 3)

Dead Time: min. (Range: 0 - 2000, Default: 0)

Key String: Encrypted
 Plaintext (0/128 Characters Used)

RADIUS Table									
<input checked="" type="checkbox"/>	Server	Priority	Key String (Encrypted)	Timeout for Reply	Authentication Port	Accounting Port	Retries	Dead Time	Usage Type
<input checked="" type="checkbox"/>	192.168.1.20	1	msllBwBuYnGQnh...	10	1812	1813	5	5	Login

æŸéª 17

i¼^â ¢ é€%oi¼%oè | ¢ â^ é™ª RADIUSæœ ¢ åš;â™™ i¼Œæœ™ RADIUSè;™ éf™ â^ti¼Œé€%oä,è | ¢ â^ é™ª çš,,

RADIUS è°«ä»½éªŒè

æfç;®é... ¢ ç½® RADIUSæœ ¢ åš;â™™ â ¢ ži¼Œæœ™ éœ€è | ¢ æœ™ äªæ ¢ çæœªšâ™™ 1â... ¶ è¿è;Œè°«ä»½éª

ç™ª 1 æŸ

ç™ª»â½ª^° Webé... ¢ ç½®â®žç™™ ç™™ <ª° ¢ i¼Œç,, ¶ â ¢ žé€%oæ<© Security > Management Access
Authenticationã€,â°†æ%°â¼Œ Management Access Authenticationé;¶ ¢ ç¼š

Management Access Authentication


Application:

Optional Methods:

Selected Methods:

Step 2


Optional Methods —> RADIUS

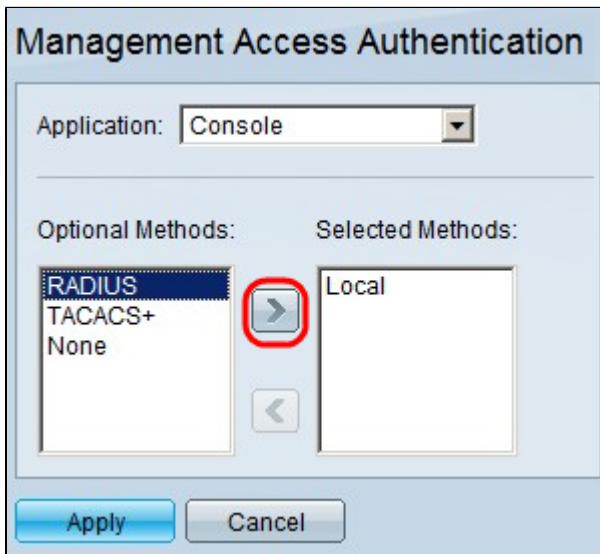

The dialog box is titled "Management Access Authentication". At the top, there is a dropdown menu for "Application" set to "Console". Below this, there are two columns: "Optional Methods" and "Selected Methods". In the "Optional Methods" column, "RADIUS" is selected and highlighted. A red circle highlights the right-pointing arrow button between the two columns. The "Selected Methods" column currently contains "Local". At the bottom, there are "Apply" and "Cancel" buttons.

Step 3

Optional Methods —> Apply

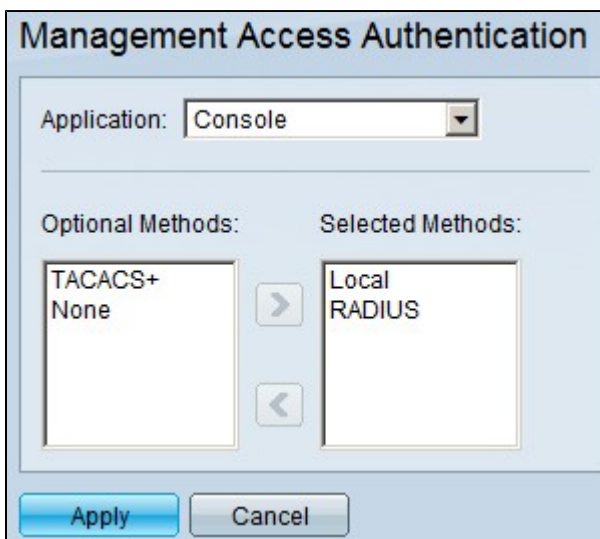

The dialog box is titled "Management Access Authentication". At the top, there is a dropdown menu for "Application" set to "Console". Below this, there are two columns: "Optional Methods" and "Selected Methods". In the "Optional Methods" column, "TACACS+" and "None" are listed. In the "Selected Methods" column, "Local" and "RADIUS" are listed. At the bottom, there are "Apply" and "Cancel" buttons.

Step 4

Optional Methods —> Apply

关于此翻译

思科采用人工翻译与机器翻译相结合的方式将此文档翻译成不同语言，希望全球的用户都能通过各自的语言得到支持性的内容。

请注意：即使是最好的机器翻译，其准确度也不及专业翻译人员的水平。

Cisco Systems, Inc. 对于翻译的准确性不承担任何责任，并建议您总是参考英文原始文档（已提供链接）。