



Overview

- [Features, on page 1](#)
- [Package Contents, on page 4](#)
- [Serial Number Locations, on page 5](#)
- [Front Panel, on page 6](#)
- [Front Panel LEDs , on page 9](#)
- [Rear Panel, on page 12](#)
- [Rear Panel LEDs, on page 15](#)
- [Power Supply, on page 17](#)
- [Hardware Specifications, on page 17](#)
- [Product ID \(PID\) Numbers, on page 18](#)
- [Power Cord Specifications, on page 19](#)

Features

The Cisco Secure Web Appliance includes the S196, S396, S696, and S696F. It helps organizations secure and control web traffic.

The Secure Web Appliance S196, S396, S696, and S696F support Cisco AsyncOS version 15.2 and later. See [Product ID \(PID\) Numbers, on page 18](#) for a list of field-replaceable product IDs (PIDs) associated with the Secure Web Appliance.

The following figures show the Cisco Secure Web Appliance series.

Figure 1: Cisco Secure Web Appliance S196 and S396



Figure 2: Cisco Secure Web Appliance S696 and S696F



The following table lists the features of the Secure Web Appliance S196, S396, S696, and S696F.

Table 1: Secure Web Appliance S196, S396, S696, and S696F Features

Feature	S196	S396	S696	S696F
Form factor	1 RU		2 RU	
Rack mount	Standard 19-inch (48.3 cm) 4-post EIA rack			
Airflow	Front to rear Cold aisle to hot aisle			
Pullout asset card	Displays the serial number			


Feature	S196	S396	S696	S696F
Grounding holes	Two threaded holes for dual-hole grounding lug Use is optional; the supported AC power supplies have internal grounding, so no additional chassis grounding is required.			
Locking faceplate	Optional			
Unit identification button	On front panel			
Power button	On front panel			
Memory	16-GB RAM	64-GB RAM	128-GB RAM	
RDIMMs Internal component only; not field-replaceable	One 16-GB SRx4 3200-MHz DIMM (8 Gb)	Two 32-GB SRx4 3200-MHz DIMM (16 Gb)	Four 32-GB DRx4 3200-MHz DIMM (8 Gb)	
Management ports	One (M1) M2 is not supported.			
Proxy ports	Two (P1 and P2)			
Traffic ports	Two (T1 and T2)			
Remote power cycling (RPC)	Accessed through the 1-Gb dedicated port			
USB ports	Two USB 3.0 Type A			
SFP+ ports	No			Six fiber optic
Supported SFP+ Note Copper SFPs are not supported.	—			SFP-10G-SR (10 Gb) Note SFP-10G-SR has been qualified by Cisco. Use only Cisco-qualified SFPs. We recommend you use SFP-10G-SR in the secure web appliance interface and the corresponding switch interface.

Feature	S196	S396	S696	S696F
Serial console port	One 1-Gb RJ45 serial port running RS-232 (RS-232D TIA-561)			
AC power supply Note Do not mix power supply type or wattage between models.	Two 1050 W AC Hot-swappable and redundant as 1+1			
Fans	Six fans for front-to-rear cooling Internal component only; not field-replaceable. If one fan fails, you must send your chassis for return material authorization (RMA).			
Storage	Two 1.2-TB SAS HDDs RAID 1, hot-swappable	Four 1.2-TB SAS HDDs RAID 10, hot-swappable	Ten 1.2-TB SAS HDDs RAID 10, hot-swappable	

Package Contents

The following figure shows the package contents for the Secure Web Appliance S196, S396, S696, and S696F. Note that the contents are subject to change and your exact contents might contain additional or fewer items.

Figure 3: Secure Web Appliance Package Contents

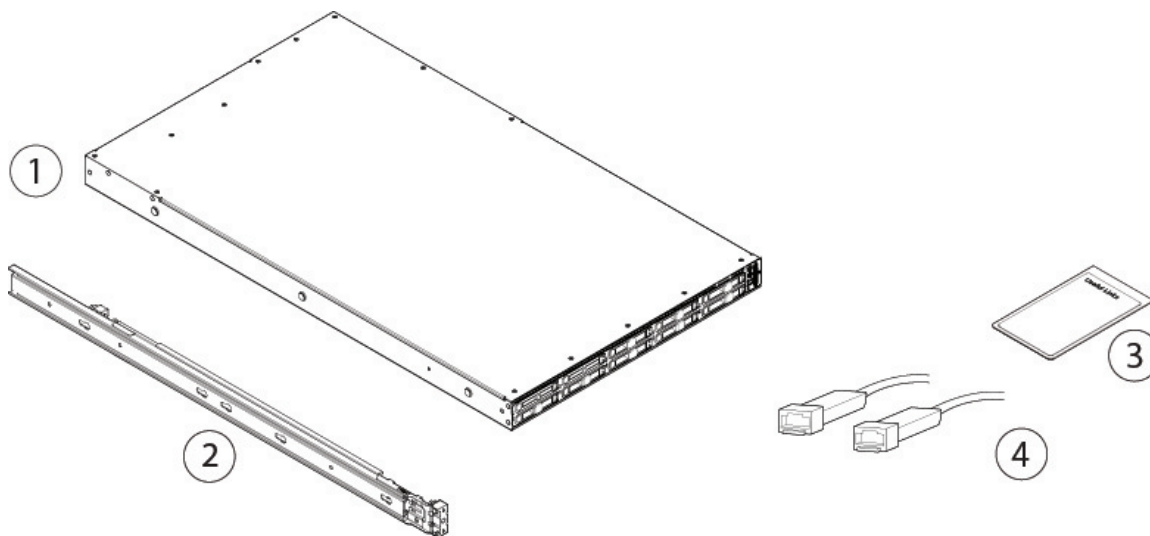


1	Chassis	2	Cisco rail kit (Cisco part number 800-43376-02)
---	---------	---	---

<p>3</p>	<p><i>Cisco Secure Web Appliance S196, S396, S696, S696F</i></p> <p>This document contains URLs that point to the hardware installation guide, regulatory compliance and safety information guide, the getting started guide, and a QR code that points to the secure web appliance Documentation Portal.</p>	<p>4</p>	<p>Two 10-Gb SFP+ fiber optic transceivers with cables</p> <p>Note Supported on the S696F. You cannot mix SFP transceiver types in the same chassis. 1-Gb SFPs are not supported on the S696F.</p>
-----------------	---	-----------------	---

Serial Number Locations

The Serial Number (SN) and the Media Access Control (MAC) address for the Secure Web Appliance S196, S396, S696, and S696F are printed on the top of the pullout asset card located on the front panel as shown in the following figure of the Secure Web Appliance S196. The PID (Product ID) and VID (Version ID) are printed on the back of the pullout asset card.

Figure 4: Serial Number on Pullout Asset Card

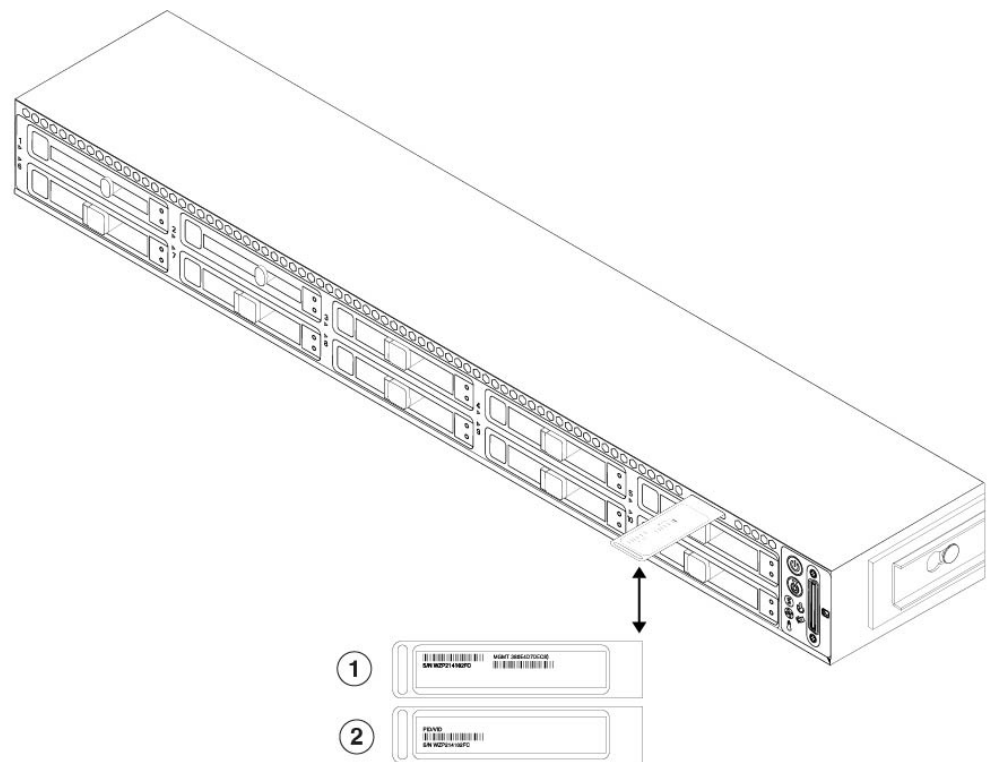


<p>1</p>	<p>Front of the pullout asset tag with the SN and MAC address</p>	<p>2</p>	<p>Bottom of the pullout asset tag with the PID and VID numbers</p>
-----------------	---	-----------------	---

The serial number is also on the label on the cover of the chassis as shown in the following figure.



Caution The cover latch on the top of the chassis cover is not supported. There are no internal field-replaceable parts in the Secure Web Appliance S196, S396, S696, and S696F.

Figure 5: Serial Number Location on Cover

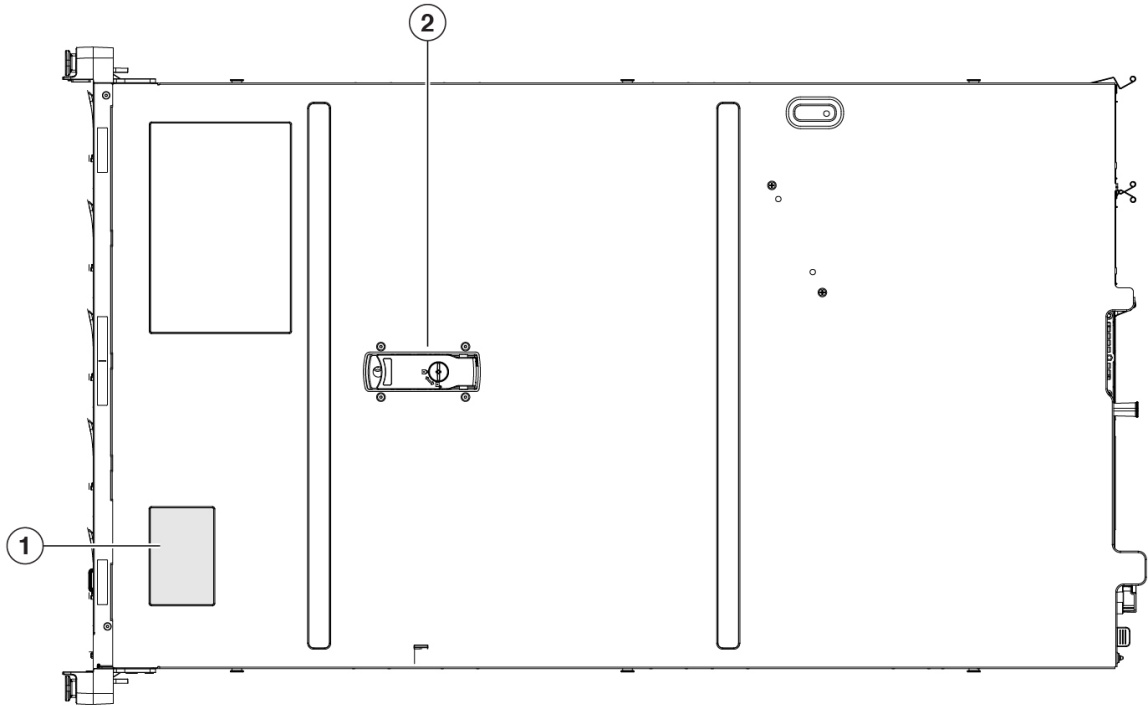


<p>1 Chassis compliance labels with the SN, MAC address, etc. and a QR code that points to the Documentation Portal</p> <p>Note Scan the QR code to go to the Documentation Portal, which has links to the product page, hardware installation guide, the regulatory and compliance guide, and the getting started guide.</p>	<p>2 Cover latch Not supported</p>
---	---

Front Panel

The following figure shows the front panel features and disk-drive configuration for the Secure Web Appliance S196. See [Front Panel LEDs](#), on page 9 for a description of the LEDs.


Figure 6: Secure Web Appliance S196 Front Panel

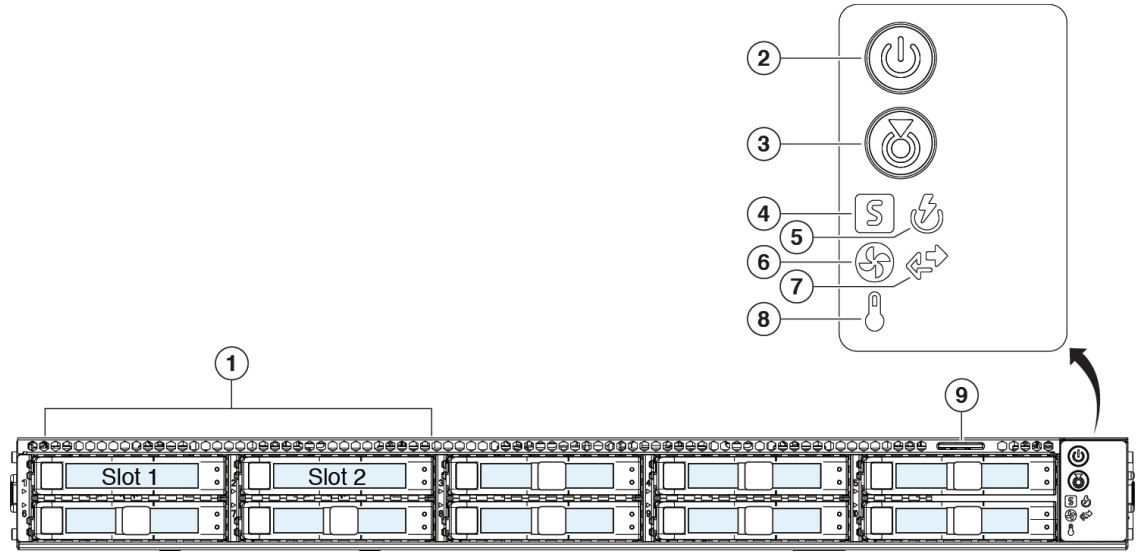

1	Drive bays Supports two 1.2-TB SAS HDDs in slots 1 and 2	2	Power button/power status LED
3	Unit identification button/LED	4	System status LED
5	Power supply status LED	6	Fan status LED
7	Network link activity LED	8	Temperature status LED
9	Pullout asset card	—	

The following figure shows the front panel features and disk-drive configuration for the Secure Web Appliance S396. See [Front Panel LEDs](#) , on page 9 for a description of the LEDs.


Figure 7: Secure Web Appliance S396 Front Panel

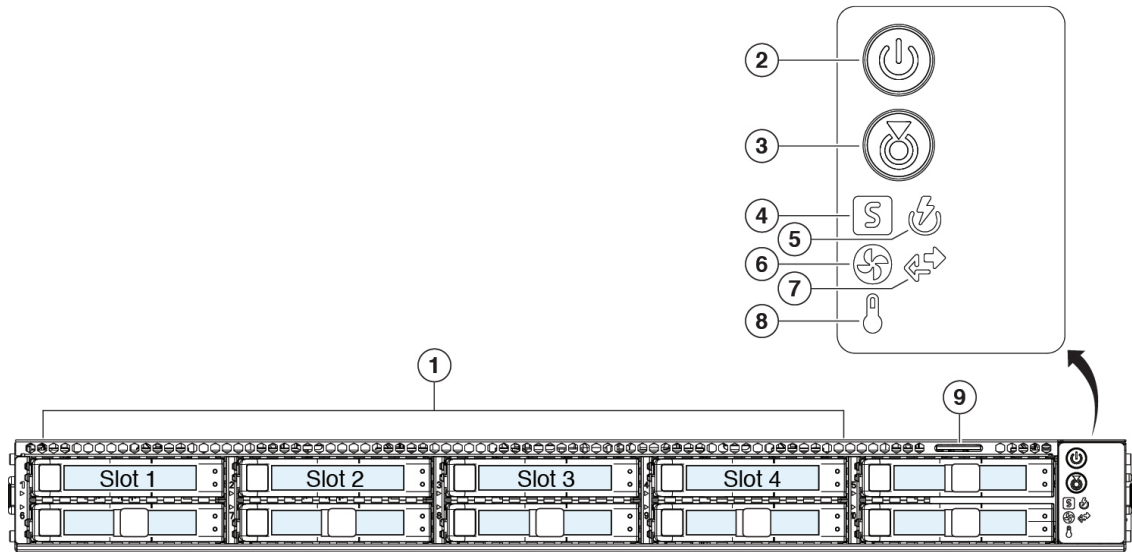

1 Drive bays Supports four 1.2-TB SAS HDDs in slots 1 through 4	2 Power button/power status LED
3 Unit identification button/LED	4 System status LED
5 Power supply status LED	6 Fan status LED
7 Network link activity LED	8 Temperature status LED
9 Pullout asset card	—

The following figure shows the front panel features and disk-drive configuration for the Secure Web Appliance S695 and S695F. See [Front Panel LEDs](#) , on page 9 for a description of the LEDs.

Figure 8: Secure Web Appliance S696 and S696F Front Panel

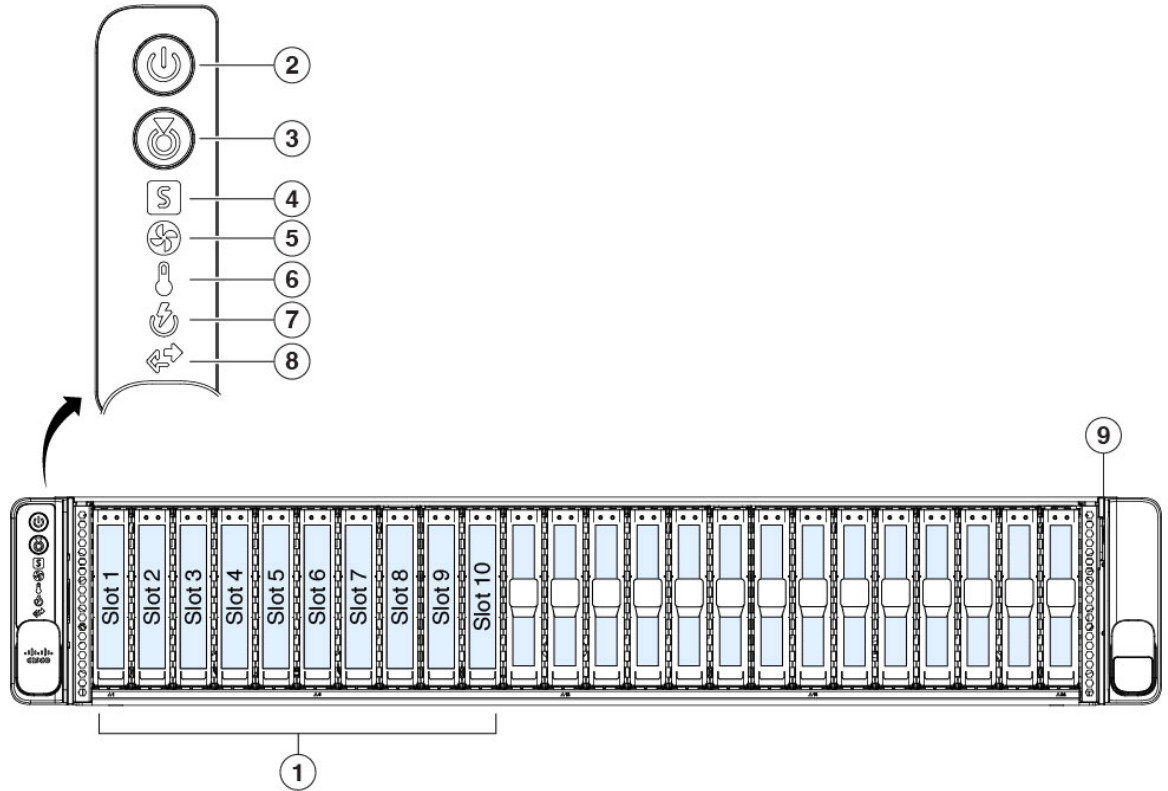


1	Drive bays Supports ten 1.2-TB SAS HDDs in slots 1 through 10	2	Power button/power status LED
3	Unit identification button/LED	4	System status LED
5	Fan status LED	6	Temperature status LED
7	Power supply status LED	8	Network link activity LED
9	Pullout asset card		—

Front Panel LEDs

The following figure shows the front panel LEDs for the Secure Web Appliance S196, S396, S696, and S696F, and describes their states.

Figure 9: Front Panel LEDs

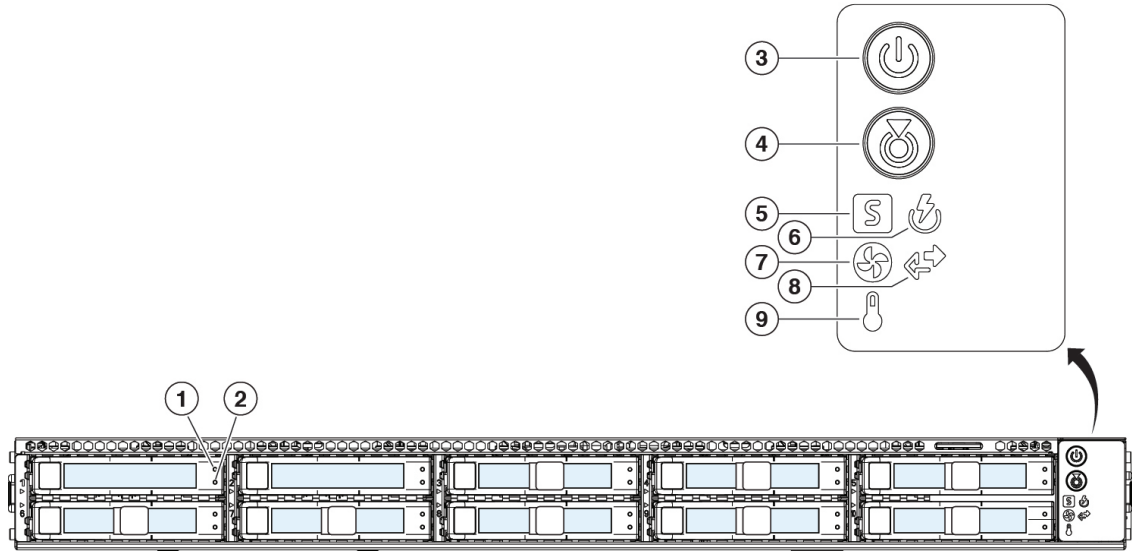


<p>1 Drive fault LED:</p> <ul style="list-style-type: none"> • Off—The drive is operating properly. • Amber—Drive fault detected. • Amber, flashing—The drive is rebuilding. • Amber, flashing with 1-second interval—Drive locate function activated in the software. 	<p>2 Drive activity LED:</p> <ul style="list-style-type: none"> • Off—There is no drive in the drive tray (no access, no fault). • Green—The drive is ready. • Green, flashing—The drive is reading or writing data.
<p>3 Power LED:</p> <ul style="list-style-type: none"> • Off—There is no AC power to the chassis. • Amber—The chassis is in standby mode. • Green—The chassis is in main power mode. Power is supplied to all components. 	<p>4 Unit identification LED:</p> <ul style="list-style-type: none"> • Off—The unit identification function is not in use. • Blue, flashing—The unit identification function is activated.

5	<p>System status LED:</p> <ul style="list-style-type: none"> • Green—The chassis is running in normal operating condition. • Green, flashing—The chassis is performing system initialization and memory check. • Amber—The chassis is in a degraded operational state (minor fault). <ul style="list-style-type: none"> • Power supply redundancy is lost. • CPUs are mismatched. • At least one CPU is faulty. • At least one DIMM is faulty. • At least one drive in a RAID configuration failed. • Amber, 2 flashes—There is a major fault with the system board. • Amber, 3 flashes—There is a major fault with the DIMMs. • Amber, 4 flashes—There is a major fault with the CPUs. 	6	<p>Power supply status LED:</p> <ul style="list-style-type: none"> • Green—All power supplies are operating normally. • Amber—One or more power supplies are in a degraded operational state. • Amber, flashing—One or more power supplies are in a critical fault state.
7	<p>Fan status LED:</p> <ul style="list-style-type: none"> • Green—All fans are operating properly. • Amber, flashing—One or more fans breached the nonrecoverable threshold. 	8	<p>Network link activity LED:</p> <ul style="list-style-type: none"> • Off—The Ethernet port link is idle. • Green—One or more Ethernet ports are link-active, but there is no activity. • Green, flashing—One or more Ethernet ports are link-active with activity.
9	<p>Temperature status LED:</p> <ul style="list-style-type: none"> • Green—The chassis is operating at normal temperature. • Amber—One or more temperature sensors breached the critical threshold. • Amber, flashing—One or more temperature sensors breached the nonrecoverable threshold. 		—

Rear Panel

The following figure shows the rear panel of the Secure Web Appliance S196 and S396. See [Rear Panel LEDs, on page 15](#) for a description of the LEDs.


Figure 10: Secure Web Appliance S196 and S396 Rear Panel

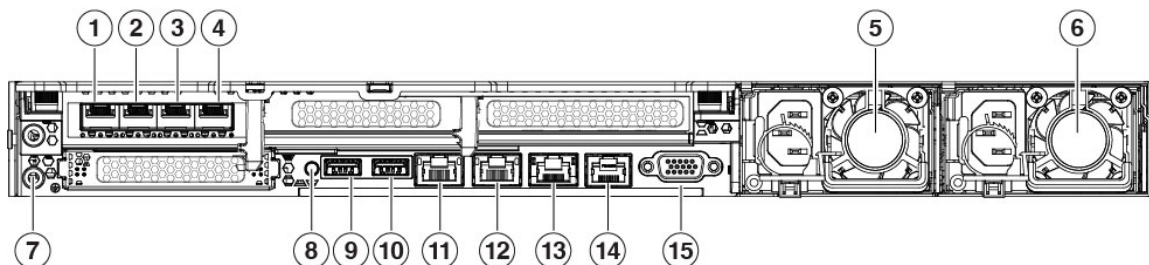

1	Proxy port 1 (P1) Connects to the network for both incoming and outgoing traffic.	2	Proxy port 2 (P2) When P1 and P2 are both enabled, you must connect P1 to the internal network and P2 to the internet. Note You can connect P1 and P2 to an L4 switch, WCCP router, or network switch.
3	Traffic monitor port 1 (T1) Use for Duplex Ethernet tap; one cable for all incoming and outgoing traffic.	4	Traffic monitor port 2 (T2) Use for Simplex Ethernet tap; one cable connected to T1 for all packets going to the internet. and one cable connected to T2 for all packets coming from the internet.
5	1050-W AC power supply (PSU 2)	6	1050-W AC power supply (PSU 1)
7	Threaded holes for dual-hole grounding lug Use is optional. The supported AC power supplies have internal grounding, so no additional chassis grounding is required.	8	Unit identification button
9	USB 3.0 Type A (USB 2)	10	USB 3.0 Type A (USB 1)
11	Management interface (M1) Restricted to management use only	12	Management interface (M2) Not in use
13	RPC port (RPC) Used for remote power cycling	14	Serial console port (Console) RJ-45 connector that directly connects a management computer to the appliance.
15	VGA video port (DB-15 connector) Not supported		—

The following figure shows the rear panel of the Secure Web Appliance S696. See [Rear Panel LEDs, on page 15](#) for a description of the LEDs.


Figure 11: Secure Web Appliance S696 Rear Panel

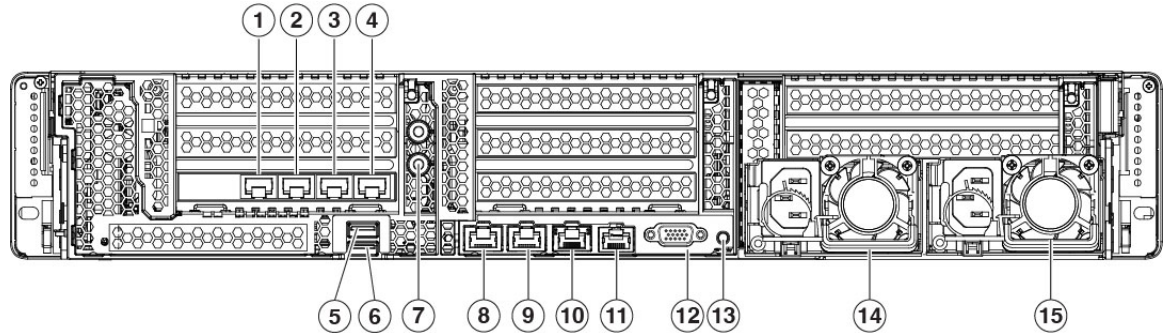

<p>1 Proxy port 1 (P1) Connects to the network for both incoming and outgoing traffic.</p>	<p>2 Proxy port 2 (P2) When P1 and P2 are both enabled, you must connect P1 to the internal network and P2 to the internet. Note You can connect P1 and P2 to an L4 switch, WCCP router, or network switch.</p>
<p>3 Traffic monitor port 1 (T1) Use for Duplex Ethernet tap; one cable for all incoming and outgoing traffic.</p>	<p>4 Traffic monitor port 2 (T2) Use for Simplex Ethernet tap; one cable connected to T1 for all packets going to the internet, and one cable connected to T2 for all packets coming from the internet.</p>
<p>5 USB 3.0 Type A (USB 1)</p>	<p>6 USB 3.0 Type A (USB 2)</p>
<p>7 Threaded holes for dual-hole grounding lug Use is optional. The supported AC power supplies have internal grounding, so no additional chassis grounding is required.</p>	<p>8 Management interface 1 (MGMT 1) Restricted to management use only</p>
<p>9 Management interface 2 (MGMT 2) Not supported</p>	<p>10 RPC port (RPC) Used for remote power cycling</p>
<p>11 Serial console port RJ-45 connector that directly connects a management computer to the appliance.</p>	<p>12 VGA video port (DB-15 connector) Not supported</p>
<p>13 Unit identification button</p>	<p>14 1050-W AC power supply (PSU 1)</p>
<p>15 1050-W AC power supply (PSU 2)</p>	<p>—</p>

The following figure shows the rear panel of the Secure Web Appliance S696F. See [Rear Panel LEDs, on page 15](#) for a description of the LEDs.

Figure 12: Secure Web Appliance S696F Rear Panel

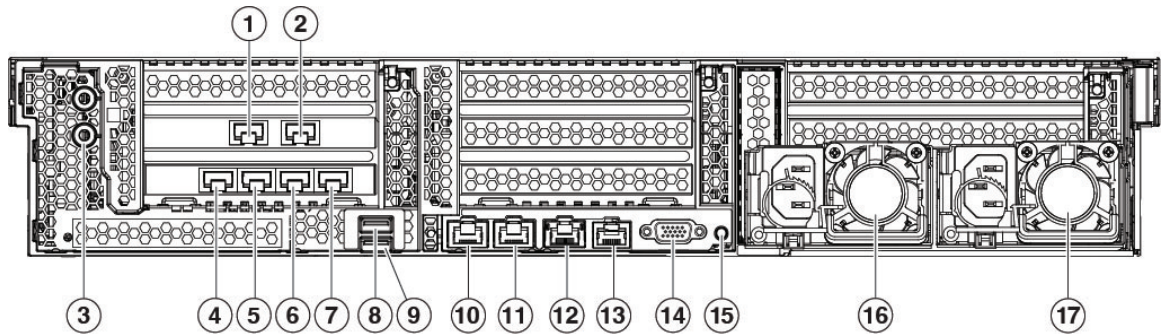


<p>1 Management interface 1 (MGMT 1) Restricted to management use only 10-Gigabit Ethernet SFP+ support</p> <p>Note The SFP-10G-SR (10 Gb) is the only SFP+ transceiver qualified by Cisco. Use only Cisco-qualified SFPs.</p> <p>Note Copper SFPs are not supported.</p>	<p>2 Management interface 2 (MGMT 2) Not in use</p> <p>Caution Do not install any SFPs into this interface.</p>
<p>3 Threaded holes for dual-hole grounding lug Use is optional; the supported AC power supplies have internal grounding, so no additional chassis grounding is required.</p>	<p>4 Proxy port 1 (P1) Connects to the network for both incoming and outgoing traffic. The SFP-10G-SR (10 Gb) is the only SFP+ transceiver qualified by Cisco. Use only Cisco-qualified SFPs.</p> <p>Note Copper SFPs are not supported.</p>
<p>5 Proxy port 2 (P2) When P1 and P2 are both enabled, you must connect P1 to the internal network and P2 to the internet.</p> <p>Note You can connect P1 and P2 to an L4 switch, WCCP router, or network switch.</p> <p>10-Gigabit Ethernet SFP+ support The SFP-10G-SR (10 Gb) is the only SFP+ transceiver qualified by Cisco. Use only Cisco-qualified SFPs.</p> <p>Note Copper SFPs are not supported.</p>	<p>6 Traffic monitor port 1 (T1) Use for Duplex Ethernet tap; one cable for all incoming and outgoing traffic. 10-Gigabit Ethernet SFP+ support</p> <p>Note The SFP-10G-SR (10 Gb) is the only SFP+ transceiver qualified by Cisco. Use only Cisco-qualified SFPs.</p> <p>Note Copper SFPs are not supported.</p>

<p>7 Traffic monitor port 2 (T2)</p> <p>Use for Simplex Ethernet tap; one cable connected to T1 for all packets going to the internet. and one cable connected to T2 for all packets coming from the internet.</p> <p>10-Gigabit Ethernet SFP+ support</p> <p>Note The SFP-10G-SR (10 Gb) is the only SFP+ transceiver qualified by Cisco. Use only Cisco-qualified SFPs.</p> <p>Note Copper SFPs are not supported.</p>	<p>8 USB 3.0 Type A (USB 1)</p>
<p>9 USB 3.0 Type A (USB 2)</p>	<p>10 Data interface (DATA 1)</p> <p>Not supported</p>
<p>11 Data interface (DATA 2)</p> <p>Not supported</p>	<p>12 RPC port (RPC)</p> <p>Used for remote power cycling</p>
<p>13 Serial console port (Console)</p> <p>RJ-45 connector that directly connects a management computer to the appliance.</p>	<p>14 VGA video port (DB-15 connector)</p> <p>Not supported</p>
<p>15 Unit identification button</p>	<p>16 1050-W AC power supply (PSU 1)</p>
<p>17 1050-W AC power supply (PSU 2)</p>	<p>—</p>

Rear Panel LEDs

The following figure shows the rear panel LEDs of the Secure Web Appliance S196 and describes their states. The Secure Web Appliance S396 is the same except it has two power supplies. The Secure Web Appliance S696 and S696F have the same LEDs except that these models have more data interfaces; the speed and status LED descriptions are the same.

Figure 13: Rear Panel LEDs

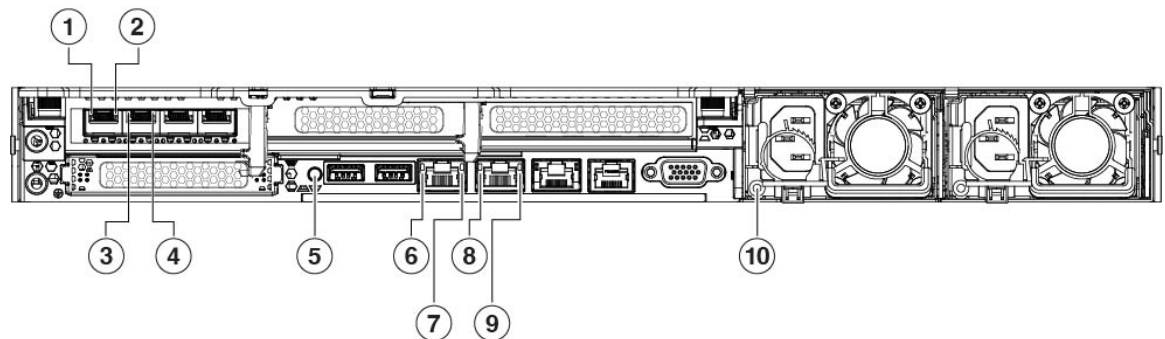

1 Data interface link speed: <ul style="list-style-type: none"> • Off—Link speed is 100 Mbps. • Amber—Link speed is 1 Gbps. • Green—Link speed is 10 Gbps. 	2 Data interface link status: <ul style="list-style-type: none"> • Off—No link is present. • Green—Link is active. • Green, flashing—Traffic is present on the active link.
3 Data interface link speed: <ul style="list-style-type: none"> • Off—Link speed is 100 Mbps. • Amber—Link speed is 1 Gbps. • Green—Link speed is 10 Gbps. 	4 Data interface link status: <ul style="list-style-type: none"> • Off—No link is present. • Green—Link is active. • Green, flashing—Traffic is present on the active link.
5 Rear unit identification: <ul style="list-style-type: none"> • Off—The unit identification function is not in use. • Blue, flashing—The unit identification function is activated. 	6 Management interface link speed: <ul style="list-style-type: none"> • Off—Link speed is 100 Mbps. • Amber—Link speed is 1 Gbps. • Green—Link speed is 10 Gbps.
7 Management interface link status: <ul style="list-style-type: none"> • Off—No link is present. • Green—Link is active. • Green, flashing—Traffic is present on the active link. 	4 Management interface link speed: <ul style="list-style-type: none"> • Off—Link speed is 100 Mbps. • Amber—Link speed is 1 Gbps. • Green—Link speed is 10 Gbps.
5 Management interface link status: <ul style="list-style-type: none"> • Off—No link is present. • Green—Link is active. • Green, flashing—Traffic is present on the active link. 	6 Power supply: <ul style="list-style-type: none"> • Off—No AC input (12-V main power off; 12-V standby power off) • Green, flashing—12-V main power off; 12-V standby power on. • Green—12-V main power on; 12-V standby power on. • Amber, flashing—Warning threshold detected but 12-V main power on. • Amber—Critical error detected; 12-V main power off (for example, overcurrent, overvoltage, or overtemperature failure).

Power Supply

The power supply is hot-swappable. The Secure Web Appliance ships with two power supplies thus providing redundancy.



Note Make sure that one power supply is always active.

The following table lists the specifications for the 1050-W AC power supply (Cisco part number 341-0638-03).

Table 2: 1050-W Power Supply Specifications

Description	Specification
AC input voltage range	Nominal range: 100 to 120 V AC, 200 to 240 V AC Range: 90–132 V AC, 180–264 V AC
AC input frequency	Nominal range: 50–60 Hz Range: 47–63 Hz
Maximum AC input current	12.5 A peak at 100 V AC 6.0 A peak at 208 V AC
Maximum input volt amperes	1250 VA at 100 V AC
Maximum output power for each power supply	1050 W
Maximum inrush current	15 A (subcycle duration)
Maximum hold-up time	12 ms at 1050 W
Power supply output voltage	12 V DC
Power supply standby voltage	12 V DC
Efficiency rating	Climate Savers Platinum Efficiency (80 Plus Platinum certified)
Form factor	RSP2
Input connector	IEC320 C14

Hardware Specifications

The following table lists the hardware specifications for the Secure Web Appliance S196, S396, S696, and S696F.

Table 3: S196, S396, S696, and S696F Hardware Specifications

Specification	S196	S396	S696	S696F
Weight	31 lb (14.06 kg)	33.5 lb (15.19 kg)	30.8 lb (13.97 kg)	52.2 lb (23.68 kg)
Dimensions (H x W x D)	1.7 x 16.89 x 29.8 inches (4.32 x 43.0 x 75.6 cm)		3.4 x 16.9 x 29.5 inches (8.64 x 42.92 x 74.93 cm)	
Temperature	Operating: 41 to 95°F (5 to 35°C) Derate the maximum temperature by 1°C for every 1000 ft (305 m) of altitude above sea level. Nonoperating: -40 to 149°F (-40 to 65°C) When stored or transported			
Relative humidity	Operating: 10 to 90% noncondensing Nonoperating: 5 to 93% noncondensing			
Altitude	Operating: 0 to 10,000 ft Nonoperating: 0 to 40,000 ft When stored or transported			
Sound power level	5.5 Bels (measure A-weighted per ISO7779 LWAd) Operation at 73°F (23°C)			
Sound pressure level	40 dBa (measure A-weighted per ISO7779 LpAM) Operation at 73°F (23°C)			

Product ID (PID) Numbers

The following table lists the PIDs associated with Secure Web Appliance S196, S396, S696, and S696F. The spare components are ones that you can order and replace yourself. If any internal components fail, you must get an RMA for the entire chassis including the SFPs and SFP cables. Remove the drives and power supplies before you send the chassis for RMA. See the [Cisco Returns Portal](#) for more information.

Table 4: S196, S396, S696, and S696F PIDs

PID	Description
WSA-S196-K9	Cisco Secure Web Appliance S196 chassis 1 RU
WSA-S396-K9	Cisco Secure Web Appliance S396 chassis 1 RU
WSA-S696-K9	Cisco Secure Web Appliance S696 chassis 2 RU
WSA-S696F-K9	Cisco Secure Web Appliance S696F chassis 2 RU
UCS-HD12TB10K12N	S196, S396, S696, S696F HDD

PID	Description
UCS-HD12TB10K12N=	S196, S396, S696, S696F HDD (spare)
UCSC-PSU1-1050W	S196, S396, S696, S696F AC power supply
UCSC-PSU1-1050W=	S196, S396, S696, S696F AC power supply (spare)
UCSC-RAIL-M6	S195, S395, S695, S695F rail kit
UCSC-RAIL-M6=	S196, S396, S696, S696F rail kit (spare)
UCSC-BZL-C220M6	S196 and S396 1 RU locking faceplate
UCSC-BZL-C220M6=	S196 and S396 1 RU locking faceplate (spare)
UCSC-BZL-C240M6	S696 and S696F 2 RU locking faceplate
UCSC-BZL-C240M6=	S696 and S696F 2 RU locking faceplate (spare)
SFP-10G-SR	C696F 10-Gb SFP
SFP-10G-SR=	C696F 10-Gb SFP (spare)


Power Cord Specifications

Each power supply has a separate power cord. Standard power cords or jumper power cords are available for connection to the Secure Web Appliance. The jumper power cords for use in racks are available as an optional alternative to the standard power cords.

If you do not order the optional power cord with the system, you are responsible for selecting the appropriate power cord for the product. Using an incompatible power cord with this product may result in electrical safety hazard. Orders delivered to Argentina, Brazil, and Japan must have the appropriate power cord ordered with the system.


The following power cords and jumper cords are supported.

Figure 14: Argentina (CAB-250V-10A-AR)

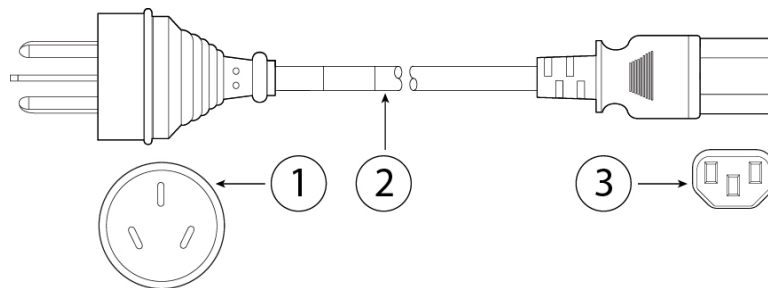


1	Plug: IRAM 2073	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C13		—

Figure 15: Australia (CAB-9K10A-AU)

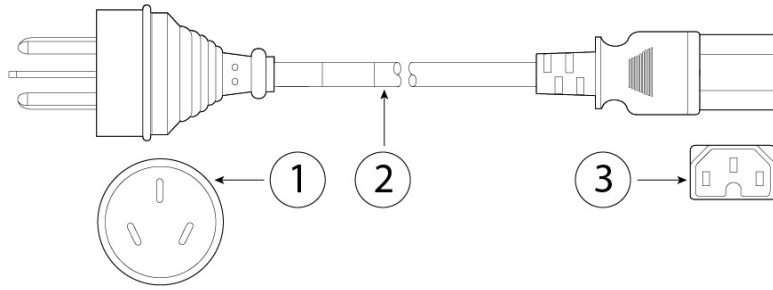


1	Plug: A.S. 3112-2000	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C15		—

Figure 16: Brazil (PWR-250V-10A-BZ)

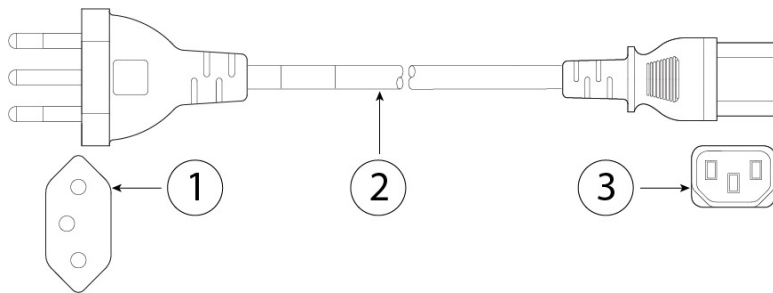


1	Plug: NBR 14136	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C13		—

Figure 17: Cabinet Jumper (CAB-C13-C14-2M)

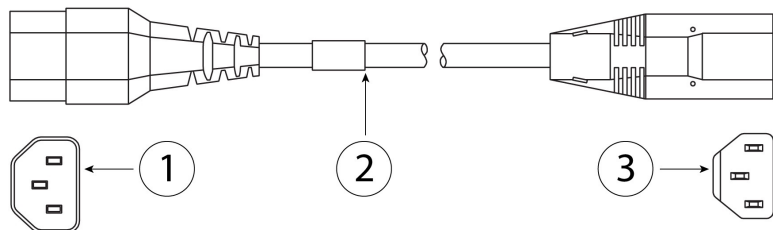


1	Plug: SS10A	2	Cord set rating: 10A, 250V
3	Connector: HS10S, C-13 to C-14		—

Figure 18: Cabinet Jumper (CAB-C13-C14-AC)

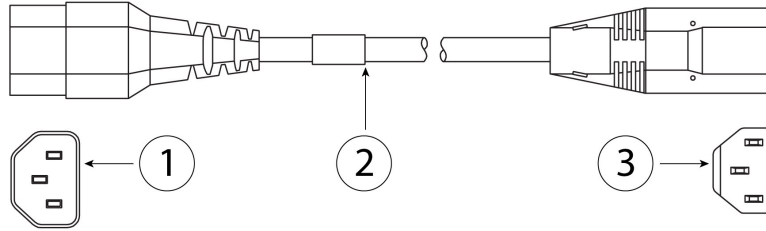


1	Plug: SS10A	2	Cord set rating: 10 A, 250 V
3	Connector: HS10S, C-13 to C-14 (recessed receptacle)		—

Figure 19: Cabinet Jumper (CAB-C13-CBN)

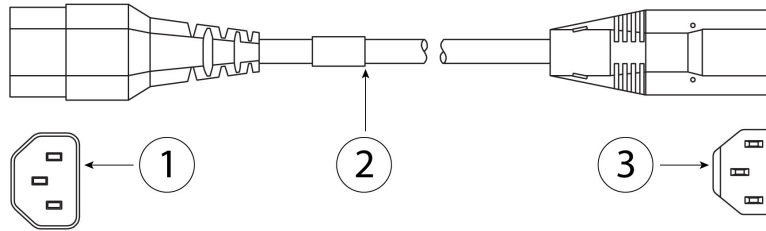


1	Plug: SS10A	2	Cord set rating: 10 A, 250 V
3	Connector: HS10S, C-13 to C-14		—

Figure 20: China (CAB-250V-10A-CH)

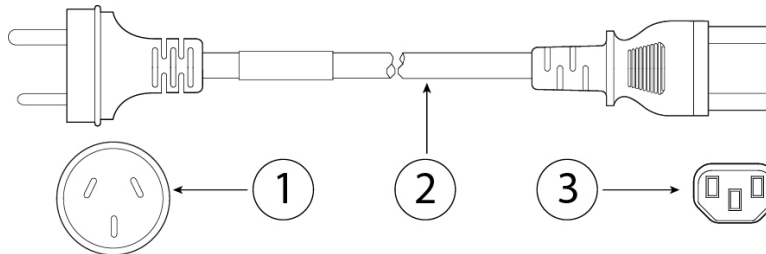


1	Plug: GB2099.1/2008	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C13		—

Figure 21: Europe (CAB-9K10A-EU)

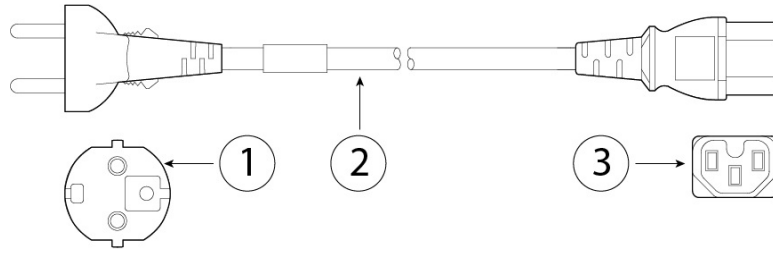


1	Plug: CEE 7/7 (M2511)	2	Cord set rating: 10 A/16 A, 250 V
3	Connector: IEC 60320/C15 (VSCC 15)		—

Figure 22: India (CAB-250V-10A-ID)

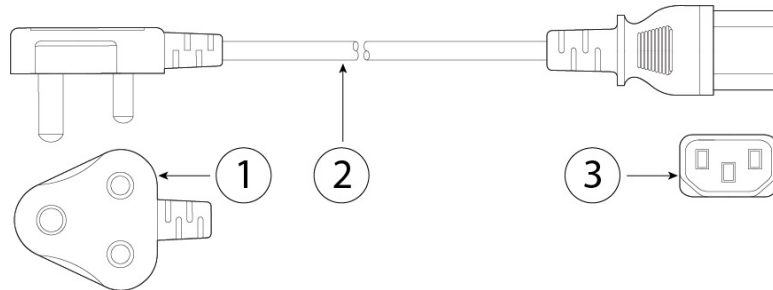


1	Plug: IS 6538-1971	2	Cord set rating: 16 A, 250 V
3	Connector: IEC 60320-C13		—

Figure 23: Israel (CAB-250V-10A-IS)

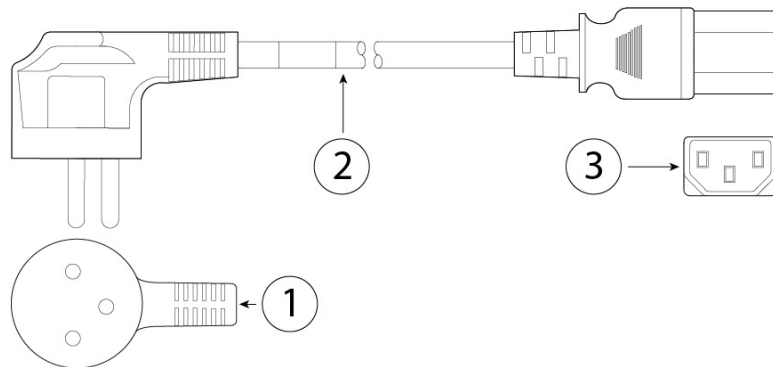


1	Plug: SI-32	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320-C13		—

Figure 24: Italy (CAB-9K10A-IT)

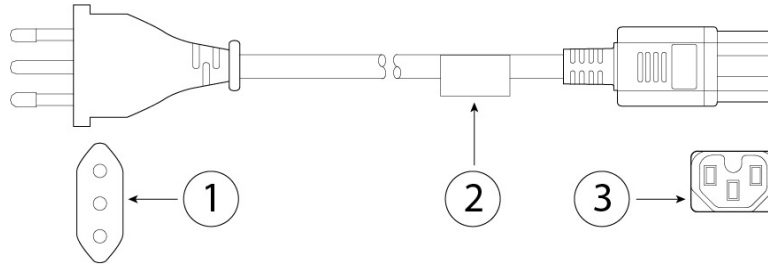


1	Plug: CEI 23-16/VII (I/3G)	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C15 (EN 60320/C15M)		—

Figure 25: Japan (CAB-JPN-3PIN)

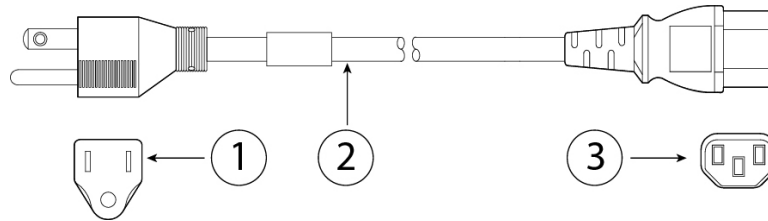


1	Plug: JIS 8303	2	Cord set rating: 12 A, 125 V
3	Connector: IEC 60320/C13		—

Figure 26: Japan (CAB-C13-C14-2M-JP)

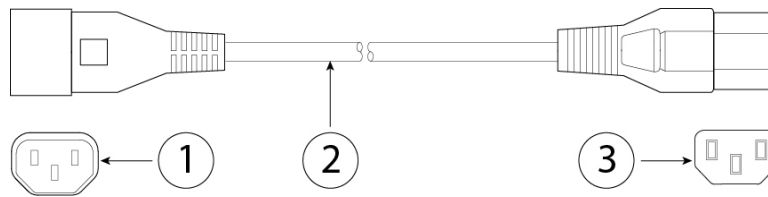


1	Plug: EN 60320-2-2/E	2	Cord set rating: 10 A, 250 V
3	Connector: EN 60320/C13 to C14		—

Figure 27: Korea (CAB-9K10S-KOR)

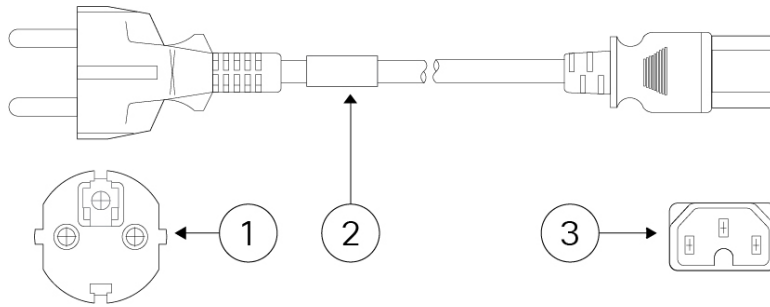


1	Plug: EL211 (KSC 8305)	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C15		—

Figure 28: North America (CAB-9K12A-NA)

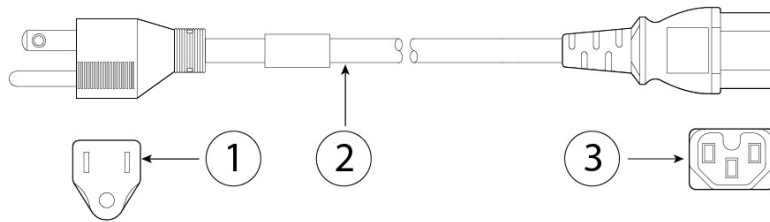


1	Plug: NEMA5-15P	2	Cord set rating: 13 A, 125 V
3	Connector: IEC 60320/C15		—

Figure 29: North America (CAB-N5K6A-NA)

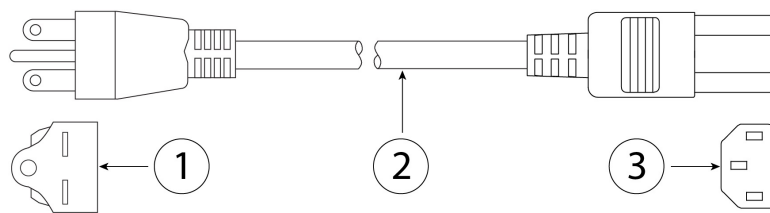


1	Plug: NEMA6-15P	2	Cord set rating: 10 A, 125 V
3	Connector: IEC 60320/C13		—

Figure 30: North America (CAB-AC-L620-C13)

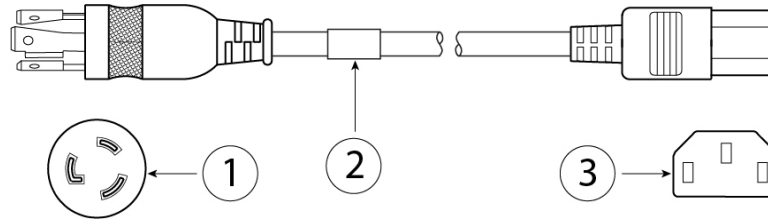


1	Plug: NEMA L6-20 (molded twist lock)	2	Cord set rating: 13 A, 250 V
3	Connector: IEC 60320/C13		—

Figure 31: Switzerland (CAB-9K10A-SW)

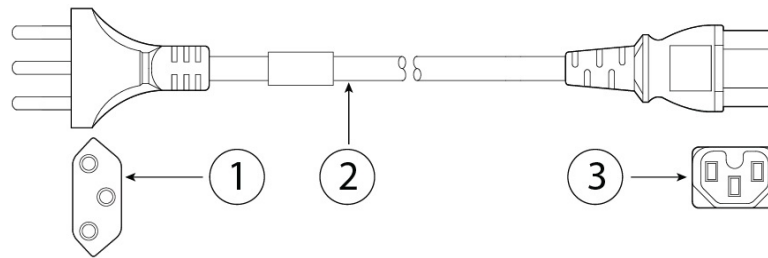


1	Plug: SEV 1011 (MP232-R)	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C15		—

Figure 32: Taiwan (CAB-ACTW)

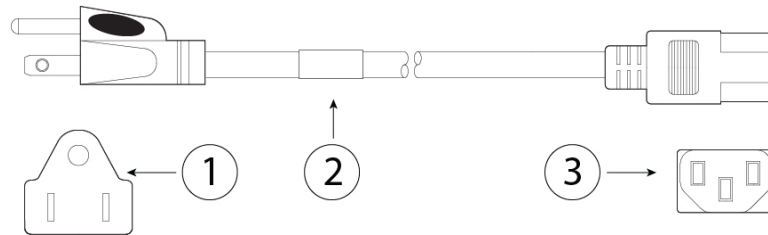

1	Plug: EL 302 (CNS10917)	2	Cord set rating: 10 A, 125 V
3	Connector: IEC 60320/C13		—

Figure 33: United Kingdom (CAB-9K10A-UK)

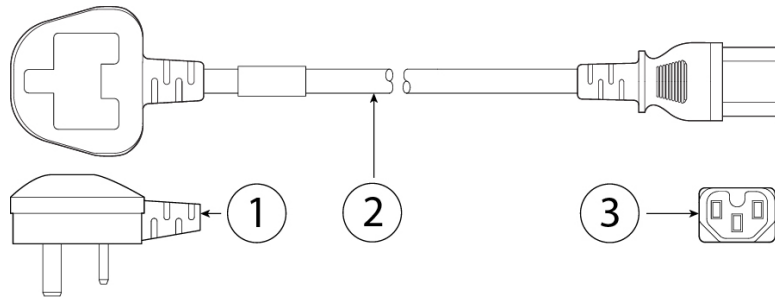

1	Plug: BS1363A/SS145	2	Cord set rating: 10 A, 250 V
3	Connector: IEC 60320/C15		—