

# Configuración de una sesión PPPoE de un equipo Windows a un router Cisco

## Contenido

[Introducción](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Configurar](#)

[Diagrama de la red](#)

[Configuraciones](#)

[Configuración de BRAS](#)

[Configuración y configuración de equipos Windows](#)

[Verificación](#)

[Troubleshoot](#)

[Información Relacionada](#)

## Introducción

Este documento describe el procedimiento para configurar una conexión punto a punto sobre Ethernet (PPPoE) entre una máquina Windows (que actúa como cliente PPPoE) y un router Cisco que actúa como servidor PPPoE.

## Prerequisites

### Requirements

Cisco recomienda que tenga conocimiento de la conectividad de capa 1 integral como prioridad de usuario (UP).

### Componentes Utilizados


Este documento no tiene restricciones específicas en cuanto a versiones de software y de hardware.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

## Configurar

### Diagrama de la red

Este documento utiliza la configuración de red que se muestra en la imagen:

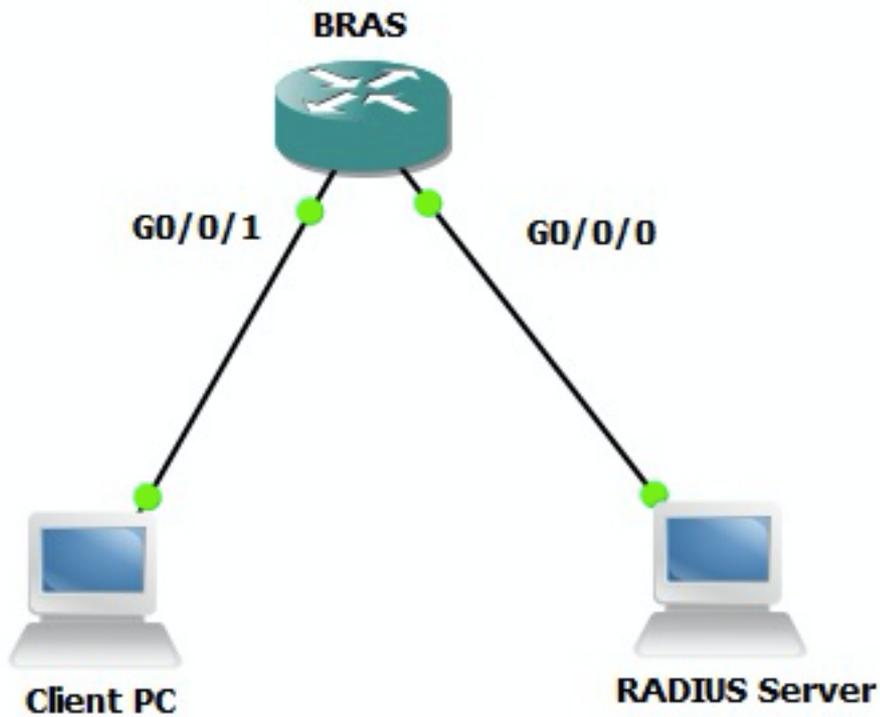

## Configuraciones

### Configuración de BRAS

```
aaa new-model

! Enabling AAA on router

!

aaa authentication ppp PPPOE-METD group PPPOE-RADIUS

! Defining AAA method list for PPP Authentication

aaa authorization network PPPOE-AUTHOR-METD group PPPOE-RADIUS

! Defining AAA method list for PPP Authorization

aaa accounting network PPPOE-ACCT-METD start-stop group PPPOE-RADIUS

! Defining AAA method list for PPP Accounting

!

aaa group server radius PPPOE-RADIUS

! Defining AAA Server Group named PPPOE-RADIUS
server-private 10.106.39.253 key cisco
ip radius source-interface GigabitEthernet0/0/0

!


bba-group pppoe BBA-TEST
virtual-template 10
```

```
!  
  
interface GigabitEthernet0/0/1.47  
encapsulation dot1Q 1 native  
pppoe enable group BBA-TEST  
end  
  
!  
  
interface Virtual-Template10  
ip unnumbered Loopback10  
peer default ip address pool local  
  
! Calling three named AAA Method lists configured above under this Virtual Template  
ppp authentication pap chap PPPOE-METD  
ppp authorization PPPOE-AUTHOR-METD  
ppp accounting PPPOE-ACCT-METD  
end  
  
!  
  
ip local pool local 192.168.1.2 192.168.1.10  
  
!  
  
interface Loopback10  
ip address 192.168.1.1 255.255.255.255  
end
```


## ! **Configuración y configuración de equipos Windows**

Complete estos pasos para iniciar la sesión PPPoE desde Windows Machine que actúa como cliente PPPoE.

Paso 1. Abra **Network and Sharing Center** y haga clic en **Set up a new connection or network** tal como se muestra en la imagen.

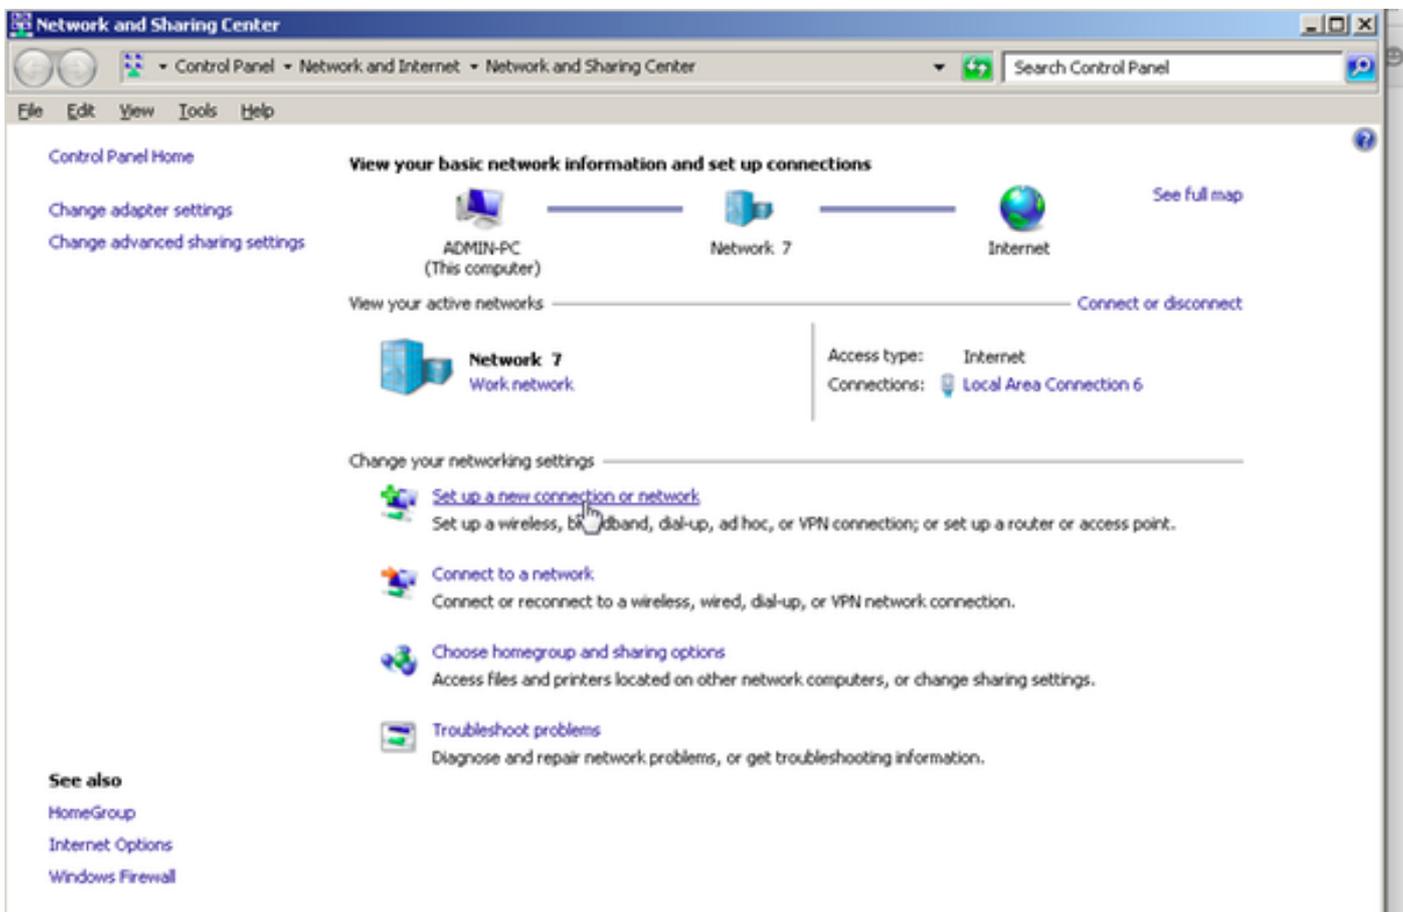


Paso 2. Como se muestra en la imagen, seleccione **Conectar a Internet** y haga clic en **Siguiente**.

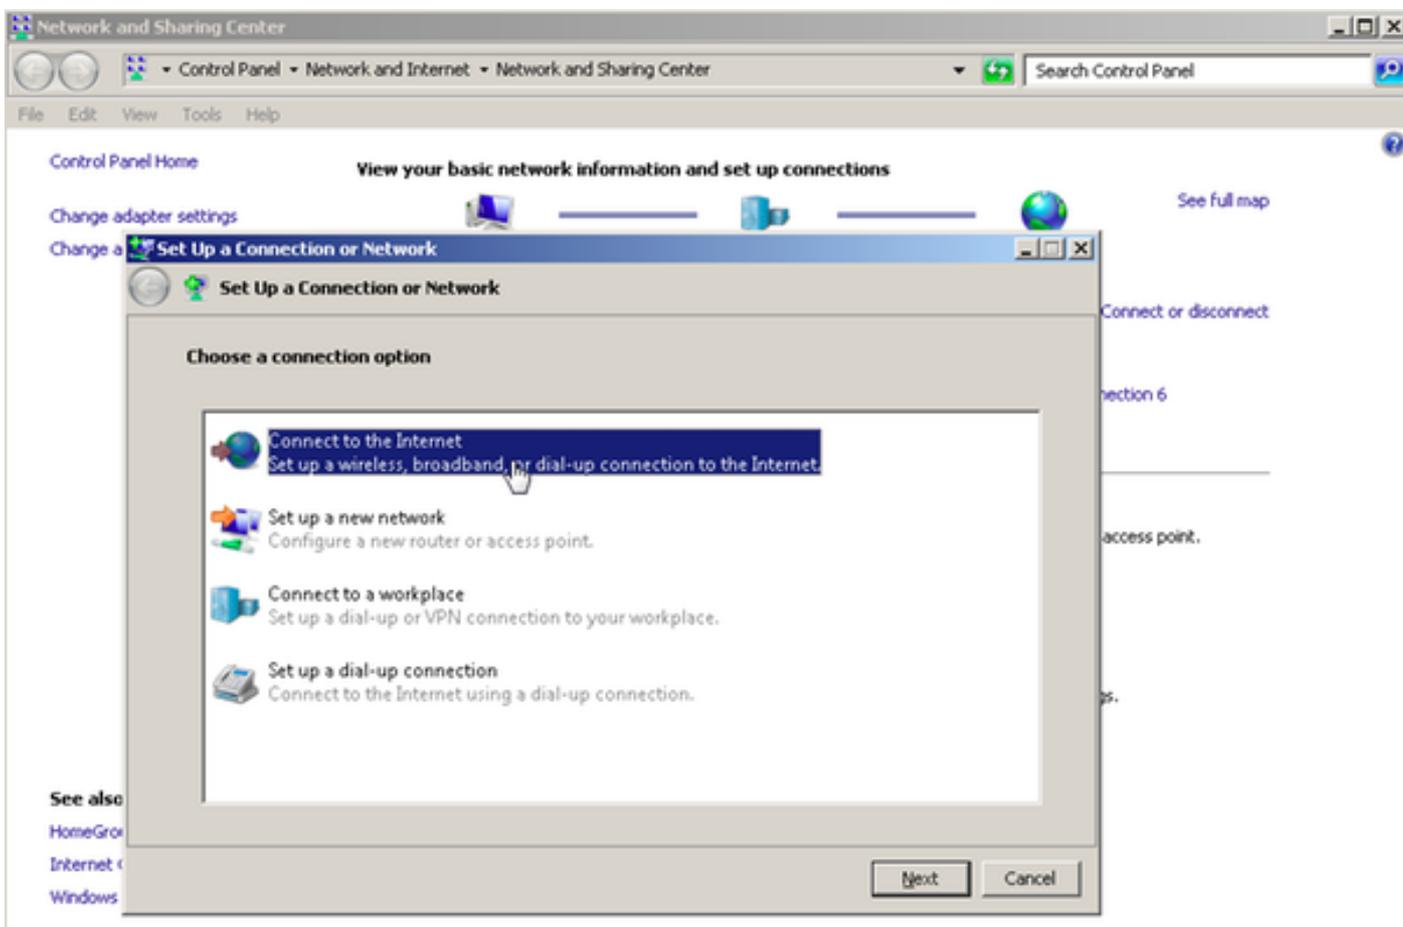


Paso 3. Seleccione **Configurar una nueva conexión de todos modos**, como se muestra en la


imagen:

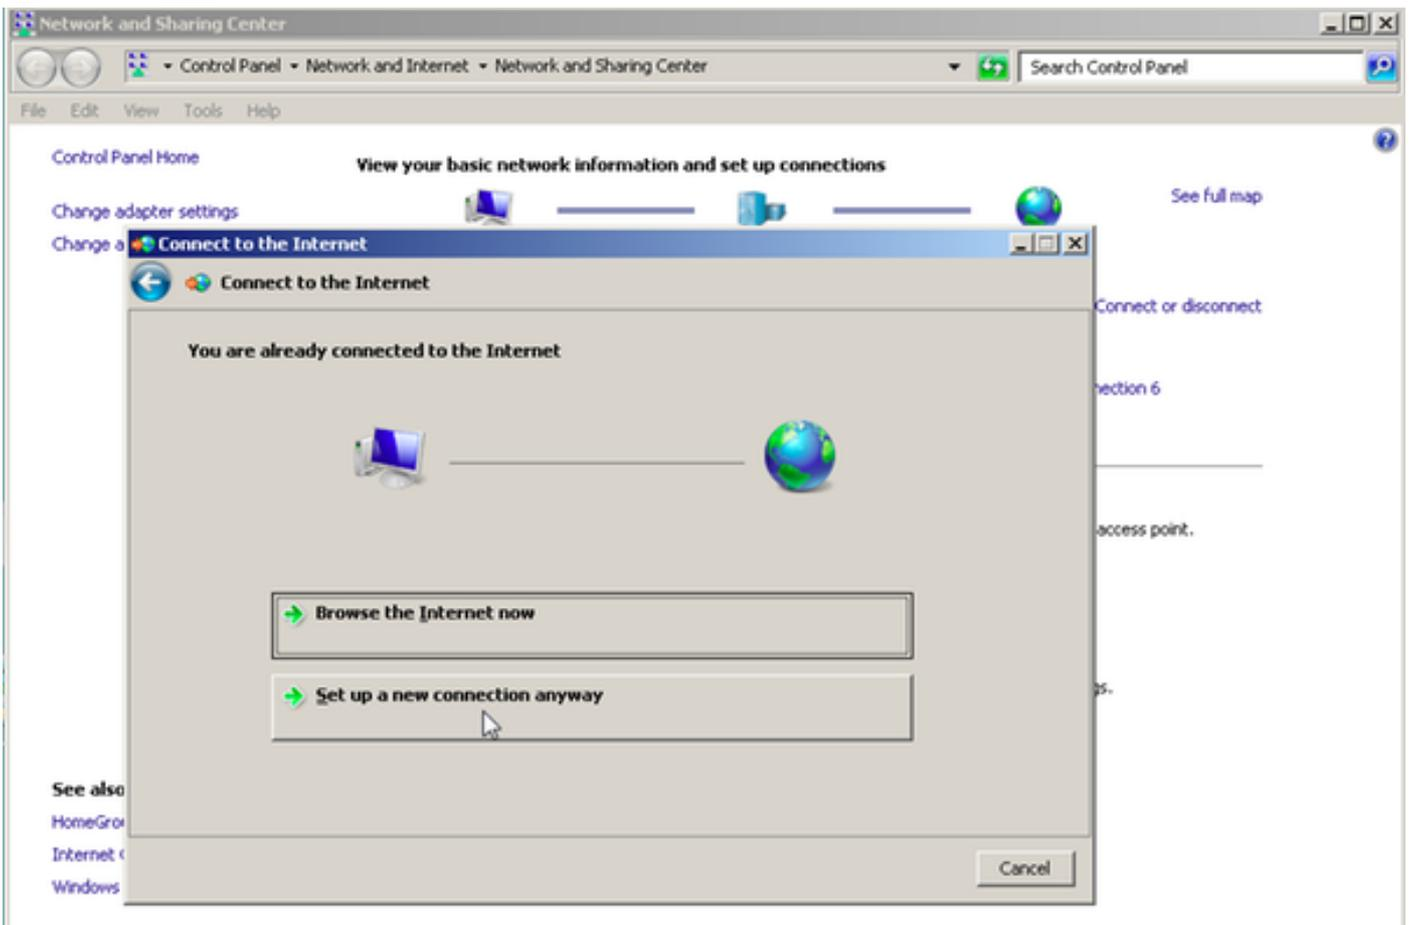


Paso 4. Seleccione No, cree una nueva conexión, como se muestra en la imagen:

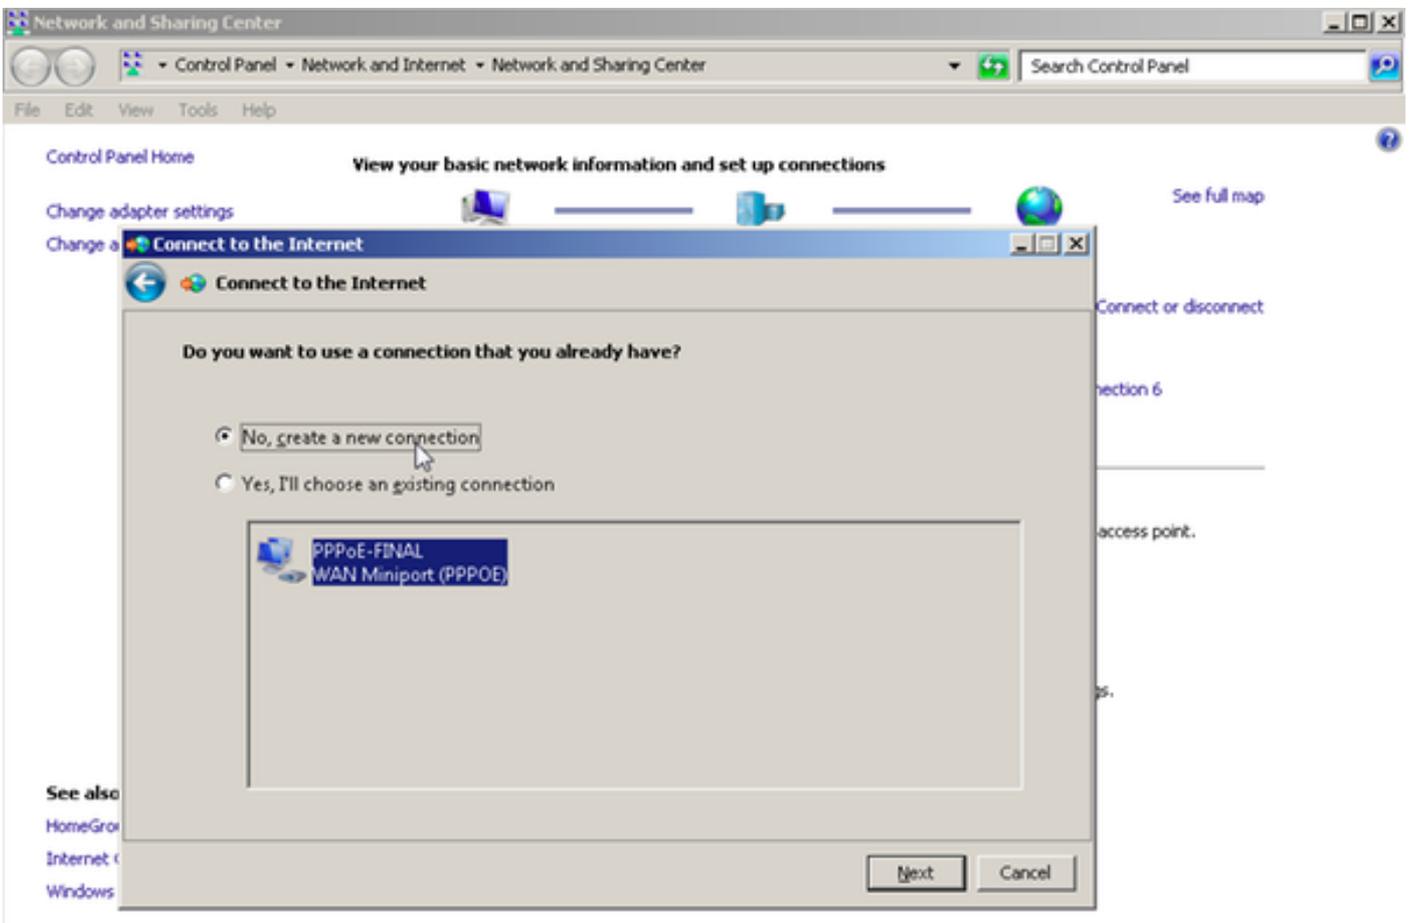


Paso 5. Como se muestra en la imagen, haga clic en **Banda ancha (PPPoE)**:

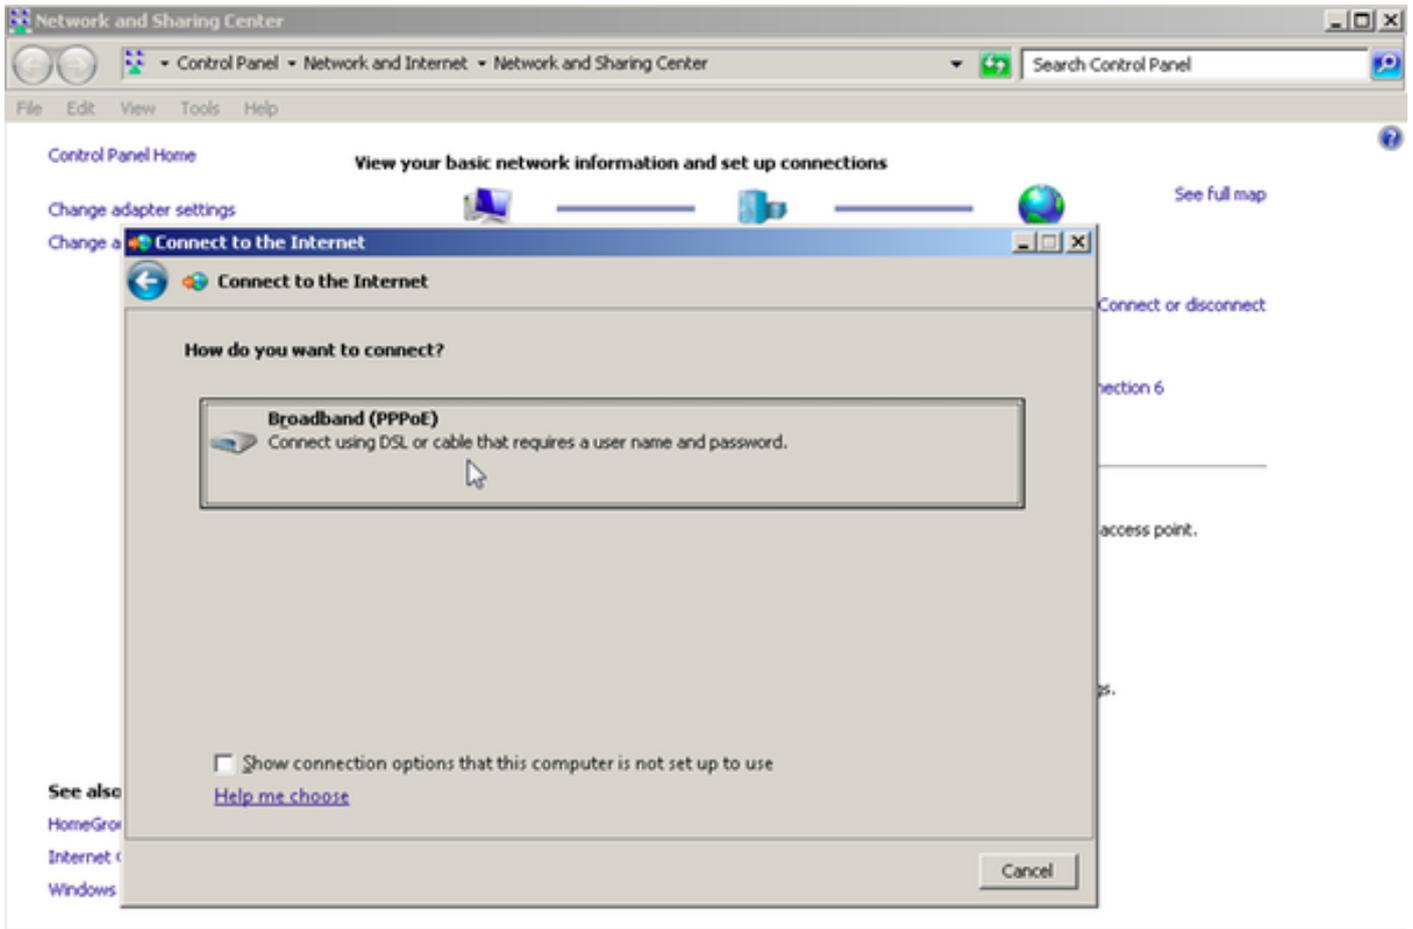

Paso 6. Como se muestra en la imagen, introduzca el **nombre de usuario**, la **contraseña** y un **nombre de conexión**, y haga clic en **Conéctese**.

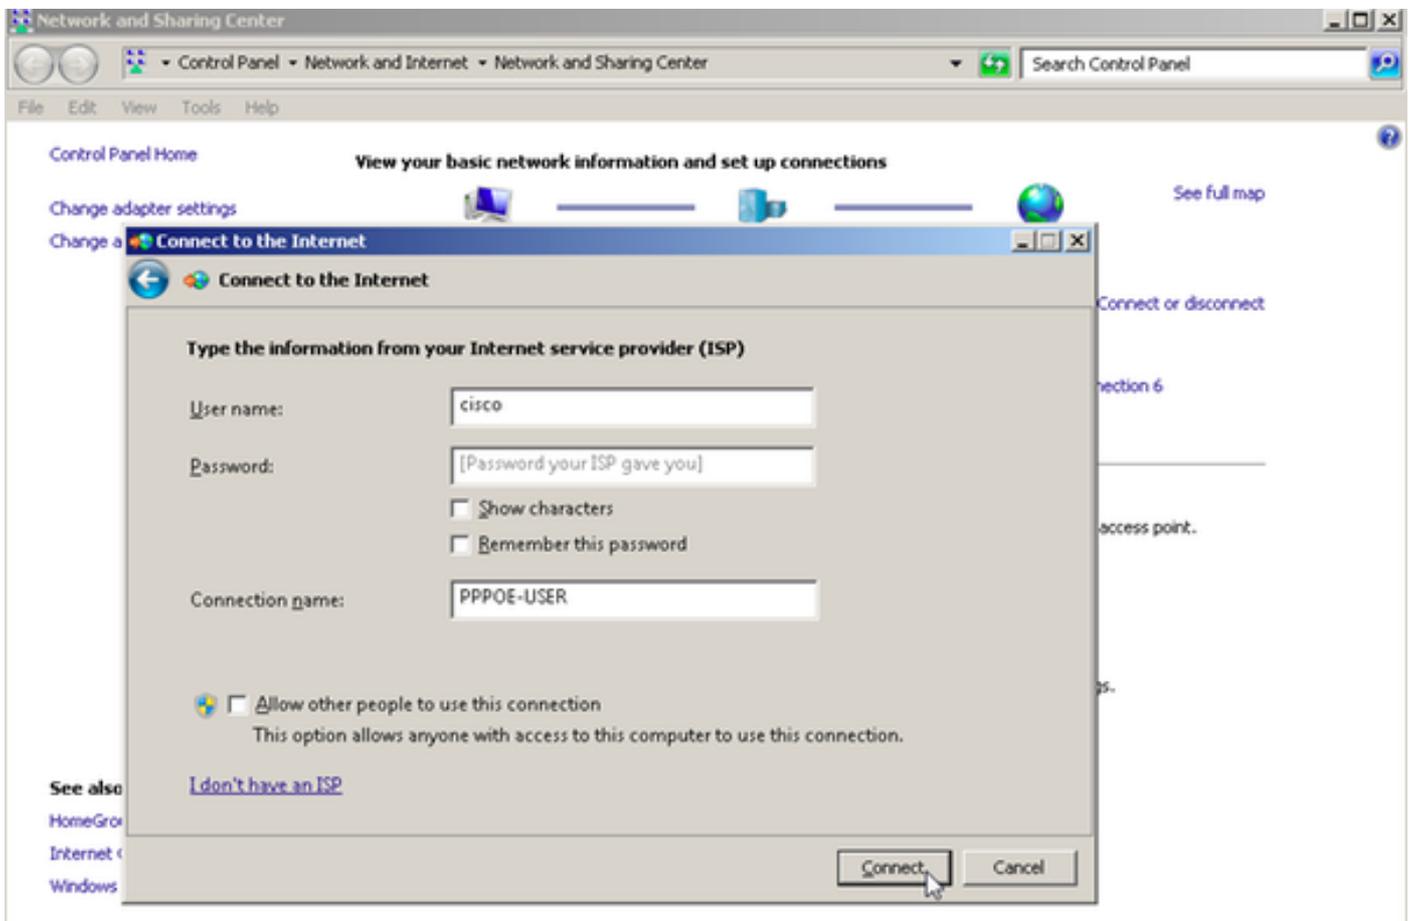



Esto inicia una sesión PPPoE hacia el servidor. Verifique la sección verify como se muestra en la imagen:

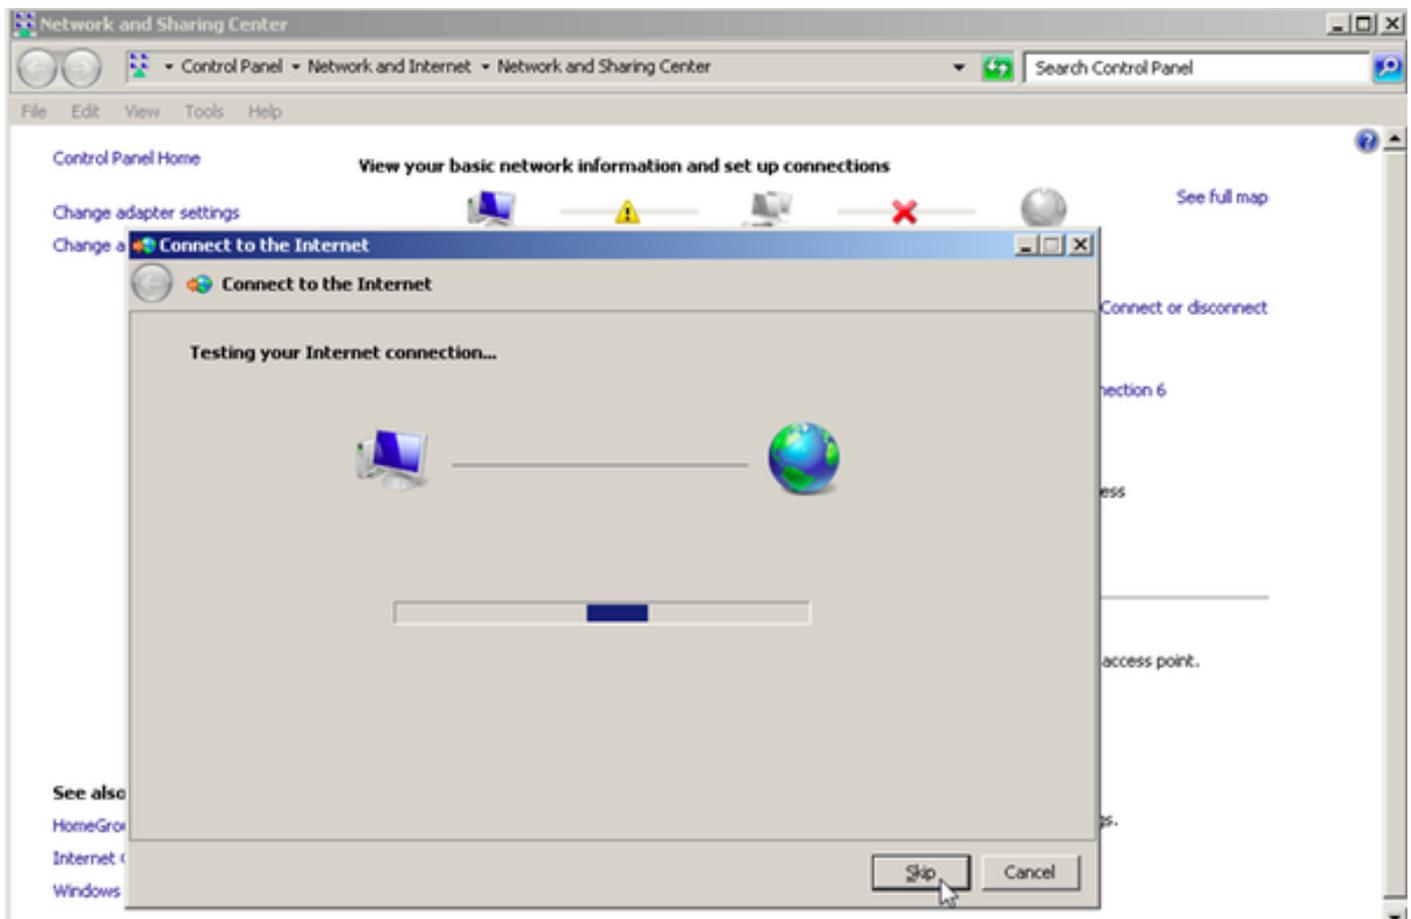

# Verificación

Paso 1. Vuelva a abrir la ficha **Networks**, seleccione la red (denominada PPPOE-USER en este ejemplo) y verifique el estado. Haga clic en **Connect** para iniciar una sesión después de introducir el nombre de usuario y la contraseña, como se muestra en la imagen:

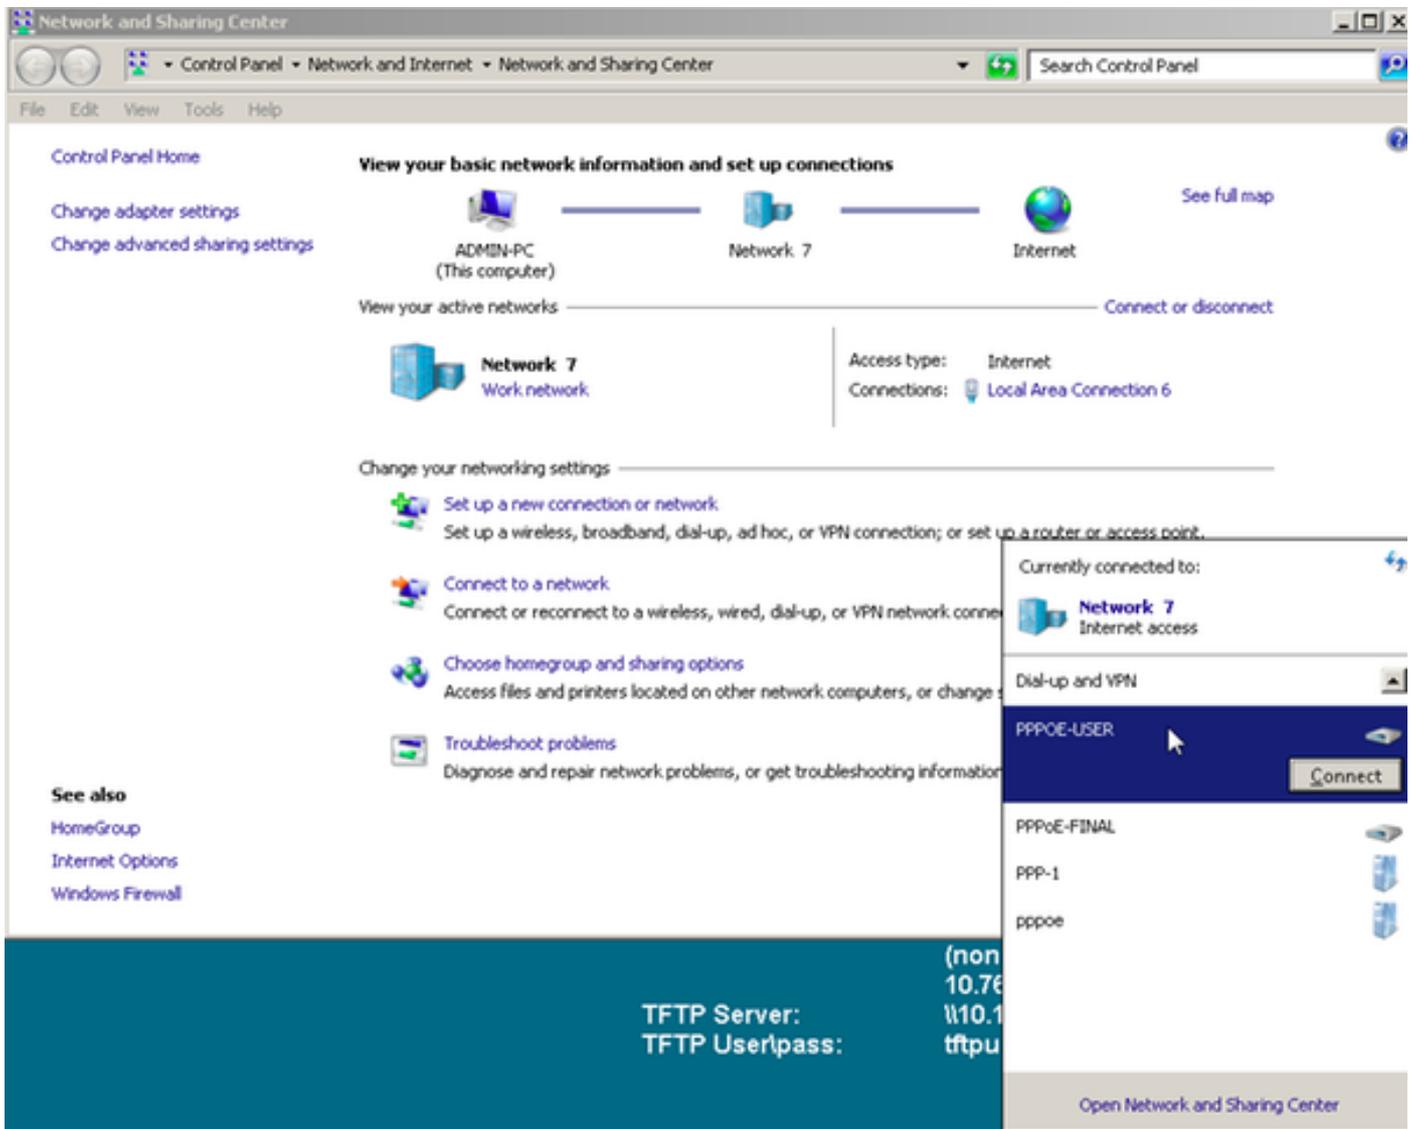

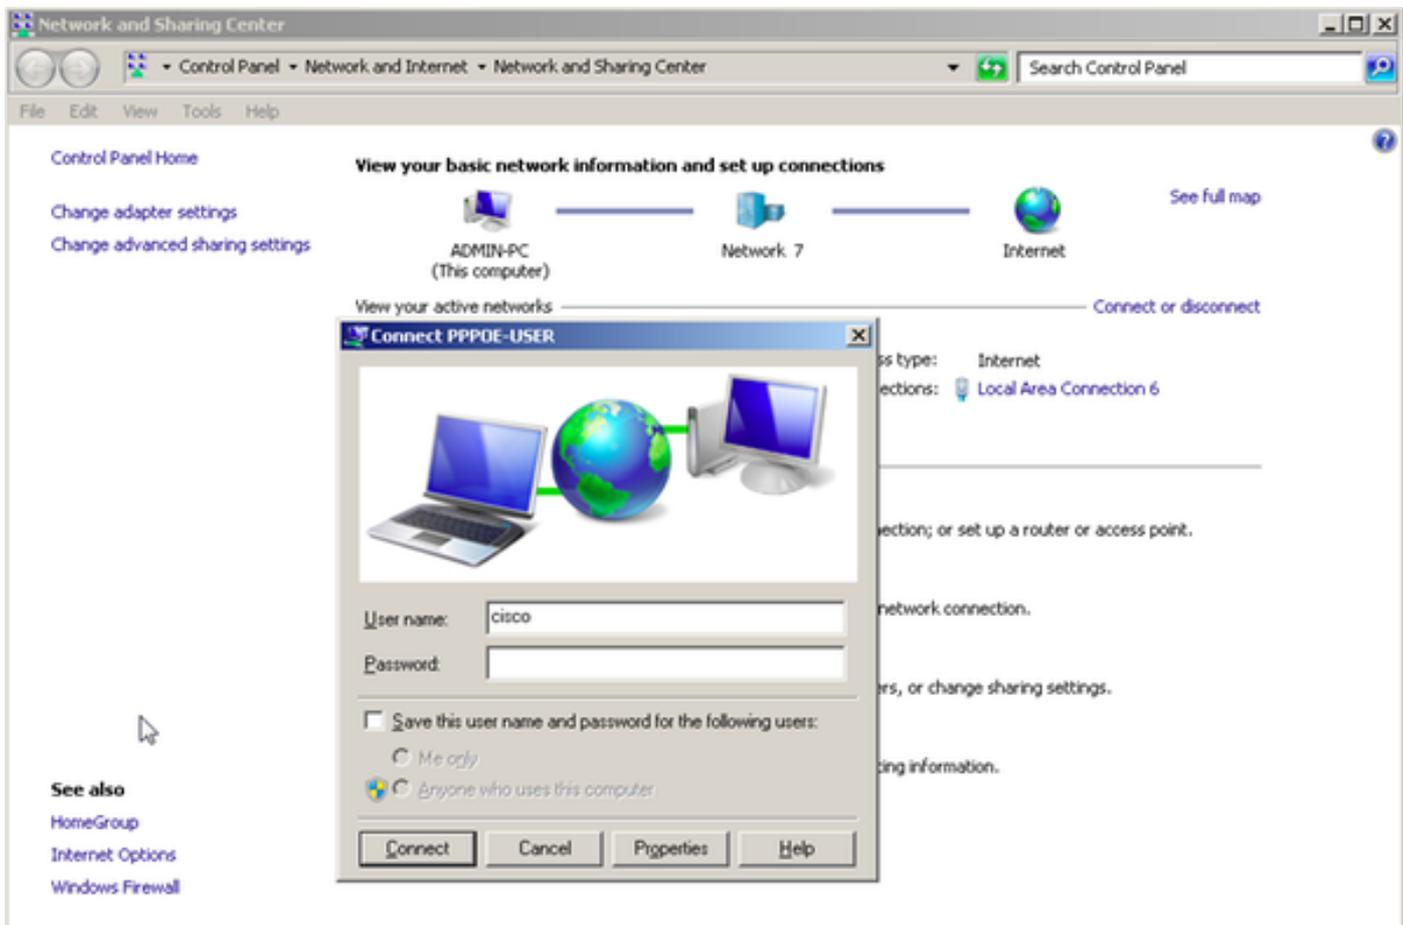

Paso 2. Abra el símbolo del sistema y ejecute el comando `ipconfig /all` para verificar la dirección IP negociada, como se muestra en la imagen:

```

PPP adapter PPPoE-USER:

Connection-specific DNS Suffix . . . : 
Description . . . . . : PPPoE-USER
Physical Address. . . . . : 
DHCP Enabled. . . . . : No
Autoconfiguration Enabled . . . . . : Yes
IPv4 Address. . . . . : 192.168.1.2(Preferred)
Subnet Mask . . . . . : 255.255.255.255
Default Gateway . . . . . : 0.0.0.0
DNS Servers . . . . . : 10.76.77.50
NetBIOS over Tcpip. . . . . : Disabled
  
```

Paso 3. Habilite `debug pppoe event`, `debug pppoe error` y `debug ppp negotiation` para verificar el establecimiento de la sesión PPPoE. También podemos habilitar `debug radius` para ver mensajes intercambiados con el servidor Radius.

```
BRAS#show debugging
```

```

PPP:
PPP protocol negotiation debugging is on
PPPoE:
PPPoE protocol events debugging is on
PPPoE protocol errors debugging is on
  
```

```
Radius protocol debugging is on
```

Radius packet protocol debugging is on

Debug snippet:

BRAS#

\*Sep 19 18:44:14.531: PPPoE 0: I PADI R:0050.56ad.7206 L:ffff.ffff.ffff Gi0/0/1.47

! Receiving PPPoE Active Discovery Initiation (PADI) broadcast packet from Windows Machine (MAC 0050.56ad.7206) on Router interface Gi0/0/1.47

\*Sep 19 18:44:14.531: Service tag: NULL Tag

\*Sep 19 18:44:14.531: PPPoE 0: O PADO, R:d867.d99f.6601 L:0050.56ad.7206 Gi0/0/1.47

! Sending PPPoE Active Discovery Offer (PADO) unicast packet from Router interface Gi0/0/1.47 (MAC d867.d99f.6601 ) to Windows Machine (MAC 0050.56ad.7206)

\*Sep 19 18:44:14.531: Service tag: NULL Tag

\*Sep 19 18:44:14.533: PPPoE 0: I PADR R:0050.56ad.7206 L:d867.d99f.6601 Gi0/0/1.47

! Receiving PPPoE Active Discovery Request (PADR) unicast packet from Windows Machine (MAC 0050.56ad.7206) on Router interface Gi0/0/1.47

\*Sep 19 18:44:14.533: Service tag: NULL Tag

\*Sep 19 18:44:14.533: PPPoE : encap string prepared

\*Sep 19 18:44:14.533: [76]PPPoE 63: Access IE handle allocated

\*Sep 19 18:44:14.533: [76]PPPoE 63: AAA get retrieved attrs

\*Sep 19 18:44:14.533: [76]PPPoE 63: AAA get nas port details

\*Sep 19 18:44:14.533: [76]PPPoE 63: Error adjusting nas port format did

\*Sep 19 18:44:14.533: [76]PPPoE 63: AAA get dynamic attrs

\*Sep 19 18:44:14.533: [76]PPPoE 63: AAA unique ID 88 allocated

\*Sep 19 18:44:14.533: [76]PPPoE 63: No AAA accounting method list

\*Sep 19 18:44:14.534: [76]PPPoE 63: Service request sent to SSS

\*Sep 19 18:44:14.534: [76]PPPoE 63: Created, Service: None R:d867.d99f.6601 L:0050.56ad.7206 Gi0/0/1.47

\*Sep 19 18:44:14.534: [76]PPPoE 63: State NAS\_PORT\_POLICY\_INQUIRY Event SSS MORE KEYS

\*Sep 19 18:44:14.534: PPP: Alloc Context [7FE79EC0D8C8]

\*Sep 19 18:44:14.534: ppp76 PPP: Phase is ESTABLISHING

\*Sep 19 18:44:14.534: [76]PPPoE 63: data path set to PPP

\*Sep 19 18:44:14.534: [76]PPPoE 63: Segment (SSS class): PROVISION

! We can also enable 'debug sss events' and 'debug sss error' to debug this stage

\*Sep 19 18:44:14.534: [76]PPPoE 63: State PROVISION\_PPP Event SSM PROVISIONED

\*Sep 19 18:44:14.534: [76]PPPoE 63: O PADS R:0050.56ad.7206 L:d867.d99f.6601 Gi0/0/1.47

! Sending PPPoE Active Discovery Session Confirmation (PADS) unicast packets from Router interface Gi0/0/1.47 (MAC d867.d99f.6601 ) to Windows Machine (MAC 0050.56ad.7206)

\*Sep 19 18:44:14.534: [76]PPPoE 63: Unable to Add ANCP Line attributes to the PPPoE Authen attributes

! Access Node Control Protocol (ANCP) is configured between the Digital Subscriber Line Access Concentrator (DSLAM) and Broadband Remote Access Server (BRAS), which is used to aggregate traffic from multiple subscribers and deliver information for any application independently. More information related to ANCP could be found here. It is expected for the IOS to print this message even if ANCP is not enabled.

```
*Sep 19 18:44:14.534: ppp76 PPP: Using vpn set call direction
*Sep 19 18:44:14.534: ppp76 PPP: Treating connection as a callin
*Sep 19 18:44:14.534: ppp76 PPP: Session handle[8800004C] Session id[76]
*Sep 19 18:44:14.534: ppp76 LCP: Event[OPEN] State[Initial to Starting]
*Sep 19 18:44:14.534: ppp76 PPP LCP: Enter passive mode, state[Stopped]
*Sep 19 18:44:14.539: ppp76 LCP: I CONFREQ [Stopped] id 0 len 21
*Sep 19 18:44:14.539: ppp76 LCP: MRU 1480 (0x010405C8)
*Sep 19 18:44:14.539: ppp76 LCP: MagicNumber 0x61EB5A46 (0x050661EB5A46)
*Sep 19 18:44:14.539: ppp76 LCP: PFC (0x0702)
*Sep 19 18:44:14.539: ppp76 LCP: ACFC (0x0802)
*Sep 19 18:44:14.539: ppp76 LCP: Callback 6 (0x0D0306)
*Sep 19 18:44:14.539: ppp76 LCP: O CONFREQ [Stopped] id 1 len 18
*Sep 19 18:44:14.539: ppp76 LCP: MRU 1492 (0x010405D4)
*Sep 19 18:44:14.539: ppp76 LCP: AuthProto PAP (0x0304C023)
*Sep 19 18:44:14.539: ppp76 LCP: MagicNumber 0x7B063BEA (0x05067B063BEA)
*Sep 19 18:44:14.539: ppp76 LCP: O CONFREQ [Stopped] id 0 len 7
*Sep 19 18:44:14.539: ppp76 LCP: Callback 6 (0x0D0306)
*Sep 19 18:44:14.539: ppp76 LCP: Event[Receive ConfReq-] State[Stopped to REQsent]
*Sep 19 18:44:14.540: ppp76 LCP: I CONFACK [REQsent] id 1 len 18
*Sep 19 18:44:14.540: ppp76 LCP: MRU 1492 (0x010405D4)
*Sep 19 18:44:14.540: ppp76 LCP: AuthProto PAP (0x0304C023)
*Sep 19 18:44:14.540: ppp76 LCP: MagicNumber 0x7B063BEA (0x05067B063BEA)
*Sep 19 18:44:14.540: ppp76 LCP: Event[Receive ConfAck] State[REQsent to ACKrcvd]
*Sep 19 18:44:14.540: ppp76 LCP: I CONFREQ [ACKrcvd] id 1 len 18
*Sep 19 18:44:14.540: ppp76 LCP: MRU 1480 (0x010405C8)
*Sep 19 18:44:14.540: ppp76 LCP: MagicNumber 0x61EB5A46 (0x050661EB5A46)
*Sep 19 18:44:14.540: ppp76 LCP: PFC (0x0702)
*Sep 19 18:44:14.540: ppp76 LCP: ACFC (0x0802)
*Sep 19 18:44:14.540: ppp76 LCP: O CONFACK [ACKrcvd] id 1 len 18
*Sep 19 18:44:14.540: ppp76 LCP: MRU 1480 (0x010405C8)
*Sep 19 18:44:14.540: ppp76 LCP: MagicNumber 0x61EB5A46 (0x050661EB5A46)
*Sep 19 18:44:14.540: ppp76 LCP: PFC (0x0702)
*Sep 19 18:44:14.540: ppp76 LCP: ACFC (0x0802)
*Sep 19 18:44:14.540: ppp76 LCP: Event[Receive ConfReq+] State[ACKrcvd to Open]
*Sep 19 18:44:14.541: ppp76 LCP: I IDENTIFY [Open] id 2 len 18 magic 0x61EB5A46MSRASV5.20
*Sep 19 18:44:14.541: ppp76 LCP: I IDENTIFY [Open] id 3 len 24 magic 0x61EB5A46MSRAS-0-ADMIN-PC
*Sep 19 18:44:14.541: ppp76 LCP: I IDENTIFY [Open] id 4 len 24 magic 0x61EB5A46sPPY.X`I?Z5SWE}}
*Sep 19 18:44:14.541: ppp76 PPP: Queue PAP code[1] id[78]
*Sep 19 18:44:14.563: ppp76 PPP: Phase is AUTHENTICATING, by this end
*Sep 19 18:44:14.564: ppp76 PAP: Redirect packet to ppp76
*Sep 19 18:44:14.564: ppp76 PAP: I AUTH-REQ id 78 len 11 from "cisco"
```

! Incoming Authentication Request from Windows Machine using User name "cisco"

```
*Sep 19 18:44:14.564: ppp76 PAP: Authenticating peer cisco
*Sep 19 18:44:14.564: ppp76 PPP: Phase is FORWARDING, Attempting Forward
```

```
*Sep 19 18:44:14.564: ppp76 LCP: State is Open
*Sep 19 18:44:14.564: ppp76 PPP: Phase is AUTHENTICATING, Unauthenticated User
*Sep 19 18:44:14.564: RADIUS/ENCODE(00000088):Orig. component type = PPPoE
*Sep 19 18:44:14.564: RADIUS: DSL line rate attributes successfully added
*Sep 19 18:44:14.564: RADIUS/ENCODE: Skip encoding 0 length AAA Cisco vsa password
*Sep 19 18:44:14.564: RADIUS(00000088): Config NAS IP: 10.106.39.212
*Sep 19 18:44:14.564: RADIUS(00000088): Config NAS IPv6: ::
*Sep 19 18:44:14.564: RADIUS/ENCODE: No idb found! Framed IP Addr might not be included
*Sep 19 18:44:14.564: RADIUS/ENCODE(00000088): acct_session_id: 125
*Sep 19 18:44:14.564: RADIUS(00000088): Config NAS IP: 10.106.39.212
*Sep 19 18:44:14.564: RADIUS(00000088): sending
*Sep 19 18:44:14.564: RADIUS(00000088): Send Access-Request to 10.106.39.253:1645 id 1645/106,
len 147
```

! Sending an Access-Request to Radius Server at 10.106.39.253 on port 1645.

```
*Sep 19 18:44:14.564: RADIUS: authenticator C1 5B AA 62 1D E1 31 6C - 16 A5 CE 92 D6 9C 12 E7
*Sep 19 18:44:14.564: RADIUS: Framed-Protocol [7] 6 PPP [1]
*Sep 19 18:44:14.564: RADIUS: User-Name [1] 7 "cisco"
*Sep 19 18:44:14.564: RADIUS: User-Password [2] 18 *
*Sep 19 18:44:14.564: RADIUS: NAS-Port-Type [61] 6 Virtual [5]
*Sep 19 18:44:14.564: RADIUS: NAS-Port [5] 6 0
*Sep 19 18:44:14.564: RADIUS: NAS-Port-Id [87] 9 "0/0/1/1"
*Sep 19 18:44:14.564: RADIUS: Vendor, Cisco [26] 41
*Sep 19 18:44:14.564: RADIUS: Cisco AVpair [1] 35 "client-mac-address=0050.56ad.7206"
*Sep 19 18:44:14.564: RADIUS: Service-Type [6] 6 Framed [2]
*Sep 19 18:44:14.564: RADIUS: NAS-IP-Address [4] 6 10.106.39.212
*Sep 19 18:44:14.564: RADIUS: Acct-Session-Id [44] 10 "0000007D"
*Sep 19 18:44:14.564: RADIUS: Nas-Identifier [32] 12 "BRAS"
*Sep 19 18:44:14.564: RADIUS(00000088): Sending a IPv4 Radius Packet
*Sep 19 18:44:14.564: RADIUS(00000088): Started 5 sec timeout
*Sep 19 18:44:14.566: RADIUS: Received from id 1645/106 10.106.39.253:1645, Access-Accept, len
52
```

! Receiving an Access-Accep from Radius Server

```
*Sep 19 18:44:14.566: RADIUS: authenticator C0 0D 6C 33 F1 A3 04 27 - F0 C2 76 F5 54 FD E2 42
*Sep 19 18:44:14.566: RADIUS: Class [25] 32
*Sep 19 18:44:14.566: RADIUS: 4A 83 05 60 00 00 01 37 00 01 0A 6A 27 FD 01 D2 12 2E 98 D0 4F B0
00 00 00 00 00 00 14 [ J`7j'.O]
*Sep 19 18:44:14.566: RADIUS(00000088): Received from id 1645/106
*Sep 19 18:44:14.566: ppp76 PPP: Phase is FORWARDING, Attempting Forward
*Sep 19 18:44:14.568: [76]PPPoE 63: State LCP_NEGOTIATION Event SSS CONNECT LOCAL
*Sep 19 18:44:14.568: [76]PPPoE 63: Segment (SSS class): UPDATED
*Sep 19 18:44:14.568: [76]PPPoE 63: Segment (SSS class): BOUND
*Sep 19 18:44:14.568: [76]PPPoE 63: data path set to Virtual Access
*Sep 19 18:44:14.569: [76]PPPoE 63: State LCP_NEGOTIATION Event SSM UPDATED
*Sep 19 18:44:14.569: Vi2.1 PPP: Phase is AUTHENTICATING, Authenticated User
*Sep 19 18:44:14.569: Vi2.1 PAP: 0 AUTH-ACK id 78 len 5
*Sep 19 18:44:14.569: Vi2.1 PPP: Reducing MTU to peer's MRU
*Sep 19 18:44:14.569: [76]PPPoE 63: AAA get dynamic attrs
*Sep 19 18:44:14.569: Vi2.1 PPP: Phase is UP
*Sep 19 18:44:14.569: Vi2.1 IPCP: Protocol configured, start CP. state[Initial]
*Sep 19 18:44:14.569: Vi2.1 IPCP: Event[OPEN] State[Initial to Starting]
*Sep 19 18:44:14.569: Vi2.1 IPCP: 0 CONFREQ [Starting] id 1 len 10
*Sep 19 18:44:14.569: Vi2.1 IPCP: Address 192.168.1.1 (0x0306C0A80101)
*Sep 19 18:44:14.569: Vi2.1 IPCP: Event[UP] State[Starting to REQsent]
*Sep 19 18:44:14.569: [76]PPPoE 63: State PTA_BINDING Event STATIC BIND RESPONSE
```

```
*Sep 19 18:44:14.569: [76]PPPoE 63: Connected PTA
<snip>
*Sep 19 18:44:14.572: Vi2.1 IPCP: Event[Receive ConfReq+] State[ACKrcvd to Open]
*Sep 19 18:44:14.595: Vi2.1 IPCP: State is Open
*Sep 19 18:44:14.595: PPPoE : ipfib_encapstr prepared
*Sep 19 18:44:14.596: Vi2.1 Added to neighbor route AVL tree: topoid 0, address 192.168.1.2
*Sep 19 18:44:14.596: Vi2.1 IPCP: Install route to 192.168.1.2
```

```
! Installing route to PPPoE client
```

```
BRAS#sh pppoe sess
```

```
  1 session in LOCALLY_TERMINATED (PTA) State
  1 session total
```

Uniq ID	PPPoE SID	RemMAC LocMAC	Port	VT	VA VA-st	State Type
76	63	0050.56ad.7206 d867.d99f.6601	Gi0/0/1.47	10	Vi2.1 UP	PTA

```
BRAS#
```

```
BRAS#sh caller ip
```

```
Line User IP Address Local Number Remote Number <->
```

```
Vi2.1 cisco 192.168.1.2 - - in
```

```
BRAS# ping 192.168.1.2
```

```
Type escape sequence to abort.
```

```
Sending 5, 100-byte ICMP Echos to 192.168.1.2, timeout is 2 seconds:
```

```
!!!!
```

```
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

## Troubleshoot

Actualmente, no hay información específica de troubleshooting disponible para esta configuración. Sin embargo, podemos aplicar técnicas estándar de resolución de problemas relacionadas con PPP y PPPoE con ayuda de depuraciones relacionadas.

## Información Relacionada

- [Soporte Técnico y Documentación - Cisco Systems](#)