

Identificar e Solucionar Problemas de Conectividade de Clientes Sem Fio Comuns do Catalyst 9800 Wireless Controllers

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Coletar logs](#)

[Cenários em que o cliente não pode se conectar](#)

[As Credenciais De Autenticação Da Web Não Funcionam](#)

[Nenhuma VLAN válida definida no perfil de política](#)

[Senha incorreta](#)

[A lista de controle de acesso \(ACL\) enviada pelo RADIUS não existe na WLC 9800](#)

[A VLAN enviada pelo RADIUS não existe na WLC 9800](#)

[Desconectado devido a alterações no perfil da WLAN ou da política](#)

[O cliente é removido manualmente da rede](#)

[Desconectado devido a tempo limite de EAP](#)

[Desconectado devido à redefinição de rádio do AP](#)

[Desconectado devido a tempo limite de autenticação da Web](#)

[Desconectado devido ao tempo limite da sessão](#)

[Desconectado devido ao tempo limite ocioso](#)

[O cliente moveu-se entre SSIDs](#)

Introduction

Este documento descreve os cenários mais comuns de problemas de conectividade de cliente sem fio e como resolvê-los nos controladores sem fio Catalyst 9800.

Prerequisites

Requirements

A Cisco recomenda que você tenha conhecimento destes tópicos:

- Controladores sem fio Cisco Catalyst 9800 Series
- Acesso via Interface de Linha de Comando (CLI) aos controladores sem fio

Componentes Utilizados

As informações neste documento são baseadas no Cisco IOS® XE Gibraltar 16.10 ou versões

posteriores de software e hardware.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. Se a rede estiver ativa, certifique-se de que você entenda o impacto potencial de qualquer comando.

Coletar logs

O WLC 9800 fornece recursos de rastreamento sempre conectados. Isso garante que todos os erros, avisos e mensagens de nível de aviso relacionados à conectividade do cliente sejam constantemente registrados e que você possa exibir registros de uma condição de incidente ou falha após sua ocorrência.

Observação: Dependendo do volume de logs gerados, você pode voltar de algumas horas a vários dias.

Para visualizar os rastreamentos que a WLC 9800 coletou por padrão, você pode se conectar via SSH/Telnet à WLC 9800 e seguir estas etapas (certifique-se de que sua sessão esteja registrada em um arquivo de texto).

Etapa 1. Verifique a hora atual do controlador para que você possa acompanhar os registros no tempo de volta até quando o problema ocorreu.

```
# show clock
```

Etapa 2. Colete syslogs do buffer do controlador ou do syslog externo, conforme ditado pela configuração do sistema. Isso fornece uma visão rápida da integridade e dos erros do sistema, se houver.

```
# show logging
```

Etapa 3. Verifique se as condições de depuração estão ativadas.

```
# show debugging
IOSXE Conditional Debug Configs:

Conditional Debug Global State: Stop

IOSXE Packet Tracing Configs:

Packet Infra debugs:
```

Ip Address

Port

-----|-----

Observação: se você vir qualquer condição listada, isso significa que os rastreamentos são registrados no nível de depuração para todos os processos que encontram as condições ativadas (endereço mac, endereço ip e assim por diante). Isso aumenta o volume de registros. Portanto, recomenda-se limpar todas as condições quando não estiver depurando ativamente.

Etapa 4. Supondo que o endereço mac em teste não esteja listado como uma condição na Etapa 3., colete os rastreamentos de nível de aviso sempre ativo para o endereço mac específico.

```
# show logging profile wireless filter { mac | ip } { <aaaa.bbbb.cccc> | <a.b.c.d> } to-file  
always-on-<FILENAME.txt>
```

Você pode exibir o conteúdo da sessão ou copiar o arquivo para um servidor TFTP externo.

```
# more bootflash:always-on-<FILENAME.txt>  
or  
# copy bootflash:always-on-<FILENAME.txt> tftp://a.b.c.d/path/always-on-<FILENAME.txt>
```

Depuração condicional e rastreamento ativo de rádio:

Se os rastreamentos sempre ativos não fornecerem informações suficientes para determinar o disparador do problema sob investigação, você poderá habilitar a depuração condicional e capturar o rastreamento de Radio Ative (RA), que fornece rastreamentos em nível de depuração para todos os processos que interagem com a condição especificada (endereço mac do cliente, neste caso). Para habilitar a depuração condicional, verifique estas etapas.

Etapa 5. Verifique se não há condições de depuração habilitadas.

```
# clear platform condition all
```

Etapa 6. Ative a condição de depuração para o endereço MAC do cliente sem fio que você deseja monitorar.

Esse comando começa a monitorar o endereço mac fornecido por 30 minutos (1800 segundos). Como alternativa, você pode aumentar esse tempo para até 2.085.978.494 segundos.

```
# debug wireless mac <aaaa.bbbb.cccc> {monitor-time <seconds>}
```

Note: Para monitorar mais de um cliente por vez, execute `debug wireless mac` por endereço mac.

Observação: você não vê a saída da atividade do cliente na sessão do terminal, pois tudo é armazenado em buffer internamente para ser visualizado posteriormente.

Passo 7. Reproduza o problema ou comportamento que você deseja monitorar.

Etapa 8. Interrompa as depurações se o problema for reproduzido antes que o tempo de monitoramento padrão ou configurado acabe.

```
# no debug wireless mac <aaaa.bbbb.cccc>
```

Quando o tempo do monitor tiver decorrido ou a depuração sem fio tiver sido interrompida, a WLC 9800 gerará um arquivo local com o nome:

```
ra_trace_MAC_aaaabbbbcccc_HHMMSS.XXX_timezone_DayWeek_Month_Day_year.log
```

Etapa 9. Colete o arquivo da atividade do endereço MAC. Você pode copiar o `ra_trace .log` a um servidor externo ou exibir a saída diretamente na tela.

Verifique o nome do arquivo de rastreamentos de RA.

```
# dir bootflash: | inc ra_trace
```

Copie o arquivo para um servidor externo:

```
# copy bootflash:ra_trace_MAC_aaaabbbbcccc_HHMMSS.XXX_timezone_DayWeek_Month_Day_year.log  
tftp://a.b.c.d/ra-FILENAME.txt
```

Mostre o conteúdo:

```
# more bootflash:ra_trace_MAC_aaaabbbbcccc_HHMMSS.XXX_timezone_DayWeek_Month_Day_year.log
```

Etapa 10. Se a causa raiz ainda não for óbvia, colete os logs internos, que são uma visualização mais detalhada dos logs de depuração. Você não precisa depurar o cliente novamente, pois isso é apenas para dar uma olhada mais detalhada nos logs de depuração que já foram coletados e armazenados internamente.

```
# show logging profile wireless internal filter { mac | ip } { <aaaa.bbbb.cccc> | <a.b.c.d> }  
to-file ra-internal-<FILENAME>.txt
```

Observação: a saída desse comando retorna rastros para todos os níveis de registro de todos os processos e é bastante volumosa. Envie o Cisco TAC para ajudar a analisar esses rastreamentos.

Você pode copiar o ra-internal-FILENAME.txt a um servidor externo ou exibir a saída diretamente na tela.

Copie o arquivo para um servidor externo:

```
# copy bootflash:ra-internal-<FILENAME>.txt tftp://a.b.c.d/ra-internal-<FILENAME>.txt
```

Mostre o conteúdo:

```
# more bootflash:ra-internal-<FILENAME>.txt
```

Etapa 11. Remova as condições de depuração.

```
# clear platform condition all
```

Observação: certifique-se de sempre remover as condições de depuração após uma sessão de solução de problemas.

Cenários em que o cliente não pode se conectar

As Credenciais De Autenticação Da Web Não Funcionam

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [27915]: UUID: 100000000015b, ra: 15,  
(info): [e4b3.1851.90ff:capwap_90800003] Authc failure from WebAuth, Auth event fail
```

Razão:

- O cliente não está usando credenciais válidas
- Não há rede de autorização padrão definida na WLC 9800

Soluções possíveis:

- Verifique se o cliente está usando credenciais válidas
- Adicionar um método de rede de autorização padrão

GUI:

Navegue até Configuration > Security > AAA > AAA Method List > Authorization > + Add e criar um novo método de autorização com esses parâmetros.

Quick Setup: AAA Authorization

Method List Name*

Type*

Group Type

Available Server Groups: radius, ldap, tacacs+, ISE-KCG-grp

Assigned Server Groups: (empty)

CLI:

```
# config t
# aaa authorization network default local
```

Nenhuma VLAN válida definida no perfil de política

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm] [25054]: UUID: 1000000000019, ra: 15, (ERR):
EPM_PLUGIN_VLAN_ERR: [HDL = 0x0] Unable to get active_feature_ctx for vlan group name YYYY/DD/MM
HH:MM:SS.xxx {wncd_x_R0-0}{1}: [sanet-shim-miscellaneous] [25054]: UUID: 1000000000019, ra: 15,
(ERR): MAC: 0874.0277.1345 Error in fetching vlans YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}:
[sanet-shim-miscellaneous] [25054]: UUID: 1000000000019, ra: 15, (ERR): MAC: 0874.0277.1345
building Mobile Announce Vlanid payload failed
```

Razão:


Não há VLAN válida definida no perfil de política atribuído à WLAN.

Solução:

1. Verifique qual perfil de política é usado pelo cliente.

GUI:

Navegue até **Monitoring > Wireless > Clients > Client row > Client Properties** (pesquisa opcional para um cliente específico usando seu endereço mac).

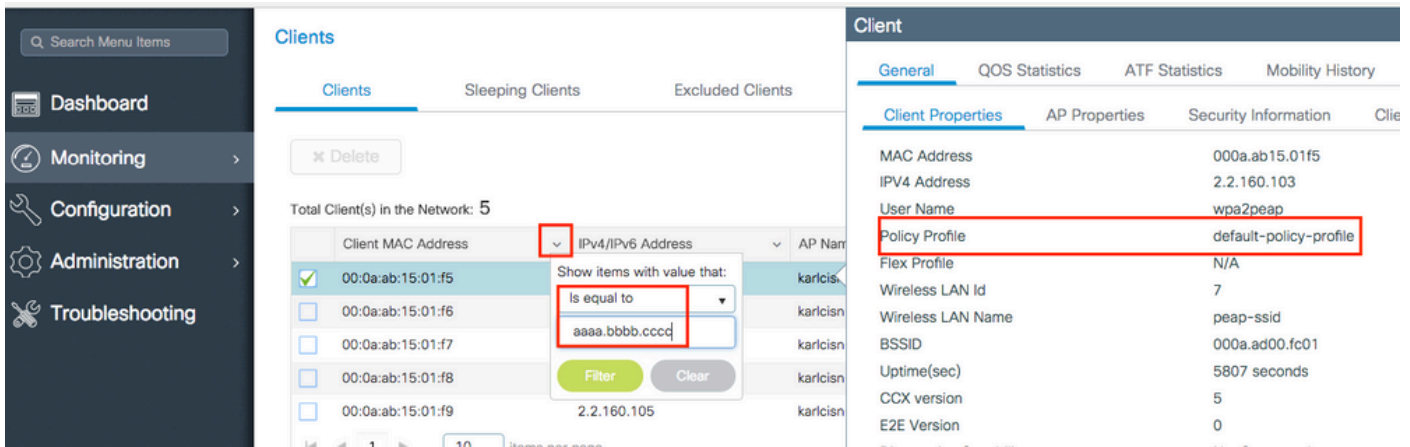


CLI:

```
# show wireless client mac-address <aaaa.bbbb.cccc> detail | inc Policy Profile
Policy Profile : default-policy-profile
```

2. Verifique qual VLAN está atribuída a esse Perfil de política.

GUI:

Navegue até Configuration > Tags & Profiles > Policy > Policy Profile row > Access Policies .

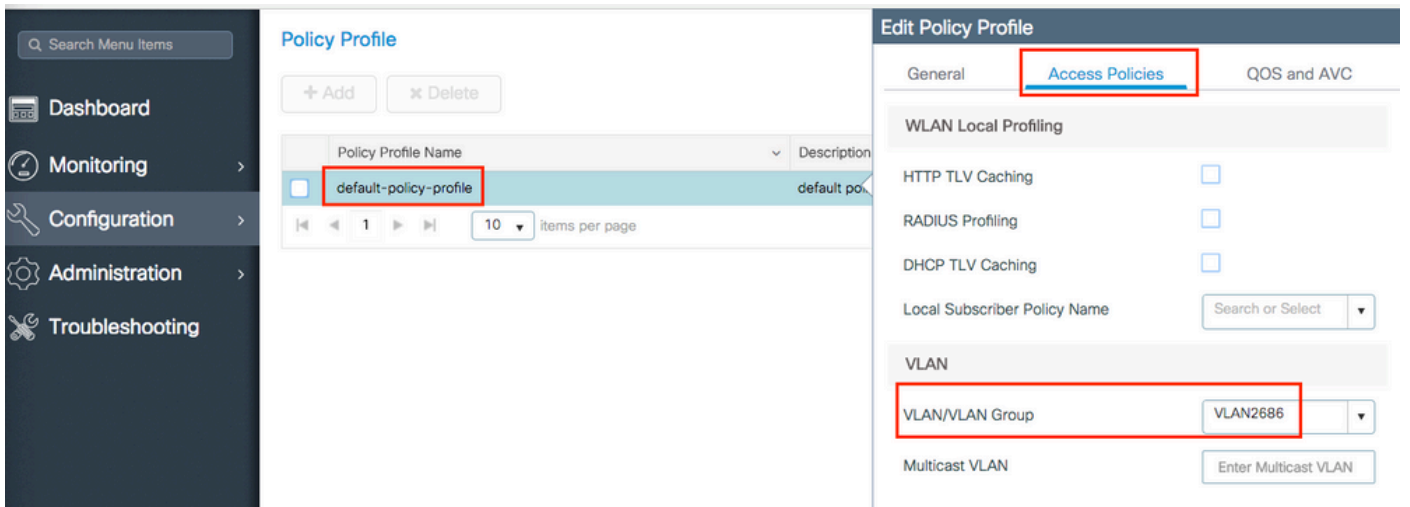

CLI:

```
# show wireless profile policy detailed default-policy-profile | inc VLAN
VLAN : VLAN2686
```

3. Verifique se o parâmetro VLAN tem um nome de VLAN ou ID de VLAN válido e ativo.

GUI:

Navegue até Configuration > Layer2 > VLAN > VLAN .

The screenshot shows a network management interface with a sidebar on the left containing menu items: Dashboard, Monitoring, Configuration (highlighted in red), Administration, and Troubleshooting. The main content area is titled 'VLAN' and has a sub-tab 'VLAN' (also highlighted in red) selected. Below the tabs are '+ Add' and 'x Delete' buttons. A table displays the following VLAN configurations:

VLAN ID	Name	Status
<input type="checkbox"/> 1	default	active
<input type="checkbox"/> 210	VLAN0210	active
<input type="checkbox"/> 2600	VLAN2600	active
<input type="checkbox"/> 2601	VLAN2601	active
<input type="checkbox"/> 2602	VLAN2602	active
<input type="checkbox"/> 2686	VLAN2686	active

CLI:

```
# show vlan brief
```

```

VLAN Name                Status      Ports
-----
1    default                active     Te0/0/2, Te0/0/3
210  VLAN0210                active
1002 fddi-default            act/unsup
1003 token-ring-default    act/unsup
1004 fddinet-default       act/unsup
1005 trnet-default        act/unsup

VLAN Name                Status      Ports
-----
2600 VLAN2600                active
2601 VLAN2601                active
2602 VLAN2602                active
2686 VLAN2686            active

```

Note: Se um nome de VLAN for usado, ele diferencia maiúsculas de minúsculas, portanto, certifique-se de que seja exatamente o mesmo visto no `show vlan brief` comando.

4. Corrija a VLAN conforme necessário.

GUI:

Navegue novamente para Configuration > Tags & Profiles > Policy > Policy Profile row > Access Policies e corrigir a VLAN.

CLI:

```

# config t
# wireless profile policy default-policy-profile
# shutdown # vlan <vlan-# or vlan-name>
# no shutdown

```


Senha incorreta

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-keymgmt] [27782]: UUID: 1000000000088, ra: 15,  
(ERR): MAC: e4b3.187c.3058 Keymgmt: Failed to validate eapol mic. MIC mismatch. YYYY/DD/MM  
HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-keymgmt] [27782]: UUID: 1000000000088, ra: 15, (ERR):  
MAC: e4b3.187c.3058 Keymgmt: Failed to validate eapol key m2. MIC validation failed
```

Razão:

O cliente está inserindo uma senha incorreta.

Soluções possíveis:

- Corrija a senha no dispositivo de ponto de extremidade
- Corrija a senha no SSID

GUI:

Navegue até [Configuration > Wireless > WLANs > WLAN name > Security > Layer2](#) , e corrija a senha.

The screenshot displays the Cisco Wireless LAN Controller (WLC) configuration interface. On the left, the 'Configuration' menu item is highlighted. The main configuration area is titled 'Edit WLAN' and has two tabs: 'General' and 'Security'. The 'Security' tab is selected. Below the tabs, there are two sub-sections: 'Layer2' and 'Layer3'. The 'Layer2' sub-section is active, showing the following settings:

- Layer 2 Security Mode: WPA + WPA2
- MAC Filtering:
- Protected Management Frame:
- PMF: Disabled
- WPA Parameters:
 - WPA Policy:
 - WPA2 Policy:
 - WPA2 Encryption:
 - AES(CCMP128):
 - CCMP256:
 - GCMP128:
 - GCMP256:
 - Auth Key Mgmt: PSK
 - PSK Format: ASCII
 - Pre-Shared Key: [Redacted]

CLI:

```
# config t
# wlan <wlan-name>
# shut
# security wpa psk set-key ascii 0 <clear-text-password>
# no shut
```

A lista de controle de acesso (ACL) enviada pelo RADIUS não existe na WLC 9800

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm-acl] [8104]: (ERR): ACL acl-sent-by-ise is
missing in configuration for mac e4b3.187c.3058
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm-acl] [8104]: (ERR): Unable to parse EPM
attributes
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event
```

```
EV_PLUGIN_CONF
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm] [8104]: (ERR): Error in activating feature (EPM
ACL PLUG-IN)
.
.
.
EPM Data Base:
Number of Authz_info: 2
Authz info 1 details
Number of feat info: 2, State: Success, Priority: 254
EPM Vlan PLUG-IN Status: Success
VLAN Group: VLAN2602
VLAN-ID: 2602
SM Reauth PLUG-IN Status: Success
Authz info 2 details
Number of feat info: 4, State: Fail, Priority: 100
EPM MISC PLUG-IN Status: Success
Anchor Vlan: 0
EPM ACL PLUG-IN Status: Activate Failure
SM ACCOUNTING PLUG-IN Status: Success
linksec Status: Success
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-infra-evq-lib] [8104]: (note): already
started radioactive trace on key:[e4b3.187c.3058]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event
EV_SVM_APPLY_UP_FAIL
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] SM unable to apply User Profile for 0x1A000004 - 'Subsystem(4)'
detected the 'fatal' condition 'Code(47)'
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] Unable to process authc result for 0x1A000004 - success
handling failed
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet eventQ: AUTH_MGR_MQ,
message:3
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8104]: (ERR): MAC: e4b3.187c.3058
client authz result: FAILURE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-exclusion] [8104]: (info): MAC:
e4b3.187c.3058 Add client to exclusionlist, sending ipc to add client to client exclusion
table, reason: ACL failure, timeout: 60, AP: MAC: f07f.06ee.f590
```

Razão:

A ACL enviada pelo servidor RADIUS não existe na WLC 9800.

Soluções possíveis:

- Corrija a configuração do servidor RADIUS para enviar o nome correto da ACL
- Adicione a ACL ausente à WLC 9800

A VLAN enviada pelo RADIUS não existe na WLC 9800

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm] [8104]: (ERR): Error in activating feature (EPM
Vlan PLUG-IN)
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event EV_START_CALL
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-infra-evq] [8104]: (ERR):
EPM Data Base:
```

```
Number of Authz_info: 2
Authz info 1 details
Number of feat info: 2, State: Success, Priority: 254
EPM Vlan PLUG-IN Status: Conflict
SM Reauth PLUG-IN Status: Success
Authz info 2 details
Number of feat info: 4, State: Activate, Priority: 100
EPM MISC PLUG-IN Status: Success
Anchor Vlan: 0
SM ACCOUNTING PLUG-IN Status: Success
EPM Vlan PLUG-IN Status: Activate Failure
VLAN Group: vlan-sent-by-ise
VLAN-ID: 0
linksec Status: Success
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event
EV_SVM_APPLY_UP_FAIL
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] SM unable to apply User Profile for 0x0E000005 - 'Subsystem(4)'
detected the 'fatal' condition 'Code(47)'
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] Unable to process authc result for 0x0E000005 - success
handling failed
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet eventQ: AUTH_MGR_MQ,
message:3
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8104]: (ERR): MAC: e4b3.187c.3058
client authz result: FAILURE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-exclusion] [8104]: (info): MAC: e4b3.187c.3058
Add client to exclusionlist, sending ipc to add client to client exclusion table, reason: VLAN
failure, timeout: 60, AP: MAC: f07f.06ee.f590
```

Razão:

A VLAN enviada pelo servidor RADIUS não existe na WLC 9800.

Soluções possíveis:

- Corrija a configuração do servidor RADIUS para enviar o nome/ID correto da VLAN
- Adicione a VLAN ausente à WLC 9800

Desconectado devido a alterações no perfil da WLAN ou da política

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-infra-evq] [8522]: (note): Mcast: Sent L2
MGID 2602 DEL to AP vap_id 2
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [apmgr-bssid] [8522]: (ERR): 00c8.8b26.d790 Radio:0
BSSID:1 - Bssid ifid is not created so no need to push data to fman
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 5, CO_CLIENT_DELETE_REASON_BSSID_DOWN, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_BSSID_DOWN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [8522]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [8522]: (ERR): MAC:
```

```
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [multicast-main] [8522]: (info): MAC: e4b3.187c.3058
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-iplearn] [8522]: (info): MAC: e4b3.187c.3058
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCN[0]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [8522]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-transition] [8522]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [8522]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8522]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8522]: (info):
[e4b3.187c.3058:capwap_90000003] Disconnect request from SANET-SHIM (12) for e4b3.187c.3058 /
0xfb6000001 - term: service-unavailable, abort: Unknown, disc: session disconnect
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute
:bsn-vlan-interface-name 0 "VLAN2602" ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute :
timeout 0 1800 (0x708) ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8522]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 5,
CO_CLIENT_DELETE_REASON_BSSID_DOWN.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

Razão:

Foram feitas alterações na GUI ou o SSID ou o perfil de política foi desativado manualmente.

Solução:

Esse é um comportamento normal, evite fazer alterações nos SSIDs ou nos perfis de política nas horas de produção.

O cliente é removido manualmente da rede

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 12, CO_CLIENT_DELETE_REASON_ADMIN_RESET, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCN[0]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_ADMIN_RESET
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [8522]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [8522]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [multicast-main] [8522]: (info): MAC: e4b3.187c.3058
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-iplearn] [8522]: (info): MAC: e4b3.187c.3058
```

```
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [8522]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-transition] [8522]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [8522]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8522]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8522]: (info):
[e4b3.187c.3058:capwap_90000003] Disconnect request from SANET-SHIM (12) for e4b3.187c.3058 /
0x30000003 - term: admin-reset, abort: Unknown, disc: session disconnect
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute
:bsn-vlan-interface-name 0 "VLAN2602" ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute :
timeout 0 1800 (0x708) ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8522]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 12,
CO_CLIENT_DELETE_REASON_ADMIN_RESET.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

Razão:

O cliente foi removido manualmente da rede por uma das interfaces de linha de comando:

```
# wireless client mac-address aaaa.bbbb.cccc deauthenticate
```

Ou por GUI:

The screenshot displays the 'Clients' management interface. On the left, a dark sidebar contains navigation options: Dashboard, Monitoring (highlighted with a red box), Configuration, Administration, and Troubleshooting. The main area shows three tabs: 'Clients' (highlighted with a red box), 'Sleeping Clients', and 'Excluded Clients'. Below the tabs, there is a 'Delete' button (highlighted with a red box) and a summary 'Total Client(s) in the Network: 1'. A table lists the client details:

Client MAC Address	IPv4/IPv6 Address	AP Name
e4:b3:18:7c:30:58	172.16.1.253	3702-02

At the bottom of the table, there is a pagination control showing '1' of 1 items and '10 items per page'. A checkbox next to the client entry is checked (highlighted with a red box).

Solução:

Nenhum, comportamento normal iniciado pelo usuário.

Desconectado devido a tempo limite de EAP

Exemplo de registro:

```

YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [errmsg] [8681]: (note): %DOT1X-5-FAIL: Authentication
failed for client (0874.0277.1345) with reason (Timeout) on Interface capwap_90800003
AuditSessionID 34AD580A0000000D7F735399
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Authc failure from Dot1X, Auth event timeout
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] (Re)try failed method Dot1X - 0874.0277.1345
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Retrying (count 3) method dot1x
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (info): MAC: 0874.0277.1345
Deleting the client, reason: 7, CO_CLIENT_DELETE_REASON_CONNECT_TIMEOUT, Client state
S_CO_L2_AUTH_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (note): MAC: 0874.0277.1345
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_CONNECT_TIMEOUT
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-state] [8681]: (note): MAC:
0874.0277.1345 Client state transition: S_CO_L2_AUTH_IN_PROGRESS -> S_CO_DELETE_IN_PROGRESS
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-transition] [8681]: (info): MAC: 0874.0277.1345
MMIF FSM transition: S_MA_INIT -> S_MA_LOCAL_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-client] [8681]: (ERR): MAC: 0874.0277.1345 Client
not present in DB. Responding to CO with Delete Ack
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Disconnect request from SANET-SHIM (12) for 0874.0277.1345 /
0x30000003 - term: supplicant-restart, abort: Unknown, disc: authorization failure
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_AUTHIF_DOT1XAUTH_PENDING -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dot11] [8681]: (info): MAC: 0874.0277.1345 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 7,
CO_CLIENT_DELETE_REASON_CONNECT_TIMEOUT.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dot11] [8681]: (info): MAC: 0874.0277.1345 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_SANET_DELETE_IN_PROGRESS -> S_AUTHIF_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet eventQ: EAP_CORE_MQ,
message:2
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-state] [8681]: (note): MAC:
0874.0277.1345 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED

```

Razão:

O cliente não está respondendo ao pacote EAP (Extensible Authentication Protocol) enviado pela WLC 9800 no intervalo de tempo limite de solicitação EAP nem aos tempos máximos de tentativas de solicitação EAP.

Soluções possíveis:

- Atualize os drivers de cliente sem fio para o mais recente
- Certificado RADIUS de confiança de cliente sem fio
- Aumentar o Tempo Limite de Solicitação EAP e/ou o Máximo de Repetições de Solicitação

EAP

CLI:

```
# config t
# wireless security dot1x request retries <0-20>
# wireless security dot1x timeout <1-120 seconds>
```

GUI:

Navegue até Configuration > Security > Advanced EAP e personalizar as configurações necessárias.

Desconectado devido à redefinição de rádio do AP

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [apmgr-capwap-config] [8621]: (info): f07f.06ee.f590
Radio: 1 is Operationally DOWN.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [apmgr-db] [8621]: (note): MAC: f07f.06ee.f590 Radio 1
is disabled, on receiving change state event message from AP
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [radio-history-reset] [8621]: (info): Radio reset of
the AP f07f.06ee.f590 Slot:1 Band:802.11a due to Cause:0, Detailed Cause : 56 - Interface UP for
Channel Change
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCID[1]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 5, CO_CLIENT_DELETE_REASON_BSSID_DOWN, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_BSSID_DOWN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8621]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dpath_svc] [8621]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-transition] [8621]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-client] [8621]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [wncd_1] [8621]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [auth-mgr] [8621]: (info):
[e4b3.187c.3058:capwap_90400003] Disconnect request from SANET-SHIM (12) for e4b3.187c.3058 /
0xf89000008 - term: service-unavailable, abort: Unknown, disc: session disconnect
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-auth] [8621]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 5,
CO_CLIENT_DELETE_REASON_BSSID_DOWN.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

Razão:

O AP ao qual o cliente estava associado alterou o canal ou a alimentação, causando uma reinicialização do rádio.

Soluções possíveis:

- Este é um comportamento normal
- Você pode configurar a frequência com que a WLC 9800 tem permissão para fazer alterações de canal

CLI:

```
# config t
# ap dot11 { 5ghz | 24ghz } rrm channel dca interval <0-24>

Valid values 1,2,3,4,6,8,12 and 24 hours, 0 = 10 minutes (default)
```

GUI:

Navegue até **Configuration > Radio Configurations > RRM > 5 GHz Band/2.4 GHz Band > DCA > Increase Interval Setting.**

Desconectado devido a tempo limite de autenticação da Web

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Authc failure from WebAuth, Auth event no-response
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet eventQ: AUTH_MGR_MQ,
message:6
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_AUTHC_FAILED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] AUTHC_FAIL - unauthorize by default
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [9800 WLC-infra-evq] [8681]: (ERR): Authc failure for
mac 0874.0277.1345, username , audit session id 34AD580A0000000E7FFA4ED8, Failure reason: No
Response from Client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Signalling Authc fail for client 0874.0277.1345
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [errmsg] [8681]: (note): %SESSION_MGR-5-FAIL:
Authorization failed or unapplied for client (0874.0277.1345) on Interface capwap_90800003
AuditSessionID 34AD580A0000000E7FFA4ED8. Failure reason: Authc fail. Authc failure reason: No
Response from Client.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Authz failed/unapplied for 0x08000004 (0874.0277.1345), method:
webauth. Signal switch PI.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_AUTHZ_FAILED
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_AUTHIF_WEBAUTH_PENDING -> S_AUTHIF_WEBAUTH_PENDING
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (ERR): MAC: 0874.0277.1345 L3
Authentication FAIL.
```

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_AUTHIF_WEBAUTH_PENDING -> S_WAIT_FOR_CO_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [9800 WLC-infra-evq] [8681]: (ERR): WLAN profile =
prof-name, Policy profile = default-policy-profile, AP name = AP1702-05
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (info): MAC: 0874.0277.1345
Deleting the client, reason: 0, CO_CLIENT_DELETE_REASON_NONE, Client state
S_CO_L3_AUTH_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (note): MAC: 0874.0277.1345
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_NONE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-state] [8681]: (note): MAC:
0874.0277.1345 Client state transition: S_CO_L3_AUTH_IN_PROGRESS -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [9800 WLC-qos-client] [8681]: (ERR): MAC:
0874.0277.1345 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [multicast-main] [8681]: (info): MAC: 0874.0277.1345
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-iplearn] [8681]: (info): MAC: 0874.0277.1345
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dpath_svc] [8681]: (note): MAC: 0874.0277.1345 Client
datapath entry deleted for ifid 0xfa0000002
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-transition] [8681]: (info): MAC: 0874.0277.1345
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-client] [8681]: (ERR): MAC: 0874.0277.1345 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Disconnect request from SANET-SHIM (12) for 0874.0277.1345 /
0x08000004 - term: none, abort: Unknown, disc: (default)
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [aaa-attr-inf] [8681]: (info): [ Applied attribute
:bsn-vlan-interface-name 0 "VLAN2602" ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [aaa-attr-inf] [8681]: (info): [ Applied attribute :
timeout 0 1800 (0x708) ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_WAIT_FOR_CO_DELETE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
0874.0277.1345 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[2]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dot11] [8681]: (info): MAC: 0874.0277.1345 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

Razão:

O cliente não concluiu a autenticação da Web dentro do tempo permitido (cerca de 120 segundos).

Solução:

Certifique-se de que os clientes concluem a autenticação da Web em 120 segundos.

Desconectado devido ao tempo limite da sessão

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-auth] [8621]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 23, CO_CLIENT_DELETE_REASON_SESSION_TIMEOUT, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_SESSION_TIMEOUT
```

```

YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[1]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8621]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [9800 WLC-qos-client] [8621]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [multicast-main] [8621]: (info): MAC: e4b3.187c.3058
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-iplearn] [8621]: (info): MAC: e4b3.187c.3058
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dpath_svc] [8621]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa0000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-transition] [8621]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-client] [8621]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-auth] [8621]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_SANET_DELETED -> S_AUTHIF_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 23,
CO_CLIENT_DELETE_REASON_SESSION_TIMEOUT.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8621]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED

```

Razão:

O cliente atingiu o tempo limite de sua sessão.

Soluções possíveis:

- Este é um comportamento normal
- Aumentar o tempo limite de sessão de perfil de política associado ao SSID

CLI:

```

# config t
# wireless profile policy <policy-profile-name>
# shutdown
# session-timeout <20-86400 seconds>
# no shutdown

```

GUI:

Navegue até **Configuration > Tags & Profiles > Policy > Policy Profile Name > Advanced > WLAN Timeout** e personalize os temporizadores conforme necessário.

Desconectado devido ao tempo limite ocioso

Exemplo de registro:

```

YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (note): MAC: e4b3.187c.3058

```

```
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_MN_IDLE_TIMEOUT
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [7807]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [7807]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa000002
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [7807]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED
```

Razão:

O cliente não enviou tráfego (ou tráfego suficiente) dentro do intervalo de tempo limite ocioso configurado.

Soluções possíveis:

- Este é um comportamento normal
- Personalizar as configurações ociosas do perfil de política associadas ao SSID

CLI:

```
# config t
# wireless profile policy <policy-profile-name>
# shutdown
# idle-timeout <15-100000 seconds>
# idle-threshold <0-4294967295 bytes>
# no shutdown
```

GUI:

Navegue até [Configuration > Tags & Profiles > Policy > Policy Profile Name > Advanced > WLAN Timeout](#) e personalize as configurações ociosas conforme necessário.

Observação: se você não configurar o `idle-threshold`, o cliente precisará enviar qualquer quantidade de tráfego dentro do período de `idle-timeout` para não ser desconectado. Se você configurar o limiar de ociosidade, o cliente deverá enviar essa quantidade de bytes dentro do timeout de ociosidade para não ser desconectado (isto é, você configura um limiar de ociosidade de 10 bytes e um timeout de ociosidade de 30 segundos, os clientes sem fio precisam enviar pelo menos 10 bytes de tráfego a cada 30 segundos para não serem desconectados da rede).

O cliente moveu-se entre SSIDs

Exemplo de registro:

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (note): MAC: e4b3.187c.3058
Association received. BSSID f07f.06ee.f59d, old BSSID f07f.06ee.f59e, WLAN 1, Slot 1 AP
f07f.06ee.f590, 3702-02
```

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (ERR): MAC: e4b3.187c.3058
Failed to start dot11 processing. Failed to populate client record in DB
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_WLAN_CHANGE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [7807]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {fman_fp_F0-0}{1}: [wireless-client] [10254]: UUID: 1000000006930, ra: 5
(note): WLCLIENT 0xa0000002 pd_hdl 0x33 AOM delete succeeded
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [7807]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa0000002
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [7807]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8009]: (note): MAC: e4b3.187c.3058
Association received. BSSID 00c8.8b26.d79d, old BSSID 0000.0000.0000, WLAN 1, Slot 1 AP
00c8.8b26.d790, AP-1700-x
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8009]: (note): MAC:
e4b3.187c.3058 Client state transition: client_orch_sm_state__none -> S_CO_ASSOCIATING
```

Razão:

O cliente foi conectado a um SSID e movido para outro.

Soluções possíveis:

- Comportamento normal
- Remova o 2º SSID do cliente

Sobre esta tradução

A Cisco traduziu este documento com a ajuda de tecnologias de tradução automática e humana para oferecer conteúdo de suporte aos seus usuários no seu próprio idioma, independentemente da localização.

Observe que mesmo a melhor tradução automática não será tão precisa quanto as realizadas por um tradutor profissional.

A Cisco Systems, Inc. não se responsabiliza pela precisão destas traduções e recomenda que o documento original em inglês ([link fornecido](#)) seja sempre consultado.