

RV130W上SSID的一天访问时间

目标

管理员可以通过为特定服务集标识符(SSID)配置一天中的时间访问来提高网络的安全性。SSID是与无线网络关联的唯一标识符。Time of Day Access允许管理员指定何时允许用户访问网络以及何时限制用户。


本文档旨在说明如何在RV130W上配置SSID的Time of Access设置。

适用设备

·RV130W

步骤

步骤1. 登录Web配置实用程序并选择Wireless > **Basic Settings**。“基本设置”页打开：

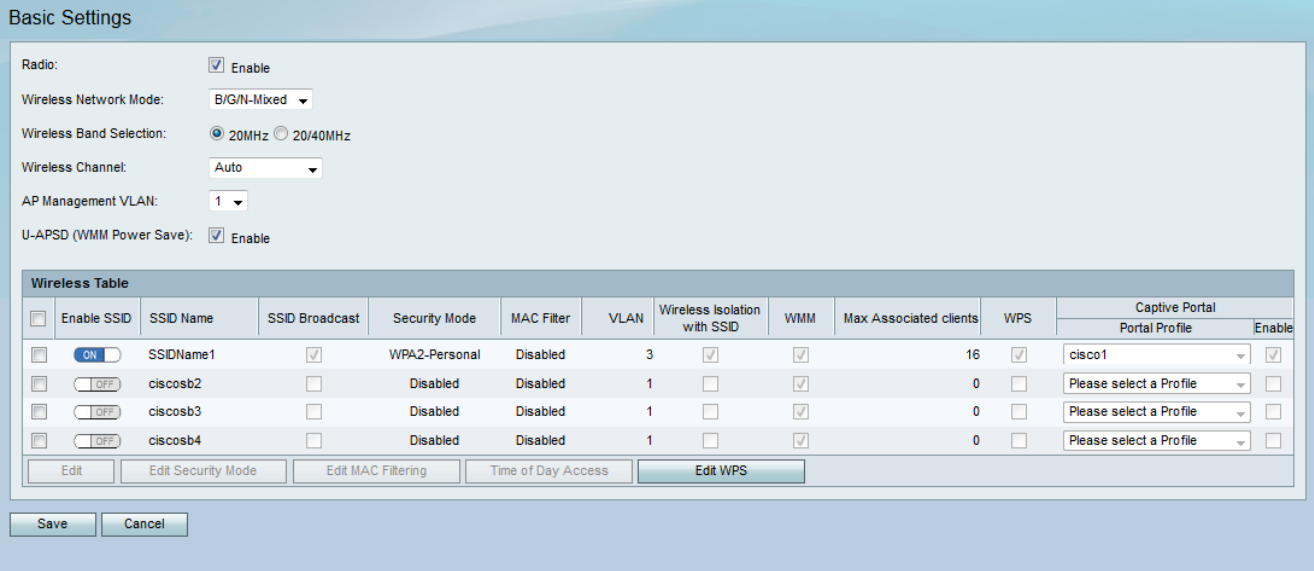

The screenshot shows the 'Basic Settings' page. At the top, there are several configuration options:

- Radio: Enable
- Wireless Network Mode: B/G/N-Mixed
- Wireless Band Selection: 20MHz 20/40MHz
- Wireless Channel: Auto
- AP Management VLAN: 1
- U-APSD (WMM Power Save): Enable

Below these settings is a table titled 'Wireless Table' with the following columns: Enable SSID, SSID Name, SSID Broadcast, Security Mode, MAC Filter, VLAN, Wireless Isolation with SSID, WMM, Max Associated clients, WPS, and Captive Portal (Portal Profile, Enable).

Enable SSID	SSID Name	SSID Broadcast	Security Mode	MAC Filter	VLAN	Wireless Isolation with SSID	WMM	Max Associated clients	WPS	Captive Portal	
										Portal Profile	Enable
<input checked="" type="checkbox"/>	SSIDName1	<input checked="" type="checkbox"/>	WPA2-Personal	Disabled	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	16	<input checked="" type="checkbox"/>	cisco1	<input checked="" type="checkbox"/>
<input type="checkbox"/>	ciscosb2	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	ciscosb3	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	ciscosb4	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>

At the bottom of the table, there are buttons for 'Edit', 'Edit Security Mode', 'Edit MAC Filtering', 'Time of Day Access', and 'Edit WPS'. Below the table are 'Save' and 'Cancel' buttons.

步骤2. 选中要编辑的服务集标识符(SSID)复选框，然后单击Time of Day Access按钮为SSID配置Time of Access。

Basic Settings

Radio: Enable

Wireless Network Mode: B/G/N-Mixed

Wireless Band Selection: 20MHz 20/40MHz

Wireless Channel: Auto

AP Management VLAN: 1

U-APSD (WMM Power Save): Enable

<input type="checkbox"/>	Enable SSID	SSID Name	SSID Broadcast	Security Mode	MAC Filter	VLAN	Wireless Isolation with SSID	WMM	Max Associated clients	WPS	Captive Portal	
											Portal Profile	Enable
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	SSIDName1	<input checked="" type="checkbox"/>	WPA2-Personal	Disabled	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	16	<input checked="" type="checkbox"/>	cisco1	<input checked="" type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	ciscosb2	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	ciscosb3	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	ciscosb4	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>

Buttons: Edit, Edit Security Mode, Edit MAC Filtering, Time of Day Access, Edit WPS

Buttons: Save, Cancel

此时将打开“访问时间”页：

Time of Day Access

Add / Edit Access Point Configuration

Active Time: Enable

Start Time: 12 Hours 0 Minutes AM

Stop Time: 12 Hours 0 Minutes AM

Buttons: Save, Cancel, Back

步骤3.在“活动时间”字段中，选中启用复选框以启用“每日时间访问”。

Time of Day Access

Add / Edit Access Point Configuration

Active Time: Enable

Start Time: 12 Hours 0 Minutes AM

Stop Time: 12 Hours 0 Minutes AM

Buttons: Save, Cancel, Back

步骤4.在“开始时间”字段中，使用提供的下拉列表指定一天内用户可访问网络的时间。

Time of Day Access

Add / Edit Access Point Configuration

Active Time: Enable

Start Time: 12 Hours 0 Minutes AM

Stop Time: 12 Hours 0 Minutes AM

Save Cancel Back

步骤5.在“停止时间”字段中，使用提供的下拉列表指定网络限制给用户的时间。

Time of Day Access

Add / Edit Access Point Configuration

Active Time: Enable

Start Time: 05 Hours 08 Minutes PM

Stop Time: 12 Hours 0 Minutes AM

Save Cancel Back

步骤6.单击“保存”以保存设置。

06		28		50	
07		29		51	
08		30		52	
09		31		53	
10		32		54	
11		33		55	
12		34		56	
13		35		57	
14		36		58	
15		37		59	
16		38		60	
17		39		61	
18		40		62	
19		41		63	
20		42		64	
21		43			
22		44			

Save Cancel Back