

اهل يغشت و ةي امحل رادج لي حرت ةادأ ةئيهت يلع CDO

تايوت حمل

[ةمدقم](#)

[ةيساس الابل طتم](#)

[تابل طتم](#)

[ةمدخت سمل تانوك](#)

[ةيساس اتمول عم](#)

[نيوك ت](#)

[ينال شات](#)

[جرطلا](#)

[ةجهل ايلع لاثم](#)

[ةلص تاذت اتمول عم](#)

ةمدقم

اهم ادخت ساو اهل يغشت و FirePOWER (FMT) لي حرت ةادأ ةئيهت ةيفيك دن تسمل اذ ه حضوي
يلع Cisco Defense Orchestrator (CDO) ةيساس الابل طتم.

ةيساس الابل طتم

تابل طتم

ةيلالت تاعوضوم الة فرع م ب Cisco ي صوت

أ Firepower (FMT) لي حرت ةادأ

Cisco Defense Orchestrator (CDO).

(FTD) ةيران الة قاطال ديهت دض عافدل

(ASA) ةلد عم ال نام الة ةزهجأ

ةمدخت سمل تانوك

(4.0.3 رادصل) ةي امحل رادج لي حرت ةادأ

Cisco Defense Orchestrator.

ةباحس ال ربع هري فون مت يذلا ةي امحل ناردي ةرادك زكرم

ةلد عم ال نام الة ةزهجأ

ران الة قاطا طبارت رشؤم نع عافدل

ةصاخ ةي لم عم ةئيب ي ف ةدوجوم ل ةزهجال نم دنتسمل اذ ف ةدراول تامولعمل عاشنإ م تناك اذإ. (يضا رتفا) حوسم نيوك تب دنتسمل اذ ف ةمدختسمل ةزهجال عيمج تادب رما يال لم تحم ل ريثأ ل ل كم هف نم دكأ ت ف ، ليغشت ل دي ق ك تكبش

ةيساسأ تامولعم

فلم نم وأ هددت يذال ردصم ل زاهجال نم زاهجال تانيوك ت CDO ي ف ليحرت ل ةادأ جرتست ةباحس ل ربع هميلست م يذال ةيامحل راج ةرادا زكرم ل ل هليحرت و هليمح تب موقت نيوك ت ك ب صاخ ل CDO رجأتسم ل ع دوزم ل او


زكرم ل ع ايودي دمتم عمل ريغ نيوك ت ل نيوك ت كنكمي ، تانيوك ت ل ةحص نم ققحت ل دع ب ةباحس ل ربع هميلست م يذال ةيامحل راج ةرادا

نيوك ت ل


يزاي ل شات

CDO ل ع FirePOWER ليحرت ةادأ ليغشت ءدب ةيفي ك روص ل هذه فرصت


> تامدخل او تاودال ل ل ل قنت او CDO رجأتسم حتفا ، ةيامحل راج ليحرت ةادأ ةئيه ت لجأ نم 1.- ةيامحل راج ليحرت ةادأ

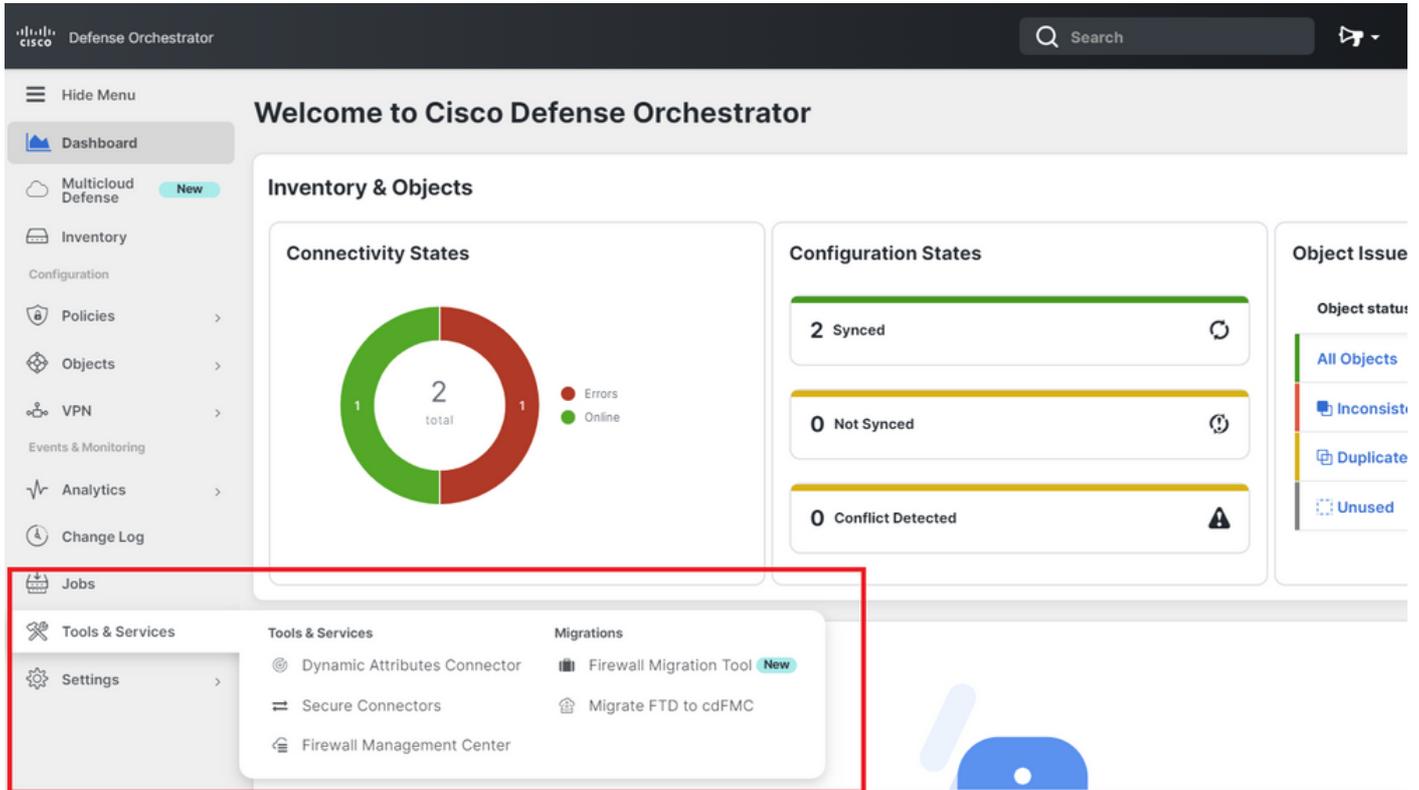

ةديج ليحرت ةي لم عم عاشنإ ل (+) دئاز قرزال رزلا دح 2.-

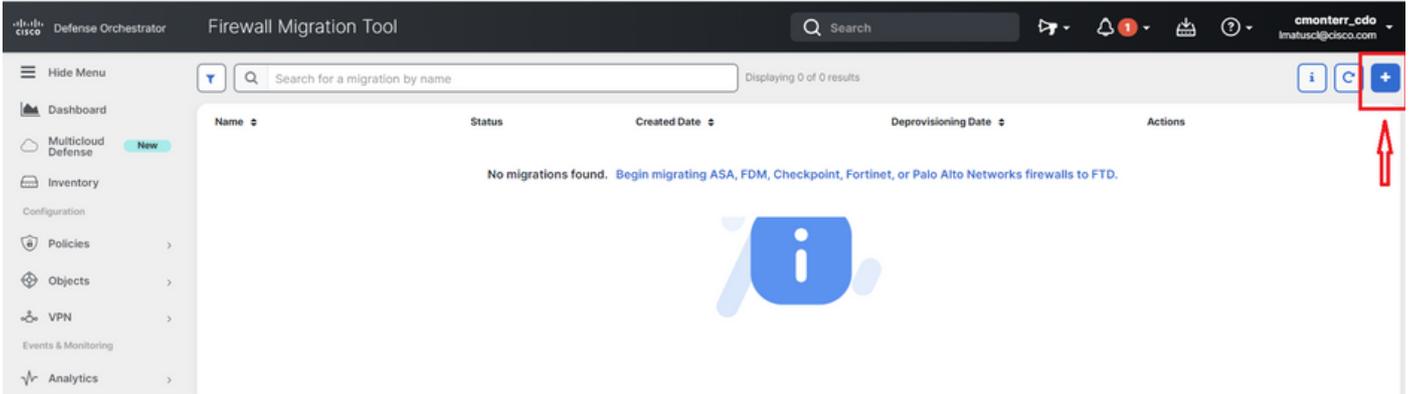


3.- كنك مي، ايئاقولت ي ضارتفا مسا عاشن اب CDO موقوي، ليحرتلا ةي لمع ةئيهت لجا نم .
 "قفاوم قوف طوق رقنا م، تدرأ اذا هريغت".

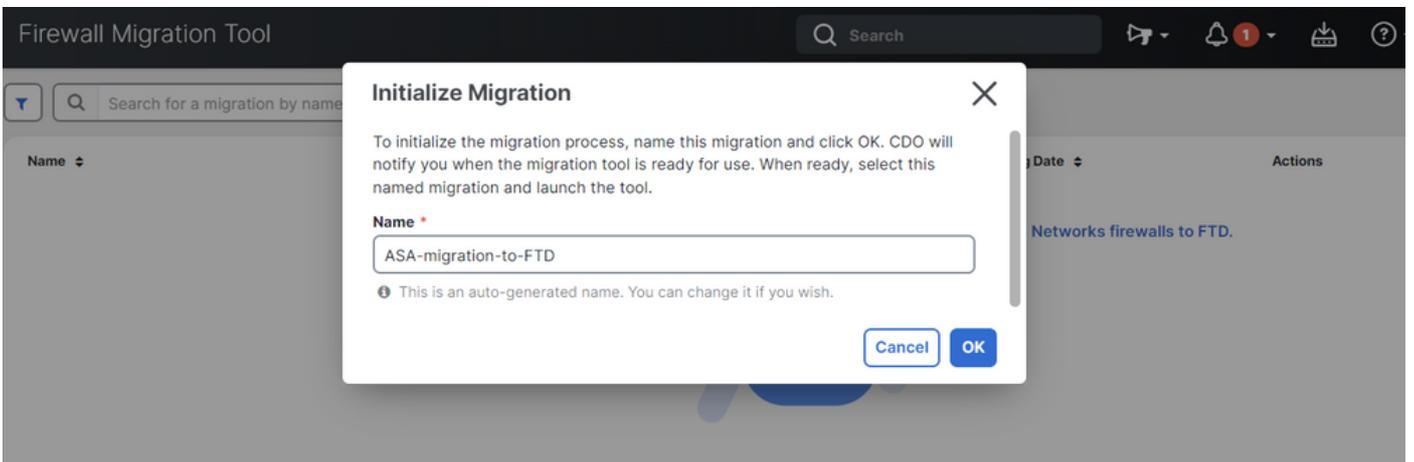

حرطالا

1.- "ليحرتلل ةزهاج ىلإ" ةئيهت نم ةلجال ريغت بجي؛ ليحرتلا ةي لمع لامتك راطتنا .
 FMT جمانرب ليغشت كنكمي، ةزهاج ةمدخل هذه حبصت نا درجمبو.

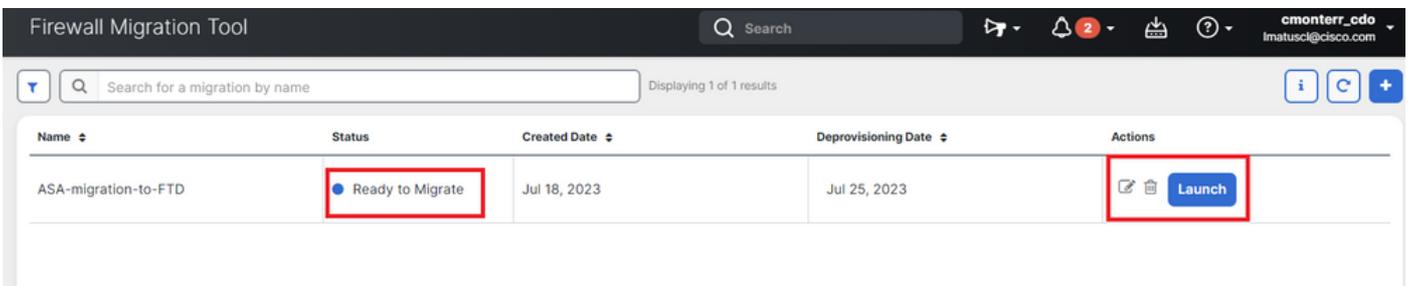

2.- نم كنكميو ةديج ضرعتسم بيوبت ةمالع في ليحرتلا ةادا نم ةومجم ليثم حتفي .
 هجوم لمع ريس مادختساب ليحرتلا ماهم ذي فن.

ةادا نم بتكمال حطس ةخسن لي زنت ىلإ ةجال نم صلختلا ىلع CDO في ليحرتلا ةادا لمعت
 اهتنايصو نم آلا ةيامجال راج ربع ليحرتلا

Select Source Configuration

Source Firewall Vendor

Cisco ASA (8.4+) ▼

Start Migration

Cisco ASA (8.4+) Pre-Migration Instructions

This migration may take a while. Do not make any changes to the Firepower Management Center (FMC) when migration is in progress.

Session Telemetry:

Cisco collects the firewall telemetry set forth below in connection with this migration. By completing the migration, you consent to Cisco's collection and use of this telemetry data for By completing the migration, you consent to Cisco's collection and use of this telemetry data for purposes of tracking and following up on firewall device migrations and performing related migration analytics.

Acronyms used:

FMT: Firewall Migration Tool

FMC: Firepower Management Center

FTD: Firepower Threat Defense

Before you begin your Adaptive Security Appliance (ASA) to Firepower Threat Defense migration, you must have the following items:

- Stable IP Connection:

ةرجهلا لىل لاثم

ASA نيوكت فلم ليحرتب لاثملا اذه موقىي FMT ةيلمع لىل اعيرس الاثم روصلا هذه ضرعت CDO لىل فيضتسي يذلاو ةباحسلا ربع هميلست مت يذلا ةيامحلا راج ةرادا زكرم لىل

1.- "يودىل نيوكتل لىل محت رايخ لىل هلي محت و ASA نيوكت ريدصت - 1. "ASA ب لاصتالا" رايخ مادختسا كنكمي في، CDO ب لىل لاصت

Extract Cisco ASA (8.4+) Information

Source: Cisco ASA (8.4+)

Extraction Methods ▼

Manual Configuration Upload

- File format is '.cfg' or '.txt'.
- For Multi-context upload a show tech.
For Single-context upload show running.
- Do not upload hand coded configurations.

Upload

Connect to ASA

- Select any ASA device onboarded on CDO from the below dropdown.
- Only devices with online connectivity and synced status will be displayed in the dropdown.

Connect

Context Selection >

Parsed Summary >

2.- عم و. ايئاقلت دحاو قاي س عضو لىل "قاي سلا دىحت" نىي عت ب FMT موقىي، لاثملا اذه في - 2. لىل لىل غشتلا دىق كىدل ASA نيوكت ناك اذا هلي حرت بولطملا قاي سلا دىحت كنكمي، كلذ ددعت م عضو

Extract Cisco ASA (8.4+) Information

Source: Cisco ASA (8.4+)

Extraction Methods

Manual Upload: [shitech_asav-a.txt](#)

Context Selection

Selected Context: Single Context Mode

Parsed Summary

Collect Hitcounts: No. Hitcount information is only available when connected to a live ASA.

2 Access Control List Lines	0 Access List Objects (Standard, Extended used in BGP/RAVPN/EIGRP)	0 Network Objects	0 Port Objects	0 Dynamic-Route Objects (AS-Path, Community-List, Policy-List, Prefix-List, Route-Map)
--------------------------------	--	----------------------	-------------------	--

Back Next

3- طغضا مة حصلال نم ققحتلاب مق .كنيوكتل اصخلم ضرعيو ASA نيوكت FMT للحي -3
ة.يالاتا واطخال ةعباتمل "يالاتا"

Parsed Summary

Collect Hitcounts: No. Hitcount information is only available when connected to a live ASA.

2 Access Control List Lines	0 Access List Objects (Standard, Extended used in BGP/RAVPN/EIGRP)	0 Network Objects	0 Port Objects	0 Dynamic-Route Objects (AS-Path, Community-List, Policy-List, Prefix-List, Route-Map)
0 Network Address Translation	4 Logical Interfaces	3 Routes (Static Routes, Policy Based Routing, ECMP)	0 Site-to-Site VPN Tunnels	0 Remote Access VPN (Connection Profiles)

● Pre-migration report will be available after selecting the targets.

Back Next

3- يف راعشا .بتكمال حطس رادصا ةادا يف لالحال وه امك ةيداعال FMT تاوطخ عابتا يف رمتسا -3
ة.يلمع ضارغأل ددحم فده زاهاج دجوي ال لاثملا اذه



Select Target ⓘ

Source: Cisco ASA (8.4+)

Firewall Management - Cloud-delivered FMC >

Choose FTD >

Select FTD Device
Select FTD Device >

Proceed without FTD

Interface, Routes and Site-to-Site VPN Tunnels won't be migrated

Select Features >

Rule Conversion/ Process Config >

4.- قرادإ زكرم ىلإ نىوكتلا عفد متى، FMT ؤحص نم ققحتلا تايلىم لامتكا درجم ب-
FirePOWER ؤباحسلا ربع همىلست متى يذلا

Complete Migration ⓘ

Migration Status

Migration is complete, policy is pushed to FMC.
Next Step - Login to FMC to deploy the policy to FTD.

Manual Upload: shtech_asav-a.txt

Selected Context: Single Context Mode

Migration Summary (Post Push)

ةلص تاذا تامولعم

- نمآلا ؤىامحلا رادج ربع لىحرتلا ؤادأل امخالص او ؤاطخألا فاشكتسا
- فى ؤىامحلا رادج لىحرت ؤادأ مادختسا ب أدبى لصحى

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا ذه Cisco ت مچرت
م ل ا ل اء ان ا ع مچ ي ف ن م دخت س م ل ل م عد ي و ت ح م م ي دقت ل ة ي ر ش ب ل و
امك ة ق ي ق د ن و ك ت ن ل ة ي ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ال م ي ج ر ي . ة ص ا خ ل ا م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ال ا ة مچرت ل ا ع م ل ا ح ل ا و ه
ي ل ا م اء ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا هذه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل ج ن ا ل ا دن ت س م ل ا