

عم Cisco Business Mobile قيبطت مادختسا ةلسلسلا CBW150

فدهلا

Cisco Business قيبطت مادختسا ةيفيك حيصوت وه دننسملا اذه نم فدهلا
Cisco Business 150 ةلسلسلا نم لوصولا طاقن عم Mobile

رادصإلا | قيبطت لل ةلباقلا جماربلا

- لصحإلا (Apple تاقيبطت رجتم نم ليزنت) | 1.2 Cisco Business Mobile قيبطت
(Google Play نم هيلع)
 - CBW150AX | 10.2.2.0
 - cbw151AXM | 10.2.2.0

ةمدقملا

ةمدوملا Cisco Business ةزهجأ رشن ءالمعلل Cisco Business Mobile قيبطت حيتي
تالوحملا دادعإ يف ءالمعلل ةدعاسم ىلا ةلومحملل ةزهجألا قيبطت فدهي. اهترادإو
ةطقن نم مهيدل ةيساسألا ةينبلا ةرادإو مهب ةصاخلا ةيكللساللا تاكلشللاو
دادعإلل ةدحاو.

Note:

معدمتي الو CBW 14x/240 Series ةزهجأ عم CBW 15x series ةزهجأ قفاوتت ال
LAN. ةكبش سفن ىلع دجاوتلا

Cisco Business قيبطت قلععتي اميف اهيلع فرعتلا بجي يتلا طورشلا ضعب
Mobile:

- دع ب اهنيوكت متي مل ةديج ةكبش - Greenfield ةكبش
- لعفلاب اهنيوكت مت ةدوجوم ةكبش - Brownfield ةكبش
 - يلوألا نيوكتلا - 0 مويلا
- مثيدحت وأ دوجوملا نيوكتلا ريغت - يناثلا مويلا

ⓘ Note:

Greenfield ةكبش رشن تايلمع ةلومحملا ةزهجالا قيبتت معديس ،ايلاح اهترادا وأ ةدوجوملا تانيوكتلا تاذ ةزهجالا فاشتكا متي نل .طقف

ادعت كلعجن انعدف ، Cisco Business Mobile قيبتت مادختساب نيوكتلل ادعتسم تنك اذا

مماظنلا تابلطتم

Cisco Business Mobile 1.2 قيبتت ةطساوب CBW151AXM و CBW150AX معد متي

تايوتحملا لودج

- [Cisco Business Mobile قيبتت نيوكت](#)
 - [عقوم ةفاضلا](#)
 - [عقوملا نيوكت](#)
 - [ةزهجالا ةفاضلا](#)

Cisco Business Mobile قيبتت نيوكت

عقوم ةفاضلا

1 ةوطخلا

Apple زاغ يلع تاقويبتتلا رجتم نم Cisco Business Mobile قيبتت ليذنتب مق (iPhone أو iPad).

ⓘ Note:

iPad، زاهج مدختست تنك اذا iPhone. ىلع ضرعلل قيبتتلا نيسحت مت ىل ضرعلا ةبسن نأل ارظن قيبتتلا بناج ىلع ءادوس ةطرشأ ىرتسفة. ةفلتخم iPad زاهج ةصاخلا عافتلالا

2 ةوطخلا

Cisco Business Mobile قيبتت قوف رقنا



.عقوم ةفاضلا + قوف رقنا ،كتكبش نم عقوم عاشنال

All Sites

+ Add Site



Create Your First Site


A site is a physical location you are going to deploy your network in. You can see all your sites here.



مادختسالادبىلع رقنا

[← All Sites](#)

Add Site

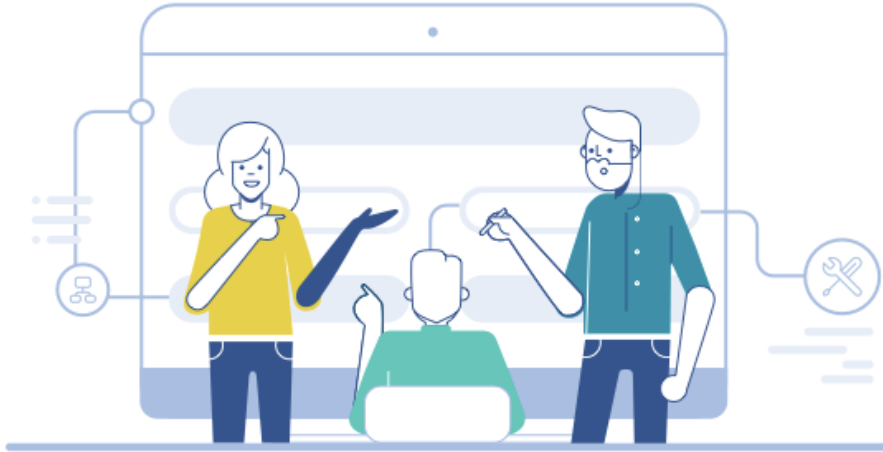

Add Site

Name and physically locate the site that will contain the devices you are about to configure.


[Get Started](#)

[Don't show this to me again](#)

يلا تاللا قوف رقناو ةلودلا وناونعلا و عقوملا مسا نيوكتاب مق

[← Add Site](#)

Add Site

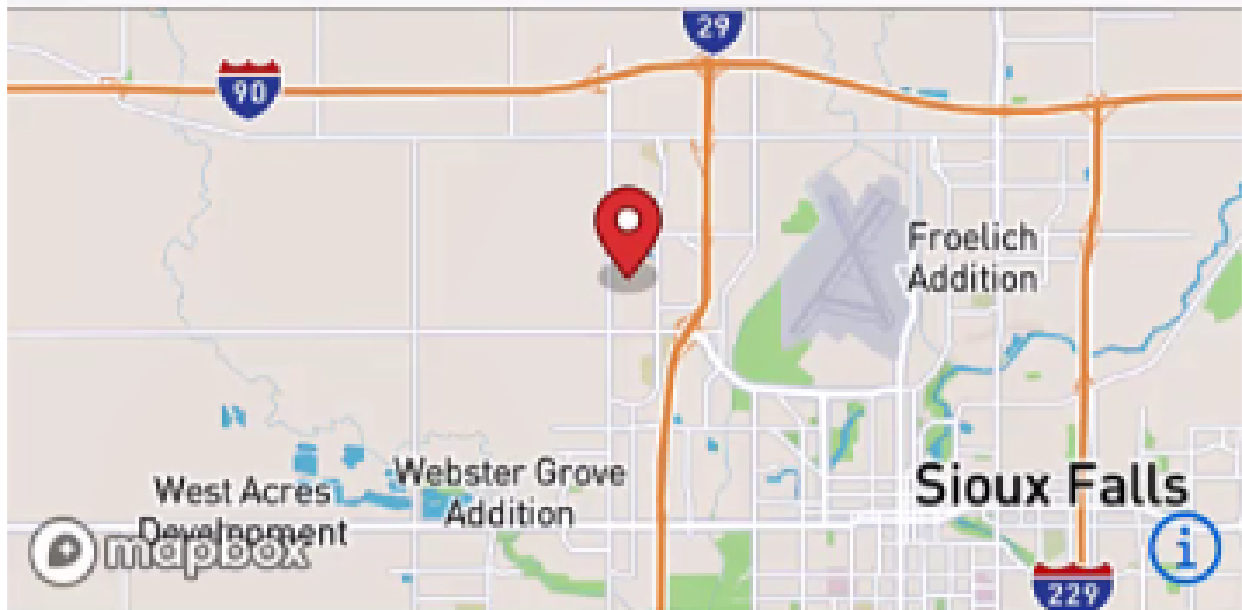

What do you want to name your site?

1

Lab

Ex: San Jose or Central Station

What is the full address?

2

N Vincent Ave, Sioux Falls, SD, United States

Ex: 123 Main St, Newark, NJ 02341

Country

3

United States



4

Next

يالاتلا قوف رقن او عقوملل رورم ةملك و مدختسم مسا لخدأ

Site Credentials

Create a username and password for this site.
These credentials will be used to access all
devices added to this site

Username

admin

1

Password

Enter password

2

Confirm Password

Enter password again

3

4

Next

ⓘ Note:

اذه يف ةدوجوملا ةزهجالا ىلا لوصولل دامتعالا تانايب مادختسا متيس
عقوملا

7 ةوطخلا

ةفاك نبيعت مت اذا .ريرحت قوف رقنا ،تاريغت يا لمعل .صخلملا ةشاش ىرتس
عقوم ةفاضل قوف رقناف ،رصانعل

Summary

Almost done. Check your site detail before you create it.

Site




Name

Lab

Address

N Vincent Ave, Sioux Falls, SD, United States

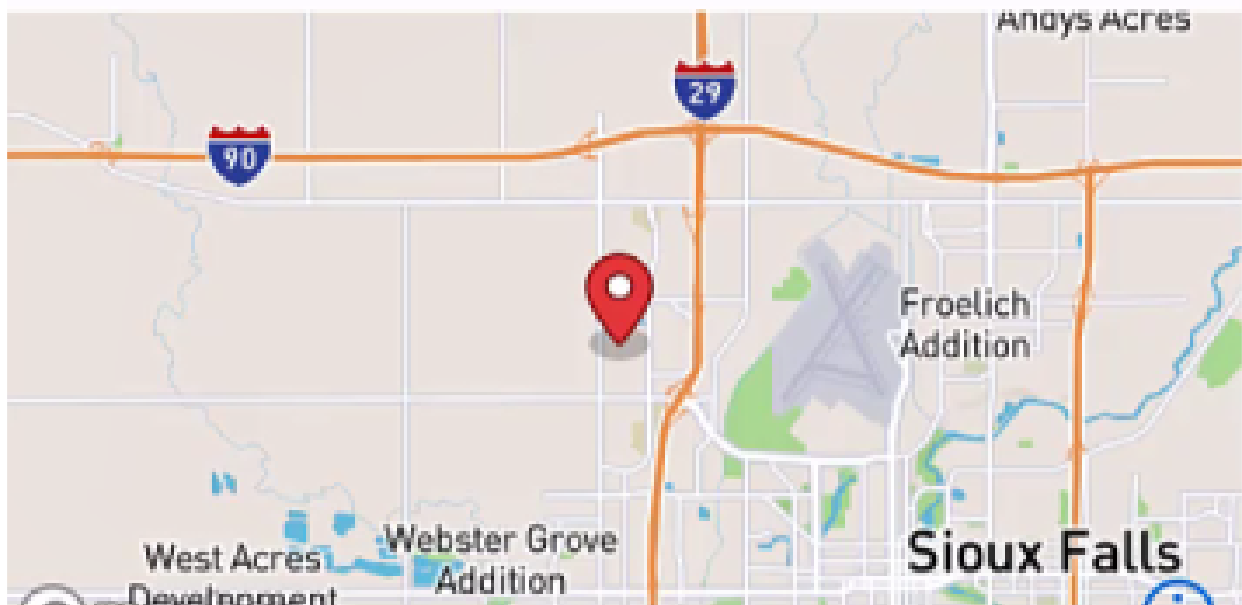

مت ةقطقط

Add Site



Done! The site "Lab" has been created

You will be able to use this site to manage your network, all networking hardware and guest devices.

Here's what you should do Next?

[Configure the Network for this Site](#)


Done

عقوم لانيوكت

ةليلات لاناوطخال عبتا، عقوم لانيوكتل

1 ةوطخال

مادختسال اءب ىل ع رقنا

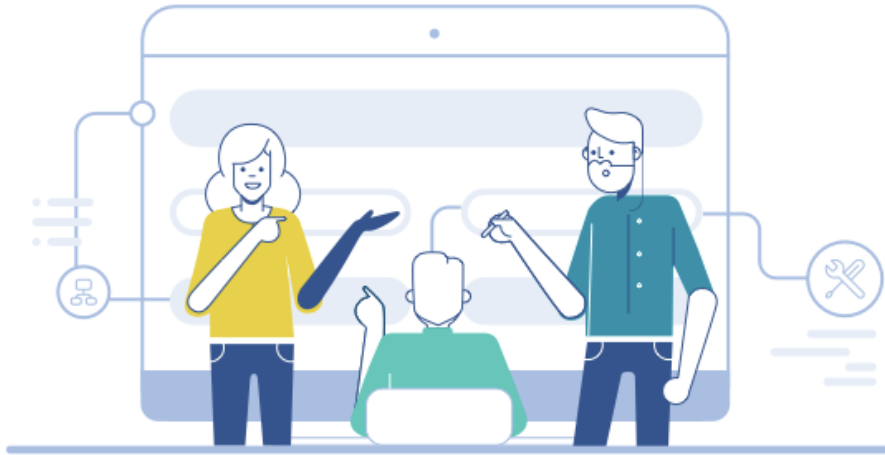

Tell us about your Site

Answer some questions about your preferences on how you would like to configure your site - Segmentation, Wireless preferences, advanced configuration etc.



Get Started

Don't show this to me again

نأ دواً م عن ، لاثم لا اذه ف . كتكبش ف ف كلساللا تاداعل ليشتل ارايخ رتخأ
هرايخ متي .



Site Configuration

Questionnaire

Answer these questions to help us understand how you would like to set up this site

QUESTION 1

Wireless?

Would you like to enable Wi-Fi and let your users connect wirelessly at this site (Lab)?

Yes I would like to

No



م تي ،لاثلما اذه في .اهنيوكتل راخلا كي دلف ،ةددعتم تاكبش كي دل ناك اذ
دحاوم قرقف دي دحت



Site Configuration

Questionnaire

Answer these questions to help us understand how you would like to set up this site

Multiple Networks?

Would you like to create multiple Networks at this site (Lab)?

Some business create multiple networks for different departments or based on who is going to using them.

Example 1: Internal, Guest

Example 2: IT, Finance, Business

Create separate Wi-Fi for each network

Yes I would like to

Just 1 is fine

كلذب مق ،لاثملا اذه يف .ايئاقلت وأ ايودي ةمدقتملا تاداعإلا نيوكت اما كنكمي
ةعباتم قوف رقنا .ادحم نوكي ايئاقلت



Site Configuration

Questionnaire

Answer these questions to help us understand how you would like to set up this site

QUESTION 3

Advanced Settings

Would you like to do the advanced configuration on your own or have us do them for you automatically?

Advanced configuration lets you configure DNS, NTP and DHCP Server settings.

I will do them on my own

1

Do it automatically

2

Continue

ك.لذ دعب ةقطقطو مسإ ةكبش تلخد

Networks

Name the network at Lab. You can also add multiple networks if you like



Add a network

▼ Lab

Network Name

Lab

1

Network ID

1

2

Next

ⓘ Note:

ةكبش ةفاضإ + قوف رقنا ،تاكبشلل نم ديزملا ةفاضإ تدرأ اذا

6 ةوطخلا

يلاتلا ىلع رقنا م ثكتكبشل رورم ةملك لخدا

▼ Lab

WiFi Network Name

Lab

Associated Wired Network Name

Lab

Radio Frequency

2.4 GHz 5 GHz

Type

Employee

Authentication

WPA2 Personal

Password

1

Re-enter Password

2

3

Next

رشابي نأ كلذ دعب تقطوط

Wireless

Choose the Management WiFi Network at Lab.

We need to know which WiFi Network you would like us to use to perform maintenance actions and network configuration changes.

Management WiFi

Lab ∨

The Management Wi-Fi is usually the one which is the most secure and is only used by known users within your organization. (Can only be Employee type with network ID 1 and the authentication cannot be Open)

Next

تانويوك ت ديكات رزلا قوف رقنا . صخلملا ةشاش يف ليصافتلا نم ققحت
دادعإلا لامكإل عقوملا

Summary

Almost done. Check your Site detail before you create it.

Network Segmentation [Edit](#)

NETWORK 1

Network Name	Lab
Network ID	1

Wireless [Edit](#)

WIRELESS 1 M

SSID	Lab
2.4 GHz	enable
5 GHz	enable
Guest Network	No

Confirm Site Configurations

مت ةقطقط.



Done! The site configurations for "Lab" has been created

You can edit your configurations later if needed from the sites homepage

Here's what you should do Next?

[Add Devices to this Site](#)

Done

ةزهجأة فاضل

:ةليلالال اواطلالال عبالا،ةزهجأة فاضلال



1 ةواطلال

.ةزهجأة فاضلال قوا رقنا




Add Devices

You need to finish the steps below before you your site can go live

-  **Site Configuration** 
1 wired, 1 wireless network configured
-  **Add devices**
Add switches and access points to that are part of this site.

Add Devices

مادختسالادبىلع رقنا

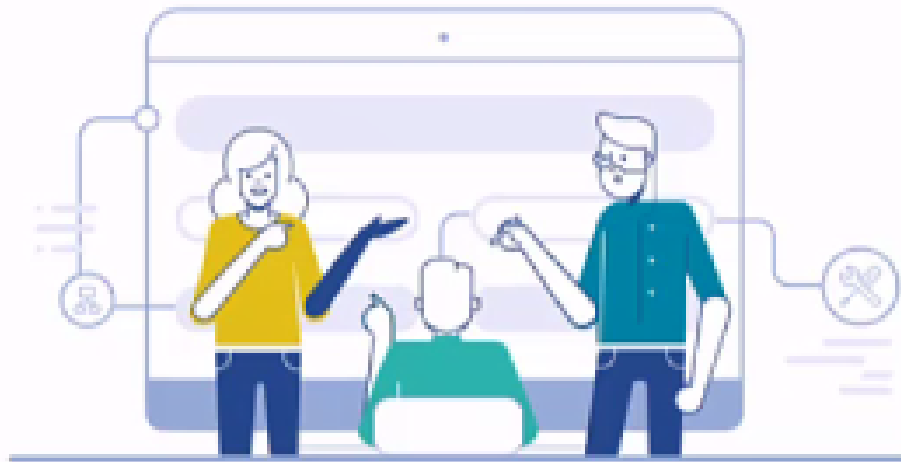


Connect your devices

Before we proceed, please make sure that all the devices you want to add to Lab have been plugged in.

[Get Started](#)

[Don't show this to me again](#)

Cisco ن م لامعال دادعال ڤضارتفال ال SSID ىلإ مامضنالل مامضنا ىلع رقنا

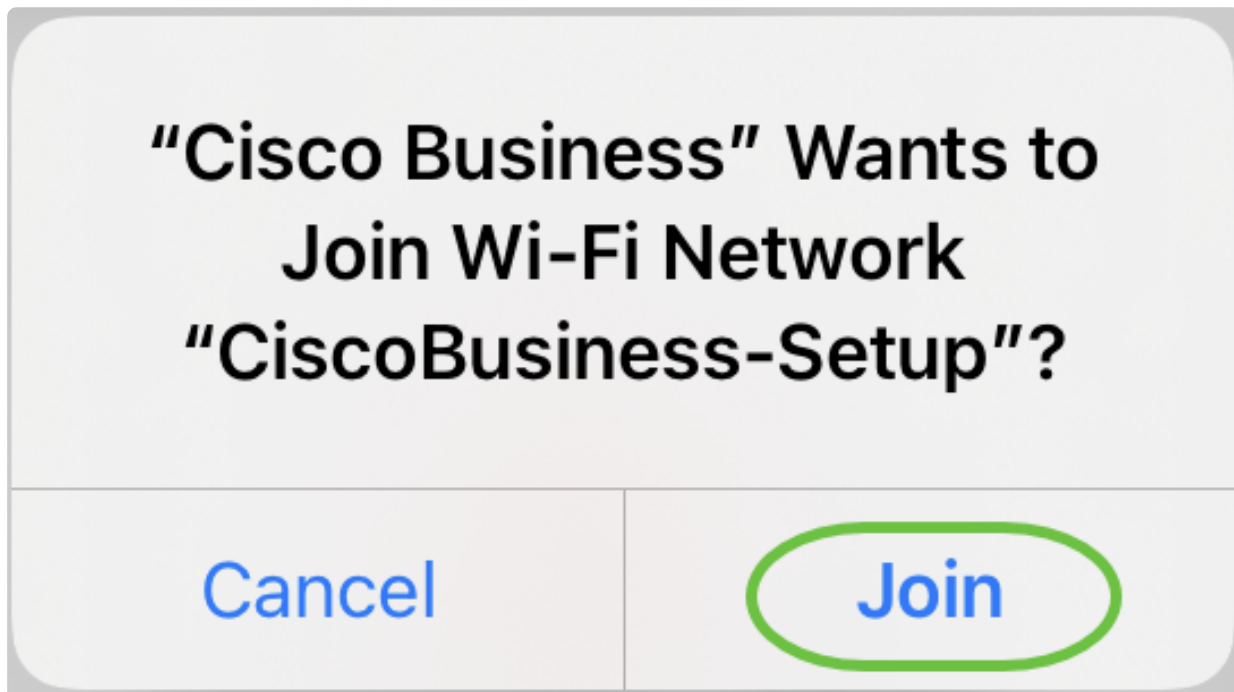

Note:

تاداعل ڤ اهعضوو لمالكلاب ةيكلسالل لوصولل ةطقن ديهمت نم دكأت ةضارتفال عنصملا

لاصتاللا فاشتكلا دعب مت ىلع رقنا

[← Back](#)


Connect Result

Setting Up for the first time?

Before we begin lets get you connected to the setup wireless network.




Network Available

The  **CiscoBusiness-Setup** WiFi network was detected and we are ready to connect.

Done

Cisco ةزهجأ نع ثحبلاب Cisco Business ةكبشلا حامسلل قفاوم قوف رقنا
اب لاصتال او Business

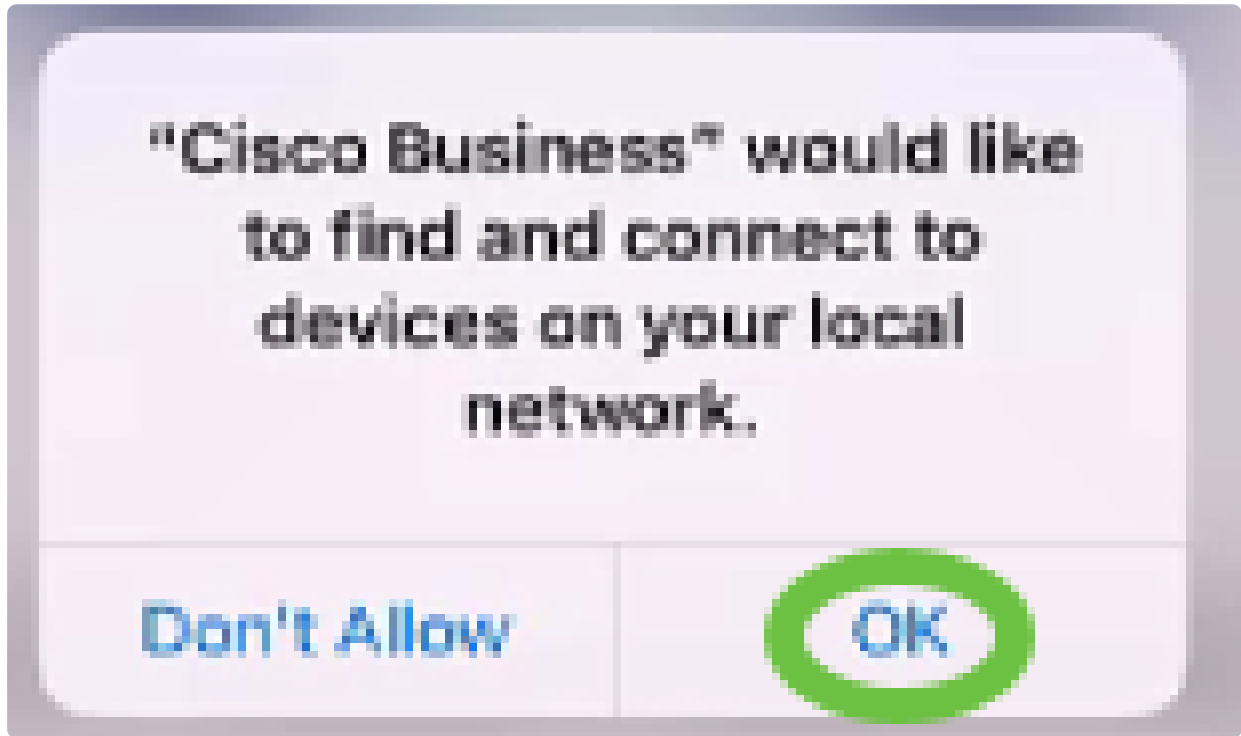

Cisco لوصو ةطقن نوكتس ،لاثلما اذه يف .لوصولا ةطقن نع فشكلا متيس
Cisco Business Wireless ةفاضل ىلع رقنا . Business Wireless

Found a new device

We automatically discovered a new device via the CiscoBusiness-Setup wireless network.



Cisco Business Wireless 1

Type: Access Point

Should we go ahead and add this device to your network?

Add Cisco Business Wireless 1

Cancel

زاهج ةفاضل ديكأت قوف رقنا . تادادعل او زاهجلل صخلم ضرع متيس

Summary

Almost done. Make sure you check the device and the settings to be applied to it.

∨ **Devices To Be Added**

Model Cisco Business Wireless 1

∨ **Site Settings to be applied**

The following settings will be applied to the device.

[View Site Settings](#)



Confirm Add Device

[Cancel](#)

زاهجلا ةفاضل مدقت ضرعت ةشاش رهظتس

Adding Device

Adding Device

About 9 minutes remaining

Cisco Business Wireless 1 

Type: Access Point




 Initializing device...

3%



Adding device. Do not quit or minimize the app till it's done

يتلا ةكبشلا ىلإ مامضنلاب لوصولا ةطقنل حامسلل مامضنا ىلع رقنا اهتأشناً.

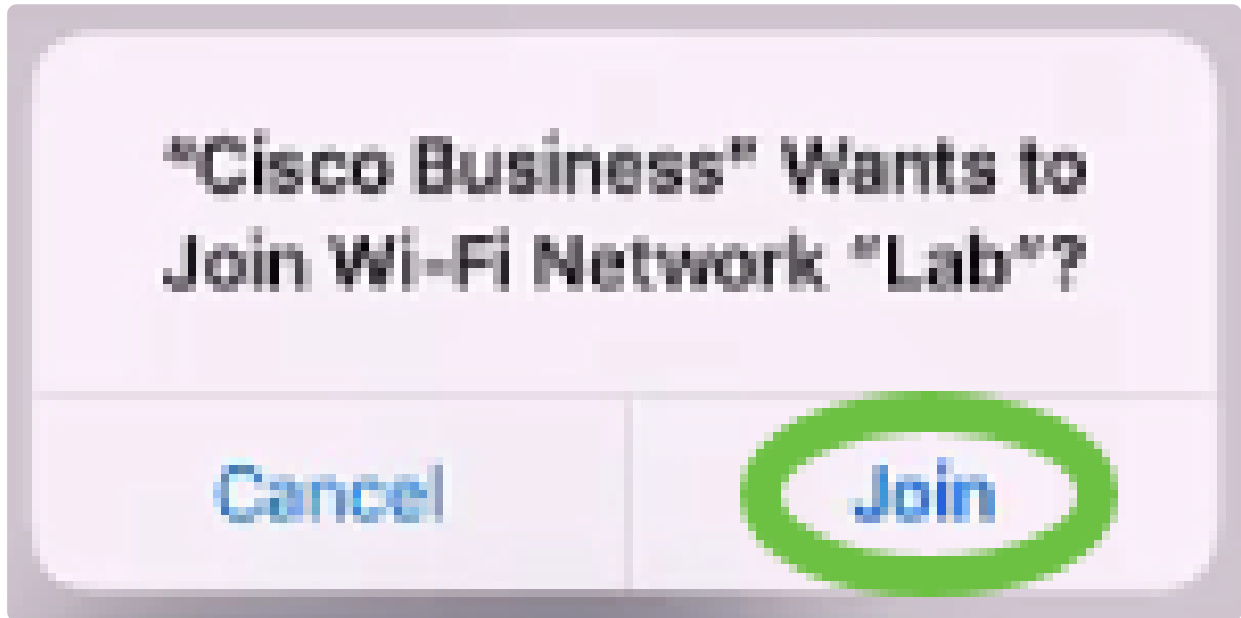

ةزهألأ نم ديزملا ةفاضل رايخك كنكمي .حاجنب اهب زاهجلا رشن مت ةشاش ىرتس مت ديدحت متي ،لاثملا اذه في .مت قوف رقنلا وأ



Adding Device

Device deployed



Cisco Business Wireless 1 [redacted]

Type: Access Point

Serial No: FC [redacted] F



Cisco Business Wireless 1 [redacted] has been successfully setup is broadcasting WiFi network.

The access point is now live and added to Lab. We can now use it to add and discover other devices to your network.

Add more devices

Done

ةسئلا ءفصلا لىل ءفصتلل مء قوف رقنا

Add Devices



Done! Your Device has
been Deployed.

AP6C71.0D54.064C has been added to your
Lab site.

What's Next?

[Add other Devices](#)

Done

رشنل Cisco Business Mobile قيبطت حاجنب نآلا تم دختسأ دقل !كيدي نيپ وه اه
ةلوهسب كتكبش ةرادا نآلا كنكمي . CBW 150 ةلسلسلا نم لوصولا ةطقن

!تاظحال م مېدقتل وأ تامولعملال نم ديزم ىلع لوصولل بهذت نيأ ىلإ فرعت نآلاو

ىلإ رظنت ال Cisco Business Mobile قيبطت لوح تالاقملا نم ديزم نع شحبت له
اذه ىلع ةرشابم لصحتل هاندأ ةدوجوملا زييمتلا تامالع نم يا رقنا !كلذ نم دعبا
!اوعتمتسا .عوضوملا

[ةيقرت تاميلعتلا ةحفص ةزهجالا ةرادا اهلصاوا ءاطخاللا فاشكتسا ةماع ةرظن](#)
[حيحصتلا تالچس زاھج ليغشت ةداعا ةتباتلا چماربلا](#)

ةمچرتل هذه لوج

ةللأل تاي نقتل نم ةومچم مادختساب دن تسمل اذه Cisco تچرت
ملاعلاء انءمچ يف نيمدختسمل معدى وتحم مي دقتل ةيرشبل او
امك ةقيد نوك تنل ةللأل ةمچرت لصف أن ةظحال مچرئ. ةصاغل مه تلبل
Cisco يلخت. فرتحم مچرت مامدقي يتل ةيفارتحال ةمچرتل عم لاعل او
ىل إامءاد ةوچرلاب يصوت و تامچرتل هذه ةقد نع اهتيل وئسم Cisco
Systems (رفوتم طبارل) يلصلأل يزلچنل دن تسمل