



## Cisco 8700 Series Routers Overview

---

- [Cisco 8700 Series Routers, on page 1](#)
- [Temperature and Physical Specifications, on page 3](#)
- [Weight and Power Consumption, on page 3](#)
- [Airflow Direction, on page 3](#)
- [Maximum Power Available to Router, on page 5](#)
- [Supported Optics, on page 5](#)

## Cisco 8700 Series Routers

### Cisco 8711-32FH-M

The Cisco 8711-32FH-M is a P100 silicon chip-based router that provides 12.8 Tbps of network bandwidth. The Cisco 8711-32FH-M is a fixed-port, high density, one rack-unit form factor router. Supported ports include 32 QSFP56-DD 400GbE ports. It includes HBM/2.5D for advanced performance, and supports Cisco 400GbE Digital Coherent Optical Modules.

### Cisco 8711-32FH-M Router Front View

The front of the chassis has the following:

- 32 x QSFP56-DD 400GbE ports or 16 x 800G QSFP-DD800 ports




---

**Note** Each of these ports can support 2x400GbE or 1x800G traffic. You can have any combination of the available 400GbE or 800G ports that must not exceed the total bandwidth of 12.8 Tbps. All the 400GbE ports support breakout operation.

---

Figure 1: Cisco 8711-32FH-M - Front View

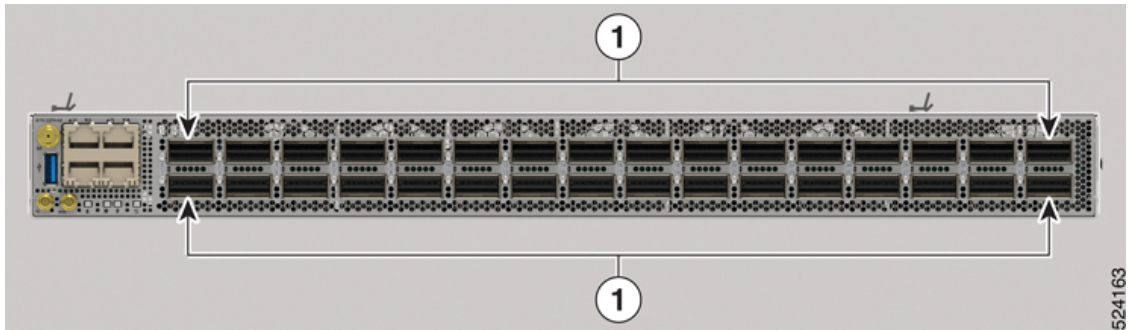

1	32 QSFP56-DD 400GbE ports <b>Note</b> The top row is 16 x 800G QSFP-DD800 capable ports.
---	---

**Cisco 8711-32FH-M Router Rear View**

This table details the modules available in the rear of the chassis:


Table 1: Cisco 8711-32FH-M Router Rear View Details

Module Type	Description	Airflow Directions
Power Supply Modules	Two 2KW power modules that operate at 12 V capacity, providing 1+1 power redundancy and different AC/DC inputs capabilities.	<ul style="list-style-type: none"> <li>• Port-Side-Intake (PSI)</li> <li>• Port-Side-Exhaust (PSE)</li> </ul>
Fan Modules	Six 40mm counter-rotating double-fan trays providing N+1 redundancy. The fan modules can be removed individually.	<ul style="list-style-type: none"> <li>• Port-Side-Intake (PSI)</li> <li>• Port-Side-Exhaust (PSE)</li> </ul>



**Note** The chassis does not come preloaded with fans and power supply units.

Figure 2: Cisco 8711-32FH-M - Rear View

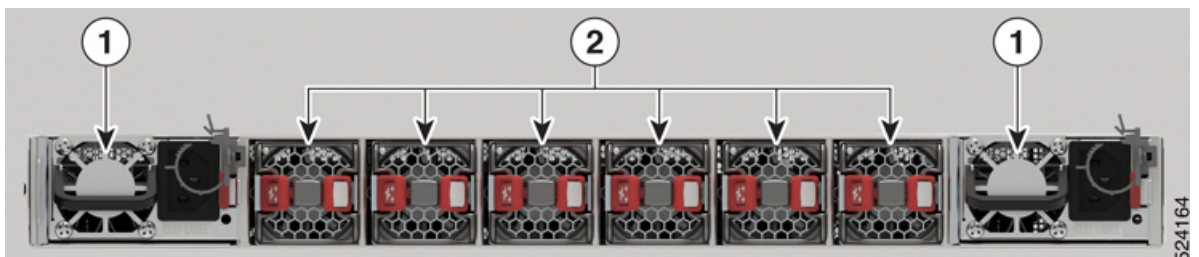

1	Power Supply
2	Fans



**Note** The fans and power modules illustrated have Port-Side-Intake (PSI) configuration.

## Temperature and Physical Specifications

For temperature and physical specifications, refer to the *Physical characteristics* table in the *Cisco 8700 Router Data Sheet*.

## Weight and Power Consumption


For weight and power consumption, refer to the *Physical characteristics* table in the *Cisco 8700 Router Data Sheet*.

## Airflow Direction

The Cisco 8700 series routers support these configurations:

- Post-Side Intake (PSI) configuration - the airflow through both the fan trays and power supplies is from the front-side to the rear-side. In PSI configuration, the power and fan modules are in Burgundy color.
- Post-Side Exhaust (PSE) configuration - the airflow through both the fan trays and power supplies is from the rear-side to the front-side. In PSE configuration, the power and fan modules are in Cisco Safety Blue color.

**Figure 3: Airflow Direction for Cisco 8711-32FH-M Router in PSI Configuration**

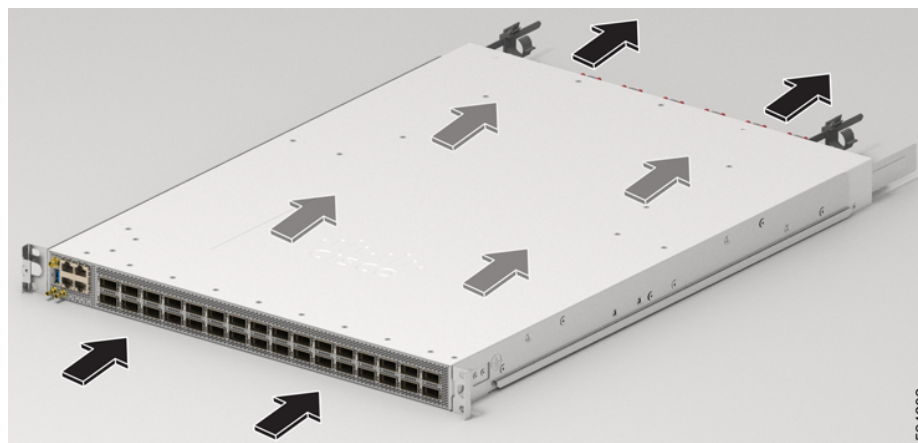

**Figure 4: Airflow Direction for Cisco 8711-32FH-M Router in PSE Configuration**



**Figure 5: Airflow Direction for Cisco 8712-MOD-M Router in PSI Configuration**



**Figure 6: Airflow Direction for Cisco 8712-MOD-M Router in PSE Configuration**





**Note** The airflow direction must be the same for all power supply and fan modules in the chassis.

## Maximum Power Available to Router

The maximum power available to the router depends on the following factors:

- the input power from the power source
- the number of Power Supply Units (PSUs)
- the output capabilities of the PSUs
- the power redundancy mode

The following table lists the amount of power available for Cisco 8700 series routers from all available power trays.

**Table 2: Maximum Power Available**

Number of PSUs	Combined Mode (No redundancy)	1+1 Redundancy Mode (with Single Supply Loss)
1	2KW	—
2	4KW	2KW



**Note** In Cisco 8700 series routers, when the AC power supply unit operates at the low line voltage range of 90VAC to 140VAC, the router does not support 1+1 redundancy mode. The low line voltage maximum power per AC power supply unit is 1KW. Thus, the total power of two AC power supply units at the low line voltage is 2KW. Therefore, you must have two AC power supply units for the router to operate at low line voltage.

## Supported Optics



**Note** To determine which transceivers and cables are supported by this router, refer to the Transceiver Module Group (TMG) Compatibility Matrix Tool:

<https://tmgmatrix.cisco.com/>

