



Figure 2: Admin TUI

```

Cisco Secure Malware Analytics - Appliance Administration
Your Malware Analytics appliance can be managed at:
Admin URL / MAC: https://10.90.3.108 / 3c:fd:fe:eb:f8:30
Application URL / MAC: https://10.90.2.108 / 5c:71:0d:26:80:46
Password: RMDLHnMc5hSGItX764o
The password shown has been automatically generated for you.
You will be required to change this password when you first login.

(n) Network
    Configure the system's network interfaces
(r) Support Mode
    Allow remote access by customer support
(u) Updates
    Download and optionally install updates
(s) Snapshots
    Generate and submit snapshots
(a) Apply
    Apply configuration
(c) Console
    CLI-based configuration access
(e) Exit
    Exit the management tool

```

The Admin URL shows as unavailable because the network interface connections are not yet configured and the Admin UI cannot be reached yet to perform this task.

**Important**

The **Admin TUI** displays the initial administrator Password, which will be needed to access and configure the Admin UI later in the configuration. Make a note of the Password in a separate text file (copy and paste).

## Configure Network Using Admin TUI

The initial network configuration is completed in the Admin TUI. The basic configuration, once completed, allows access to the Admin UI, where you can complete additional configuration tasks.


**Note**

For DHCP users, the following steps assume that you are using static IP addresses. If you are using DHCP to obtain your IP addresses, see the [Cisco Secure Malware Analytics Appliance Administration Guide](#).

**Step 1**

On the Admin TUI, select **NETWORK**. The **Status: configuration current** screen appears.

Figure 3: Admin TUI - Network Configuration Console

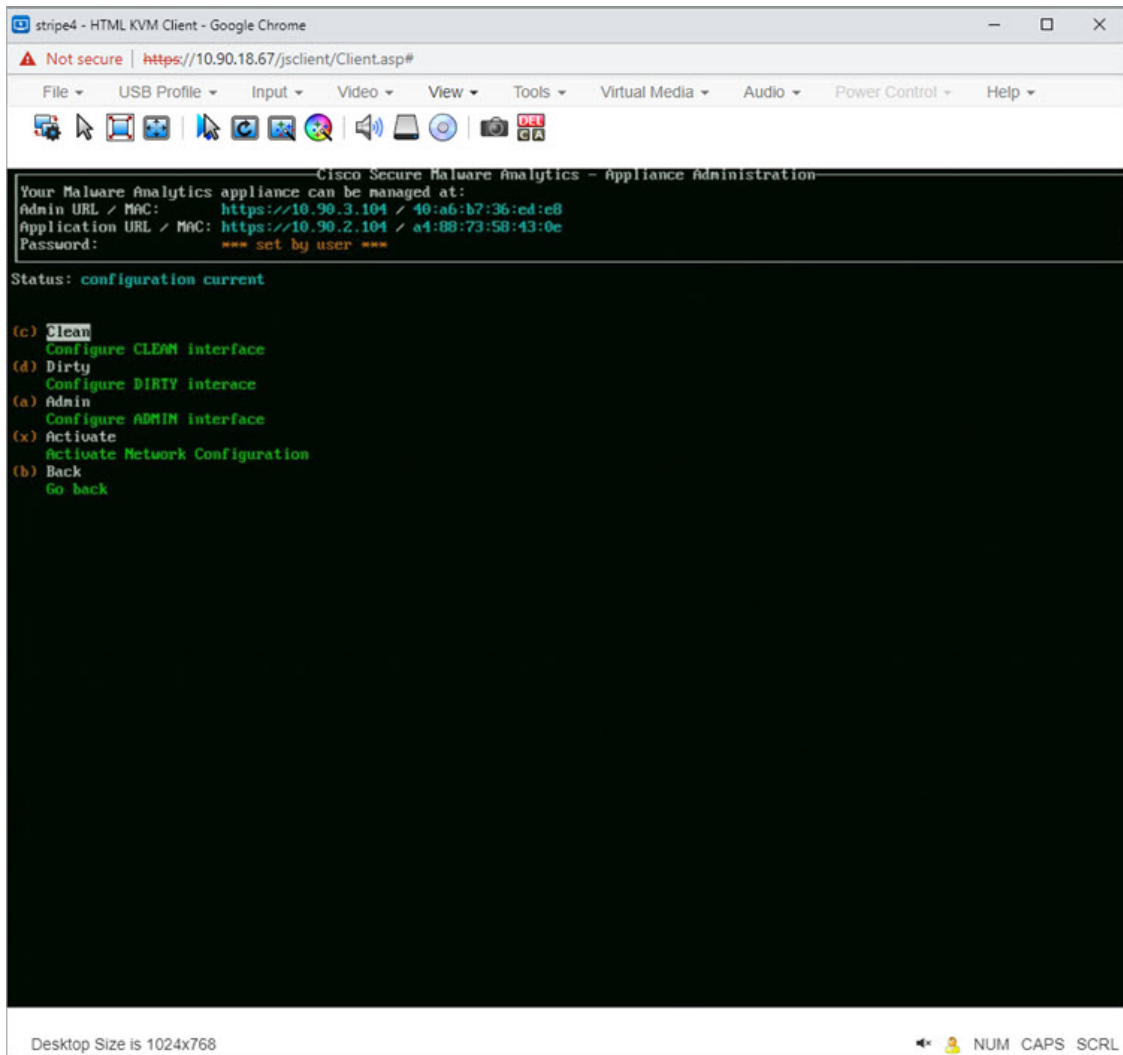

- Step 2** Select **Clean**. The **Network Config - CLEAN Interface** screen appears.
- Step 3** Complete the blank fields according to the settings provided by your network administrator.
- Step 4** Select **Save**.
- Step 5** Select **Dirty**. The **Network Config - Dirty Interface** Interface screen appears.
- Step 6** Complete the blank fields according to the settings provided by your network administrator.
- Step 7** Select **Save**.
- Step 8** Select **Admin**. The **Network Config - ADMIN Interface** Interface screen appears.
- Step 9** Complete the blank fields according to the settings provided by your network administrator.
- Step 10** Select **Save**.
- Step 11** Select **Activate**. To activate the configuration.

**What to do next**

The next step in the Secure Malware Analytics Appliance setup is to complete the remaining configuration tasks using the Admin UI, as described in [Admin UI Configuration](#).