

RV110W上的無線分佈系統(WDS)設定

目標


無線分佈系統(WDS)是以無線方式連線多個存取點，以幫助擴展網路面積的系統。要建立這樣的系統，所有WDS裝置都需要設定為相同的WDS設定。本文說明如何在RV110W上配置WDS設定。

適用裝置

- RV110W

程式步驟

步驟1.使用Web配置實用程式選擇Wireless > WDS。WDS頁面隨即開啟。

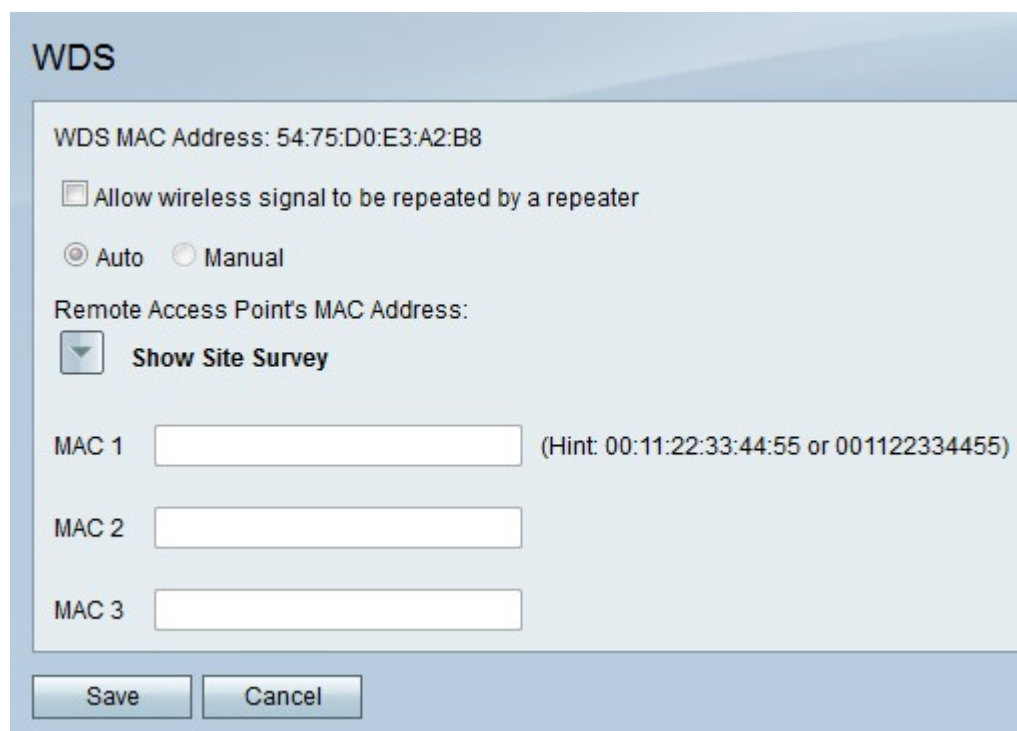

The screenshot shows the WDS configuration page. At the top, it displays 'WDS MAC Address: 54:75:D0:E3:A2:B8'. Below this, there is a checkbox labeled 'Allow wireless signal to be repeated by a repeater' which is currently unchecked. There are two radio buttons: 'Auto' (selected) and 'Manual'. Underneath, it says 'Remote Access Point's MAC Address:' followed by a dropdown menu with a downward arrow and the text 'Show Site Survey'. Below these are three input fields labeled 'MAC 1', 'MAC 2', and 'MAC 3'. A hint text '(Hint: 00:11:22:33:44:55 or 001122334455)' is positioned to the right of the MAC 1 field. At the bottom of the form, there are two buttons: 'Save' and 'Cancel'.

步驟2.選中Allow wireless signal to be repeated by a repeater復選框以啟用WDS。

步驟3.按一下Auto單選按鈕使RV110W自動檢測遠端接入點，或按一下Manual單選按鈕輸入重複訊號的裝置的MAC地址。

附註：如果選擇自動，請跳至步驟9。

WDS

WDS MAC Address: 54:75:D0:E3:A2:B8

Allow wireless signal to be repeated by a repeater

Auto Manual

Remote Access Point's MAC Address:

Hide Site Survey

Available Networks Table						
	Network Name (SSID)	Channel	Security	Signal	MAC Address	
<input type="checkbox"/>	WSU Guest	6	Disabled	48%	00:14:1C:F1:21:30	▲
<input type="checkbox"/>	WSU Guest	6	Disabled	12%	00:14:1C:F1:1B:70	≡
<input type="checkbox"/>	WSU Secure	6	WPA2-Enterprise	48%	00:14:1C:F1:21:31	
<input type="checkbox"/>	wushock	6	WEP	49%	00:14:1C:F1:21:32	
<input type="checkbox"/>	ciscosb	6	Disabled	82%	00:1C:10:F6:AD:B4	
<input type="checkbox"/>	MITM-Test	8	Disabled	82%	00:40:96:29:23:8F	
<input type="checkbox"/>	MKTECH	9	WPA2-Personal	44%	E8:B7:48:5E:4D:20	▼

MAC 1 (Hint: 00:11:22:33:44:55 or 001122334455)

MAC 2

MAC 3

步驟4. (可選) 按一下**Show Site Survey**檢視所有可用的網路。

步驟5. (可選) 按一下**Refresh**更新表。

步驟6. (可選) 選中您想要重複的最多三個網路的覈取方塊。

步驟7. (可選) 按一下**Connect**，將三個網路的MAC地址新增到MAC地址欄位。

步驟8. 在任何空的MAC地址欄位中，輸入要連線的網路的MAC地址。

步驟9. 按一下**Save**儲存更改，或按一下**Cancel**放棄更改。