

Administración de certificados de CUCM y notificación de cambios

Contenido

- [1. Introducción](#)
- [2. ¿Cómo se almacenan los certificados?](#)
- [3. Descripción general del diseño de CertMgmt y Certificado CN](#)
- [4. Examples](#)
 - [4.A. Inserte un nuevo certificado tomcat-trust.](#)
 - [4.B. Elimine los certificados tomcat-trust](#)
- [C Regenere el certificado tomcat en el nodo de editor](#)
- [5. Troubleshoot](#)
 - [5.A. Advertencias conocidas: categorización](#)
 - [5.B. Sugerencias y trucos](#)
 - [5.C. Verificación del certificado del servicio CCM](#)
 - [5.D. Verificación de tomcat trust-store y keystore](#)

1. Introducción

En este documento, se describe que la administración de certificados en Cisco Unified Operating System es un componente muy importante de CUCM y VOS, debido a que muchas aplicaciones y funciones se basan en certificados por ejemplo: TV, CAPF, Seguridad de manera predeterminada o páginas de servicio unificadas. CertMgmt proporciona un único depósito de certificados y API para otros componentes con el fin de incluir fácilmente la seguridad y la transferencia de datos segura (TLS).

El servicio "Notificación de cambio de certificado de Cisco" se ha introducido principalmente para sincronizar algunos certificados en los nodos del clúster y está supervisado por ServM. Hace que la provisión de certificados sea más fácil y rápida para el administrador en implementaciones más grandes.

Aportado por Mateusz Olszowy, ingeniero de Cisco TAC.

2. ¿Cómo se almacenan los certificados?

Los certificados se almacenan en el sistema de archivos, así como en la base de datos, y el servicio CN mantiene la sincronización de ellos entre los nodos. Los certificados del sistema de archivos tienen mayor prioridad que los certificados DB.

Tablas DB:

- CERTIFICADO: almacena todos los detalles de certificados como asunto, emisor, serie, certificado en formato PEM, etc.
- CERTIFICATESERVICECERTIFICATEMAP : asignación entre el certificado y el tipo de certificado, como por ejemplo, CallManager-Trust,CAPF-Trust

- CERTIFICATEHASHMAP: asignación entre el certificado y el hash del certificado
- CERTIFICATEPROCESSNODEMAP: asignación entre el certificado y processnode
- CERTIFICATESTRUSTROLEMAP: asignación entre el certificado y role_enum
- TYPECERTIFICATESERVICE: asigna enums que puede encontrar en CERTIFICATESERVICECERTIFICATEMAP a los tipos de certificados (es decir, tomcat, tomcat-trust, callmanager etc.)

Almacenamiento en el sistema de archivos:

- certs: clave pública (X509Certificate: certificado propio) (formato .der y .pem con .description), como también en formato pkcs-12 keystore.
- claves: clave privada, contraseñas y CSR.
- trust-certs: todos los certificados confiables (formatos .der y .pem), como también en formato PKCS-12 keystore.

Rutas de ejemplo:

```
/usr/local/cm/.security/CallManager/
```

```
/usr/local/cm/.security/CAPF
```

```
/usr/local/platform/.security/tomcat
```

El subdirectorío Trust-certs contiene enlaces simbólicos que hacen referencia a archivos .pem con nombres especiales compuestos por el hash openssl y, generalmente, la extensión .0, que se puede utilizar como iterador cuando se genera el mismo hash. Consulte el ejemplo a continuación:

```
[root@cucmpub trust-certs]# pwd
/usr/local/cm/.security/CallManager/trust-certs
```

```
[root@cucmpub trust-certs]# ls -l cucmpub.pem
-rwxr-xr-x 1 certbase ccmbase 993 Mar 15 2013 cucmpub.pem
```

```
[root@cucmpub trust-certs]# openssl x509 -noout -hash -in cucmpub.pem
5eb51e07
```

```
[root@cucmpub trust-certs]# ls -l 5eb51e07.0 lrwxrwxrwx 1 certbase ccmbase 11 May 13 17:16
5eb51e07.0 -> cucmpub.pem
```

3. Descripción general del diseño de CertMgmt y Certificado CN

Cuando el certificado se carga en la página de administración del SO, el archivo en formato .PEM y .DER se escribe en el sistema de archivos y las tablas de DB se actualizan.

A continuación, estos certificados se replican a través de la replicación de DB a los otros nodos del clúster.

Algunos tipos de certificados son detectados por el proceso de Notificación de cambios de certificado de Cisco en los nodos remotos y cargados en el sistema de archivos por el mismo proceso.

El proceso de Notificación de cambios de certificado de Cisco recibe notificaciones sobre cambios en estas tablas: CERTIFICATE y CERTIFICATESERVICECERTIFICATEMAP.


Los certificados detectados por la Notificación de cambios de certificado de Cisco se configuran en el siguiente archivo de configuración /usr/local/platform/conf/certM.conf:

```
CHANGE_NOTIFICATION_UNIT = Tomcat, Tomcat-Trust, Directory-Trust, CallManager, Phone-SAST-Trust, CallManager-Trust
```

Además, el servicio se ejecuta cada 30 min (1800 seg) de manera predeterminada para mantener todos los certificados sincronizados, este temporizador también está configurado en el archivo anterior: CN_SYNC_TIMER = 1800

Una vez que se replican en los nodos remotos y se cargan allí, como también en el sistema de archivos, la página de administración del SO mostrará los certificados.

Es importante tener en cuenta que la página de administración del SO y todos los demás servicios leen los certificados del sistema de archivos y no de la DB.

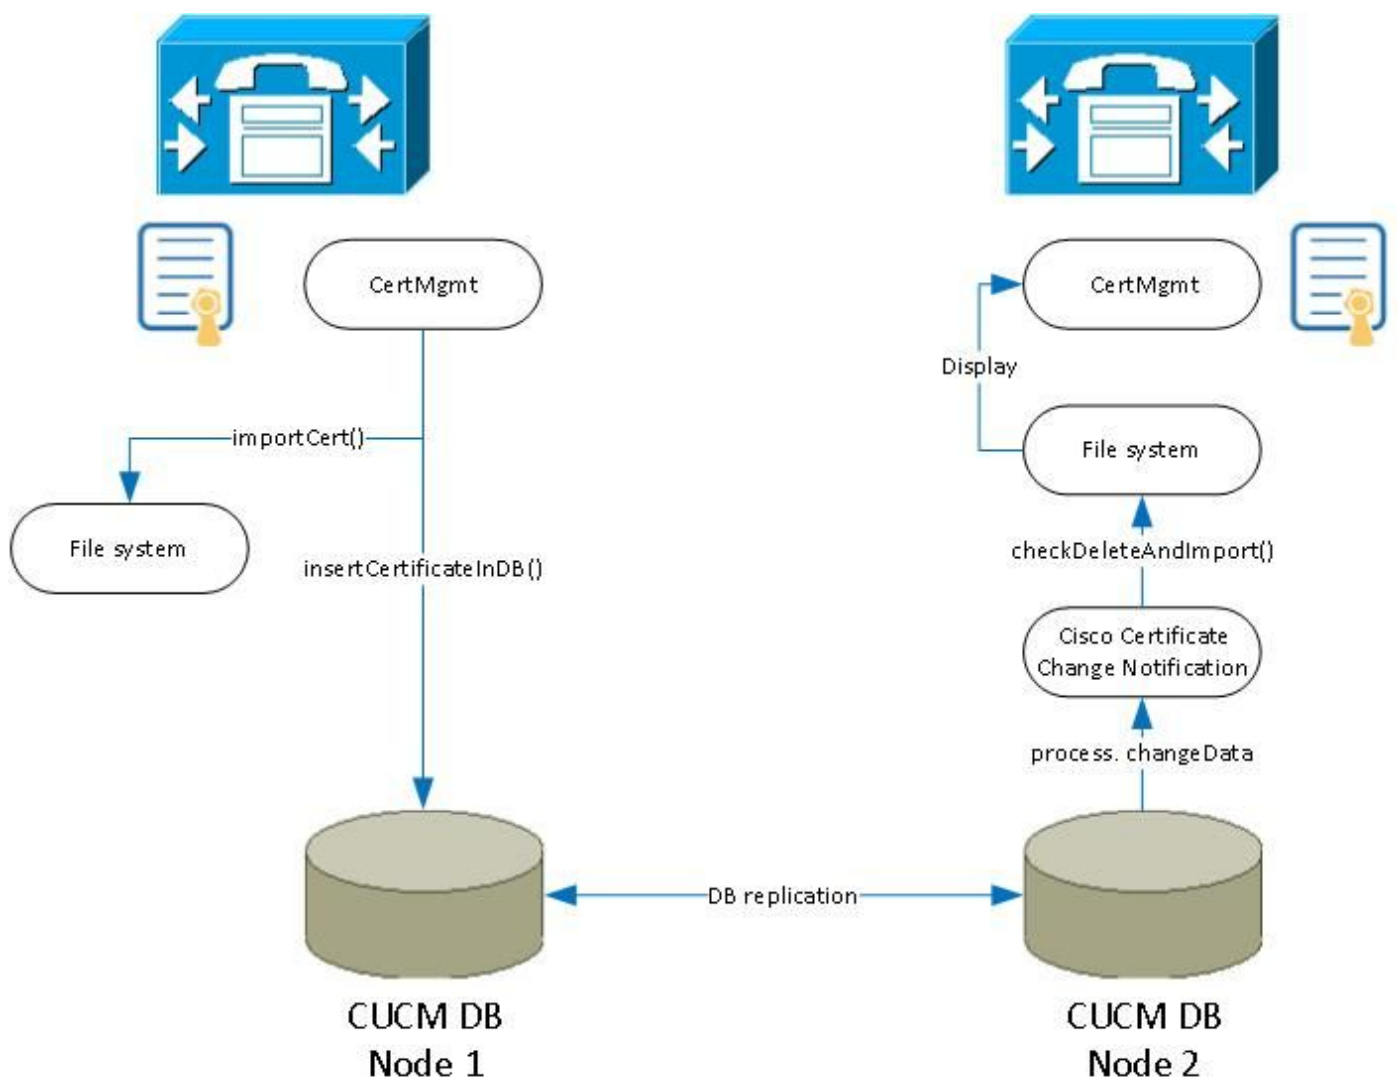

4. Examples

En esta sección, considerará 3 situaciones diferentes de administración de certificados.

Para cada situación, se sigue el proceso en detalle y se utilizan capturas de pantalla y registros.

Para esta situación, se utiliza un clúster de 2 nodos con CUCM versión 9.1.2.10000-28.

Leyenda:

CM - Administración de certificados (los registros se pueden encontrar en 'file list activelog platform/log/certMgmtXXXXX.log')

certCN: Servicio de notificación de cambios de certificados (los registros se pueden encontrar en 'file list activelog platform/log/certCNXXXXX.log')

Ejemplos basados en el clúster CUCM 9.1.2.10000-28, dos nodos:

PUB, IP: 10.48.46.29, HOSTNAME: CUCM861

SUB, IP: 10.48.46.30, HOSTNAME: CUCM861s

Los certificados se presentan en la página de administración del SO con el número de serie en formato decimal. DB almacena este número en HEX. Para convertir números de serie entre HEX/DEC, puede utilizar esta herramienta [en línea](#).

Los fragmentos de registro contienen algunos comentarios (en negrita, que comienzan con '##').

4.A. Inserte un nuevo certificado tomcat-trust.

En la primera situación, usted carga un certificado en tomcat-trust a través de la página de administración del SO; los pasos siguientes se producirán en ambos nodos del clúster:

- a. Cargar manualmente el certificado
 - b. El certificado se almacenará en el sistema de archivos por CM.
 - c. CM insertará el certificado en la DB.
 - d. El certificado se replicará a través de la replicación de DB al suscriptor. Se notificará el cambio a CertCN en ambos nodos (pub y sub). No realizará ninguna acción en el nodo pub.
 - e. CertCN en el subnodo importará el certificado al sistema de archivos y lo agregará al keystore.
 - f. Después de estos pasos, el certificado será visible en la GUI en la página de administración del SO.
- a.** Cuando se produce la carga de certificados desde el archivo PEM. Siga las capturas de pantalla siguientes:

Certificate List

Generate New Upload Certificate/Certificate chain Download CTL Generate CSR

Status
4 records found

Certificate List (1 - 4 of 4)

Find Certificate List where Certificate Name begins with tomcat Find Clear Filter

Certificate Name	Certificate Type	.PEM File
tomcat	certs	tomcat.pem
tomcat-trust	trust-certs	CUCM861.pem
tomcat-trust	trust-certs	CUCM861s.pem
tomcat-trust	trust-certs	VeriSign_Class_3_Secure_Server_CA - G3.p

Generate New Upload Certificate/Certificate chain Download CTL Generate CSR

Upload Certificate/Certificate chain - Mozilla Firefox

https://ghnizdur-1:8443/cmplatform/certificateUpload.do

Upload Certificate/Certificate chain

Upload File Close

Status
Status: Ready

Upload Certificate/Certificate chain

Certificate Name* tomcat-trust

Description

Upload File Przeglądaj... tomcat.pem

Upload File Close

* - indicates required item.

Certificate List

Generate New Upload Certificate/Certificate chain Download CTL Generate CSR

Status
5 records found

Certificate List (1 - 5 of 5)

Find Certificate List where Certificate Name begins with tomcat Find Clear Filter

Certificate Name	Certificate Type	.PEM File	.DER File	Description
tomcat	certs	tomcat.pem	tomcat.der	Self-signed certificate generated by system
tomcat-trust	trust-certs	CUCM9X.pem	CUCM9X.der	Signed Certificate
tomcat-trust	trust-certs	CUCM861.pem	CUCM861.der	Trust Certificate
tomcat-trust	trust-certs	CUCM861s.pem	CUCM861s.der	Trust Certificate
tomcat-trust	trust-certs	VeriSign_Class_3_Secure_Server_CA - G3.pem	VeriSign_Class_3_Secure_Server_CA - G3.der	Trust Certificate

Generate New Upload Certificate/Certificate chain Download CTL Generate CSR

Upload Certificate/Certificate chain - Mozilla Firefox

https://ghnizdur-1:8443/cmplatform/certificateUpload.do

Upload Certificate/Certificate chain

Upload File Close

Status
Success: Certificate Uploaded

Upload Certificate/Certificate chain

Certificate Name* tomcat-trust

Description



Upload File Przeglądaj... Nie wybrano pliku.

Upload File Close


* - indicates required item.

Show ▾ Settings ▾ Security ▾ Software Upgrades ▾ Services ▾ Help ▾

Certificate Configuration

 Delete  Download

Status

 Status: Ready

Certificate Settings

File Name CUCM9X.pem
 Certificate Name tomcat-trust
 Certificate Type trust-certs
 Certificate Group product-cpi
 Description Signed Certificate

Certificate File Data

```
[
Version: V3
Serial Number: 162503161730851213217569888696899890998
Signature Algorithm: SHA256withRSA (1.2.840.113549.1.1.11)
Issuer Name: L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL
Validity From: Mon Aug 04 15:19:07 CEST 2014
To: Sat Aug 03 15:19:06 CEST 2019
Subject Name: L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL
Key: RSA (1.2.840.113549.1.1.1)
Key value:
3082010a0282010100cb42282338f20e9682fe018c4f0b0951aa32bc0771c1184052fb2ba3b96aafce37e1d002964115d4f0f6a
2f452ff9c02f09329f5ec978409225eafc5c31606ac05e92d4e230004f43ca1636664b9188b5f43b6e1e4677f7d0578f1fd8e5e5e55
553097808a6954b7c5af72abac9a61ae28ecf13a432a4af520c82a6d881d0ea3d475f6e995cb28b2499878452b972715ba3eed45
3376d884bb7f97050b674d0b12fdb33ba156dcb32a98b9a41d76b4f966bce8f50123c7806e33adbdbd8e611c82623f390e4ee2c
692f9d123c7dbbe83dae6acdbaf674a60b6c1c75372228de3d90a72a6e49138a220b5a88db35304de72f91893e3126745de5f237
65ab910203010001
Extensions: 3 present
[
Extension: KeyUsage (OID.2.5.29.15)
Critical: false
Usage: digitalSignature, keyEncipherment, dataEncipherment, keyAgreement, keyCertSign,
]
[
Extension: ExtKeyUsageSyntax (OID.2.5.29.37)
Critical: false
Usage oids: 1.3.6.1.5.5.7.3.1, 1.3.6.1.5.5.7.3.2, 1.3.6.1.5.5.7.3.5,
]
]
```

Número de serie de nuestro nuevo certificado:
 Dic: 162503161730851213217569888696899890998
 Hex 7A40F8743A793B44FE802B5F3E1E6F36

El certificado se escribe en el sistema de archivos (seguirá este proceso en los siguientes pasos).

```
[root@CUCM861 tomcat]# pwd
/usr/local/platform/.security/tomcat
[root@CUCM861 tomcat]# ls -la
total 40
drwxr-xr-x 5 root root 4096 Apr 4 12:47 .
drwxr-xr-x 5 root root 4096 Apr 4 12:47 ..
drwxr-xr-x 2 certbase ccmbase 4096 Aug 2 23:36 certs
drwxr-xr-x 2 certbase ccmbase 4096 Aug 2 23:36 keys
drwxr-xr-x 2 certbase ccmbase 4096 Aug 4 15:21 trust-certs
```

```

[root@CUCM861 tomcat]# ls -la certs
total 48
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 23:36 .
drwxr-xr-x 5 root      root    4096 Apr  4 12:47 ..
-rwxr-xr-x 1 certbase ccmbase  939 Aug  2 23:36 tomcat.der
-rwxr-xr-x 1 certbase ccmbase   64 Aug  2 23:36 tomcat.description
-rwxr-xr-x 1 certbase ccmbase 2598 Aug  2 23:36 tomcat.keystore
-rwxr-xr-x 1 certbase ccmbase 1326 Aug  2 23:36 tomcat.pem

[root@CUCM861 tomcat]# ls -la trust-certs total 140 drwxr-xr-x 2 certbase ccmbase 4096 Aug  4
15:21 . drwxr-xr-x 5 root root 4096 Apr  4 12:47 .. lrwxrwxrwx 1 certbase ccmbase 11 Aug  4 15:21
101f99a6.0 -> CUCM861.pem lrwxrwxrwx 1 certbase ccmbase 10 Aug  4 15:21 25ffab9b.0 -> CUCM9X.pem
lrwxrwxrwx 1 certbase ccmbase  42 Aug  4 15:21 7e0370f0.0 ->
VeriSign_Class_3_Secure_Server_CA_-_G3.pem
-rwxr-xr-x 1 certbase ccmbase  939 Aug  2 23:36 CUCM861.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 23:36 CUCM861.description
-rwxr-xr-x 1 certbase ccmbase 1326 Aug  2 23:36 CUCM861.pem
-rwxr-xr-x 1 certbase ccmbase  941 Aug  2 22:51 CUCM861s.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 22:51 CUCM861s.description
-rwxr-xr-x 1 certbase ccmbase 1330 Aug  2 22:51 CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase  953 Aug  4 15:21 CUCM9X.der
-rwxr-xr-x 1 certbase ccmbase   45 Aug  4 15:21 CUCM9X.description
-rwxr-xr-x 1 certbase ccmbase 1346 Aug  4 15:21 CUCM9X.pem
lrwxrwxrwx 1 certbase ccmbase  12 Aug  4 15:21 d0aacffb.0 -> CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase 4939 Aug  4 15:21 tomcat-trust.keystore
-rwxr-xr-x 1 certbase ccmbase 1520 Apr  4 12:47 VeriSign_Class_3_Secure_Server_CA_-_G3.der
-rwxr-xr-x 1 certbase ccmbase   44 Apr  4 12:47 VeriSign_Class_3_Secure_Server_CA_-_
_G3.description
-rwxr-xr-x 1 certbase ccmbase 2114 Apr  4 12:47 VeriSign_Class_3_Secure_Server_CA_-_G3.pem

[root@CUCM861 tomcat]# md5sum trust-certs/CUCM9X.pem a0a2e12a42e4bbbf10655c9b299839d9 trust-
certs/CUCM9X.pem

```

Como puede ver, el nuevo certificado se almacena en el directorio trust-certs. El nombre común (que equivale al nombre de host del nodo CUCM) se ha utilizado como nombre de archivo. Se guardó como .pem y .der.

También se creó el enlace simbólico **25ffab9b.0 -> CUCM9X.pem** y se agregó el certificado a **tomcat-trust.keystore**.

Por último, comparará la checksum md5 del archivo de certificado en el subnodo para probar que este es el mismo certificado.

b. Analicemos más en detalle cómo el certificado se ha guardado en el sistema de archivos. Desde el registro de CM (comentarios en fragmento, en negrita, empieza con **##**):

```

2014-08-04 15:21:21,116 INFO [main] - log4j configuration successful.
2014-08-04 15:21:21,239 INFO [main] - IN -- CertMgr.java - mainInternal(args) -
2014-08-04 15:21:21,241 INFO [main] - decode

```

import is the operation that will be performed

```

2014-08-04 15:21:21,241 INFO [main] - op:import
2014-08-04 15:21:21,241 INFO [main] - type:trust-certs
2014-08-04 15:21:21,241 INFO [main] - unit:tomcat-trust
2014-08-04 15:21:21,241 INFO [main] - src-
cert:%2Fusr%2Flocal%2Fplatform%2Fupload%2Fcerts%2Ftomcat.pem
2014-08-04 15:21:21,241 INFO [main] - cert-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Ftrust-certs
2014-08-04 15:21:21,241 INFO [main] - key-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Fkeys
2014-08-04 15:21:21,241 INFO [main] - rootCA-cert:Dummy+Root+cert
2014-08-04 15:21:21,241 INFO [main] - trust-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Ftrust-certs

```

```
2014-08-04 15:21:21,241 INFO [main] - logfile:%2Fvar%2Flog%2Factive%2Fplatform%2Flog%2Fcert-
mgmt.log
2014-08-04 15:21:21,241 INFO [main] -
resultfile:%2Fvar%2Flog%2Factive%2Fplatform%2Flog%2Fcertde-info.xml
2014-08-04 15:21:21,241 INFO [main] - description:Signed+Certificate
2014-08-04 15:21:21,294 INFO [main] - Parsed information
2014-08-04 15:21:21,294 INFO [main] - OrgName: CISCO
2014-08-04 15:21:21,294 INFO [main] - OrgUnit: TAC
2014-08-04 15:21:21,294 INFO [main] - Location: KRAKOW
2014-08-04 15:21:21,294 INFO [main] - Country: PL
2014-08-04 15:21:21,294 INFO [main] - State: MALOPOLSKA
2014-08-04 15:21:21,294 INFO [main] - Hostname: CUCM861
2014-08-04 15:21:21,294 INFO [main] - AlternateHostname: null
2014-08-04 15:21:21,294 INFO [main] - Domain Name:
2014-08-04 15:21:21,294 INFO [main] - IPAddress: 10.48.46.29
2014-08-04 15:21:21,296 INFO [main] - In parseXML()
2014-08-04 15:21:21,359 INFO [main] - FQDN Name retrived by InetAddress : CUCM861
2014-08-04 15:21:21,360 INFO [main] - CN: CUCM861
2014-08-04 15:21:21,360 INFO [main] - Temp before mod is
2014-08-04 15:21:21,361 INFO [main] - Temp afer mod is TAC
2014-08-04 15:21:21,361 INFO [main] - Temp in else is TAC
2014-08-04 15:21:21,361 INFO [main] - Temp before mod is
2014-08-04 15:21:21,361 INFO [main] - Temp afer mod is TAC
2014-08-04 15:21:21,361 INFO [main] - Temp in else is TAC
2014-08-04 15:21:21,361 INFO [main] - OuFields are TAC
2014-08-04 15:21:21,361 DEBUG [main] - Field after encoding: TAC
2014-08-04 15:21:21,361 DEBUG [main] - Field after encoding: CISCO
2014-08-04 15:21:21,362 DEBUG [main] - Field after encoding: KRAKOW
2014-08-04 15:21:21,362 DEBUG [main] - Field after encoding: MALOPOLSKA
2014-08-04 15:21:21,362 DEBUG [main] - Field after encoding: PL
2014-08-04 15:21:21,366 INFO [main] - OU field is :TAC
2014-08-04 15:21:21,366 INFO [main] - SubjectDN ::
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
2014-08-04 15:21:21,366 INFO [main] - IN -- CertMgr.java - getCertMgrObj(unit) - tomcat-trust
2014-08-04 15:21:21,386 INFO [main] - OUT -- CertMgr.java - getCertMgrObj -
com.cisco.cpi.certMgmt.manager.TomcatCertMgr@162dbb6
2014-08-04 15:21:21,386 INFO [main] - Dummy loadProperties
2014-08-04 15:21:21,386 INFO [main] - IN -- CertMgr.java - doOp(info) -
2014-08-04 15:21:21,387 INFO [main] - IN -- DefaultCertMgr.java - importCert(info) -
decode:      true
op:          import
unit:        tomcat-trust
keystoreUnit:tomcat-trust
logFile:     /var/log/active/platform/log/cert-mgmt.log
resultFile:  /var/log/active/platform/log/certde-info.xml
keyDir:      /usr/local/platform/.security/tomcat/keys
certDir:     /usr/local/platform/.security/tomcat/trust-certs
srcCert:     /usr/local/platform/upload/certs/tomcat.pem
type:        trust-certs
rootCACert:  Dummy Root cert
trustDir:    /usr/local/platform/.security/tomcat/trust-certs
DNAME:       CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
description:Signed Certificate
isDBInsert:true

2014-08-04 15:21:21,387 INFO [main] - IN -- DefaultCertMgr.java - loadInputCert(info) -
2014-08-04 15:21:22,246 DEBUG [main] - Loading RSA providers explicitly...
2014-08-04 15:21:25,159 DEBUG [main] - RSA providers are loaded explicitly...
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.1=JsafeJCE
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.2=RsaJsse
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.3=BC
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.4=SUN
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.5=SunRsaSign
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.6=SunJSSE
```



```
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.7=SunJCE
2014-08-04 15:21:25,159 DEBUG [main] - New security.provider.8=SunJGSS
2014-08-04 15:21:25,160 DEBUG [main] - New security.provider.9=SunSASL
2014-08-04 15:21:25,160 DEBUG [main] - New security.provider.10=XMLDSig
2014-08-04 15:21:25,160 DEBUG [main] - New security.provider.11=SunPCSC
2014-08-04 15:21:25,160 INFO [main] - IN -- RSACryptoEngine.java - loadCertificates(..) -
2014-08-04 15:21:25,160 INFO [main] - IN -- RSACryptoEngine.java - loadCertificate(..) -
2014-08-04 15:21:25,772 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificate -
2014-08-04 15:21:25,772 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificates -
2014-08-04 15:21:25,772 INFO [main] - OUT -- DefaultCertMgr.java - loadInputCert - Successfully
loaded input cert
2014-08-04 15:21:25,772 DEBUG [main] - Checking validity of cert
2014-08-04 15:21:25,772 INFO [main] - Verifying certificate
L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
2014-08-04 15:21:25,772 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-04 15:21:25,773 DEBUG [main] - parseCNfromDN( certSubjDN:
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL')
2014-08-04 15:21:25,773 DEBUG [main] - Truncating CN 'CUCM9X,OU=TAC,O=Cisco Systems,C=PL' ->
'CUCM9X'
2014-08-04 15:21:25,773 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-04 15:21:25,773 DEBUG [main] - Parsed CN 'CUCM9X' from DN
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL'
2014-08-04 15:21:25,773 INFO [main] - trying to load cert from trust store
::/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem
2014-08-04 15:21:25,773 INFO [main] - cert not available in trust store
::L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
2014-08-04 15:21:25,773 INFO [main] - IN -- DefaultCertMgr.java - importTrustCert(info, cert) -
2014-08-04 15:21:25,773 INFO [main] - IN -- DefaultCertMgr.java - saveToTrustStore(info, cert) -
2014-08-04 15:21:25,773 INFO [main] - IN -- DefaultCertMgr.java - saveTrustCert(cert, targetDir,
certType) -
2014-08-04 15:21:25,773 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-04 15:21:25,773 DEBUG [main] - parseCNfromDN( certSubjDN:
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL')
2014-08-04 15:21:25,773 DEBUG [main] - Truncating CN 'CUCM9X,OU=TAC,O=Cisco Systems,C=PL' ->
'CUCM9X'
2014-08-04 15:21:25,773 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-04 15:21:25,773 DEBUG [main] - Parsed CN 'CUCM9X' from DN
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL'
2014-08-04 15:21:25,773 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-04 15:21:25,773 DEBUG [main] - parseCNfromDN( certSubjDN:
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL')
2014-08-04 15:21:25,774 DEBUG [main] - Truncating CN 'CUCM9X,OU=TAC,O=Cisco Systems,C=PL' ->
'CUCM9X'
2014-08-04 15:21:25,774 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-04 15:21:25,774 DEBUG [main] - Parsed CN 'CUCM9X' from DN
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL'
```

cert will be stored in filesystem with below filename (which is CN retrieved from certificate)

```
2014-08-04 15:21:25,774 DEBUG [main] - target filename for imported cert: 'CUCM9X.pem'
2014-08-04 15:21:25,774 DEBUG [main] - existing certificate with same filename not found.
2014-08-04 15:21:25,774 DEBUG [main] - Saving PEM encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem'
2014-08-04 15:21:25,776 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) - File :
/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem
2014-08-04 15:21:25,796 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-04 15:21:25,796 DEBUG [main] - Saving DER encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.der'
2014-08-04 15:21:25,797 INFO [main] - OUT -- DefaultCertMgr.java - saveTrustCert -
```

saving it to key store

```
2014-08-04 15:21:25,797 INFO [main] - IN -- TomcatCertMgr.java - saveToKeyStore(..) -
2014-08-04 15:21:25,797 INFO [main] - IN -- RSACryptoEngine.java - saveToKeyStore(keystoreFile,
keystorePass, x509Certificate, alias) -
```

```
2014-08-04 15:21:25,797 INFO [main] - IN -- RSACryptoEngine.java - loadKeyStore(keystoreFile,
keystorePass) -
2014-08-04 15:21:25,981 INFO [main] - OUT -- RSACryptoEngine.java - loadKeyStore -
2014-08-04 15:21:25,981 INFO [main] - Size of the keystore before import is : 3
2014-08-04 15:21:25,982 INFO [main] - Importing certificate : CUCM9X
2014-08-04 15:21:26,023 INFO [main] - Size of the keystore after import is : 4
2014-08-04 15:21:26,023 INFO [main] - OUT -- RSACryptoEngine.java - saveToKeyStore -
2014-08-04 15:21:26,023 INFO [main] - OUT -- TomcatCertMgr.java - saveToKeyStore -
2014-08-04 15:21:26,023 DEBUG [main] - TrustCert description filename : 'CUCM9X.description'
2014-08-04 15:21:26,024 INFO [main] - IN -- DefaultCertMgr.java - createDescriptionFile(name,
description) -
2014-08-04 15:21:26,024 INFO [main] - description is :Signed Certificate
2014-08-04 15:21:26,024 INFO [main] - OUT -- DefaultCertMgr.java - createDescriptionFile -
2014-08-04 15:21:26,024 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-04 15:21:26,024 DEBUG [main] - setOwnershipAndPermissions : CUCM9X.description
2014-08-04 15:21:26,025 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description'
2014-08-04 15:21:26,025 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:26,025 DEBUG [main] - Executing command from Util.sysExec : /bin/chown
certbase /usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description
2014-08-04 15:21:26,049 INFO [main] - OUT -- Util.java - sysExec -
2014-08-04 15:21:26,049 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description'
2014-08-04 15:21:26,049 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:26,049 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp ccmbase
/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description
2014-08-04 15:21:26,064 INFO [main] - OUT -- Util.java - sysExec -
2014-08-04 15:21:26,065 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description'
2014-08-04 15:21:26,065 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:26,065 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod 755
/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description
2014-08-04 15:21:26,068 INFO [main] - OUT -- Util.java - sysExec -
2014-08-04 15:21:26,068 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-04 15:21:26,068 INFO [main] - OUT -- DefaultCertMgr.java - saveToTrustStore -
```

certificate will be stored in trust-certs directory

```
2014-08-04 15:21:26,069 INFO [main] - trustdir ::/usr/local/platform/.security/tomcat/trust-
certs
2014-08-04 15:21:26,069 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:26,069 DEBUG [main] - Executing command from Util.sysExec : python
/usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:26,449 INFO [main] - OUT -- Util.java - sysExec -
```

setting necessary permissions

```
2014-08-04 15:21:26,449 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-04 15:21:26,449 DEBUG [main] - setOwnershipAndPermissions : trust-certs
2014-08-04 15:21:26,449 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-04 15:21:26,449 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:26,449 DEBUG [main] - Executing command from Util.sysExec : /bin/chown -R
certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:26,460 INFO [main] - OUT -- Util.java - sysExec -
2014-08-04 15:21:26,460 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-04 15:21:26,460 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:26,460 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp -R
ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:26,471 INFO [main] - OUT -- Util.java - sysExec -
2014-08-04 15:21:26,472 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-04 15:21:26,472 INFO [main] - IN -- Util.java - sysExec(exe, args) -
```

```
2014-08-04 15:21:26,472 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod -R 755
/usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:26,478 INFO [main] - OUT -- Util.java - sysExec -
2014-08-04 15:21:26,478 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-04 15:21:26,478 INFO [main] - IN -- CertUtil.java - populateCertInfo(cert, opInfo,
certFilePemLocation) -
2014-08-04 15:21:26,480 INFO [main] - IN -- CertUtil.java - getHostName(..) -
2014-08-04 15:21:26,480 INFO [main] - OUT -- CertUtil.java - getHostName - CUCM861
2014-08-04 15:21:26,480 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) -
2014-08-04 15:21:26,482 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-04 15:21:26,483 INFO [main] - OUT -- CertUtil.java - populateCertInfo -
```

c. El certificado se ha almacenado en el sistema de archivos, ahora se debe insertar en la base de datos. Esta operación también la realiza API CM.

```
2014-08-04 15:21:26,484 INFO [main] - IN -- CertDBAction.java -
insertCertificateInDB(certFiletoStore, info) -
2014-08-04 15:21:26,485 INFO [main] -
```

certificate has been identified as tomcat-trust one

```
DBParameters ...
PKID :null
CN :L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
serialNo :7a40f8743a793b44fe802b5f3e1e6f36
hostName :CUCM861
issuerName :L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
Certificate :Not Printing huge Certificate String..
IPV4Address :10.48.46.29
IPV6Address :
TimeToLive :NULL
UNIT :tomcat-trust
TYPE :trust-certs
ROLE :null
RoleMoniker :null
RoleEnum :null
SERVICE :null
ServiceMoniker :null
ServiceEnum :0
```

```
2014-08-04 15:21:26,485 INFO [main] - DB - Certifciate Store Plugin Handler is
:com.cisco.ccm.certmgmt.db.CertDBImpl
2014-08-04 15:21:26,697 DEBUG [main] - Connection Initialized to localnode. Connection
HashCode:896033 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:26,697 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:26,712 DEBUG [main] - Try to get a connection from pool
2014-08-04 15:21:26,712 DEBUG [main] - getting local connection from Pool
2014-08-04 15:21:26,714 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-04 15:21:26,715 DEBUG [main] - There are currently 0 connection pool entries
2014-08-04 15:21:26,719 DEBUG [main] - Checking if connection limit has been reached for
database
2014-08-04 15:21:26,720 DEBUG [main] - Connecting to publisher so max number of connections
allowed is 100
2014-08-04 15:21:26,720 DEBUG [main] - Number of connections in use is 0
2014-08-04 15:21:26,720 DEBUG [main] - There is currently 1 connection pool entry
2014-08-04 15:21:26,720 DEBUG [main] - Number of available connections in pool: 0
2014-08-04 15:21:27,411 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@135da43> to connection list
2014-08-04 15:21:27,411 DEBUG [main] - Marking connection
```

```

<com.informix.jdbc.IfxSqlConnect@135da43> as used
2014-08-04 15:21:27,411 DEBUG [main] - Got connection from pool
2014-08-04 15:21:27,418 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:27,422 DEBUG [main] - Closing the resultset.
2014-08-04 15:21:27,423 DEBUG [main] - Closing the connection. Connection HashCode:896033 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:27,423 DEBUG [main] - Attempting to close connection
2014-08-04 15:21:27,423 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-04 15:21:27,423 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-04 15:21:27,447 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@135da43> from connection list
2014-08-04 15:21:27,452 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@135da43> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-04 15:21:27,453 INFO [main] - Connection/Statement/Resultset is closed properly.

## service is checking current enums for TYPETRUSTROLEMAP (for tomcat-trust it is
## ROLE_APPLICATION_SERVER=7) and TYPESERVICEROLEMAP (for tomcat-trust it will be
## tomcat-trust=6)
2014-08-04 15:21:27,453 INFO [main] - TYPETRUSTROLEMAP ::{TRUST_ROLE_DATA_SERVICE=24,
TRUST_ROLE_PROVISIONING_SERVICE=23, TRUST_ROLE_SERVICEABILITY=27,
TRUST_ROLES_CALLMANAGER_TFTP=2, PHONE_TRUST_ROLES_FIREWALL=6, ROLE_APPLICATION_SERVER=7,
TRUST_ROLES_SAST=0, ROLE_SIGNALING_CALL_CONTROL=22, TRUST_ROLES_CALLMANAGER=1,
TRUST_ROLES_UNKNOWN=255, TRUST_ROLE_NETWORK_ELEMENT=25, TRUST_ROLES_SRST=5,
ROLE_CERTIFICATE_AUTHORITY=20, TRUST_ROLE_VPN=26, TRUST_ROLES_CAPF=4, TRUST_ROLES_TFTP=3,
ROLE_AUTHENTICATION_AUTHORIZATION=21}
2014-08-04 15:21:27,453 INFO [main] - TYPESERVICEROLEMAP ::{Phone-VPN-trust=2, CallManager=3,
Phone-CTL-trust=15, tomcat-trust=6, TVS=11, ipsec-trust=8, Phone-trust=1, Phone-SAST-trust=14,
tomcat=5, userlicensing-trust=16, CAPF=9, ipsec=7, CAPF-trust=10, CallManager-trust=4, TVS-
trust=12, directory-trust=13}
2014-08-04 15:21:27,453 INFO [main] - unitRoleMap ::{Phone-VPN-trust=[TRUST_ROLE_VPN],
CallManager=[TRUST_ROLES_CALLMANAGER_TFTP, TRUST_ROLES_SAST], Phone-CTL-
trust=[ROLE_APPLICATION_SERVER], tomcat-trust=[ROLE_APPLICATION_SERVER],
TVS=[ROLE_AUTHENTICATION_AUTHORIZATION], ipsec-trust=[], Phone-trust=[ROLE_APPLICATION_SERVER],
Phone-SAST-trust=[TRUST_ROLES_SAST, TRUST_ROLES_TFTP], tomcat=[ROLE_APPLICATION_SERVER],
userlicensing-trust=[], CAPF=[TRUST_ROLES_CAPF], ipsec=[ROLE_APPLICATION_SERVER], CAPF-trust=[],
CallManager-trust=[], TVS-trust=[], directory-trust=[]}
2014-08-04 15:21:27,453 INFO [main] - commonTrustStoreMap ::{}
2014-08-04 15:21:27,456 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:7962652 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:27,456 INFO [main] - IN -- CertDBImpl.java - insertCertificate(certInfo, con) -
2014-08-04 15:21:27,456 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-04 15:21:27,456 DEBUG [main] - Try to get a connection from pool
2014-08-04 15:21:27,456 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-04 15:21:27,456 DEBUG [main] - There is currently 1 connection pool entry
2014-08-04 15:21:27,456 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@135da43> to connection list
2014-08-04 15:21:27,456 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@135da43> as used
2014-08-04 15:21:27,457 DEBUG [main] - Got connection from pool
2014-08-04 15:21:27,459 INFO [main] - IN -- CertDBImpl.java -
populateRoleEnumServiceEnum(certInfo) -
2014-08-04 15:21:27,459 INFO [main] - UNIT :: tomcat-trust
2014-08-04 15:21:27,459 INFO [main] - role :: [ROLE_APPLICATION_SERVER]
2014-08-04 15:21:27,459 INFO [main] - roleEnum :: [7]
2014-08-04 15:21:27,459 INFO [main] - service :: null
2014-08-04 15:21:27,459 INFO [main] - serviceEnum :: 6
2014-08-04 15:21:27,459 INFO [main] - OUT -- CertDBImpl.java - populateRoleEnumServiceEnum -
2014-08-04 15:21:27,489 INFO [main] - IN -- CertDBUtil.java - getProcessNodeId(con, hostName,
ipAddress, fqdn) -
2014-08-04 15:21:27,489 INFO [main] - getProcessNodeId Query :SELECT PKID,NAME FROM PROCESSNODE

```

```
WHERE UPPER(NAME)=UPPER("CUCM861") OR UPPER(NAME)=UPPER("10.48.46.29") OR
UPPER(NAME)=UPPER("CUCM861")
2014-08-04 15:21:27,489 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-04 15:21:27,497 INFO [main] - ProcessNodeId:13f4b0d9-0bae-429a-a86e-625336a35bb6
2014-08-04 15:21:27,498 DEBUG [main] - Closing the resultset.
2014-08-04 15:21:27,498 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-04 15:21:27,498 INFO [main] - OUT -- CertDBUtil.java - getProcessNodeId -
2014-08-04 15:21:27,498 INFO [main] - IN -- CertDBImpl.java - getPkidOfCertificate(hash,
serverName, con) -
2014-08-04 15:21:27,498 DEBUG [main] - GetPKID Query :SELECT A.PKID FROM CERTIFICATE A,
CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND B.HASH = "a9Ww/WeDmBnnHHncUCqOGCz409g="
2014-08-04 15:21:27,498 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-04 15:21:27,522 DEBUG [main] - Closing the resultset.
2014-08-04 15:21:27,539 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-04 15:21:27,539 INFO [main] - OUT -- CertDBImpl.java - getPkidOfCertificate -
2014-08-04 15:21:27,539 DEBUG [main] - INSERT FLAG :: isCertUpdate=false :: doNothing=false
```

**## you can see an insert query that is used to upload the certificate into the CERTIFICATE
table**

```
2014-08-04 15:21:27,543 DEBUG [main] - INSERT/UPDATE Query of CERTIFICATE : INSERT INTO
CERTIFICATE VALUES ("4152b36b-002e-68ac-711d-
c373fa940779", "CUCM861", "L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco
Systems,C=PL", "L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco
Systems,C=PL", "7a40f8743a793b44fe802b5f3e1e6f36", "-----BEGIN CERTIFICATE-----
MIIDtTCCAp2gAwIBAgIQekD4dDp500T+gCtfPh5vNjANBgkqhkiG9w0BAQsFADBg
MQswCQYDVQQGEWJQTDEWMBQGA1UEChMNQ2lzy28gU3lzdGVtczEMMAoGA1UECxMD
VEFDMQ8wDQYDVQQDEWZDVUNNOVgxZzARBGNVBAgTCk1hbG9wb2xza2ExDzANBgNV
BACTBktyYWtvdzAeFw0xNDA4MDQxMzE5MDdaFw0xOTA4MDMxMzE5MDZaMGoxCzAJ
BgNVBAYTALBMMRYwFAyDVoQKEw1DaXNjbyBTeXN0ZW1zMQwwCgYDVQQLEwNUQUxM
DzANBgNVBAMTBkNVQ005WDEtMBEGA1UECBMKTWFsY291bnR5b3BvbnR5TEPMA0GA1UEBxMG
S3Jha293MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAY0IoIzjyDpaC
/gGMTwsJUaoyvAdxwRhAUvsro7lqr+rON+HQApZBFdTw9qL0Uv+cAvCTKfXs14QJ
I16vxcMWBqWf6S10IwAE9DyhY2ZkuRiLX0024eRnf30FePH9j15eVVUw14CKaVS3
xa9yq6yaYa4o7PE6QypK9SDIKm2IHQ6j1HX26ZXLKlJmHhFK5cnFbo+7UUzdtie
u3+XBQtnTqsS/bM7oVbcsyqYuaQddrT5Zrzo9QEjx4BuM62929jmEcgmI/OQ504s
aS+dEjx9u+g9rmrNuvZ0pgtsHHU3IijePZCnKm5JE4oiC1qI2zUwTevckYk+MSZ0
XeXyN2WrkQIDAQABo1cwVTALBgNVHQ8EBAMCARwwJwYDVR0lBCAwHgYIKwYBBQUH
AwEGCCsGAQUFBwMCBggrBgEFBQCDBTAdBgNVHQ4EFgQUt6d1JJ8fTevcRHxEQKG9
fYV3SPswDQYJKoZIhvcNAQELBQADggEBALA9jn5CQWQHMA+Eg9C6QUyLqKNN7Lshy
loSSE7Nn5RsIB4PQ9cD8Wv17bzRyp70yFoQ1B+Z8U4FgSCWkbGAGAUbMyb/6rXLW
uUyCrXhy48XrMDVJ3CqMHXhR5tjY9Sn1ziXdJe4AwvBRAzId4QrIdNuE6pUSLrrh
915dRYvrXpIXgeQJ2pGU+qo12CSaySSPTEfHNDh8U2yjjw/tg8H1Amnv0VW+TY+9U
B6TC04iElmwOr9tJ6+LyZI7emRmNkv50n5PZcK4RQz5NOefVXdSHLpwAuW+Q8Eb
mt7BbxzyZl5KbaSdAMvKyrbnuwDJyZWMJPowftVcmRlRpk2/yDb959o=
-----END CERTIFICATE-----
", "10.48.46.29", "", NULL)
2014-08-04 15:21:27,543 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-04 15:21:27,766 INFO [main] - IN -- CertDBImpl.java - updateCertificateHashMap(certInfo,
con) -
```

hash for this certificate is being updated in teh CERTIFICATEHASHMAP

```
2014-08-04 15:21:27,766 DEBUG [main] - Update query of CERTIFICATEHASHMAP :UPDATE
CERTIFICATEHASHMAP SET HASH = "a9Ww/WeDmBnnHHncUCqOGCz409g=" WHERE FKCERTIFICATE = "4152b36b-
002e-68ac-711d-c373fa940779"
2014-08-04 15:21:27,766 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-04 15:21:27,771 INFO [main] - OUT -- CertDBImpl.java - updateCertificateHashMap -
```

**## cert is in the DB, but there is still no info about the type of this certificate.
Corresponding tables: CERTIFICATESERVICECERTIFICATEMAP, CERTIFICATESTRUSTROLEMAP and
CERTIFICATEPROCESSNODEMAP need to be updated with correct info. For each one CM will**

**## check if you have any entries in the DB with the PKID of certificate you just added. If
no, proper entry is inserted**

2014-08-04 15:21:27,771 INFO [main] - IN -- CertDBImpl.java - insertCertSrvCertMap(certInfo, con) -

2014-08-04 15:21:27,771 INFO [main] - IN -- CertDBImpl.java - checkExistingCertificateServiceMapping(certInfo, serviceEnum, con) -

checked here

2014-08-04 15:21:27,771 DEBUG [main] - checkExistingTrustCertificateForService Query :SELECT PKID,FKCERTIFICATE, TKCERTIFICATESERVICE FROM CERTIFICATESERVICECERTIFICATEMAP WHERE FKCERTIFICATE = "4152b36b-002e-68ac-711d-c373fa940779" AND TKCERTIFICATESERVICE= "6"

2014-08-04 15:21:27,771 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]

2014-08-04 15:21:27,774 DEBUG [main] - Closing the resultset.

2014-08-04 15:21:27,774 INFO [main] - Connection/Statement/Resultset is closed properly.

2014-08-04 15:21:27,774 INFO [main] - OUT -- CertDBImpl.java -

checkExistingCertificateServiceMapping -

inserted here

2014-08-04 15:21:27,774 DEBUG [main] - Certificate to be inserted in CERTIFICATESERVICECERTIFICATEMAP table :tomcat-trust ::PKID :4152b36b-002e-68ac-711d-c373fa940779 ::toInsertInCertSrvMap:true

2014-08-04 15:21:27,774 DEBUG [main] - Insert query of CERTIFICATESERVICECERTIFICATEMAP :INSERT INTO CERTIFICATESERVICECERTIFICATEMAP VALUES (newid(),"4152b36b-002e-68ac-711d-c373fa940779",6)

2014-08-04 15:21:27,775 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]

2014-08-04 15:21:27,778 DEBUG [main] - CertService mapping entry already exists..

2014-08-04 15:21:27,778 INFO [main] - OUT -- CertDBImpl.java - insertCertSrvCertMap -

2014-08-04 15:21:27,778 INFO [main] - IN -- CertDBImpl.java - insertCertTrustRoleMap(certInfo, log, con) -

2014-08-04 15:21:27,779 INFO [main] - IN -- CertDBImpl.java -

checkExistingCertificateRoleMapping(certInfo, roleEnum, con) -

checked here

2014-08-04 15:21:27,779 DEBUG [main] - checkExistingTrustCertificateForRole Query :SELECT PKID,FKCERTIFICATE, TKTRUSTROLE FROM CERTIFICATETRUSTROLEMAP WHERE FKCERTIFICATE = "4152b36b-002e-68ac-711d-c373fa940779" AND TKTRUSTROLE= "7"

2014-08-04 15:21:27,779 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]

2014-08-04 15:21:27,781 DEBUG [main] - Closing the resultset.

2014-08-04 15:21:27,781 INFO [main] - Connection/Statement/Resultset is closed properly.

2014-08-04 15:21:27,781 INFO [main] - OUT -- CertDBImpl.java -

checkExistingCertificateRoleMapping -

inserted here

2014-08-04 15:21:27,781 DEBUG [main] - Certificate to be inserted in CERTIFICATETRUSTROLEMAP table :tomcat-trust ::PKID :4152b36b-002e-68ac-711d-c373fa940779 ::toInsertInCertSrvMap:true

2014-08-04 15:21:27,781 DEBUG [main] - Insert query of CERTIFICATETRUSTROLEMAP :INSERT INTO CERTIFICATETRUSTROLEMAP VALUES (newid(),"4152b36b-002e-68ac-711d-c373fa940779",7)

2014-08-04 15:21:27,782 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]

2014-08-04 15:21:27,868 INFO [main] - OUT -- CertDBImpl.java - insertCertTrustRoleMap -

2014-08-04 15:21:27,868 INFO [main] - IN -- CertDBImpl.java - insertCertProcessNodeMap(certInfo, con) -

2014-08-04 15:21:27,868 INFO [main] - IN -- CertDBImpl.java -

checkExistingCertProcessNodeMapping(certInfo, con) -

finally checked here

2014-08-04 15:21:27,868 DEBUG [main] - checkExistingCertProcessNodeMapping Query :SELECT PKID,FKCERTIFICATE, FKPROCESSNODE, SERVERNAME FROM CERTIFICATEPROCESSNODEMAP WHERE FKCERTIFICATE="4152b36b-002e-68ac-711d-c373fa940779" AND FKPROCESSNODE="13f4b0d9-0bae-429a-a86e-625336a35bb6" AND SERVERNAME="CUCM861"

2014-08-04 15:21:27,869 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]

```
2014-08-04 15:21:27,872 DEBUG [main] - Closing the resultset.
2014-08-04 15:21:27,872 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-04 15:21:27,872 INFO [main] - OUT -- CertDBImpl.java -
checkExistingCertProcessNodeMapping -
```

and inserted here

```
2014-08-04 15:21:27,872 DEBUG [main] - Insert query of CERTIFICATEPROCESSNODEMAP :INSERT INTO
CERTIFICATEPROCESSNODEMAP VALUES (newId(),"4152b36b-002e-68ac-711d-c373fa940779", "13f4b0d9-
0bae-429a-a86e-625336a35bb6" , "CUCM861", "10.48.46.29" , "")
2014-08-04 15:21:27,872 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-04 15:21:27,879 INFO [main] - OUT -- CertDBImpl.java - insertCertProcessNodeMap -
2014-08-04 15:21:27,930 DEBUG [main] - Connection committed for insertCertificate..
2014-08-04 15:21:27,930 DEBUG [main] - Insertion of Certificate in DB is Successful.
2014-08-04 15:21:27,930 INFO [main] - OUT -- CertDBImpl.java - insertCertificate -
2014-08-04 15:21:27,930 DEBUG [main] - Closing the connection. Connection HashCode:7962652 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:27,930 DEBUG [main] - Attempting to close connection
2014-08-04 15:21:27,930 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-04 15:21:27,930 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-04 15:21:27,930 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@135da43> from connection list
2014-08-04 15:21:27,931 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@135da43> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-04 15:21:27,931 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-04 15:21:27,931 INFO [main] - DB - Generate Certificate operation in DB is successful
2014-08-04 15:21:27,931 INFO [main] - OUT -- CertDBAction.java - insertCertificateInDB -
2014-08-04 15:21:27,931 INFO [main] - IN -- CryptoUtil.java - isOCSPEnabled(..) -
2014-08-04 15:21:27,931 INFO [main] - IN -- CryptoUtil.java - getCertMonitorXmlParser(..) -
2014-08-04 15:21:27,989 INFO [main] - OUT -- CryptoUtil.java - getCertMonitorXmlParser -
2014-08-04 15:21:27,989 INFO [main] - OUT -- CryptoUtil.java - isOCSPEnabled - false
2014-08-04 15:21:27,990 DEBUG [main] - OCSP is not enabled.
```

process of importing the cert to this node is finishing here.

```
2014-08-04 15:21:27,990 INFO [main] - Successfully imported trusted certificate with Subject
DN:L#61;Krakow,ST#61;Malopolska,CN#61;CUCM9X,OU#61;TAC,O#61;Cisco Systems,C#61;PL
2014-08-04 15:21:27,990 INFO [main] - OUT -- DefaultCertMgr.java - importTrustCert -
Successfully imported trusted certificate with Subject
DN:L#61;Krakow,ST#61;Malopolska,CN#61;CUCM9X,OU#61;TAC,O#61;Cisco Systems,C#61;PL
2014-08-04 15:21:27,990 INFO [main] - result of import operations is ::Import of trust
certificate is successful
2014-08-04 15:21:27,990 INFO [main] - OUT -- DefaultCertMgr.java - importCert -
2014-08-04 15:21:27,990 INFO [main] - IN -- CertMgr.java - logResult(result, desc, resultFile) -
2014-08-04 15:21:27,990 INFO [main] - CertMgmt Operation Result : null
2014-08-04 15:21:27,991 INFO [main] - OUT -- CertMgr.java - logResult -
2014-08-04 15:21:27,991 INFO [main] - OUT -- CertMgr.java - doOp -
2014-08-04 15:21:27,992 INFO [main] - OUT -- CertMgr.java - mainIntenal -
```

d. Una vez que se replican los certificados, se notifica al servicio CertCN en ambos nodos sobre el cambio que se hizo en la base de datos. Esto se puede ver en los registros. A continuación, se muestra el registro del editor

notification about the change comes, service is notified about change in CERTIFICATE and CERTIFICATESERVICECERTIFICATEMAP tables

```
2014-08-04 15:21:28,003 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-04 15:21:28,016 INFO [Thread-5] - Inside CERTIFICATE - I/U option..
2014-08-04 15:21:28,016 DEBUG [Thread-5] - Updated Data in CERTIFICATE
::<msg><type>DBL</type><table>certificate</table><tableid>41</tableid><action>I</action><time>14
07158487</time><new><cdrserver>2</cdrserver><cdrtime>1407158486</cdrtime><pkid>4152b36b-002e-
68ac-711d-
c373fa940779</pkid><servername>CUCM861</servername><subjectname>L=Krakow,ST=Malopolska,CN=CUCM9X
,OU=TAC,O=Cisco
```

```
Systems,C=PL</subjectname><issuename>L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco
Systems,C=PL</issuename><serialnumber>7a40f8743a793b44fe802b5f3e1e6f36</serialnumber><certifica
te></certificate><ipv4address>10.48.46.29</ipv4address><ipv6address></ipv6address><timetolive>NU
LL</timetolive><ifx_replcheck>6043699677659004930</ifx_replcheck></new></msg>
2014-08-04 15:21:28,016 DEBUG [Thread-5] - Certificate PKID : 4152b36b-002e-68ac-711d-
c373fa940779 , ipAddress : 10.48.46.29 , OldSerialNo : , NewSerialNo :
7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:28,017 INFO [Thread-5] - OUT - process.
2014-08-04 15:21:28,018 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-04 15:21:28,018 INFO [Thread-5] - Inside CERTIFICATESEVICECERTIFICATEMAP - I option..
2014-08-04 15:21:28,019 DEBUG [Thread-5] - Updated Data in CERTIFICATESEVICECERTIFICATEMAP
::<msg><type>DBL</type><table>certificateservicecertificatemap</table><tableid>44</tableid><acti
on>I</action><time>1407158487</time><new><cdrserver>2</cdrserver><cdrtime>1407158487</cdrtime><p
kid>798ff6e1-e1d6-42e5-a4e6-30d9d7360d6d</pkid><fkcertificate>4152b36b-002e-68ac-711d-
c373fa940779</fkcertificate><tkcertificateservice>6</tkcertificateservice><ifx_replcheck>6043699
681953972226</ifx_replcheck></new></msg>
2014-08-04 15:21:28,019 INFO [InsertThread --- 8] - IN -- CertKeystoreHandler.java - run() -
2014-08-04 15:21:28,021 DEBUG [InsertThread --- 8] - InsertThread --- 8 -- START --
```

change is related to the PKID that has been assigned for the new certificate

```
2014-08-04 15:21:28,021 DEBUG [InsertThread --- 8] - DB Value UPDATE: 4152b36b-002e-68ac-711d-
c373fa940779
2014-08-04 15:21:28,021 INFO [InsertThread --- 8] - IN -- CertKeystoreHandler.java -
updateIntoKeystore() -
2014-08-04 15:21:28,021 INFO [InsertThread --- 8] - IN -- CertDBImpl.java -
getCertificate(certBash64SHA1:null --pkid:4152b36b-002e-68ac-711d-c373fa940779
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - Connection Initialized to localnode.
Connection HashCode:14186201 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - Select Query to getCertificate :SELECT
A.*,B.HASH FROM CERTIFICATE A, CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND A.PKID =
"4152b36b-002e-68ac-711d-c373fa940779"
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - Try to get a connection from pool
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - getting local connection from Pool
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - Getting connection from connection pool
entry <database,jdbcurl2>
2014-08-04 15:21:28,022 DEBUG [InsertThread --- 8] - There are currently 2 connection pool
entries
2014-08-04 15:21:28,023 DEBUG [InsertThread --- 8] - Checking if connection limit has been
reached for database
2014-08-04 15:21:28,023 DEBUG [InsertThread --- 8] - Connecting to publisher so max number of
connections allowed is 100
2014-08-04 15:21:28,023 DEBUG [InsertThread --- 8] - Number of connections in use is 0
2014-08-04 15:21:28,023 DEBUG [InsertThread --- 8] - There are currently 2 connection pool
entries
2014-08-04 15:21:28,023 DEBUG [InsertThread --- 8] - Number of available connections in pool: 0
2014-08-04 15:21:28,079 DEBUG [InsertThread --- 8] - Adding connection
<com.informix.jdbc.IfxSqlConnect@162db76> to connection list
2014-08-04 15:21:28,079 DEBUG [InsertThread --- 8] - Marking connection
<com.informix.jdbc.IfxSqlConnect@162db76> as used
2014-08-04 15:21:28,079 DEBUG [InsertThread --- 8] - Got connection from pool
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - Closing the resultset.
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - Closing the connection. Connection
HashCode:14186201 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - Attempting to close connection
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - Removing connection <database,jdbcurl2>
from ConnectionManager list
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - removeConnectionFromConnectionList()
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - Removing connection
<com.informix.jdbc.IfxSqlConnect@162db76> from connection list
2014-08-04 15:21:28,081 DEBUG [InsertThread --- 8] - Connection
<com.informix.jdbc.IfxSqlConnect@162db76> is not closed, adding it back to the pool entry
```



```
<database,jdbcurl2>
2014-08-04 15:21:28,082 INFO [InsertThread --- 8] - Connection/Statement/Resultset is closed
properly.
2014-08-04 15:21:28,082 DEBUG [InsertThread --- 8] - Connection released from
CertDBImpl.getCertificate method.
2014-08-04 15:21:28,082 INFO [InsertThread --- 8] - OUT -- CertDBImpl.java - getCertificate -
2014-08-04 15:21:28,082 INFO [InsertThread --- 8] - IN -- CertDBImpl.java -
getCertUnitByPkid(pkid) -
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Connection Initialized to localnode.
Connection HashCode:20337133 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Select Query to getCertUnitByPkid :SELECT
A.PKID, A.FKCERTIFICATE, A.TKCERTIFICATESERVICE, B.NAME UNIT FROM
CERTIFICATESEVICEMAP A, TYPECERTIFICATESERVICE B WHERE A.FKCERTIFICATE="4152b36b-
002e-68ac-711d-c373fa940779" AND A.TKCERTIFICATESERVICE = B.ENUM
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Try to get a connection from pool
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - getting local connection from Pool
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Getting connection from connection pool
entry <database,jdbcurl2>
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - There are currently 2 connection pool
entries
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Adding connection
<com.informix.jdbc.IfxSqlConnect@162db76> to connection list
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Marking connection
<com.informix.jdbc.IfxSqlConnect@162db76> as used
2014-08-04 15:21:28,083 DEBUG [InsertThread --- 8] - Got connection from pool
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Closing the resultset.
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Closing the connection. Connection
HashCode:20337133 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Attempting to close connection
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Removing connection <database, jdbcurl2>
from ConnectionManager list
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - removeConnectionFromConnectionList()
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Removing connection
<com.informix.jdbc.IfxSqlConnect@162db76> from connection list
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Connection
<com.informix.jdbc.IfxSqlConnect@162db76> is not closed, adding it back to the pool entry
<database,jdbcurl2>
2014-08-04 15:21:28,085 INFO [InsertThread --- 8] - Connection/Statement/Resultset is closed
properly.
2014-08-04 15:21:28,085 DEBUG [InsertThread --- 8] - Resultset released from
CertDBImpl.getCertUnitByPkid method.
2014-08-04 15:21:28,085 INFO [InsertThread --- 8] - OUT -- CertDBImpl.java - getCertUnitByPkid -
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - UNIT : tomcat-trust
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - CurrentIPAddress : 10.48.46.29
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - RemoteIPAddress : 10.48.46.29
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - OldSerialNo :
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - NewSerialNo
:7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - IN -- CertUtil.java -
getListFromComaSeperatedStr(..) -
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - OUT -- CertUtil.java -
getListFromComaSeperatedStr -

## tomcat-trust is in scope of certCN for import but since it is already on the file
## system the service will nothing with that one.
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - tomcat-trust --- is included unit for CN
2014-08-04 15:21:28,086 DEBUG [InsertThread --- 8] - Change notification not require on same
node except tomcat cert.
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - tomcat-trust Certificate successfully
updated in trust-store by Change Notification..
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - OUT -- CertKeystoreHandler.java -
```

```
updateIntoKeystore -
2014-08-04 15:21:28,086 DEBUG [InsertThread --- 8] - InsertThread --- 8 -- END --
2014-08-04 15:21:28,086 INFO [InsertThread --- 8] - OUT -- CertKeystoreHandler.java - run -
```

e. En el suscriptor, puede ver que sucede lo mismo, certCN recibe notificación del cambio y luego importa el certificado en el sistema de archivos, crea los enlaces simbólicos, etc... Esto se puede ver en el siguiente registro:

service is notified about the change in DB. Notifications are related to two tables:

```
2014-08-04 15:21:29,298 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-04 15:21:29,299 INFO [Thread-5] - Inside CERTIFICATE - I/U option..
```

CERTIFICATE one ...

```
2014-08-04 15:21:29,299 DEBUG [Thread-5] - Updated Data in CERTIFICATE
::<msg><type>DBL</type><table>certificate</table><tableid>41</tableid><action>I</action><time>14
07158488</time><new><cdrserver>2</cdrserver><cdrtime>1407158487</cdrtime><pkid>4152b36b-002e-
68ac-711d-
c373fa940779</pkid><servername>CUCM861</servername><subjectname>L=Krakow,ST=Malopolska,CN=CUCM9X
,OU=TAC,O=Cisco
Systems,C=PL</subjectname><issuename>L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco
Systems,C=PL</issuename><serialnumber>7a40f8743a793b44fe802b5f3e1e6f36</serialnumber><certifica
te></certificate><ipv4address>10.48.46.29</ipv4address><ipv6address></ipv6address><timetolive>NU
LL</timetolive><ifx_replcheck>6043699677659004930</ifx_replcheck></new></msg>
2014-08-04 15:21:29,299 DEBUG [Thread-5] - Certificate PKID : 4152b36b-002e-68ac-711d-
c373fa940779 , ipAddress : 10.48.46.29 , OldSerialNo : , NewSerialNo :
7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:29,299 INFO [Thread-5] - OUT - process.
2014-08-04 15:21:29,299 INFO [InsertThread --- 35] - IN -- CertKeystoreHandler.java - run() -
2014-08-04 15:21:29,300 DEBUG [InsertThread --- 35] - InsertThread --- 35 -- START --
2014-08-04 15:21:29,300 DEBUG [InsertThread --- 35] - DB Value UPDATE: 4152b36b-002e-68ac-711d-
c373fa940779
2014-08-04 15:21:29,300 INFO [InsertThread --- 35] - IN -- CertKeystoreHandler.java -
updateIntoKeystore() -
2014-08-04 15:21:29,300 INFO [InsertThread --- 35] - IN -- CertDBImpl.java -
getCertificate(certBash64SHA1:null --pkid:4152b36b-002e-68ac-711d-c373fa940779
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - Connection Initialized to localnode.
Connection HashCode:30607587 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - Select Query to getCertificate :SELECT
A.*,B.HASH FROM CERTIFICATE A, CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND A.PKID =
"4152b36b-002e-68ac-711d-c373fa940779"
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - Try to get a connection from pool
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - getting local connection from Pool
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - Getting connection from connection pool
entry <database,jdbcurl2>
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - There are currently 2 connection pool
entries
2014-08-04 15:21:29,301 DEBUG [InsertThread --- 35] - Checking if connection limit has been
reached for database
2014-08-04 15:21:29,302 DEBUG [InsertThread --- 35] - Connecting to subscriber so max number of
connections allowed is 100
2014-08-04 15:21:29,302 DEBUG [InsertThread --- 35] - Number of connections in use is 0
2014-08-04 15:21:29,302 DEBUG [InsertThread --- 35] - There are currently 2 connection pool
entries
2014-08-04 15:21:29,302 DEBUG [InsertThread --- 35] - Number of available connections in pool: 0
2014-08-04 15:21:29,315 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-04 15:21:29,316 INFO [Thread-5] - Inside CERTIFICATESERVICECERTIFICATEMAP - I option..
```

... and CERTIFICATESERVICECERTIFICATEMAP

```
2014-08-04 15:21:29,316 DEBUG [Thread-5] - Updated Data in CERTIFICATESERVICECERTIFICATEMAP
::<msg><type>DBL</type><table>certificateservicecertificatemap</table><tableid>44</tableid><acti
```

```
on>I</action><time>1407158489</time><new><cdrserver>2</cdrserver><cdrtime>1407158487</cdrtime><p
kid>798ff6e1-e1d6-42e5-a4e6-30d9d7360d6d</pkid><fkcertificate>4152b36b-002e-68ac-711d-
c373fa940779</fkcertificate><tkcertificateservice>6</tkcertificateservice><ifx_replcheck>6043699
681953972226</ifx_replcheck></new></msg>
2014-08-04 15:21:29,354 DEBUG [InsertThread --- 35] - Adding connection
<com.informix.jdbc.IfxDriver@1ec9f34> to connection list
2014-08-04 15:21:29,355 DEBUG [InsertThread --- 35] - Marking connection
<com.informix.jdbc.IfxDriver@1ec9f34> as used
2014-08-04 15:21:29,355 DEBUG [InsertThread --- 35] - Got connection from pool
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Closing the resultset.
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Closing the connection. Connection
HashCode:30607587 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Attempting to close connection
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Removing connection <database, jdbcurl2>
from ConnectionManager list
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - removeConnectionFromConnectionList()
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Removing connection
<com.informix.jdbc.IfxDriver@1ec9f34> from connection list
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Connection
<com.informix.jdbc.IfxDriver@1ec9f34> is not closed, adding it back to the pool entry
<database, jdbcurl2>
2014-08-04 15:21:29,363 INFO [InsertThread --- 35] - Connection/Statement/Resultset is closed
properly.
2014-08-04 15:21:29,363 DEBUG [InsertThread --- 35] - Connection released from
CertDBImpl.getCertificate method.
2014-08-04 15:21:29,363 INFO [InsertThread --- 35] - OUT -- CertDBImpl.java - getCertificate -
2014-08-04 15:21:29,363 INFO [InsertThread --- 35] - IN -- CertDBImpl.java -
getCertUnitByPkid(pkid) -
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Connection Initialized to localnode.
Connection HashCode:29897942 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Select Query to getCertUnitByPkid :SELECT
A.PKID, A.FKCERTIFICATE, A.TKCERTIFICATESERVICE, B.NAME UNIT FROM
CERTIFICATESERVICECERTIFICATEMAP A, TYPECERTIFICATESERVICE B WHERE A.FKCERTIFICATE="4152b36b-
002e-68ac-711d-c373fa940779" AND A.TKCERTIFICATESERVICE = B.ENUM
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Try to get a connection from pool
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - getting local connection from Pool
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Getting connection from connection pool
entry <database, jdbcurl2>
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - There are currently 2 connection pool
entries
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Adding connection
<com.informix.jdbc.IfxDriver@1ec9f34> to connection list
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Marking connection
<com.informix.jdbc.IfxDriver@1ec9f34> as used
2014-08-04 15:21:29,364 DEBUG [InsertThread --- 35] - Got connection from pool
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Closing the resultset.
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Closing the connection. Connection
HashCode:29897942 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Attempting to close connection
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Removing connection <database, jdbcurl2>
from ConnectionManager list
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - removeConnectionFromConnectionList()
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Removing connection
<com.informix.jdbc.IfxDriver@1ec9f34> from connection list
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Connection
<com.informix.jdbc.IfxDriver@1ec9f34> is not closed, adding it back to the pool entry
<database, jdbcurl2>
2014-08-04 15:21:29,369 INFO [InsertThread --- 35] - Connection/Statement/Resultset is closed
properly.
2014-08-04 15:21:29,369 DEBUG [InsertThread --- 35] - Resultset released from
CertDBImpl.getCertUnitByPkid method.
```

2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - OUT -- CertDBImpl.java - getCertUnitByPkid
-
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - UNIT : tomcat-trust
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - CurrentIPAddress : 10.48.46.30
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - RemoteIPAddress : 10.48.46.29
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - OldSerialNo :
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - NewSerialNo
:7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - IN -- CertUtil.java -
getListFromComaSeperatedStr(..) -
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - OUT -- CertUtil.java -
getListFromComaSeperatedStr -
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - tomcat-trust --- is included unit for CN
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - IN -- CertUtil.java -
loadCertFromString(cert) -
2014-08-04 15:21:29,370 INFO [InsertThread --- 35] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - OUT -- CertUtil.java - loadCertFromString -

**## Info about the certificate has been received. CertCN will try to delete old
tomcat-trust for this node (if any) and import it**

2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - IN -- CertDBUtil.java -
checkDeleteAndImport(unit, dbCert) -
2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - DB CertInfo.--
SN:162503161730851213217569888696899890998--
SubjectDN:L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL--GetNotBefore:Mon Aug 04
15:19:07 CEST 2014--GetNotAfter:Sat Aug 03 15:19:06 CEST 2019
2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - loading certificate element named [tomcat-
trust]
2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - determining certificates in group [product-
cpi] with type [trust-certs]
2014-08-04 15:21:29,373 INFO [InsertThread --- 35] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - looking for first [trust-certs] in
[product-cpi]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - loaded element [tomcat-trust]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - determining cert dir for [tomcat-trust]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - looking for first [dir] in [tomcat-trust]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - getting the value of [dir]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - value is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-04 15:21:29,374 INFO [InsertThread --- 35] - cert dir is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.description] match is false
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.description] match is false
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.pem]
match is true
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.der]
match is true
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore] match is false
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.der] match is true
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.der] match is true
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description] match is false

2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/7e0370f0.0] match is false
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/d0aacffb.0] match is false
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/101f99a6.0] match is false
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem] match is true
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.pem] match is true
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:29,375 INFO [InsertThread --- 35] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:29,376 INFO [InsertThread --- 35] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:29,376 INFO [InsertThread --- 35] - IN -- CertDBUtil.java -
importTrustCertInFileSystem.. unit : tomcat-trust
2014-08-04 15:21:29,376 INFO [InsertThread --- 35] - IN -- CertDBUtil.java -
populateOpInfo(operation, unit, type, fileLocation, x509Cert, isDBInsert) -
2014-08-04 15:21:29,376 INFO [InsertThread --- 35] - loading certificate element named [tomcat-
trust]
2014-08-04 15:21:29,376 INFO [InsertThread --- 35] - determining certificates in group [product-
cpi] with type [trust-certs]
2014-08-04 15:21:29,376 INFO [InsertThread --- 35] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - looking for first [trust-certs] in
[product-cpi]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - loaded element [tomcat-trust]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - determining key dir for [tomcat-trust]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - looking for first [key-dir] in [tomcat-
trust]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - getting the value of [key-dir]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - value is
[/usr/local/platform/.security/tomcat/keys]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - key dir is
[/usr/local/platform/.security/tomcat/keys]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - loading certificate element named [tomcat-
trust]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - determining certificates in group [product-
cpi] with type [trust-certs]
2014-08-04 15:21:29,377 INFO [InsertThread --- 35] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - looking for first [trust-certs] in
[product-cpi]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - loaded element [tomcat-trust]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - determining cert dir for [tomcat-trust]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - looking for first [dir] in [tomcat-trust]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - getting the value of [dir]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - value is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - cert dir is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - OUT -- CertDBUtil.java - populateOpInfo -
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- CertMgr.java - getCertMgrObj(unit) -
tomcat-trust
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - OUT -- CertMgr.java - getCertMgrObj -
com.cisco.cpi.certMgmt.manager.TomcatCertMgr@104f57f

```
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
importCert(info) -
decode:      true
op:         import
unit:       tomcat-trust
keystoreUnit:tomcat-trust
logFile:    /var/log/active/platform/log/cert-mgmt.log
resultFile: /var/log/active/platform/log/certde-info.xml
keyDir:     /usr/local/platform/.security/tomcat/keys
certDir:    /usr/local/platform/.security/tomcat/trust-certs
srcCert:    null
type:       trust-certs
rootCACert: null
trustDir:   null
DNAME:      null
description:null
isDBInsert:false

2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Checking validity of cert
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - Verifying certificate
L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- CertUtil.java - parseCNfromDN(DN,
sSearchStr) -
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - parseCNfromDN( certSubjDN:
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL')
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Truncating CN 'CUCM9X,OU=TAC,O=Cisco
Systems,C=PL' -> 'CUCM9X'
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Parsed CN 'CUCM9X' from DN
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL'
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - trying to load cert from trust store
::/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - cert not available in trust store
::L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
importTrustCert(info, cert) -
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
saveToTrustStore(info, cert) -
2014-08-04 15:21:29,379 ERROR [InsertThread --- 35] - trust directory parameter is null
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
saveTrustCert(cert, targetDir, certType) -
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- CertUtil.java - parseCNfromDN(DN,
sSearchStr) -
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - parseCNfromDN( certSubjDN:
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL')
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Truncating CN 'CUCM9X,OU=TAC,O=Cisco
Systems,C=PL' -> 'CUCM9X'
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Parsed CN 'CUCM9X' from DN
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL'
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- CertUtil.java - parseCNfromDN(DN,
sSearchStr) -
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - parseCNfromDN( certSubjDN:
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL')
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Truncating CN 'CUCM9X,OU=TAC,O=Cisco
Systems,C=PL' -> 'CUCM9X'
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Parsed CN 'CUCM9X' from DN
'L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL'

## certificate will be stored in filesystem with below name (CN from cert). Old
## certificate for CUCM9X has not been found
2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - target filename for imported cert:
'CUCM9X.pem'
```

2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - existing certificate with same filename not found.

saving certificate as *.pem and *.der

2014-08-04 15:21:29,379 DEBUG [InsertThread --- 35] - Saving PEM encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem'
2014-08-04 15:21:29,379 INFO [InsertThread --- 35] - IN -- CryptoUtil.java - saveAsPEM(..) -
File : /usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem
2014-08-04 15:21:29,403 INFO [InsertThread --- 35] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-04 15:21:29,403 DEBUG [InsertThread --- 35] - Saving DER encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.der'
2014-08-04 15:21:29,406 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java - saveTrustCert
-
2014-08-04 15:21:29,406 INFO [InsertThread --- 35] - IN -- TomcatCertMgr.java -
saveToKeyStore(..) -
2014-08-04 15:21:29,406 INFO [InsertThread --- 35] - IN -- RSACryptoEngine.java -
saveToKeyStore(keystoreFile, keystorePass, x509Certificate, alias) -
2014-08-04 15:21:29,406 INFO [InsertThread --- 35] - IN -- RSACryptoEngine.java -
loadKeyStore(keystoreFile, keystorePass) -
2014-08-04 15:21:29,421 INFO [InsertThread --- 35] - OUT -- RSACryptoEngine.java - loadKeyStore
-
2014-08-04 15:21:29,421 INFO [InsertThread --- 35] - Size of the keystore before import is : 3
2014-08-04 15:21:29,421 INFO [InsertThread --- 35] - Importing certificate : CUCM9X
2014-08-04 15:21:29,428 INFO [InsertThread --- 35] - Size of the keystore after import is : 4
2014-08-04 15:21:29,428 INFO [InsertThread --- 35] - OUT -- RSACryptoEngine.java -
saveToKeyStore -
2014-08-04 15:21:29,428 INFO [InsertThread --- 35] - OUT -- TomcatCertMgr.java - saveToKeyStore
-
2014-08-04 15:21:29,428 DEBUG [InsertThread --- 35] - TrustCert description filename :
'CUCM9X.description'
2014-08-04 15:21:29,439 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
createDescriptionFile(name, description) -
2014-08-04 15:21:29,439 INFO [InsertThread --- 35] - description is :Trust Certificate
2014-08-04 15:21:29,446 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java -
createDescriptionFile -
2014-08-04 15:21:29,446 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -

setting necessary permissions for the new created files (correcting access, owner and ## group)

2014-08-04 15:21:29,446 DEBUG [InsertThread --- 35] - setOwnershipAndPermissions :
CUCM9X.description
2014-08-04 15:21:29,446 DEBUG [InsertThread --- 35] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description'
2014-08-04 15:21:29,446 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,446 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
/bin/chown certbase /usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description
2014-08-04 15:21:29,471 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,471 DEBUG [InsertThread --- 35] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description'
2014-08-04 15:21:29,472 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,472 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
/bin/chgrp ccmbase /usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description
2014-08-04 15:21:29,474 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,475 DEBUG [InsertThread --- 35] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description'
2014-08-04 15:21:29,475 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,475 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
/bin/chmod 755 /usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description
2014-08-04 15:21:29,484 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,484 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java -
setOwnershipAndPermissions -
2014-08-04 15:21:29,484 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java -
saveToTrustStore -

```

2014-08-04 15:21:29,485 INFO [InsertThread --- 35] - trustdir
:./usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:29,485 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,485 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
python /usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:29,668 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,668 INFO [InsertThread --- 35] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-04 15:21:29,668 DEBUG [InsertThread --- 35] - setOwnershipAndPermissions : trust-certs
2014-08-04 15:21:29,668 DEBUG [InsertThread --- 35] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-04 15:21:29,668 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,669 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
/bin/chown -R certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:29,675 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,675 DEBUG [InsertThread --- 35] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-04 15:21:29,675 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,675 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
/bin/chgrp -R ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:29,680 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,680 DEBUG [InsertThread --- 35] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-04 15:21:29,680 INFO [InsertThread --- 35] - IN -- Util.java - sysExec(exe, args) -
2014-08-04 15:21:29,680 DEBUG [InsertThread --- 35] - Executing command from Util.sysExec :
/bin/chmod -R 755 /usr/local/platform/.security/tomcat/trust-certs
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- Util.java - sysExec -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java -
setOwnershipAndPermissions -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - No plugins registered for DB Store
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - IN -- CryptoUtil.java - isOCSPEnabled(..) -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - IN -- CryptoUtil.java -
getCertMonitorXmlParser(..) -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- CryptoUtil.java -
getCertMonitorXmlParser -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- CryptoUtil.java - isOCSPEnabled -
false
2014-08-04 15:21:29,683 DEBUG [InsertThread --- 35] - OCSP is not enabled.
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - Successfully imported trusted certificate
with Subject DN:L&#61;Krakow,ST&#61;Malopolska,CN&#61;CUCM9X,OU&#61;TAC,O&#61;Cisco
Systems,C&#61;PL
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java -
importTrustCert - Successfully imported trusted certificate with Subject
DN:L&#61;Krakow,ST&#61;Malopolska,CN&#61;CUCM9X,OU&#61;TAC,O&#61;Cisco Systems,C&#61;PL

## inserting certificate ends with success
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - result of import operations is ::Import of
trust certificate is successful
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- DefaultCertMgr.java - importCert -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- CertDBUtil.java -
importTrustCertInFileSystem -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- CertDBUtil.java -
checkDeleteAndImport -
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - tomcat-trust Certificate successfully
updated in trust-store by Change Notification..
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- CertKeystoreHandler.java -
updateIntoKeystore -
2014-08-04 15:21:29,683 DEBUG [InsertThread --- 35] - InsertThread --- 35 -- END --
2014-08-04 15:21:29,683 INFO [InsertThread --- 35] - OUT -- CertKeystoreHandler.java - run -
2014-08-04 15:21:29,786 DEBUG [ConnectionCleaner] - Cleaning connection list

## above process was the result for row inserted into CERTIFICATE table. Similar check
## will be done for the row inserted into CERTIFICATESERVICECERTIFICATEMAP
2014-08-04 15:21:34,322 INFO [Thread-5] - Inside CERTIFICATESERVICECERTIFICATEMAP - I option..

```



```
2014-08-04 15:21:34,322 DEBUG [Thread-5] - Insert Data in CERTIFICATESERVICECERTIFICATEMAP
::<msg><type>DBL</type><table>certificateservicecertificatemap</table><tableid>44</tableid><action>I</action><time>1407158489</time><new><cdrserver>2</cdrserver><cdftime>1407158487</cdftime><pkid>798ff6e1-eld6-42e5-a4e6-30d9d7360d6d</pkid><fkcertificate>4152b36b-002e-68ac-711d-c373fa940779</fkcertificate><tkcertificateservice>6</tkcertificateservice><ifx_replcheck>6043699681953972226</ifx_replcheck></new></msg>
2014-08-04 15:21:34,322 INFO [Thread-5] - IN -- CertDBImpl.java -
getCertificate(certBash64SHA1:null --pkid:4152b36b-002e-68ac-711d-c373fa940779
2014-08-04 15:21:34,323 DEBUG [Thread-5] - Connection Initialized to localnode. Connection
HashCode:32140521 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:34,323 DEBUG [Thread-5] - Select Query to getCertificate :SELECT A.*,B.HASH
FROM CERTIFICATE A, CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND A.PKID = "4152b36b-
002e-68ac-711d-c373fa940779"
2014-08-04 15:21:34,323 DEBUG [Thread-5] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:34,323 DEBUG [Thread-5] - Try to get a connection from pool
2014-08-04 15:21:34,323 DEBUG [Thread-5] - getting local connection from Pool
2014-08-04 15:21:34,324 DEBUG [Thread-5] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-04 15:21:34,324 DEBUG [Thread-5] - There are currently 2 connection pool entries
2014-08-04 15:21:34,324 DEBUG [Thread-5] - Adding connection
<com.informix.jdbc.IfxSqliConnect@1ec9f34> to connection list
2014-08-04 15:21:34,324 DEBUG [Thread-5] - Marking connection
<com.informix.jdbc.IfxSqliConnect@1ec9f34> as used
2014-08-04 15:21:34,324 DEBUG [Thread-5] - Got connection from pool
2014-08-04 15:21:34,328 DEBUG [Thread-5] - Closing the resultset.
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Closing the connection. Connection HashCode:32140521
--Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Attempting to close connection
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-04 15:21:34,329 DEBUG [Thread-5] - removeConnectionFromConnectionList()
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Removing connection
<com.informix.jdbc.IfxSqliConnect@1ec9f34> from connection list
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Connection <com.informix.jdbc.IfxSqliConnect@1ec9f34>
is not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-04 15:21:34,329 INFO [Thread-5] - Connection/Statement/Resultset is closed properly.
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Connection released from CertDBImpl.getCertificate
method.
2014-08-04 15:21:34,329 INFO [Thread-5] - OUT -- CertDBImpl.java - getCertificate -
2014-08-04 15:21:34,329 DEBUG [Thread-5] - Certificate PKID : 4152b36b-002e-68ac-711d-
c373fa940779 , ipAddress : 10.48.46.29 , OldSerialNo : 7a40f8743a793b44fe802b5f3e1e6f36 ,
NewSerialNo : 7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:34,329 INFO [Thread-5] - OUT - process.
2014-08-04 15:21:34,330 INFO [InsertThread --- 36] - IN -- CertKeystoreHandler.java - run() -
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - InsertThread --- 36 -- START --
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - DB Value UPDATE: 4152b36b-002e-68ac-711d-
c373fa940779
2014-08-04 15:21:34,330 INFO [InsertThread --- 36] - IN -- CertKeystoreHandler.java -
updateIntoKeystore() -
2014-08-04 15:21:34,330 INFO [InsertThread --- 36] - IN -- CertDBImpl.java -
getCertificate(certBash64SHA1:null --pkid:4152b36b-002e-68ac-711d-c373fa940779
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - Connection Initialized to localnode.
Connection HashCode:14972385 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - Select Query to getCertificate :SELECT
A.*,B.HASH FROM CERTIFICATE A, CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND A.PKID =
"4152b36b-002e-68ac-711d-c373fa940779"
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - Try to get a connection from pool
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - getting local connection from Pool
2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - Getting connection from connection pool
entry <database,jdbcurl2>
```

2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - There are currently 2 connection pool entries

2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - Adding connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> to connection list

2014-08-04 15:21:34,330 DEBUG [InsertThread --- 36] - Marking connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> as used

2014-08-04 15:21:34,331 DEBUG [InsertThread --- 36] - Got connection from pool

2014-08-04 15:21:34,333 DEBUG [InsertThread --- 36] - Closing the resultset.

2014-08-04 15:21:34,333 DEBUG [InsertThread --- 36] - Closing the connection. Connection HashCode:14972385 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)

2014-08-04 15:21:34,333 DEBUG [InsertThread --- 36] - Attempting to close connection

2014-08-04 15:21:34,333 DEBUG [InsertThread --- 36] - Removing connection <database, jdbcurl2> from ConnectionManager list

2014-08-04 15:21:34,333 DEBUG [InsertThread --- 36] - removeConnectionFromConnectionList()

2014-08-04 15:21:34,333 DEBUG [InsertThread --- 36] - Removing connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> from connection list

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> is not closed, adding it back to the pool entry <database, jdbcurl2>

2014-08-04 15:21:34,334 INFO [InsertThread --- 36] - Connection/Statement/Resultset is closed properly.

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Connection released from CertDBImpl.getCertificate method.

2014-08-04 15:21:34,334 INFO [InsertThread --- 36] - OUT -- CertDBImpl.java - getCertificate -

2014-08-04 15:21:34,334 INFO [InsertThread --- 36] - IN -- CertDBImpl.java - getCertUnitByPkid(pkid) -

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Connection Initialized to localnode. Connection HashCode:16196072 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Select Query to getCertUnitByPkid :SELECT A.PKID, A.FKCERTIFICATE, A.TKCERTIFICATESERVICE, B.NAME UNIT FROM CERTIFICATESERVICECERTIFICATEMAP A, TYPECERTIFICATESERVICE B WHERE A.FKCERTIFICATE="4152b36b-002e-68ac-711d-c373fa940779" AND A.TKCERTIFICATESERVICE = B.ENUM

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - getConn: usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Try to get a connection from pool

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - getting local connection from Pool

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Getting connection from connection pool entry <database, jdbcurl2>

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - There are currently 2 connection pool entries

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Adding connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> to connection list

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Marking connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> as used

2014-08-04 15:21:34,334 DEBUG [InsertThread --- 36] - Got connection from pool

2014-08-04 15:21:34,337 DEBUG [InsertThread --- 36] - Closing the resultset.

2014-08-04 15:21:34,337 DEBUG [InsertThread --- 36] - Closing the connection. Connection HashCode:16196072 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)

2014-08-04 15:21:34,337 DEBUG [InsertThread --- 36] - Attempting to close connection

2014-08-04 15:21:34,337 DEBUG [InsertThread --- 36] - Removing connection <database, jdbcurl2> from ConnectionManager list

2014-08-04 15:21:34,337 DEBUG [InsertThread --- 36] - removeConnectionFromConnectionList()

2014-08-04 15:21:34,337 DEBUG [InsertThread --- 36] - Removing connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> from connection list

2014-08-04 15:21:34,351 DEBUG [InsertThread --- 36] - Connection <com.informix.jdbc.IfxSqlConnect@1ec9f34> is not closed, adding it back to the pool entry <database, jdbcurl2>

2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - Connection/Statement/Resultset is closed properly.

2014-08-04 15:21:34,351 DEBUG [InsertThread --- 36] - Resultset released from CertDBImpl.getCertUnitByPkid method.

2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - OUT -- CertDBImpl.java - getCertUnitByPkid

-

2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - UNIT : tomcat-trust
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - CurrentIPAddress : 10.48.46.30
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - RemoteIPAddress : 10.48.46.29
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - OldSerialNo
:7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - NewSerialNo
:7a40f8743a793b44fe802b5f3e1e6f36
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - IN -- CertUtil.java -
getListFromComaSeperatedStr(..) -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - OUT -- CertUtil.java -
getListFromComaSeperatedStr -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - tomcat-trust --- is included unit for CN
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - IN -- CertUtil.java -
loadCertFromString(cert) -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - OUT -- CertUtil.java - loadCertFromString -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - IN -- CertDBUtil.java -
checkDeleteAndImport(unit, dbCert) -
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - DB CertInfo.--
SN:162503161730851213217569888696899890998--
SubjectDN:L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL--GetNotBefore:Mon Aug 04
15:19:07 CEST 2014--GetNotAfter:Sat Aug 03 15:19:06 CEST 2019
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - loading certificate element named [tomcat-
trust]
2014-08-04 15:21:34,351 INFO [InsertThread --- 36] - determining certificates in group [product-
cpi] with type [trust-certs]
2014-08-04 15:21:34,352 INFO [InsertThread --- 36] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - looking for first [trust-certs] in
[product-cpi]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - loaded element [tomcat-trust]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - determining cert dir for [tomcat-trust]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - looking for first [dir] in [tomcat-trust]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - getting the value of [dir]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - value is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-04 15:21:34,353 INFO [InsertThread --- 36] - cert dir is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.description] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.description] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.description] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.pem]
match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.der]
match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.der] match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/25ffab9b.0] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.der] match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description] match is false

```

2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/7e0370f0.0] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/d0aacffb.0] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.der] match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/101f99a6.0] match is false
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem] match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem] match is true
2014-08-04 15:21:34,354 INFO [InsertThread --- 36] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.pem] match is true
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - OUT -- RSACryptoEngine.java -
loadCertificate -

## but since it has been checked that the certificate is already in the filesystem,
## nothing will be added.
2014-08-04 15:21:34,355 DEBUG [InsertThread --- 36] - SUBJECTDN of DBCert and FileSystemCert
compared correctly..
2014-08-04 15:21:34,355 DEBUG [InsertThread --- 36] - Certificate already exists in FileSystem..
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:34,355 INFO [InsertThread --- 36] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-04 15:21:34,356 INFO [InsertThread --- 36] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-04 15:21:34,356 INFO [InsertThread --- 36] - OUT -- CertDBUtil.java -
checkDeleteAndImport -
2014-08-04 15:21:34,356 INFO [InsertThread --- 36] - tomcat-trust Certificate successfully
updated in trust-store by Change Notification..
2014-08-04 15:21:34,356 INFO [InsertThread --- 36] - OUT -- CertKeystoreHandler.java -
updateIntoKeystore -
2014-08-04 15:21:34,356 DEBUG [InsertThread --- 36] - InsertThread --- 36 -- END --
2014-08-04 15:21:34,356 INFO [InsertThread --- 36] - OUT -- CertKeystoreHandler.java - run -

```

f. Ahora, cuando mira el certificado en el nivel de sistema de archivos, puede verificar la checksum md5 (md5sum) y verá que es la misma que en el nodo del editor.

En la GUI, puede verificar lo mismo comparando el número de serie.

```

[root@CUCM861s tomcat]# pwd
/usr/local/platform/.security/tomcat
[root@CUCM861s tomcat]# ls -la
total 40
drwxr-xr-x 5 root    root    4096 Apr  4 14:33 .
drwxr-xr-x 5 root    root    4096 Apr  4 14:33 ..
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 22:51 certs
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 22:51 keys
drwxr-xr-x 2 certbase ccmbase 4096 Aug  4 15:21 trust-certs
[root@CUCM861s tomcat]# ls -la certs
total 48
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 22:51 .

```



```

drwxr-xr-x 5 root    root    4096 Apr  4 14:33 ..
-rwxr-xr-x 1 certbase ccmbase  941 Aug  2 22:51 tomcat.der
-rwxr-xr-x 1 certbase ccmbase   64 Aug  2 22:51 tomcat.description
-rwxr-xr-x 1 certbase ccmbase 2598 Aug  2 22:51 tomcat.keystore
-rwxr-xr-x 1 certbase ccmbase 1330 Aug  2 22:51 tomcat.pem
[root@CUCM861s tomcat]# ls -la trust-certs
total 140
drwxr-xr-x 2 certbase ccmbase 4096 Aug  4 15:21 .
drwxr-xr-x 5 root    root    4096 Apr  4 14:33 ..
lrwxrwxrwx 1 certbase ccmbase   11 Aug  4 15:21 101f99a6.0 -> CUCM861.pem
lrwxrwxrwx 1 certbase ccmbase   10 Aug  4 15:21 15:21 25ffab9b.0 -> CUCM9X.pem
lrwxrwxrwx 1 certbase ccmbase   42 Aug  4 15:21 7e0370f0.0 ->
VeriSign_Class_3_Secure_Server_CA_-_G3.pem
-rwxr-xr-x 1 certbase ccmbase  939 Aug  2 23:36 CUCM861.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 23:36 CUCM861.description
-rwxr-xr-x 1 certbase ccmbase 1326 Aug  2 23:36 CUCM861.pem
-rwxr-xr-x 1 certbase ccmbase  941 Aug  2 22:51 CUCM861s.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 22:51 CUCM861s.description
-rwxr-xr-x 1 certbase ccmbase 1330 Aug  2 22:51 CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase  953 Aug  4 15:21 CUCM9X.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  4 15:21 CUCM9X.description
-rwxr-xr-x 1 certbase ccmbase 1346 Aug  4 15:21 CUCM9X.pem
lrwxrwxrwx 1 certbase ccmbase   12 Aug  4 15:21 d0aacffb.0 -> CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase 4939 Aug  4 15:21 tomcat-trust.keystore
-rwxr-xr-x 1 certbase ccmbase 1520 Apr  4 14:33 VeriSign_Class_3_Secure_Server_CA_-_G3.der
-rwxr-xr-x 1 certbase ccmbase   44 Apr  4 14:33 VeriSign_Class_3_Secure_Server_CA_-_
_G3.description
-rwxr-xr-x 1 certbase ccmbase 2114 Apr  4 14:33 VeriSign_Class_3_Secure_Server_CA_-_G3.pem
[root@CUCM861s tomcat]# md5sum trust-certs/CUCM9X.pem
a0a2e12a42e4bbb10655c9b299839d9 trust-certs/CUCM9X.pem


```

Show ▾ Settings ▾ Security ▾ Software Upgrades ▾ Services ▾ Help ▾

Certificate Configuration

 Delete  Download

Status

 Status: Ready

Certificate Settings

File Name CUCM9X.pem
Certificate Name tomcat-trust
Certificate Type trust-certs
Certificate Group product-cpi
Description Trust Certificate

Certificate File Data

```
[
Version: V3
Serial Number: 162503161730851213217569888696899890998
Signature Algorithm: SHA256withRSA (1.2.840.113549.1.1.11)
Issuer Name: L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL
Validity From: Mon Aug 04 15:19:07 CEST 2014
                To: Sat Aug 03 15:19:06 CEST 2019
Subject Name: L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL
Key: RSA (1.2.840.113549.1.1.1)
Key value:
3082010a0282010100cb42282338f20e9682fe018c4f0b0951aa32bc0771c1184052fb2ba3b96aafeace37e1d002964115d4f0f6a
2f452ff9c02f09329f5ec978409225eafc5c31606ac05e92d4e230004f43ca1636664b9188b5f43b6e1e4677f7d0578f1fd8e5e5e55
553097808a6954b7c5af72abac9a61ae28ecf13a432a4af520c82a6d881d0ea3d475f6e995cb28b2499878452b972715ba3eed45
3376d884bb7f97050b674d0b12fdb33ba156dcb32a98b9a41d76b4f966bce8f50123c7806e33adbdbd8e611c82623f390e4ee2c
692f9d123c7dbbe83dae6acdbaf674a60b6c1c75372228de3d90a72a6e49138a220b5a88db35304de72f91893e3126745de5f237
65ab910203010001
Extensions: 3 present
[
Extension: KeyUsage (OID.2.5.29.15)
Critical: false
Usages: digitalSignature, keyEncipherment, dataEncipherment, keyAgreement, keyCertSign,
]
[
Extension: ExtKeyUsageSyntax (OID.2.5.29.37)
Critical: false
Usage oids: 1.3.6.1.5.5.7.3.1, 1.3.6.1.5.5.7.3.2, 1.3.6.1.5.5.7.3.5,
]
]
```

4.B. Elimine los certificados tomcat-trust

En la segunda situación, eliminará el certificado tomcat-trust cargado en la sección 4.A.

Cuando analiza este ejemplo, debe recordar la siguiente declaración de diseño:

"El servicio de notificación de cambios no propagará la eliminación de un certificado del almacén de tomcat-trust de un nodo al otro. Esto implica que, con la eliminación de un certificado de tomcat-trust de un nodo, no se elimina automáticamente el mismo certificado de otros nodos. Este comportamiento se implementa para garantizar que el administrador tenga la capacidad de eliminar ciertos nodos de aplicaciones confiables en otros nodos debido a consideraciones de seguridad".

Lo anterior solo es válido para el tipo de certificado de tomcat-trust.

La operación de eliminación consta de los siguientes pasos:

- a. elimine el certificado de la página CM.
- b. los archivos de certificado se eliminan del sistema de archivos
- c. certCN se dirige al editor y al suscriptor. Ninguno de los dos requiere operación alguna.
- d. eliminación del mismo certificado de confianza de tomcat del nodo del suscriptor

a. Eliminación de la operación iniciada desde la página CM

Navigation: Show ▾ Settings ▾ Security ▾ Software Upgrades ▾ Services ▾ Help ▾

Certificate Configuration

Delete Download

Status

i Status: Ready

Certificate Settings

File Name	CUCM9X.pem
Certificate Name	tomcat-trust
Certificate Type	trust-certs
Certificate Group	product-cpi
Description	Signed Certificate

Certificate File Data

```
[
Version: V3
Serial Number: 162503161730851213217569888696899890998
Signature Algorithm: sha256WithRSAEncryption (1.2.840.113549.1.1.11)
Issuer Name: L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL
Validity From: Mon Aug 04 15:19:07 CEST 2014
To: Sat Aug 03 15:19:06 CEST 2019
Subject Name: L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL
```

El certificado se elimina del sistema de archivos y las filas correspondientes en la base de datos también se eliminan. El propio certificado no se elimina de la tabla de CERTIFICADOS. Sigamos esto en los registros de CM (comentarios en línea):

```
2014-08-19 23:25:10,714 INFO [main] - log4j configuration successful.
2014-08-19 23:25:10,720 INFO [main] - IN -- CertMgr.java - mainInternal(args) -
2014-08-19 23:25:10,721 INFO [main] - decode

## delete operation is invoked here
2014-08-19 23:25:10,722 INFO [main] - op:delete
2014-08-19 23:25:10,722 INFO [main] - unit:tomcat-trust
2014-08-19 23:25:10,722 INFO [main] - cert-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Ftrust-certs%2FCUCM9X.pem
2014-08-19 23:25:10,722 INFO [main] - key-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Fkeys
2014-08-19 23:25:10,722 INFO [main] - logfile:%2Fvar%2Flog%2Factive%2Fplatform%2Flog%2Fcert-
mgmt.log
2014-08-19 23:25:10,722 INFO [main] -
resultfile:%2Fvar%2Flog%2Factive%2Fplatform%2Flog%2Fcertde-info.xml
2014-08-19 23:25:10,722 INFO [main] - type:trust-certs
2014-08-19 23:25:10,749 INFO [main] - Parsed information
2014-08-19 23:25:10,749 INFO [main] - OrgName: CISCO
2014-08-19 23:25:10,749 INFO [main] - OrgUnit: TAC
```

```
2014-08-19 23:25:10,749 INFO [main] - Location: KRAKOW
2014-08-19 23:25:10,749 INFO [main] - Country: PL
2014-08-19 23:25:10,749 INFO [main] - State: MALOPOLSKA
2014-08-19 23:25:10,749 INFO [main] - Hostname: CUCM861
2014-08-19 23:25:10,750 INFO [main] - AlternateHostname: null
2014-08-19 23:25:10,750 INFO [main] - Domain Name:
2014-08-19 23:25:10,750 INFO [main] - IPAddress: 10.48.46.29
2014-08-19 23:25:10,751 INFO [main] - In parseXML()
2014-08-19 23:25:10,761 INFO [main] - FQDN Name retrived by InetAddress : CUCM861
2014-08-19 23:25:10,761 INFO [main] - CN: CUCM861
2014-08-19 23:25:10,761 INFO [main] - Temp before mod is
2014-08-19 23:25:10,761 INFO [main] - Temp afer mod is TAC
2014-08-19 23:25:10,761 INFO [main] - Temp in else is TAC
2014-08-19 23:25:10,761 INFO [main] - Temp before mod is
2014-08-19 23:25:10,761 INFO [main] - Temp afer mod is TAC
2014-08-19 23:25:10,761 INFO [main] - Temp in else is TAC
2014-08-19 23:25:10,762 INFO [main] - OuFields are TAC
2014-08-19 23:25:10,762 DEBUG [main] - Field after encoding: TAC
2014-08-19 23:25:10,762 DEBUG [main] - Field after encoding: CISCO
2014-08-19 23:25:10,762 DEBUG [main] - Field after encoding: KRAKOW
2014-08-19 23:25:10,762 DEBUG [main] - Field after encoding: MALOPOLSKA
2014-08-19 23:25:10,762 DEBUG [main] - Field after encoding: PL
2014-08-19 23:25:10,765 INFO [main] - OU field is :TAC
2014-08-19 23:25:10,765 INFO [main] - SubjectDN ::
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
2014-08-19 23:25:10,765 INFO [main] - IN -- CertMgr.java - getCertMgrObj(unit) - tomcat-trust
2014-08-19 23:25:10,774 INFO [main] - OUT -- CertMgr.java - getCertMgrObj -
com.cisco.cpi.certMgmt.manager.TomcatCertMgr@92bbba
2014-08-19 23:25:10,774 INFO [main] - Dummy loadProperties
2014-08-19 23:25:10,774 INFO [main] - IN -- CertMgr.java - doOp(info) -
```

details about the certificate that will be deleted

```
2014-08-19 23:25:10,774 INFO [main] - IN -- DefaultCertMgr.java - deleteCert(info) -
decode:      true
op:          delete
unit:        tomcat-trust
keystoreUnit:tomcat-trust
logFile:     /var/log/active/platform/log/cert-mgmt.log
resultFile:  /var/log/active/platform/log/certde-info.xml
keyDir:      /usr/local/platform/.security/tomcat/keys
certDir:     /usr/local/platform/.security/tomcat/trust-certs/CUCM9X.pem
srcCert:     null
type:        trust-certs
rootCACert:  null
trustDir:    null
DNAME:       CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
description:null
isDBInsert:true
```

certificate file name

```
2014-08-19 23:25:10,775 INFO [main] - parsed filename: 'CUCM9X.pem'
2014-08-19 23:25:10,775 DEBUG [main] - filename: 'CUCM9X.pem'
2014-08-19 23:25:10,775 DEBUG [main] - fileRoot: 'CUCM9X'
2014-08-19 23:25:10,775 INFO [main] - IN -- DefaultCertMgr.java - deleteDERandPEM(filenameRoot,
parentDir, info) -
```

it will remove two files: CUCM9X.DER and CUCM9X.PEM

```
2014-08-19 23:25:10,775 DEBUG [main] - ParentDir:/usr/local/platform/.security/tomcat/trust-
certsFileName. (DER/PEM):CUCM9X
2014-08-19 23:25:11,100 DEBUG [main] - Loading RSA providers explicitly...
2014-08-19 23:25:12,486 DEBUG [main] - RSA providers are loaded explicitly...
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.1=JsafeJCE
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.2=RsaJsse
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.3=BC
```



```

2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.4=SUN
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.5=SunRsaSign
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.6=SunJSSE
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.7=SunJCE
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.8=SunJGSS
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.9=SunSASL
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.10=XMLDSig
2014-08-19 23:25:12,487 DEBUG [main] - New security.provider.11=SunPCSC
2014-08-19 23:25:12,487 INFO [main] - IN -- RSACryptoEngine.java - loadCertificate(..) -
2014-08-19 23:25:12,802 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificate -
2014-08-19 23:25:12,826 INFO [main] - IN -- CertUtil.java - populateCertInfo(cert, opInfo,
certFilePemLocation) -
2014-08-19 23:25:12,827 INFO [main] - IN -- CertUtil.java - getHostName(..) -
2014-08-19 23:25:12,827 INFO [main] - OUT -- CertUtil.java - getHostName - CUCM861
2014-08-19 23:25:12,830 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) -
2014-08-19 23:25:12,834 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-19 23:25:12,834 INFO [main] - OUT -- CertUtil.java - populateCertInfo -

## certificate on the filesystem level has been deleted. Now the same must be done on the
## DB level
2014-08-19 23:25:12,835 INFO [main] - IN -- CertDBAction.java - deleteCertificateInDB(certInfo)
-
2014-08-19 23:25:12,835 INFO [main] -

DBParameters ...
PKID :null
CN :L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
serialNo :7a40f8743a793b44fe802b5f3e1e6f36
hostName :CUCM861
issuerName :L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
Certificate :Not Printing huge Certificate String..
IPV4Address :10.48.46.29
IPV6Address :
TimeToLive :NULL
UNIT :tomcat-trust
TYPE :trust-certs
ROLE :null
RoleMoniker :null
RoleEnum :null
SERVICE :null
ServiceMoniker :null
ServiceEnum :0

2014-08-19 23:25:12,835 INFO [main] - DB - Certifciate Store Plugin Handler is
:com.cisco.ccm.certmgmt.db.CertDBImpl
2014-08-19 23:25:12,859 INFO [main] - IN -- CertDBImpl.java - deleteCertificate(certInfo) -
2014-08-19 23:25:13,024 DEBUG [main] - Connection Initialized to localnode. Connection
HashCode:14098944 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-19 23:25:13,024 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-19 23:25:13,026 DEBUG [main] - Try to get a connection from pool
2014-08-19 23:25:13,026 DEBUG [main] - getting local connection from Pool
2014-08-19 23:25:13,029 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-19 23:25:13,029 DEBUG [main] - There are currently 0 connection pool entries
2014-08-19 23:25:13,034 DEBUG [main] - Checking if connection limit has been reached for
database
2014-08-19 23:25:13,035 DEBUG [main] - Connecting to publisher so max number of connections
allowed is 100
2014-08-19 23:25:13,035 DEBUG [main] - Number of connections in use is 0
2014-08-19 23:25:13,035 DEBUG [main] - There is currently 1 connection pool entry
2014-08-19 23:25:13,035 DEBUG [main] - Number of available connections in pool: 0
2014-08-19 23:25:13,406 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@196e136> to connection list

```

```
2014-08-19 23:25:13,407 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@196e136> as used
2014-08-19 23:25:13,407 DEBUG [main] - Got connection from pool
2014-08-19 23:25:13,412 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-19 23:25:13,418 DEBUG [main] - Closing the resultset.
2014-08-19 23:25:13,419 DEBUG [main] - Closing the connection. Connection HashCode:14098944 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-19 23:25:13,419 DEBUG [main] - Attempting to close connection
2014-08-19 23:25:13,419 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-19 23:25:13,419 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-19 23:25:13,431 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@196e136> from connection list
2014-08-19 23:25:13,442 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@196e136> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-19 23:25:13,442 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,443 INFO [main] - TYPETRUSTROLEMAP ::{TRUST_ROLE_DATA_SERVICE=24,
TRUST_ROLE_PROVISIONING_SERVICE=23, TRUST_ROLE_SERVICEABILITY=27,
TRUST_ROLES_CALLMANAGER_TFTP=2, PHONE_TRUST_ROLES_FIREWALL=6, ROLE_APPLICATION_SERVER=7,
TRUST_ROLES_SAST=0, ROLE_SIGNALING_CALL_CONTROL=22, TRUST_ROLES_CALLMANAGER=1,
TRUST_ROLES_UNKNOWN=255, TRUST_ROLE_NETWORK_ELEMENT=25, TRUST_ROLES_SRST=5,
ROLE_CERTIFICATE_AUTHORITY=20, TRUST_ROLE_VPN=26, TRUST_ROLES_CAPF=4, TRUST_ROLES_TFTP=3,
ROLE_AUTHENTICATION_AUTHORIZATION=21}
2014-08-19 23:25:13,443 INFO [main] - TYPESERVICEROLEMAP ::{Phone-VPN-trust=2, CallManager=3,
Phone-CTL-trust=15, tomcat-trust=6, TVS=11, ipsec-trust=8, Phone-trust=1, Phone-SAST-trust=14,
tomcat=5, userlicensing-trust=16, CAPF=9, ipsec=7, CAPF-trust=10, CallManager-trust=4, TVS-
trust=12, directory-trust=13}
2014-08-19 23:25:13,443 INFO [main] - unitRoleMap ::{Phone-VPN-trust=[TRUST_ROLE_VPN],
CallManager=[TRUST_ROLES_CALLMANAGER_TFTP, TRUST_ROLES_SAST], Phone-CTL-
trust=[ROLE_APPLICATION_SERVER], tomcat-trust=[ROLE_APPLICATION_SERVER],
TVS=[ROLE_AUTHENTICATION_AUTHORIZATION], ipsec-trust=[], Phone-trust=[ROLE_APPLICATION_SERVER],
Phone-SAST-trust=[TRUST_ROLES_SAST, TRUST_ROLES_TFTP], tomcat=[ROLE_APPLICATION_SERVER],
userlicensing-trust=[], CAPF=[TRUST_ROLES_CAPF], ipsec=[ROLE_APPLICATION_SERVER], CAPF-trust=[],
CallManager-trust=[], TVS-trust=[], directory-trust=[]}
2014-08-19 23:25:13,443 INFO [main] - commonTrustStoreMap ::{}
2014-08-19 23:25:13,446 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:24762452 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-19 23:25:13,446 INFO [main] - IN -- CertDBImpl.java - getPkidOfCertificate(hash,
serverName, con) -
```

**## looking for PKID of the certificate that should be deleted. This is done basing on the
certificate hash**

```
2014-08-19 23:25:13,447 DEBUG [main] - GetPKID Query :SELECT A.PKID FROM CERTIFICATE A,
CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND B.HASH = "a9Ww/WeDmBnnHHncUCqOGCz409g="
2014-08-19 23:25:13,447 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-19 23:25:13,447 DEBUG [main] - Try to get a connection from pool
2014-08-19 23:25:13,447 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-19 23:25:13,447 DEBUG [main] - There is currently 1 connection pool entry
2014-08-19 23:25:13,447 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@196e136> to connection list
2014-08-19 23:25:13,447 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@196e136> as used
2014-08-19 23:25:13,447 DEBUG [main] - Got connection from pool
2014-08-19 23:25:13,462 DEBUG [main] - Closing the resultset.
2014-08-19 23:25:13,463 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,463 INFO [main] - OUT -- CertDBImpl.java - getPkidOfCertificate -
2014-08-19 23:25:13,463 DEBUG [main] - Closing the connection. Connection HashCode:24762452 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-19 23:25:13,463 DEBUG [main] - Attempting to close connection
2014-08-19 23:25:13,463 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
```

```
2014-08-19 23:25:13,463 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-19 23:25:13,463 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@196e136> from connection list
2014-08-19 23:25:13,463 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@196e136> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-19 23:25:13,464 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,465 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:12085572 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-19 23:25:13,465 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-19 23:25:13,465 DEBUG [main] - Try to get a connection from pool
2014-08-19 23:25:13,465 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-19 23:25:13,466 DEBUG [main] - There is currently 1 connection pool entry
2014-08-19 23:25:13,466 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@196e136> to connection list
2014-08-19 23:25:13,466 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@196e136> as used
2014-08-19 23:25:13,466 DEBUG [main] - Got connection from pool
2014-08-19 23:25:13,467 INFO [main] - IN -- CertDBImpl.java - deleteCertFromCertSrvCertMap(con,
serialNo, subjectName, serviceEnum) -
```

removing association for our certificate from CERTIFICATESSERVICECERTIFICATEMAP table
first

```
2014-08-19 23:25:13,467 DEBUG [main] - Delete query of CERTIFICATESSERVICECERTIFICATEMAP :DELETE
FROM CERTIFICATESSERVICECERTIFICATEMAP WHERE TKCERTIFICATESSERVICE = "6" AND FKCERTIFICATE =
"4152b36b-002e-68ac-711d-c373fa940779"
2014-08-19 23:25:13,467 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-19 23:25:13,561 INFO [main] - OUT -- CertDBImpl.java - deleteCertFromCertSrvCertMap -
2014-08-19 23:25:13,561 INFO [main] - IN -- CertDBImpl.java -
deleteCertFromCertProcessNodeMap(con, certInfo) -
```

corresponding entry is being deleted from CERTIFICATEPROCESSNODEMAP table

```
2014-08-19 23:25:13,562 DEBUG [main] - Delete query of CERTIFICATEPROCESSNODEMAP :DELETE FROM
CERTIFICATEPROCESSNODEMAP WHERE FKCERTIFICATE="4152b36b-002e-68ac-711d-c373fa940779" AND
SERVERNAME = "CUCM861"
2014-08-19 23:25:13,562 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-19 23:25:13,608 INFO [main] - OUT -- CertDBImpl.java - deleteCertFromCertProcessNodeMap
-
2014-08-19 23:25:13,609 DEBUG [main] - Certificate to be deleted UNIT: tomcat-trust ::
RoleMoniker :ROLE_APPLICATION_SERVER :: RoleEnum :7 :: ServiceEnum :6
2014-08-19 23:25:13,609 INFO [main] - IN -- CertDBImpl.java - checkMultipleUnitForSameRole(con,
roleMoniker, unit, certInfo) -
2014-08-19 23:25:13,609 DEBUG [main] - checkMultipleUnitForSameRole : SELECT PKID,FKCERTIFICATE,
TKCERTIFICATESSERVICE,NAME UNIT FROM CERTIFICATESSERVICECERTIFICATEMAP,TYPECERTIFICATESSERVICE
WHERE ENUM=TKCERTIFICATESSERVICE AND FKCERTIFICATE ="4152b36b-002e-68ac-711d-c373fa940779" AND
NAME != "tomcat-trust"
2014-08-19 23:25:13,609 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-19 23:25:13,646 DEBUG [main] - Closing the resultset.
2014-08-19 23:25:13,654 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,654 INFO [main] - OUT -- CertDBImpl.java - checkMultipleUnitForSameRole -
2014-08-19 23:25:13,654 INFO [main] - IN -- CertDBImpl.java - deleteCertFromTypeTrustRole(con,
certInfo, roleEnum) -
```

and the same for CERTIFICATESTRUSTROLEMAP map

```
2014-08-19 23:25:13,654 DEBUG [main] - Delete query of CERTIFICATESTRUSTROLEMAP :DELETE FROM
CERTIFICATESTRUSTROLEMAP WHERE TKTRUSTROLE = "7" AND FKCERTIFICATE = "4152b36b-002e-68ac-711d-
c373fa940779"
2014-08-19 23:25:13,654 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-19 23:25:13,680 INFO [main] - OUT -- CertDBImpl.java - deleteCertFromTypeTrustRole -
```

```

2014-08-19 23:25:13,680 INFO [main] - IN -- CertDBImpl.java - checkMultipleCertForSrv(pkid, con)
-
2014-08-19 23:25:13,680 DEBUG [main] - checkMultipleCertForSrv : SELECT PKID,FKCERTIFICATE,
TKCERTIFICATESERVICE FROM CERTIFICATESESERVICECERTIFICATEMAP WHERE FKCERTIFICATE = "4152b36b-002e-
68ac-711d-c373fa940779"
2014-08-19 23:25:13,680 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-19 23:25:13,682 DEBUG [main] - Closing the resultset.
2014-08-19 23:25:13,682 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,682 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForSrv -
2014-08-19 23:25:13,682 INFO [main] - IN -- CertDBImpl.java - checkMultipleCertForRole(certInfo,
con) -
2014-08-19 23:25:13,682 DEBUG [main] - checkMultipleCertForRole : SELECT PKID,FKCERTIFICATE,
TKTRUSTROLE FROM CERTIFICATESTRUSTROLEMAP WHERE FKCERTIFICATE = "4152b36b-002e-68ac-711d-
c373fa940779"
2014-08-19 23:25:13,683 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-19 23:25:13,684 DEBUG [main] - Closing the resultset.
2014-08-19 23:25:13,684 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,684 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForRole -
2014-08-19 23:25:13,684 INFO [main] - IN -- CertDBImpl.java -
checkMultipleCertForProcessnode(certInfo, con) -
2014-08-19 23:25:13,684 DEBUG [main] - checkMultipleCertForProcessnode : SELECT
PKID,FKCERTIFICATE,FKPROCESSNODE,SERVERNAME FROM CERTIFICATEPROCESSNODEMAP WHERE
FKCERTIFICATE='4152b36b-002e-68ac-711d-c373fa940779'
2014-08-19 23:25:13,684 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-19 23:25:13,687 DEBUG [main] - Closing the resultset.
2014-08-19 23:25:13,687 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,687 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForProcessnode -

## normally you would expect that the certificate would be removed from CERTIFICATE table.
## This will not happen since it is possible that some of the nodes in the cluster will
## have specific tomcat-trust certificate in the trust store but some not. This is in
## compliance with the design. Since you remove the certificate only from publisher
## (by removing coresponding entries from 3 tables above) node it still be used
## by subscriber node. That is why the certificate will not be removed from CERTIFICATE
## TABLE
2014-08-19 23:25:13,687 DEBUG [main] - DELETE FLAG :: isSrvMap=false :: isRoleMap=false ::
isProcessnodeMap=true
2014-08-19 23:25:13,687 DEBUG [main] - The certificate is being used by either different role or
unit or other node. So no need to delte from certificate table.
2014-08-19 23:25:13,690 DEBUG [main] - Connection committed for deleteCertificate..
2014-08-19 23:25:13,690 DEBUG [main] - Closing the connection. Connection HashCode:12085572 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-19 23:25:13,690 DEBUG [main] - Attempting to close connection
2014-08-19 23:25:13,690 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-19 23:25:13,690 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-19 23:25:13,690 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@196e136> from connection list
2014-08-19 23:25:13,690 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@196e136> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-19 23:25:13,691 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-19 23:25:13,691 DEBUG [main] - Connection released from CertDBImpl.deleteCertificate
method.
2014-08-19 23:25:13,691 INFO [main] - OUT -- CertDBImpl.java - deleteCertificate -
2014-08-19 23:25:13,691 INFO [main] - OUT -- CertDBAction.java - deleteCertificateInDB -
2014-08-19 23:25:13,691 INFO [main] - OUT -- DefaultCertMgr.java - deleteDERandPEM -
2014-08-19 23:25:13,691 DEBUG [main] - deleteDERandPEM: sCertDir =
/usr/local/platform/.security/tomcat/trust-certs --- sAlias = CUCM9X

## removing the certificate from keystore on this node
2014-08-19 23:25:13,691 INFO [main] - IN -- TomcatCertMgr.java - removeFromKeyStore(..) -

```

```

2014-08-19 23:25:13,691 INFO [main] - IN -- RSACryptoEngine.java -
removeFromKeyStore(keystoreFile, keystorePass, alias) -
2014-08-19 23:25:13,691 INFO [main] - IN -- RSACryptoEngine.java - loadKeyStore(keystoreFile,
keystorePass) -
2014-08-19 23:25:13,895 INFO [main] - OUT -- RSACryptoEngine.java - loadKeyStore -
2014-08-19 23:25:13,922 DEBUG [main] - Removing certificate from keystore : CUCM9X
2014-08-19 23:25:13,923 DEBUG [main] - Size of the keystore after delete is : 3
2014-08-19 23:25:13,923 INFO [main] - OUT -- RSACryptoEngine.java - removeFromKeyStore -
2014-08-19 23:25:13,923 INFO [main] - OUT -- TomcatCertMgr.java - removeFromKeyStore -
2014-08-19 23:25:13,924 INFO [main] - trustdir ::/usr/local/platform/.security/tomcat/trust-
certs
2014-08-19 23:25:13,924 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-19 23:25:13,924 DEBUG [main] - Executing command from Util.sysExec : python
/usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-19 23:25:13,940 DEBUG [Finalizer] - Attempting to close connection
2014-08-19 23:25:13,940 DEBUG [Finalizer] - Connection already closed or never open
2014-08-19 23:25:13,940 DEBUG [Finalizer] - Attempting to close connection
2014-08-19 23:25:13,940 DEBUG [Finalizer] - Connection already closed or never open
2014-08-19 23:25:13,962 DEBUG [Finalizer] - Attempting to close connection
2014-08-19 23:25:13,962 DEBUG [Finalizer] - Connection already closed or never open
2014-08-19 23:25:14,203 INFO [main] - OUT -- Util.java - sysExec -

## setting/updating the rights and the ownership of the files in trust store (nothing will
## be changed since you just removed two cert files + description file, this is just
## standard procedure)
2014-08-19 23:25:14,203 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-19 23:25:14,203 DEBUG [main] - setOwnershipAndPermissions : trust-certs
2014-08-19 23:25:14,203 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-19 23:25:14,204 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-19 23:25:14,204 DEBUG [main] - Executing command from Util.sysExec : /bin/chown -R
certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-19 23:25:14,224 INFO [main] - OUT -- Util.java - sysExec -
2014-08-19 23:25:14,224 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-19 23:25:14,224 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-19 23:25:14,224 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp -R
ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-19 23:25:14,236 INFO [main] - OUT -- Util.java - sysExec -
2014-08-19 23:25:14,237 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-19 23:25:14,237 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-19 23:25:14,237 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod -R 755
/usr/local/platform/.security/tomcat/trust-certs
2014-08-19 23:25:14,239 INFO [main] - OUT -- Util.java - sysExec -
2014-08-19 23:25:14,240 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-19 23:25:14,240 INFO [main] - OUT -- DefaultCertMgr.java - deleteCert -
2014-08-19 23:25:14,240 INFO [main] - IN -- CertMgr.java - logResult(result, desc, resultFile) -
2014-08-19 23:25:14,240 INFO [main] - CertMgmt Operation Result : null
2014-08-19 23:25:14,241 INFO [main] - OUT -- CertMgr.java - logResult -
2014-08-19 23:25:14,241 INFO [main] - OUT -- CertMgr.java - doOp -
2014-08-19 23:25:14,241 INFO [main] - OUT -- CertMgr.java - mainIntenal -

```

b. Para confirmar que la operación se realizó correctamente en el nivel del sistema de archivos, revisemos el directorio de tomcat-trust:

```

[root@CUCM861 trust-certs]# ls -la
total 108
drwxr-xr-x 2 certbase ccmbase 4096 Aug 19 23:25 .
drwxr-xr-x 5 root      root    4096 Apr  4 12:47 ..
lrwxrwxrwx 1 certbase ccmbase   11 Aug 19 23:25 101f99a6.0 -> CUCM861.pem
lrwxrwxrwx 1 certbase ccmbase   42 Aug 19 23:25 7e0370f0.0 ->

```

```

VeriSign_Class_3_Secure_Server_CA_-_G3.pem
-rwxr-xr-x 1 certbase ccmbase 939 Aug 2 23:36 CUCM861.der
-rwxr-xr-x 1 certbase ccmbase 44 Aug 2 23:36 CUCM861.description
-rwxr-xr-x 1 certbase ccmbase 1326 Aug 2 23:36 CUCM861.pem
-rwxr-xr-x 1 certbase ccmbase 941 Aug 2 22:51 CUCM861s.der
-rwxr-xr-x 1 certbase ccmbase 44 Aug 2 22:51 CUCM861s.description
-rwxr-xr-x 1 certbase ccmbase 1330 Aug 2 22:51 CUCM861s.pem
lrwxrwxrwx 1 certbase ccmbase 12 Aug 19 23:25 d0aacffb.0 -> CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase 3907 Aug 19 23:25 tomcat-trust.keystore
-rwxr-xr-x 1 certbase ccmbase 1520 Apr 4 12:47 VeriSign_Class_3_Secure_Server_CA_-_G3.der
-rwxr-xr-x 1 certbase ccmbase 44 Apr 4 12:47 VeriSign_Class_3_Secure_Server_CA_-_
_G3.description
-rwxr-xr-x 1 certbase ccmbase 2114 Apr 4 12:47 VeriSign_Class_3_Secure_Server_CA_-_G3.pem

```

Como pueden ver, se han eliminado 3 archivos (CUCM9X.pem, CUCM9X.der, CUCM9X.description) y el enlace simbólico.

c. El servicio CertCN en el editor y el suscriptor serán notificados sobre el cambio en la tabla CERTIFICATESSERVICECERTIFICATEMAP por el mecanismo de notificación de cambios de la base de datos.

Desde el nodo de editor:

```

2014-08-19 23:25:13,811 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-19 23:25:13,812 INFO [Thread-5] - Inside CERTIFICATESSERVICECERTIFICATEMAP - I option..
2014-08-19 23:25:13,812 DEBUG [Thread-5] - Updated Data in CERTIFICATESSERVICECERTIFICATEMAP
::<msg><type>DBL</type><table>certificateservicecertificatemap</table><tableid>44</tableid><acti
on>D</action><time>1408483513</time><old><cdrserver>2</cdrserver><cdftime>1407158487</cdftime><pkid>798ff6e1-e1d6-42e5-a4e6-30d9d7360d6d</pkid><fkcertificate>4152b36b-002e-68ac-711d-
c373fa940779</fkcertificate><tkcertificate>6</tkcertificate><ifx_replcheck>6043699
681953972226</ifx_replcheck></old></msg>
2014-08-19 23:25:18,818 INFO [Thread-5] - OUT - process.

```

No se debe hacer nada en el nodo de editor, ya que la API de CM lo hizo todo. Lo mismo se puede observar en los registros de certCN en el suscriptor.

d. Elimine el mismo certificado de confianza de tomcat en el nodo del suscriptor y realice casi la misma operación que se observó en el nodo del editor. La única diferencia es un paso final de eliminación de la entrada de la tabla de certificados. De los registros de CM (solo la parte que contiene el cambio):

```

2014-08-21 11:59:35,383 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForProcessnode -
2014-08-21 11:59:35,383 DEBUG [main] - DELETE FLAG :: isSrvMap=false :: isRoleMap=false ::
isProcessnodeMap=false
2014-08-21 11:59:35,383 INFO [main] - IN -- CertDBImpl.java - deleteCertificateBySerialNo(con,
certInfo) -

```

certificate is removed from CERTIFICATE table

```

2014-08-21 11:59:35,383 DEBUG [main] - Delete query of CERTIFICATE :DELETE FROM CERTIFICATE
WHERE PKID = "4152b36b-002e-68ac-711d-c373fa940779"
2014-08-21 11:59:35,383 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-21 11:59:35,596 INFO [main] - OUT -- CertDBImpl.java - deleteCertificateBySerialNo -
2014-08-21 11:59:35,598 DEBUG [main] - Connection committed for deleteCertificate..
2014-08-21 11:59:35,598 DEBUG [main] - Closing the connection. Connection HashCode:6923467 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)

```

Nuevamente se le notificará a certCN sobre el cambio en la tabla CERTIFICATESSERVICECERTIFICATEMAP en ambos nodos. CertCN no realizará ninguna acción, ya que todo el trabajo lo realizó CM.

C Regenera el certificado tomcat en el nodo de editor

En la tercera situación, se analiza el proceso de regeneración de tomcat.pem.

puede regenerar en el nodo de editor y, a continuación, observar cómo se propaga este cambio al segundo nodo.




Esta operación consta de los siguientes pasos:

- a. regenerar acción iniciada en la página CM.
- b. los desencadenadores anteriores generan un nuevo certificado tomcat y lo ponen en el sistema de archivos
- c. CM inserta el nuevo certificado tomcat en la base de datos (el anterior se sobrescribirá). Esta información se replicará a través de la replicación de DB.
- d. el certificado tomcat-trust antiguo se elimina del sistema de archivos (+quitarlo del almacén de claves)
- e. tomcat-trust se importa en el sistema de archivos (+ se verifican las entradas de base de datos correspondientes).
- f. certCN en el subnodo inicia y elimina tomcat-trust del sistema de archivos y del almacén de claves.
- g finalmente, el nuevo se reimporta al sistema de archivos y se lee en keystore.


- a. La regeneración de impacto muestra a continuación la salida (marca de tiempo 23:36):

Show ▾ Settings ▾ Security ▾ Software Upgrades ▾ Services ▾ Help ▾

Certificate Configuration

 Regenerate
  Download
  Generate CSR

Status

 Success: certificate regenerated. Perform a Disaster Recovery backup so the latest backup contains the regenerated certificate.

Certificate Settings

File Name tomcat.pem
 Certificate Name tomcat
 Certificate Type certs
 Certificate Group product-cpi
 Description Self-signed certificate generated by system

Certificate File Data

```
[
  Version: V3
  Serial Number: 88769680872451706773275250466208361017
  Signature Algorithm: SHA1withRSA (1.2.840.113549.1.1.5)
  Issuer Name: L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL
  Validity From: Sat Aug 02 23:36:44 CEST 2014
  To: Thu Aug 01 23:36:43 CEST 2019
  Subject Name: L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL
  Key: RSA (1.2.840.113549.1.1.1)
  Key value:
  3082010a0282010100b46ce5c17323962babf797a031ecda073e02163e38f79600766c439fb1dd35d7891439fd2b88c9de9514b6
  f00fa42db0511eca717a9b7996558b6d5c7d5df6b97b338fc8f3524c78c5129495f19a56dd3436549ff338061844b99c93989a5f92
  0ac76cd245ebb2f38e0f0ca1ced2df8dd7f37c8f16561fc7a61d64a01f218eb6a23e56c95e91747299602b58e4512f37778028fd
  260029cc5def003768969c096b39880e677a2a008eb7517379717b5d45fb4ce8b9486921ef8828b58ec8348b2b41c34420401b4a
  28e4ee32b4c76dc8d590324d6774ac68f1a4ef54a0d6c277527ec4dc0223ea1457b152bd88c1178b0cedaa9c518512d3f92bae22
  d432b0203010001
  Extensions: 3 present
  [
    Extension: KeyUsage (OID.2.5.29.15)
    Critical: false
    Usages: digitalSignature, keyEncipherment, dataEncipherment, keyAgreement, keyCertSign,
  ]
  [
    Extension: ExtKeyUsageSyntax (OID.2.5.29.37)
    Critical: false
    Usage oids: 1.3.6.1.5.5.7.3.1, 1.3.6.1.5.5.7.3.2, 1.3.6.1.5.5.7.3.5,
  ]
]
```

Número de serie de nuestro nuevo certificado:
 Dic: **88769680872451706773275250466208361017**
 Hex **42C86B2CF293630FE27BBDDC7FD02A39**

Certificado guardado en el sistema de archivos (desde la raíz):

```
[root@CUCM861 tomcat]# pwd
/usr/local/platform/.security/tomcat
[root@CUCM861 tomcat]# ls -la certs
total 48
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 23:36 .
drwxr-xr-x 5 root      root    4096 Apr  4 12:47 ..
-rwxr-xr-x 1 certbase ccmbase  939 Aug  2 23:36 tomcat.der
-rwxr-xr-x 1 certbase ccmbase   64 Aug  2 23:36 tomcat.description
-rwxr-xr-x 1 certbase ccmbase 2598 Aug  2 23:36 tomcat.keystore
-rwxr-xr-x 1 certbase ccmbase 1326 Aug  2 23:36 tomcat.pem
[root@CUCM861 tomcat]# ls -la trust-certs
total 108
```



```

drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 23:36 .
drwxr-xr-x 5 root      root    4096 Apr  4 12:47 ..
lrwxrwxrwx 1 certbase ccmbase  11 Aug  2 23:36 101f99a6.0 -> CUCM861.pem
lrwxrwxrwx 1 certbase ccmbase  42 Aug  2 23:36 7e0370f0.0 ->
VeriSign_Class_3_Secure_Server_CA_-_G3.pem
-rwxr-xr-x 1 certbase ccmbase  939 Aug  2 23:36 CUCM861.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 23:36 CUCM861.description
-rwxr-xr-x 1 certbase ccmbase 1326 Aug  2 23:36 CUCM861.pem
-rwxr-xr-x 1 certbase ccmbase  941 Aug  2 22:51 CUCM861s.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 22:51 CUCM861s.description
-rwxr-xr-x 1 certbase ccmbase 1330 Aug  2 22:51 CUCM861s.pem
lrwxrwxrwx 1 certbase ccmbase  12 Aug  2 23:36 d0aacffb.0 -> CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase 3907 Aug  2 23:36 tomcat-trust.keystore
-rwxr-xr-x 1 certbase ccmbase 1520 Apr  4 12:47 VeriSign_Class_3_Secure_Server_CA_-_G3.der
-rwxr-xr-x 1 certbase ccmbase   44 Apr  4 12:47 VeriSign_Class_3_Secure_Server_CA_-_
_G3.description
-rwxr-xr-x 1 certbase ccmbase 2114 Apr  4 12:47 VeriSign_Class_3_Secure_Server_CA_-_G3.pem
[root@CUCM861 tomcat]# md5sum certs/tomcat.der
a0dd8031bcd3c269844df8a3fafd476c  certs/tomcat.der
[root@CUCM861 tomcat]# md5sum trust-certs/CUCM861.der
a0dd8031bcd3c269844df8a3fafd476c  trust-certs/CUCM861.der

```

Como se puede ver (según la hora de modificación), nuestro nuevo certificado se almacena en el directorio certs (como tomcat.der) y en trust-certs (como CUCM861.der). La checksum MD5 (md5sum) demuestra que este es el mismo certificado, almacenado dos veces. El enlace simbólico (101f99a6.0 -> CUCM861.pem) también se actualiza.

b. La propia regeneración se lleva a cabo en CM. Analicemos más en detalle el proceso de regeneración:

```

2014-08-02 23:36:40,962 INFO [main] - log4j configuration successful.
2014-08-02 23:36:40,977 INFO [main] - IN -- CertMgr.java - mainInternal(args) -
2014-08-02 23:36:40,979 INFO [main] - decode

## operation invoked is "regenerate", if you would like to display the cert in OS
## Administration -> Security -> Certificate Management you would see "display" operation
## type.
2014-08-02 23:36:40,979 INFO [main] - op:regenerate

## you are going to regenerate tomcat cert, below the details of the cert are being listed
2014-08-02 23:36:40,979 INFO [main] - unit:tomcat
2014-08-02 23:36:40,979 INFO [main] - cert-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Fcerts%2Ftomcat
2014-08-02 23:36:40,979 INFO [main] - key-
dir:%2Fusr%2Flocal%2Fplatform%2F.security%2Ftomcat%2Fkeys
2014-08-02 23:36:40,979 INFO [main] - logfile:%2Fvar%2Flog%2Factive%2Fplatform%2Flog%2Fcert-
mgmt.log
2014-08-02 23:36:40,979 INFO [main] -
resultfile:%2Fvar%2Flog%2Factive%2Fplatform%2Flog%2Fcertde-info.xml
2014-08-02 23:36:40,979 INFO [main] - type:certs
2014-08-02 23:36:41,006 INFO [main] - Parsed information
2014-08-02 23:36:41,006 INFO [main] - OrgName: CISCO
2014-08-02 23:36:41,006 INFO [main] - OrgUnit: TAC
2014-08-02 23:36:41,007 INFO [main] - Location: KRAKOW
2014-08-02 23:36:41,007 INFO [main] - Country: PL
2014-08-02 23:36:41,007 INFO [main] - State: MALOPOLSKA
2014-08-02 23:36:41,007 INFO [main] - Hostname: CUCM861
2014-08-02 23:36:41,007 INFO [main] - AlternateHostname: null
2014-08-02 23:36:41,007 INFO [main] - Domain Name:
2014-08-02 23:36:41,007 INFO [main] - IPAddress: 10.48.46.29
2014-08-02 23:36:41,008 INFO [main] - In parseXML()
2014-08-02 23:36:41,021 INFO [main] - FQDN Name retrieved by InetAddress : CUCM861

```

2014-08-02 23:36:41,021 INFO [main] - CN: CUCM861
2014-08-02 23:36:41,022 INFO [main] - Temp before mod is
2014-08-02 23:36:41,022 INFO [main] - Temp afer mod is TAC
2014-08-02 23:36:41,022 INFO [main] - Temp in else is TAC
2014-08-02 23:36:41,022 INFO [main] - Temp before mod is
2014-08-02 23:36:41,022 INFO [main] - Temp afer mod is TAC
2014-08-02 23:36:41,022 INFO [main] - Temp in else is TAC
2014-08-02 23:36:41,022 INFO [main] - OuFields are TAC
2014-08-02 23:36:41,022 DEBUG [main] - Field after encoding: TAC
2014-08-02 23:36:41,022 DEBUG [main] - Field after encoding: CISCO
2014-08-02 23:36:41,023 DEBUG [main] - Field after encoding: KRAKOW
2014-08-02 23:36:41,023 DEBUG [main] - Field after encoding: MALOPOLSKA
2014-08-02 23:36:41,023 DEBUG [main] - Field after encoding: PL
2014-08-02 23:36:41,026 INFO [main] - OU field is :TAC
2014-08-02 23:36:41,027 INFO [main] - SubjectDN ::
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
2014-08-02 23:36:41,027 INFO [main] - IN -- CertMgr.java - getCertMgrObj(unit) - tomcat
2014-08-02 23:36:41,036 INFO [main] - OUT -- CertMgr.java - getCertMgrObj -
com.cisco.cpi.certMgmt.manager.TomcatCertMgr@123b25c
2014-08-02 23:36:41,036 INFO [main] - Dummy loadProperties
2014-08-02 23:36:41,036 INFO [main] - IN -- CertMgr.java - doOp(info) -
2014-08-02 23:36:41,037 DEBUG [main] - cert filename root: 'tomcat'
2014-08-02 23:36:41,037 DEBUG [main] - cert file parent directory:
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:41,037 DEBUG [main] - File created with certParentDir
2014-08-02 23:36:41,037 DEBUG [main] - DirCheck for certParentDir succeeded
2014-08-02 23:36:41,038 DEBUG [main] - File created with keyDir
2014-08-02 23:36:41,038 DEBUG [main] - DirCheck for keyDir succeeded

API function for generating certificate is invoked

2014-08-02 23:36:41,039 DEBUG [main] - Calling genCertAPI() from regenCert()
2014-08-02 23:36:41,039 INFO [main] - IN -- DefaultCertMgr.java - genCertAPI(info) -
2014-08-02 23:36:41,039 INFO [main] - parsed root path:
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:41,039 DEBUG [main] - cert file parent directory:
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:41,040 DEBUG [main] - tomcat Certificate keysize : 2048
2014-08-02 23:36:41,041 INFO [main] - parsed root path:
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:41,042 DEBUG [main] - SubjectAltName : null
2014-08-02 23:36:41,385 DEBUG [main] - Loading RSA providers explicitly...
2014-08-02 23:36:42,989 DEBUG [main] - RSA providers are loaded explicitly...
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.1=JsafeJCE
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.2=RsaJsse
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.3=BC
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.4=SUN
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.5=SunRsaSign
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.6=SunJSSE
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.7=SunJCE
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.8=SunJGSS
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.9=SunSASL
2014-08-02 23:36:42,989 DEBUG [main] - New security.provider.10=XMLDSig
2014-08-02 23:36:42,990 DEBUG [main] - New security.provider.11=SunPCSC

**## at this moment generateCertificate() function is invoked which actually returns a new ##
ertificate as a result**

2014-08-02 23:36:42,990 INFO [main] - IN -- RSACryptoEngine.java - generateCertificate(..) -
2014-08-02 23:36:43,003 INFO [main] - passphrase is ::LA20PvI2sezuPqph
2014-08-02 23:36:44,657 INFO [main] - OUT -- RSACryptoEngine.java - generateCertificate -
2014-08-02 23:36:44,658 INFO [main] - IN -- RSACryptoEngine.java - loadCertificate(..) -

**## certificate is written into filesystem and the owner (user:group) and rights are being
adjusted**

2014-08-02 23:36:45,009 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificate -

```
2014-08-02 23:36:45,009 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:45,009 DEBUG [main] - setOwnershipAndPermissions : certs
2014-08-02 23:36:45,009 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:45,010 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,010 DEBUG [main] - Executing command from Util.sysExec : /bin/chown -R
certbase /usr/local/platform/.security/tomcat/certs
2014-08-02 23:36:45,017 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,017 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:45,018 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,018 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp -R
ccmbase /usr/local/platform/.security/tomcat/certs
2014-08-02 23:36:45,021 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,021 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/certs'
2014-08-02 23:36:45,021 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,021 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod -R 755
/usr/local/platform/.security/tomcat/certs
2014-08-02 23:36:45,046 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,046 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-02 23:36:45,046 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:45,046 DEBUG [main] - setOwnershipAndPermissions : keys
2014-08-02 23:36:45,046 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/keys'
2014-08-02 23:36:45,046 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,046 DEBUG [main] - Executing command from Util.sysExec : /bin/chown -R
certbase /usr/local/platform/.security/tomcat/keys
2014-08-02 23:36:45,051 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,051 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/keys'
2014-08-02 23:36:45,052 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,052 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp -R
ccmbase /usr/local/platform/.security/tomcat/keys
2014-08-02 23:36:45,055 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,055 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/keys'
2014-08-02 23:36:45,055 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,055 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod -R 755
/usr/local/platform/.security/tomcat/keys
2014-08-02 23:36:45,061 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,061 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -

## description is generated and put into the description file
2014-08-02 23:36:45,061 INFO [main] - IN -- DefaultCertMgr.java - createDescriptionFile(name,
description) -
2014-08-02 23:36:45,063 INFO [main] - description is :Self-signed certificate generated by
system
2014-08-02 23:36:45,063 INFO [main] - OUT -- DefaultCertMgr.java - createDescriptionFile -
2014-08-02 23:36:45,064 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:45,064 DEBUG [main] - setOwnershipAndPermissions : tomcat.description
2014-08-02 23:36:45,064 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/certs/tomcat.description'
2014-08-02 23:36:45,064 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,064 DEBUG [main] - Executing command from Util.sysExec : /bin/chown
certbase /usr/local/platform/.security/tomcat/certs/tomcat.description
2014-08-02 23:36:45,074 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,074 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/certs/tomcat.description'
2014-08-02 23:36:45,074 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,075 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp ccmbase
```

```

/usr/local/platform/.security/tomcat/certs/tomcat.description
2014-08-02 23:36:45,077 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,077 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/certs/tomcat.description'
2014-08-02 23:36:45,077 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,077 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod 755
/usr/local/platform/.security/tomcat/certs/tomcat.description
2014-08-02 23:36:45,083 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,083 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-02 23:36:45,084 INFO [main] - IN -- CertUtil.java - populateCertInfo(cert, opInfo,
certFilePemLocation) -
2014-08-02 23:36:45,086 INFO [main] - IN -- CertUtil.java - getHostName(..) -
2014-08-02 23:36:45,089 INFO [main] - OUT -- CertUtil.java - getHostName - CUCM861
2014-08-02 23:36:45,092 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) -
2014-08-02 23:36:45,098 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-02 23:36:45,098 INFO [main] - OUT -- CertUtil.java - populateCertInfo -

```

c. En este momento tiene un nuevo certificado listo en el nivel del sistema de archivos (tomcat.pem en certs). CUCM861.pem en trust-certs también está aquí, pero no se agregó en esta etapa. Este tema se aborda más adelante.

Ahora es el momento de actualizar nuestro certificado tomcat en DB para compartir el cambio con otros nodos.

Antes de la regeneración, podría ver el certificado de tomcat en la DB:

```

admin:run sql select c.pkid, c.serialnumber from certificate c, certificateservicecertificatemap
m WHERE m.fkcertificate = c.pkid AND m.tkcertificate = '5'
pkid serialnumber =====
533dbbfc-78ce-b46f-7d64-cd2b7c536f6d 6cf5bc855b681f658f9e7506d3ec6ea5
a6b18f66-bf72-261d-8ecd-bfcea02add4e 68052e2e9cd6c979079e6449ff873031

```

Como puede ver, hay dos certificados tomcat en la DB (para PUB y SUB); el antiguo certificado tomcat tenía el número de serie = '6cf5bc855b681f658f9e7506d3ec6ea5'. PKID de nuestro certificado tomcat es '**533dbbfc-78ce-b46f-7d64-cd2b7c536f6d**' y no cambia cuando se vuelve a generar el certificado.

Continúe verificando el archivo de registro de CM (comentarios en el fragmento):

```

2014-08-02 23:36:45,099 INFO [main] - IN -- CertDBAction.java -
insertCertificateInDB(certFiletoStore, info) -
2014-08-02 23:36:45,099 INFO [main] -

DBParameters ...
PKID :null
CN :L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
serialNo :42c86b2cf293630fe27bbddc7fd02a39
hostName :CUCM861
issuerName :L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
Certificate :Not Printing huge Certificate String..
IPV4Address :10.48.46.29
IPV6Address :
TimeToLive :NULL
UNIT :tomcat
TYPE :certs
ROLE :null
RoleMoniker :null
RoleEnum :null
SERVICE :null
ServiceMoniker :null
ServiceEnum :0

```

2014-08-02 23:36:45,099 INFO [main] - DB - Certifciate Store Plugin Handler is
:com.cisco.ccm.certmgmt.db.CertDBImpl
2014-08-02 23:36:45,159 DEBUG [main] - Connection Initialized to localnode. Connection
HashCode:17241377 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,159 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-02 23:36:45,160 DEBUG [main] - Try to get a connection from pool
2014-08-02 23:36:45,160 DEBUG [main] - getting local connection from Pool
2014-08-02 23:36:45,162 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl2>
2014-08-02 23:36:45,162 DEBUG [main] - There are currently 0 connection pool entries
2014-08-02 23:36:45,166 DEBUG [main] - Checking if connection limit has been reached for
database
2014-08-02 23:36:45,167 DEBUG [main] - Connecting to publisher so max number of connections
allowed is 100
2014-08-02 23:36:45,167 DEBUG [main] - Number of connections in use is 0
2014-08-02 23:36:45,167 DEBUG [main] - There is currently 1 connection pool entry
2014-08-02 23:36:45,168 DEBUG [main] - Number of available connections in pool: 0
2014-08-02 23:36:45,381 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@1a7789c> to connection list
2014-08-02 23:36:45,382 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@1a7789c> as used
2014-08-02 23:36:45,382 DEBUG [main] - Got connection from pool
2014-08-02 23:36:45,389 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-02 23:36:45,395 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,396 DEBUG [main] - Closing the connection. Connection HashCode:17241377 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,396 DEBUG [main] - Attempting to close connection
2014-08-02 23:36:45,396 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-02 23:36:45,396 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-02 23:36:45,397 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@1a7789c> from connection list
2014-08-02 23:36:45,399 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@1a7789c> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-02 23:36:45,399 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,399 INFO [main] - TYPETRUSTROLEMAP ::{TRUST_ROLE_DATA_SERVICE=24,
TRUST_ROLE_PROVISIONING_SERVICE=23, TRUST_ROLE_SERVICEABILITY=27,
TRUST_ROLES_CALLMANAGER_TFTP=2, PHONE_TRUST_ROLES_FIREWALL=6, ROLE_APPLICATION_SERVER=7,
TRUST_ROLES_SAST=0, ROLE_SIGNALING_CALL_CONTROL=22, TRUST_ROLES_CALLMANAGER=1,
TRUST_ROLES_UNKNOWN=255, TRUST_ROLE_NETWORK_ELEMENT=25, TRUST_ROLES_SRST=5,
ROLE_CERTIFICATE_AUTHORITY=20, TRUST_ROLE_VPN=26, TRUST_ROLES_CAPF=4, TRUST_ROLES_TFTP=3,
ROLE_AUTHENTICATION_AUTHORIZATION=21}
2014-08-02 23:36:45,399 INFO [main] - TYPESERVICEROLEMAP ::{Phone-VPN-trust=2, CallManager=3,
Phone-CTL-trust=15, tomcat-trust=6, TVS=11, ipsec-trust=8, Phone-trust=1, Phone-SAST-trust=14,
tomcat=5, userlicensing-trust=16, CAPF=9, ipsec=7, CAPF-trust=10, CallManager-trust=4, TVS-
trust=12, directory-trust=13}
2014-08-02 23:36:45,399 INFO [main] - unitRoleMap ::{Phone-VPN-trust=[TRUST_ROLE_VPN],
CallManager=[TRUST_ROLES_CALLMANAGER_TFTP, TRUST_ROLES_SAST], Phone-CTL-
trust=[ROLE_APPLICATION_SERVER], tomcat-trust=[ROLE_APPLICATION_SERVER],
TVS=[ROLE_AUTHENTICATION_AUTHORIZATION], ipsec-trust=[], Phone-trust=[ROLE_APPLICATION_SERVER],
Phone-SAST-trust=[TRUST_ROLES_SAST, TRUST_ROLES_TFTP], tomcat=[ROLE_APPLICATION_SERVER],
userlicensing-trust=[], CAPF=[TRUST_ROLES_CAPF], ipsec=[ROLE_APPLICATION_SERVER], CAPF-trust=[],
CallManager-trust=[], TVS-trust=[], directory-trust=[]}
2014-08-02 23:36:45,400 INFO [main] - commonTrustStoreMap ::{}
2014-08-02 23:36:45,403 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:5823789 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,403 INFO [main] - IN -- CertDBImpl.java - insertCertificate(certInfo, con) -
2014-08-02 23:36:45,404 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-02 23:36:45,404 DEBUG [main] - Try to get a connection from pool
2014-08-02 23:36:45,404 DEBUG [main] - Getting connection from connection pool entry

```

<database,jdbcurl2>
2014-08-02 23:36:45,404 DEBUG [main] - There is currently 1 connection pool entry
2014-08-02 23:36:45,404 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@1a7789c> to connection list
2014-08-02 23:36:45,404 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@1a7789c> as used
2014-08-02 23:36:45,404 DEBUG [main] - Got connection from pool
2014-08-02 23:36:45,406 INFO [main] - IN -- CertDBImpl.java -
populateRoleEnumServiceEnum(certInfo) -

## cert type is tomcat, you can see serviceEnum = 5
2014-08-02 23:36:45,407 INFO [main] - UNIT :: tomcat
2014-08-02 23:36:45,407 INFO [main] - role :: [ROLE_APPLICATION_SERVER]
2014-08-02 23:36:45,407 INFO [main] - roleEnum :: [7]
2014-08-02 23:36:45,407 INFO [main] - service :: null
2014-08-02 23:36:45,407 INFO [main] - serviceEnum :: 5
2014-08-02 23:36:45,407 INFO [main] - OUT -- CertDBImpl.java - populateRoleEnumServiceEnum -
2014-08-02 23:36:45,409 INFO [main] - IN -- CertDBUtil.java - getProcessNodeId(con, hostName,
ipAddress, fqdn) -
2014-08-02 23:36:45,409 INFO [main] - getProcessNodeId Query :SELECT PKID,NAME FROM PROCESSNODE
WHERE UPPER(NAME)=UPPER("CUCM861") OR UPPER(NAME)=UPPER("10.48.46.29") OR
UPPER(NAME)=UPPER("CUCM861")
2014-08-02 23:36:45,409 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-02 23:36:45,418 INFO [main] - ProcessNodeId:13f4b0d9-0bae-429a-a86e-625336a35bb6
2014-08-02 23:36:45,418 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,418 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,418 INFO [main] - OUT -- CertDBUtil.java - getProcessNodeId -
2014-08-02 23:36:45,418 INFO [main] - IN -- CertDBImpl.java - getSelfSignedCertificate(certInfo,
con) -
2014-08-02 23:36:45,418 DEBUG [main] - getSelfSignedCertificate Query :SELECT
A.PKID,SERVERNAME,SUBJECTNAME,ISSUENAME,SERIALNUMBER,IPV4ADDRESS,IPV6ADDRESS,TIMETOLIVE, B.HASH
FROM CERTIFICATE A, CERTIFICATEHASHMAP B, CERTIFICATESERVICECERTIFICATEMAP C WHERE
A.PKID=B.FKCERTIFICATE AND A.PKID = C.FKCERTIFICATE AND C.TKCERTIFICATESERVICE = "5" AND
A.SERVERNAME = "CUCM861"
2014-08-02 23:36:45,418 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-02 23:36:45,424 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,424 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,425 INFO [main] - OUT -- CertDBImpl.java - getSelfSignedCertificate -
2014-08-02 23:36:45,425 INFO [main] - IN -- CertDBImpl.java - getPkidOfCertificate(hash,
serverName, con) -

## looking for PKID of our cert
2014-08-02 23:36:45,425 DEBUG [main] - GetPKID Query :SELECT A.PKID FROM CERTIFICATE A,
CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND B.HASH = "/hSVsEZT+yZeaxE+K0EM02n1Pgk="
2014-08-02 23:36:45,425 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-02 23:36:45,431 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,435 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,435 INFO [main] - OUT -- CertDBImpl.java - getPkidOfCertificate -
2014-08-02 23:36:45,436 DEBUG [main] - Own certificate is regenerated. newCert is not available
in DB.
2014-08-02 23:36:45,436 DEBUG [main] - INSERT FLAG :: isCertUpdate=true :: doNothing=false

## finally certificate is inserted. In fact this is an update since The same is used
## PKID of the tomcat cert as it was prior regeneration
2014-08-02 23:36:45,436 DEBUG [main] - INSERT/UPDATE Query of CERTIFICATE : UPDATE CERTIFICATE
SET SERVERNAME="CUCM861", SUBJECTNAME="L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL",
ISSUENAME="L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL",
SERIALNUMBER="42c86b2cf293630fe27bbddc7fd02a39", CERTIFICATE="-----BEGIN CERTIFICATE-----
MIIDpzCCAo+gAwIBAgIQQshrLPKTYw/ie73cf9AqOTANBgkqhkiG9w0BAQUFADBj
MQswCQYDVQQGEWJQTEDEOMAWGA1UEChMFQ01TQ08xDDAKBgNVBAsTA1RBQzEQMA4G
A1UEAxMHQ01VDTTg2MTETMBEGA1UECBMKTUFMT1BPTFNlQTEPMA0GA1UEBxMGS1JB

```

S09XMB4XDTE0MDgwmjIxMzY0NfOXDTE5MDgwmTlxMzY0MlowYzELMAkGA1UEBhMC
UEWxDjAMBgNVBAoTBUNJUN0NPMQwwCgYDVQQLEwNUQUUMxEDA0BgNVBAMTB0NVQ004
NjExEzARBgNVBAgTCK1BTE9QT0xTS0EXDzANBgNVBAcTBktSQUtPVzCCASlwDQYJ
KoZlIhvcNAQEBBQADgEPADCCAQoCggEBALRs5cFzI5Yrq/eXoDhs2gc+AhY+OPeW
AHZsQ5+x3TXXiRQ5/SuIyd6VFLbwD6QtsFEeynF6m3mWVYttXH1d9r17M4/I81JM
eMUSlJXxmlbdNDZUn/M4BhhEuZyTmJpFkgrHbNjF67Lzjg8Moc7S34f43X83yPF1
Yfx6YdZKafIY62oJ5WYv6RdHKZYCY5FEvN3eAKP0mACnMXe8AN2iWnAlrOYgOZ3
oqAI63UXN5cXtdRftM6LlIaSHviCi1jsg0iytBw0QgQBtKKOTuMrTHbcjVkJJNZ3
SsaPGk71Sg1sJ3Un7E3AIj6hRXsVK9iMEXiwztqpxRhRLT+SuuItQysCAwEAAANX
MFUwCwYDVR0PBAQDAGK8MCCGAlUdJQQgMB4GCCsGAQUFBwMBBggrBgEFBQcDAGYI
KwYBBQUHAWUwHQYDVR0OBBYEFPOxKMSHC4gnQQqIgLAgxQjIH0srMA0GCSqGSIb3
DQEBBQUAA4IBAQBvSfzSC1nLTYKuOPs4RtOUQXfuUMHLhI74QoBJS98A8a8w1Kg
M8ilXukBg6VZ37xgYm2uaLTCunXeG/EiNx9nkC+kgJ9y78Q4jmRh2//wqdvAkI+R
R9745RRntD4xs3svv3uGSljEGd1eCC76NUWpQAWezz0A1AEAE/EWO7hlyZVRqhuD
hq5vLVNrh0gQkjqve56/K7E9E83PqVO9JTAGRvjL9/uRpeooucACJYI9WPYXMYa6w
sIpCqFRLocYIUGCy9ufrof1vptawOJQGZ9Z9kW2SpanRD2LJunqgY8Vbveq/7Z2x
ndm8j36Lyn4IrESrk7Umpr27fn8KktYvMaD

-----END CERTIFICATE-----

", IPV4ADDRESS="10.48.46.29", IPV6ADDRESS="", TIMETOLIVE=NULL WHERE PKID = "533dbbfc-78ce-b46f-7d64-cd2b7c536f6d"

2014-08-02 23:36:45,436 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]

2014-08-02 23:36:45,447 INFO [main] - IN -- CertDBImpl.java - updateCertificateHashMap(certInfo, con) -

2014-08-02 23:36:45,448 DEBUG [main] - Update query of CERTIFICATEHASHMAP :UPDATE CERTIFICATEHASHMAP SET HASH = "/hSVsEZT+yZeae+K0EM02n1Pgk=" WHERE FKCERTIFICATE = "533dbbfc-78ce-b46f-7d64-cd2b7c536f6d"

2014-08-02 23:36:45,448 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]

2014-08-02 23:36:45,452 INFO [main] - OUT -- CertDBImpl.java - updateCertificateHashMap -

2014-08-02 23:36:45,452 INFO [main] - IN -- CertDBImpl.java - insertCertSrvCertMap(certInfo, con) -

2014-08-02 23:36:45,452 INFO [main] - IN -- CertDBImpl.java - checkExistingCertificateServiceMapping(certInfo, serviceEnum, con) -

2014-08-02 23:36:45,452 DEBUG [main] - checkExistingTrustCertificateForService Query :SELECT PKID,FKCERTIFICATE, TKCERTIFICATESERVICE FROM CERTIFICATESERVICECERTIFICATEMAP WHERE FKCERTIFICATE = "533dbbfc-78ce-b46f-7d64-cd2b7c536f6d" AND TKCERTIFICATESERVICE= "5"

2014-08-02 23:36:45,453 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]

2014-08-02 23:36:45,455 DEBUG [main] - Closing the resultset.

2014-08-02 23:36:45,456 INFO [main] - Connection/Statement/Resultset is closed properly.

**## CM verifies if there is a proper mapping for the new cert in the
CERTIFICATESERVICECERTIFICATEMAP table. There is so no need for update**

2014-08-02 23:36:45,456 INFO [main] - OUT -- CertDBImpl.java -

checkExistingCertificateServiceMapping -

2014-08-02 23:36:45,456 DEBUG [main] - Certificate to be inserted in

CERTIFICATESERVICECERTIFICATEMAP table :tomcat ::PKID :533dbbfc-78ce-b46f-7d64-cd2b7c536f6d ::toInsertInCertSrvMap:false

2014-08-02 23:36:45,456 DEBUG [main] - CertService mapping entry already exists..

2014-08-02 23:36:45,456 INFO [main] - OUT -- CertDBImpl.java - insertCertSrvCertMap -

2014-08-02 23:36:45,456 INFO [main] - IN -- CertDBImpl.java - insertCertTrustRoleMap(certInfo, log, con) -

2014-08-02 23:36:45,456 INFO [main] - IN -- CertDBImpl.java -

checkExistingCertificateRoleMapping(certInfo, roleEnum, con) -

the same check for CERTIFICATETRUSTROLEMAP table. It is there, nothing to update.

2014-08-02 23:36:45,456 DEBUG [main] - checkExistingTrustCertificateForRole Query :SELECT PKID,FKCERTIFICATE, TKTRUSTROLE FROM CERTIFICATETRUSTROLEMAP WHERE FKCERTIFICATE = "533dbbfc-78ce-b46f-7d64-cd2b7c536f6d" AND TKTRUSTROLE= "7"

2014-08-02 23:36:45,456 DEBUG [main] - getConn:

usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]

2014-08-02 23:36:45,459 DEBUG [main] - Closing the resultset.

2014-08-02 23:36:45,459 INFO [main] - Connection/Statement/Resultset is closed properly.

```

2014-08-02 23:36:45,459 INFO [main] - OUT -- CertDBImpl.java -
checkExistingCertificateRoleMapping -
2014-08-02 23:36:45,459 DEBUG [main] - Certificate to be inserted in CERTIFICATESTRUSTROLEMAP
table :tomcat ::PKID :533dbbfc-78ce-b46f-7d64-cd2b7c536f6d ::toInsertInCertSrvMap:false
2014-08-02 23:36:45,459 DEBUG [main] - CertRole mapping entry already exists..
2014-08-02 23:36:45,459 INFO [main] - OUT -- CertDBImpl.java - insertCertTrustRoleMap -
2014-08-02 23:36:45,459 INFO [main] - IN -- CertDBImpl.java - insertCertProcessNodeMap(certInfo,
con) -
2014-08-02 23:36:45,459 INFO [main] - IN -- CertDBImpl.java -
checkExistingCertProcessNodeMapping(certInfo, con) -
2014-08-02 23:36:45,459 DEBUG [main] - checkExistingCertProcessNodeMapping Query :SELECT
FKCERTIFICATE, FKPROCESSNODE, SERVERNAME FROM CERTIFICATEPROCESSNODEMAP WHERE
FKCERTIFICATE="533dbbfc-78ce-b46f-7d64-cd2b7c536f6d" AND FKPROCESSNODE="13f4b0d9-0bae-429a-a86e-
625336a35bb6" AND SERVERNAME="CUCM861"
2014-08-02 23:36:45,460 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[1]connectToPubByDefault[true]
2014-08-02 23:36:45,462 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,463 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,463 INFO [main] - OUT -- CertDBImpl.java -
checkExistingCertProcessNodeMapping -
2014-08-02 23:36:45,463 DEBUG [main] - CertProcessNode mapping entry already exists..
2014-08-02 23:36:45,463 INFO [main] - OUT -- CertDBImpl.java - insertCertProcessNodeMap -
2014-08-02 23:36:45,467 DEBUG [main] - Connection committed for insertCertificate..
2014-08-02 23:36:45,467 DEBUG [main] - Insertion of Certificate in DB is Successful.
2014-08-02 23:36:45,467 INFO [main] - OUT -- CertDBImpl.java - insertCertificate -
2014-08-02 23:36:45,467 DEBUG [main] - Closing the connection. Connection HashCode:5823789 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,468 DEBUG [main] - Attempting to close connection
2014-08-02 23:36:45,468 DEBUG [main] - Removing connection <database, jdbcurl2> from
ConnectionManager list
2014-08-02 23:36:45,468 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-02 23:36:45,468 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@1a7789c> from connection list
2014-08-02 23:36:45,468 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@1a7789c> is
not closed, adding it back to the pool entry <database,jdbcurl2>
2014-08-02 23:36:45,468 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,468 INFO [main] - DB - Generate Certificate operation in DB is successful
2014-08-02 23:36:45,468 INFO [main] - OUT -- CertDBAction.java - insertCertificateInDB -
2014-08-02 23:36:45,468 INFO [main] - OUT -- DefaultCertMgr.java - genCertAPI - Self-signed
certificate generated by system.
2014-08-02 23:36:45,469 INFO [main] - IN -- CertUtil.java - sendAlarm(alarmName, alarmParamName,
alarmParamValue) -
2014-08-02 23:36:45,469 DEBUG [main] - Sending alarm for :: TomcatCertRegen :: Message :: The
tomcat certificate is regenerated
2014-08-02 23:36:45,471 DEBUG [main] - AlarmSender: getInstance

```

d. Como recordará, se podía ver el mismo certificado en el sistema de archivos como tomcat y tomcat-trust. Hasta ahora, solo el tomcat uno se actualizó correctamente en el sistema de archivos. Continuemos con el registro de CM para ver cómo se actualiza tomcat-trust en este nodo:

```

2014-08-02 23:36:45,518 INFO [main] - OUT -- CertUtil.java - sendAlarm -
2014-08-02 23:36:45,518 INFO [main] - IN -- TomcatCertMgr.java - copyToTomcatTrustStore(info) -
2014-08-02 23:36:45,518 INFO [main] - IN -- TomcatCertMgr.java -
deleteCertFromTomcatTrustStore(info) -
2014-08-02 23:36:45,519 INFO [main] - IN -- RSACryptoEngine.java - loadCertificate(..) -
2014-08-02 23:36:45,520 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificate -
2014-08-02 23:36:45,520 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-02 23:36:45,520 DEBUG [main] - parseCNfromDN( certSubjDN:
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:45,520 DEBUG [main] - Truncating CN 'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:45,520 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -

```


2014-08-02 23:36:45,520 DEBUG [main] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'

first you need to delete old tomcat-trust certificate on the filesystem

2014-08-02 23:36:45,521 DEBUG [main] - Old Cert to be deleted during import :
/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
2014-08-02 23:36:45,521 INFO [main] - IN -- DefaultCertMgr.java - deleteCert(info) -
decode: true
op: delete
unit: tomcat-trust
keystoreUnit:tomcat-trust
logFile: /var/log/active/platform/log/cert-mgmt.log
resultFile: /var/log/active/platform/log/certde-info.xml
keyDir: /usr/local/platform/.security/tomcat/keys
certDir: /usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
srcCert: null
type: trust-certs
rootCACert: null
trustDir: null
DNNAME: CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
description:null
isDBInsert:true

2014-08-02 23:36:45,521 INFO [main] - parsed filename: 'CUCM861.pem'
2014-08-02 23:36:45,521 DEBUG [main] - filename: 'CUCM861.pem'
2014-08-02 23:36:45,521 DEBUG [main] - fileRoot: 'CUCM861'
2014-08-02 23:36:45,521 INFO [main] - IN -- DefaultCertMgr.java - deleteDERandPEM(filenameRoot,
parentDir, info) -
2014-08-02 23:36:45,521 DEBUG [main] - ParentDir:/usr/local/platform/.security/tomcat/trust-
certsFileName.(DER/PEM):CUCM861
2014-08-02 23:36:45,521 INFO [main] - IN -- RSACryptoEngine.java - loadCertificate(..) -
2014-08-02 23:36:45,538 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificate -
2014-08-02 23:36:45,539 INFO [main] - IN -- CertUtil.java - populateCertInfo(cert, opInfo,
certFilePemLocation) -
2014-08-02 23:36:45,539 INFO [main] - IN -- CertUtil.java - getHostName(..) -
2014-08-02 23:36:45,539 INFO [main] - OUT -- CertUtil.java - getHostName - CUCM861
2014-08-02 23:36:45,540 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) -
2014-08-02 23:36:45,540 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-02 23:36:45,540 INFO [main] - OUT -- CertUtil.java - populateCertInfo -

**## the same should be done on the DB level. CM consider deleting the the association
for this tomcat-trust cert from corresponding tables: CERTIFICATESERVICECERTIFICATEMAP,
CERTIFICATEPROCESSNODEMAP and CERTIFICATETRUSTROLEMAP. As you see this does not
happen since the certificate itself has not been deleted so FKCERTIFICATE in those
tables become "null for this certificate" (cert still exists, has been
updated only)**

2014-08-02 23:36:45,540 INFO [main] - IN -- CertDBAction.java - deleteCertificateInDB(certInfo)
-
2014-08-02 23:36:45,540 INFO [main] -

DBParameters ...
PKID :null
CN :L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
serialNo :6cf5bc855b681f658f9e7506d3ec6ea5
hostName :CUCM861
issuerName :L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
Certificate :Not Printing huge Certificate String..
IPV4Address :10.48.46.29
IPV6Address :
TimeToLive :NULL
UNIT :tomcat-trust
TYPE :trust-certs
ROLE :null
RoleMoniker :null

RoleEnum :null
SERVICE :null
ServiceMoniker :null
ServiceEnum :0

```
2014-08-02 23:36:45,540 INFO [main] - DB - Certifciate Store Plugin Handler is
:com.cisco.ccm.certmgmt.db.CertDBImpl
2014-08-02 23:36:45,541 INFO [main] - IN -- CertDBImpl.java - deleteCertificate(certInfo) -
2014-08-02 23:36:45,542 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:12578138 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,542 INFO [main] - IN -- CertDBImpl.java - getPkidOfCertificate(hash,
serverName, con) -
2014-08-02 23:36:45,542 DEBUG [main] - GetPKID Query :SELECT A.PKID FROM CERTIFICATE A,
CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND B.HASH = "/XB5QwYXgqrUTFZ2CDgT7BkSxNs="
2014-08-02 23:36:45,542 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,542 DEBUG [main] - Try to get a connection from pool
2014-08-02 23:36:45,542 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl>
2014-08-02 23:36:45,542 DEBUG [main] - There is currently 1 connection pool entry
2014-08-02 23:36:45,543 DEBUG [main] - Checking if connection limit has been reached for
database
2014-08-02 23:36:45,543 DEBUG [main] - Connecting to publisher so max number of connections
allowed is 100
2014-08-02 23:36:45,543 DEBUG [main] - Number of connections in use is 0
2014-08-02 23:36:45,543 DEBUG [main] - There are currently 2 connection pool entries
2014-08-02 23:36:45,544 DEBUG [main] - Number of available connections in pool: 0
2014-08-02 23:36:45,590 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@77eb97> to connection list
2014-08-02 23:36:45,590 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@77eb97> as used
2014-08-02 23:36:45,590 DEBUG [main] - Got connection from pool
2014-08-02 23:36:45,596 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,599 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,599 INFO [main] - OUT -- CertDBImpl.java - getPkidOfCertificate -
2014-08-02 23:36:45,599 DEBUG [main] - Closing the connection. Connection HashCode:12578138 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,600 DEBUG [main] - Attempting to close connection
2014-08-02 23:36:45,600 DEBUG [main] - Removing connection <database, jdbcurl> from
ConnectionManager list
2014-08-02 23:36:45,600 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-02 23:36:45,600 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@77eb97> from connection list
2014-08-02 23:36:45,600 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@77eb97> is
not closed, adding it back to the pool entry <database,jdbcurl>
2014-08-02 23:36:45,600 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,602 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:17578504 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,602 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,602 DEBUG [main] - Try to get a connection from pool
2014-08-02 23:36:45,602 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl>
2014-08-02 23:36:45,602 DEBUG [main] - There are currently 2 connection pool entries
2014-08-02 23:36:45,602 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@77eb97> to connection list
2014-08-02 23:36:45,603 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@77eb97> as used
2014-08-02 23:36:45,603 DEBUG [main] - Got connection from pool
2014-08-02 23:36:45,604 INFO [main] - IN -- CertDBImpl.java - deleteCertFromCertSrvCertMap(con,
serialNo, subjectName, serviceEnum) -
```

you can see it here ...

```
2014-08-02 23:36:45,605 DEBUG [main] - Delete query of CERTIFICATESERVICECERTIFICATEMAP :DELETE
```

```

FROM CERTIFICATESERVICECERTIFICATEMAP WHERE TKCERTIFICATESERVICE = "6" AND FKCERTIFICATE =
>null"
2014-08-02 23:36:45,605 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,618 INFO [main] - OUT -- CertDBImpl.java - deleteCertFromCertSrvCertMap -
2014-08-02 23:36:45,618 INFO [main] - IN -- CertDBImpl.java -
deleteCertFromCertProcessNodeMap(con, certInfo) -

## here ...
2014-08-02 23:36:45,619 DEBUG [main] - Delete query of CERTIFICATEPROCESSNODEMAP :DELETE FROM
CERTIFICATEPROCESSNODEMAP WHERE FKCERTIFICATE="null" AND SERVERNAME = "CUCM861"
2014-08-02 23:36:45,619 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,624 INFO [main] - OUT -- CertDBImpl.java - deleteCertFromCertProcessNodeMap
-
2014-08-02 23:36:45,624 DEBUG [main] - Certificate to be deleted UNIT: tomcat-trust ::
RoleMoniker :ROLE_APPLICATION_SERVER :: RoleEnum :7 :: ServiceEnum :6
2014-08-02 23:36:45,624 INFO [main] - IN -- CertDBImpl.java - checkMultipleUnitForSameRole(con,
roleMoniker, unit, certInfo) -
2014-08-02 23:36:45,624 DEBUG [main] - checkMultipleUnitForSameRole : SELECT PKID,FKCERTIFICATE,
TKCERTIFICATESERVICE,NAME UNIT FROM CERTIFICATESERVICECERTIFICATEMAP,TYPECERTIFICATESERVICE
WHERE ENUM=TKCERTIFICATESERVICE AND FKCERTIFICATE ="null" AND NAME != "tomcat-trust"
2014-08-02 23:36:45,624 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,649 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,649 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,649 INFO [main] - OUT -- CertDBImpl.java - checkMultipleUnitForSameRole -
2014-08-02 23:36:45,649 INFO [main] - IN -- CertDBImpl.java - deleteCertFromTypeTrustRole(con,
certInfo, roleEnum) -

## and here
2014-08-02 23:36:45,649 DEBUG [main] - Delete query of CERTIFICATETRUSTROLEMAP :DELETE FROM
CERTIFICATETRUSTROLEMAP WHERE TKTRUSTROLE = "7" AND FKCERTIFICATE = "null"
2014-08-02 23:36:45,649 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,652 INFO [main] - OUT -- CertDBImpl.java - deleteCertFromTypeTrustRole -
2014-08-02 23:36:45,653 INFO [main] - IN -- CertDBImpl.java - checkMultipleCertForSrv(pkid, con)
-
2014-08-02 23:36:45,653 DEBUG [main] - checkMultipleCertForSrv : SELECT PKID,FKCERTIFICATE,
TKCERTIFICATESERVICE FROM CERTIFICATESERVICECERTIFICATEMAP WHERE FKCERTIFICATE = "null"
2014-08-02 23:36:45,653 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,655 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,655 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,655 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForSrv -
2014-08-02 23:36:45,655 INFO [main] - IN -- CertDBImpl.java - checkMultipleCertForRole(certInfo,
con) -
2014-08-02 23:36:45,655 DEBUG [main] - checkMultipleCertForRole : SELECT PKID,FKCERTIFICATE,
TKTRUSTROLE FROM CERTIFICATETRUSTROLEMAP WHERE FKCERTIFICATE = "null"
2014-08-02 23:36:45,655 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,657 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,657 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,657 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForRole -
2014-08-02 23:36:45,657 INFO [main] - IN -- CertDBImpl.java -
checkMultipleCertForProcessnode(certInfo, con) -
2014-08-02 23:36:45,657 DEBUG [main] - checkMultipleCertForProcessnode : SELECT
PKID,FKCERTIFICATE,FKPROCESSNODE,SERVERNAME FROM CERTIFICATEPROCESSNODEMAP WHERE
FKCERTIFICATE='null'
2014-08-02 23:36:45,658 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,660 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:45,661 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,661 INFO [main] - OUT -- CertDBImpl.java - checkMultipleCertForProcessnode -

```

```
2014-08-02 23:36:45,661 DEBUG [main] - DELETE FLAG :: isSrvMap=false :: isRoleMap=false ::
isProcessnodeMap=false
2014-08-02 23:36:45,661 INFO [main] - IN -- CertDBImpl.java - deleteCertificateBySerialNo(con,
certInfo) -

## finally it tries to remove all certificates from CERTIFICATE table with null PKID.
## Nothing will be deleted of course.
2014-08-02 23:36:45,661 DEBUG [main] - Delete query of CERTIFICATE :DELETE FROM CERTIFICATE
WHERE PKID = "null"
2014-08-02 23:36:45,661 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:45,664 INFO [main] - OUT -- CertDBImpl.java - deleteCertificateBySerialNo -
2014-08-02 23:36:45,664 DEBUG [main] - Connection committed for deleteCertificate..
2014-08-02 23:36:45,664 DEBUG [main] - Closing the connection. Connection HashCode:17578504 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,664 DEBUG [main] - Attempting to close connection
2014-08-02 23:36:45,665 DEBUG [main] - Removing connection <database, jdbcurl> from
ConnectionManager list
2014-08-02 23:36:45,665 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-02 23:36:45,665 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@77eb97> from connection list
2014-08-02 23:36:45,665 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@77eb97> is
not closed, adding it back to the pool entry <database,jdbcurl>
2014-08-02 23:36:45,665 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:45,665 DEBUG [main] - Connection released from CertDBImpl.deleteCertificate
method.
2014-08-02 23:36:45,665 INFO [main] - OUT -- CertDBImpl.java - deleteCertificate -
2014-08-02 23:36:45,665 INFO [main] - OUT -- CertDBAction.java - deleteCertificateInDB -
2014-08-02 23:36:45,665 INFO [main] - OUT -- DefaultCertMgr.java - deleteDERandPEM -
2014-08-02 23:36:45,665 DEBUG [main] - deletedERandPEM: sCertDir =
/usr/local/platform/.security/tomcat/trust-certs --- sAlias = CUCM861
2014-08-02 23:36:45,665 INFO [main] - IN -- TomcatCertMgr.java - removeFromKeyStore(..) -
2014-08-02 23:36:45,666 INFO [main] - IN -- RSACryptoEngine.java -
removeFromKeyStore(keystoreFile, keystorePass, alias) -
2014-08-02 23:36:45,666 INFO [main] - IN -- RSACryptoEngine.java - loadKeyStore(keystoreFile,
keystorePass) -
2014-08-02 23:36:45,846 INFO [main] - OUT -- RSACryptoEngine.java - loadKeyStore -

## old tomcat-trust certificate is being removed from key store
2014-08-02 23:36:45,880 DEBUG [main] - Removing certificate from keystore : CUCM861
2014-08-02 23:36:45,880 DEBUG [main] - Size of the keystore after delete is : 2
2014-08-02 23:36:45,880 INFO [main] - OUT -- RSACryptoEngine.java - removeFromKeyStore -
2014-08-02 23:36:45,880 INFO [main] - OUT -- TomcatCertMgr.java - removeFromKeyStore -
2014-08-02 23:36:45,882 INFO [main] - trustdir ::/usr/local/platform/.security/tomcat/trust-
certs
2014-08-02 23:36:45,883 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,883 DEBUG [main] - Executing command from Util.sysExec : python
/usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:45,993 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:45,995 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:45,995 DEBUG [main] - setOwnershipAndPermissions : trust-certs
2014-08-02 23:36:45,995 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:45,995 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:45,996 DEBUG [main] - Executing command from Util.sysExec : /bin/chown -R
certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,005 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,010 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,010 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,010 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp -R
ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,020 INFO [main] - OUT -- Util.java - sysExec -
```

```

2014-08-02 23:36:46,020 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,020 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,020 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod -R 755
/usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,027 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,027 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-02 23:36:46,027 INFO [main] - OUT -- DefaultCertMgr.java - deleteCert -
2014-08-02 23:36:46,027 INFO [main] - OUT -- TomcatCertMgr.java - deleteCertFromTomcatTrustStore
-

```

e. En este momento, no tiene el certificado tomcat-trust en el sistema de archivos. CM la creará y la volverá a importar en el almacén de trusts:

```

2014-08-02 23:36:46,027 INFO [main] - IN -- TomcatCertMgr.java -
importCertToTomcatTrustStore(info) -
2014-08-02 23:36:46,028 INFO [main] - IN -- DefaultCertMgr.java - importCert(info) -
decode:      true
op:          import
unit:        tomcat-trust
keystoreUnit:tomcat-trust
logFile:     /var/log/active/platform/log/cert-mgmt.log
resultFile:  /var/log/active/platform/log/certde-info.xml
keyDir:      /usr/local/platform/.security/tomcat/keys
certDir:     /usr/local/platform/.security/tomcat/trust-certs
srcCert:     /usr/local/platform/.security/tomcat/certs/tomcat.pem
type:        trust-certs
rootCACert:  null
trustDir:    null
DNAME:       CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL
description:Trust Certificate
isDBInsert:true

2014-08-02 23:36:46,028 INFO [main] - IN -- DefaultCertMgr.java - loadInputCert(info) -
2014-08-02 23:36:46,028 INFO [main] - IN -- RSACryptoEngine.java - loadCertificates(..) -
2014-08-02 23:36:46,028 INFO [main] - IN -- RSACryptoEngine.java - loadCertificate(..) -
2014-08-02 23:36:46,029 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificate -
2014-08-02 23:36:46,030 INFO [main] - OUT -- RSACryptoEngine.java - loadCertificates -
2014-08-02 23:36:46,030 INFO [main] - OUT -- DefaultCertMgr.java - loadInputCert - Successfully
loaded input cert
2014-08-02 23:36:46,030 DEBUG [main] - Checking validity of cert
2014-08-02 23:36:46,030 INFO [main] - Verifying certificate
L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
2014-08-02 23:36:46,030 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-02 23:36:46,030 DEBUG [main] - parseCNfromDN( certSubjDN:
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:46,030 DEBUG [main] - Truncating CN 'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:46,030 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-02 23:36:46,030 DEBUG [main] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'

## certificate is being created on the filesystem
2014-08-02 23:36:46,030 INFO [main] - trying to load cert from trust store
::/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
2014-08-02 23:36:46,030 INFO [main] - cert not available in trust store
::L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
2014-08-02 23:36:46,031 INFO [main] - IN -- DefaultCertMgr.java - importTrustCert(info, cert) -
2014-08-02 23:36:46,031 INFO [main] - IN -- DefaultCertMgr.java - saveToTrustStore(info, cert) -
2014-08-02 23:36:46,031 ERROR [main] - trust directory parameter is null
2014-08-02 23:36:46,031 INFO [main] - IN -- DefaultCertMgr.java - saveTrustCert(cert, targetDir,
certType) -
2014-08-02 23:36:46,031 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-02 23:36:46,031 DEBUG [main] - parseCNfromDN( certSubjDN:

```

```
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:46,031 DEBUG [main] - Truncating CN 'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:46,031 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-02 23:36:46,031 DEBUG [main] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'
2014-08-02 23:36:46,031 INFO [main] - IN -- CertUtil.java - parseCNfromDN(DN, sSearchStr) -
2014-08-02 23:36:46,031 DEBUG [main] - parseCNfromDN( certSubjDN:
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:46,031 DEBUG [main] - Truncating CN 'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:46,031 INFO [main] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-02 23:36:46,031 DEBUG [main] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'
2014-08-02 23:36:46,031 DEBUG [main] - target filename for imported cert: 'CUCM861.pem'
2014-08-02 23:36:46,032 DEBUG [main] - existing certificate with same filename not found.
2014-08-02 23:36:46,032 DEBUG [main] - Saving PEM encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem'
2014-08-02 23:36:46,032 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) - File :
/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
2014-08-02 23:36:46,032 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-02 23:36:46,033 DEBUG [main] - Saving DER encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.der'
2014-08-02 23:36:46,033 INFO [main] - OUT -- DefaultCertMgr.java - saveTrustCert -
2014-08-02 23:36:46,033 INFO [main] - IN -- TomcatCertMgr.java - saveToKeyStore(..) -
2014-08-02 23:36:46,033 INFO [main] - IN -- RSACryptoEngine.java - saveToKeyStore(keystoreFile,
keystorePass, x509Certificate, alias) -
2014-08-02 23:36:46,033 INFO [main] - IN -- RSACryptoEngine.java - loadKeyStore(keystoreFile,
keystorePass) -
2014-08-02 23:36:46,050 INFO [main] - OUT -- RSACryptoEngine.java - loadKeyStore -
2014-08-02 23:36:46,050 INFO [main] - Size of the keystore before import is : 2
2014-08-02 23:36:46,050 INFO [main] - Importing certificate : CUCM861
2014-08-02 23:36:46,061 INFO [main] - Size of the keystore after import is : 3
2014-08-02 23:36:46,061 INFO [main] - OUT -- RSACryptoEngine.java - saveToKeyStore -
2014-08-02 23:36:46,061 INFO [main] - OUT -- TomcatCertMgr.java - saveToKeyStore -
2014-08-02 23:36:46,062 DEBUG [main] - TrustCert description filename : 'CUCM861.description'
2014-08-02 23:36:46,062 INFO [main] - IN -- DefaultCertMgr.java - createDescriptionFile(name,
description) -
2014-08-02 23:36:46,062 INFO [main] - description is :Trust Certificate
2014-08-02 23:36:46,062 INFO [main] - OUT -- DefaultCertMgr.java - createDescriptionFile -
2014-08-02 23:36:46,062 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:46,062 DEBUG [main] - setOwnershipAndPermissions : CUCM861.description
2014-08-02 23:36:46,063 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description'
2014-08-02 23:36:46,063 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,063 DEBUG [main] - Executing command from Util.sysExec : /bin/chown
certbase /usr/local/platform/.security/tomcat/trust-certs/CUCM861.description
2014-08-02 23:36:46,066 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,066 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description'
2014-08-02 23:36:46,067 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,067 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp cmbase
/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description
2014-08-02 23:36:46,069 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,069 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description'
2014-08-02 23:36:46,069 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,069 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod 755
/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description
2014-08-02 23:36:46,073 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,073 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-02 23:36:46,073 INFO [main] - OUT -- DefaultCertMgr.java - saveToTrustStore -
2014-08-02 23:36:46,074 INFO [main] - trustdir ::/usr/local/platform/.security/tomcat/trust-
certs
2014-08-02 23:36:46,074 INFO [main] - IN -- Util.java - sysExec(exe, args) -
```

```
2014-08-02 23:36:46,074 DEBUG [main] - Executing command from Util.sysExec : python
/usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,140 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,140 INFO [main] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:46,140 DEBUG [main] - setOwnershipAndPermissions : trust-certs
2014-08-02 23:36:46,141 DEBUG [main] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,141 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,141 DEBUG [main] - Executing command from Util.sysExec : /bin/chown -R
certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,144 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,144 DEBUG [main] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,144 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,144 DEBUG [main] - Executing command from Util.sysExec : /bin/chgrp -R
ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,147 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,147 DEBUG [main] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,148 INFO [main] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,148 DEBUG [main] - Executing command from Util.sysExec : /bin/chmod -R 755
/usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,152 INFO [main] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,152 INFO [main] - OUT -- DefaultCertMgr.java - setOwnershipAndPermissions -
2014-08-02 23:36:46,152 INFO [main] - IN -- CertUtil.java - populateCertInfo(cert, opInfo,
certFilePemLocation) -
2014-08-02 23:36:46,156 INFO [main] - IN -- CertUtil.java - getHostName(..) -
2014-08-02 23:36:46,156 INFO [main] - OUT -- CertUtil.java - getHostName - CUCM861
2014-08-02 23:36:46,156 INFO [main] - IN -- CryptoUtil.java - saveAsPEM(..) -
2014-08-02 23:36:46,157 INFO [main] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-02 23:36:46,157 INFO [main] - OUT -- CertUtil.java - populateCertInfo -
```

Ahora el nuevo tomcat-trust vuelve al sistema de archivos. Lo que resta es verificar si existe en la DB y, si falta, agregar las entradas correspondientes.

```
2014-08-02 23:36:46,157 INFO [main] - IN -- CertDBAction.java -
insertCertificateInDB(certFiletoStore, info) -
2014-08-02 23:36:46,157 INFO [main] -
```

```
DBParameters ...
PKID :null
CN :L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
serialNo :42c86b2cf293630fe27bbddc7fd02a39
hostName :CUCM861
issuerName :L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
Certificate :Not Printing huge Certificate String..
IPV4Address :10.48.46.29
IPV6Address :
TimeToLive :NULL
UNIT :tomcat-trust
TYPE :trust-certs
ROLE :null
RoleMoniker :null
RoleEnum :null
SERVICE :null
ServiceMoniker :null
ServiceEnum :0
```

```
2014-08-02 23:36:46,157 INFO [main] - DB - Certifciate Store Plugin Handler is
:com.cisco.ccm.certmgmt.db.CertDBImpl
2014-08-02 23:36:46,159 DEBUG [main] - Connection Initialized to Publisher. Connection
HashCode:23817301 --Details:Connector(NOT CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
```

```
2014-08-02 23:36:46,159 INFO [main] - IN -- CertDBImpl.java - insertCertificate(certInfo, con) -
2014-08-02 23:36:46,159 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:46,159 DEBUG [main] - Try to get a connection from pool
2014-08-02 23:36:46,159 DEBUG [main] - Getting connection from connection pool entry
<database,jdbcurl>
2014-08-02 23:36:46,159 DEBUG [main] - There are currently 2 connection pool entries
2014-08-02 23:36:46,159 DEBUG [main] - Adding connection
<com.informix.jdbc.IfxSqlConnect@77eb97> to connection list
2014-08-02 23:36:46,159 DEBUG [main] - Marking connection
<com.informix.jdbc.IfxSqlConnect@77eb97> as used
2014-08-02 23:36:46,159 DEBUG [main] - Got connection from pool
2014-08-02 23:36:46,166 INFO [main] - IN -- CertDBImpl.java -
populateRoleEnumServiceEnum(certInfo) -
2014-08-02 23:36:46,166 INFO [main] - UNIT :: tomcat-trust
2014-08-02 23:36:46,166 INFO [main] - role :: [ROLE_APPLICATION_SERVER]
2014-08-02 23:36:46,166 INFO [main] - roleEnum :: [7]
2014-08-02 23:36:46,166 INFO [main] - service :: null
2014-08-02 23:36:46,166 INFO [main] - serviceEnum :: 6
2014-08-02 23:36:46,166 INFO [main] - OUT -- CertDBImpl.java - populateRoleEnumServiceEnum -
2014-08-02 23:36:46,166 INFO [main] - IN -- CertDBUtil.java - getProcessNodeId(con, hostName,
ipAddress, fqdn) -
2014-08-02 23:36:46,166 INFO [main] - getProcessNodeId Query :SELECT PKID,NAME FROM PROCESSNODE
WHERE UPPER(NAME)=UPPER("CUCM861") OR UPPER(NAME)=UPPER("10.48.46.29") OR
UPPER(NAME)=UPPER("CUCM861")
2014-08-02 23:36:46,166 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:46,172 INFO [main] - ProcessNodeId:13f4b0d9-0bae-429a-a86e-625336a35bb6
2014-08-02 23:36:46,172 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:46,173 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:46,173 INFO [main] - OUT -- CertDBUtil.java - getProcessNodeId -
2014-08-02 23:36:46,173 INFO [main] - IN -- CertDBImpl.java - getPkidOfCertificate(hash,
serverName, con) -
2014-08-02 23:36:46,173 DEBUG [main] - GetPKID Query :SELECT A.PKID FROM CERTIFICATE A,
CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND B.HASH = "/hSVsEZT+yZeaxE+K0EM02n1Pgk="
2014-08-02 23:36:46,173 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:46,177 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:46,177 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:46,177 INFO [main] - OUT -- CertDBImpl.java - getPkidOfCertificate -
2014-08-02 23:36:46,177 DEBUG [main] - INSERT FLAG :: isCertUpdate=false :: doNothing=false
2014-08-02 23:36:46,177 DEBUG [main] - INSERT/UPDATE Query of CERTIFICATE : null
2014-08-02 23:36:46,177 INFO [main] - IN -- CertDBImpl.java - insertCertSrvCertMap(certInfo,
con) -
2014-08-02 23:36:46,177 INFO [main] - IN -- CertDBImpl.java -
checkExistingCertificateServiceMapping(certInfo, serviceEnum, con) -
```

CM checks CERTIFICATESERVICECERTIFICATEMAP table if the mapping for our cert exist.

```
2014-08-02 23:36:46,178 DEBUG [main] - checkExistingTrustCertificateForService Query :SELECT
PKID,FKCERTIFICATE, TKCERTIFICATESERVICE FROM CERTIFICATESERVICECERTIFICATEMAP WHERE
FKCERTIFICATE = "533dbbfc-78ce-b46f-7d64-cd2b7c536f6d" AND TKCERTIFICATESERVICE= "6"
2014-08-02 23:36:46,178 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:46,184 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:46,184 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:46,184 INFO [main] - OUT -- CertDBImpl.java -
checkExistingCertificateServiceMapping -
2014-08-02 23:36:46,184 DEBUG [main] - Certificate to be inserted in
CERTIFICATESERVICECERTIFICATEMAP table :tomcat-trust ::PKID :533dbbfc-78ce-b46f-7d64-
cd2b7c536f6d ::toInsertInCertSrvMap:false
```

Since it has not been previousy removed it is there

```
2014-08-02 23:36:46,185 DEBUG [main] - CertService mapping entry already exists..
2014-08-02 23:36:46,185 INFO [main] - OUT -- CertDBImpl.java - insertCertSrvCertMap -
```



```
2014-08-02 23:36:46,185 INFO [main] - IN -- CertDBImpl.java - insertCertTrustRoleMap(certInfo,
log, con) -
2014-08-02 23:36:46,185 INFO [main] - IN -- CertDBImpl.java -
checkExistingCertificateRoleMapping(certInfo, roleEnum, con) -

## the same is being checked for CERTIFICATETRUSTROLEMAP table ...
2014-08-02 23:36:46,185 DEBUG [main] - checkExistingTrustCertificateForRole Query :SELECT
PKID,FKCERTIFICATE, TKTRUSTROLE FROM CERTIFICATETRUSTROLEMAP WHERE FKCERTIFICATE = "533dbbfc-
78ce-b46f-7d64-cd2b7c536f6d" AND TKTRUSTROLE= "7"
2014-08-02 23:36:46,185 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:46,187 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:46,188 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:46,188 INFO [main] - OUT -- CertDBImpl.java -
checkExistingCertificateRoleMapping -
2014-08-02 23:36:46,188 DEBUG [main] - Certificate to be inserted in CERTIFICATETRUSTROLEMAP
table :tomcat-trust ::PKID :533dbbfc-78ce-b46f-7d64-cd2b7c536f6d ::toInsertInCertSrvMap:false

## it exists also here
2014-08-02 23:36:46,188 DEBUG [main] - CertRole mapping entry already exists..
2014-08-02 23:36:46,188 INFO [main] - OUT -- CertDBImpl.java - insertCertTrustRoleMap -
2014-08-02 23:36:46,188 INFO [main] - IN -- CertDBImpl.java - insertCertProcessNodeMap(certInfo,
con) -
2014-08-02 23:36:46,188 INFO [main] - IN -- CertDBImpl.java -
checkExistingCertProcessNodeMapping(certInfo, con) -
2014-08-02 23:36:46,188 DEBUG [main] - checkExistingCertProcessNodeMapping Query :SELECT
PKID,FKCERTIFICATE, FKPROCESSNODE, SERVERNAME FROM CERTIFICATEPROCESSNODEMAP WHERE
FKCERTIFICATE="533dbbfc-78ce-b46f-7d64-cd2b7c536f6d" AND FKPROCESSNODE="13f4b0d9-0bae-429a-a86e-
625336a35bb6" AND SERVERNAME="CUCM861"
2014-08-02 23:36:46,188 DEBUG [main] - getConn:
usePooling[true]connectToLocalDB[false]_target[0]connectToPubByDefault[true]
2014-08-02 23:36:46,190 DEBUG [main] - Closing the resultset.
2014-08-02 23:36:46,191 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:46,191 INFO [main] - OUT -- CertDBImpl.java -
checkExistingCertProcessNodeMapping -
2014-08-02 23:36:46,191 DEBUG [main] - CertProcessNode mapping entry already exists..
2014-08-02 23:36:46,191 INFO [main] - OUT -- CertDBImpl.java - insertCertProcessNodeMap -
2014-08-02 23:36:46,191 DEBUG [main] - Connection committed for insertCertificate..

## since no entries in DB were missing Insertion finishes.
2014-08-02 23:36:46,191 DEBUG [main] - Insertion of Certificate in DB is Successful.
2014-08-02 23:36:46,191 INFO [main] - OUT -- CertDBImpl.java - insertCertificate -
2014-08-02 23:36:46,192 DEBUG [main] - Closing the connection. Connection HashCode:23817301 --
Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:46,192 DEBUG [main] - Attempting to close connection
2014-08-02 23:36:46,192 DEBUG [main] - Removing connection <database, jdbcurl> from
ConnectionManager list
2014-08-02 23:36:46,192 DEBUG [main] - removeConnectionFromConnectionList()
2014-08-02 23:36:46,192 DEBUG [main] - Removing connection
<com.informix.jdbc.IfxSqlConnect@77eb97> from connection list
2014-08-02 23:36:46,192 DEBUG [main] - Connection <com.informix.jdbc.IfxSqlConnect@77eb97> is
not closed, adding it back to the pool entry <database,jdbcurl>
2014-08-02 23:36:46,192 INFO [main] - Connection/Statement/Resultset is closed properly.
2014-08-02 23:36:46,192 INFO [main] - DB - Generate Certificate operation in DB is successful
2014-08-02 23:36:46,192 INFO [main] - OUT -- CertDBAction.java - insertCertificateInDB -
2014-08-02 23:36:46,192 INFO [main] - IN -- CryptoUtil.java - isOCSPEnabled(..) -
2014-08-02 23:36:46,192 INFO [main] - IN -- CryptoUtil.java - getCertMonitorXmlParser(..) -
2014-08-02 23:36:46,203 INFO [main] - OUT -- CryptoUtil.java - getCertMonitorXmlParser -
2014-08-02 23:36:46,203 INFO [main] - OUT -- CryptoUtil.java - isOCSPEnabled - false
2014-08-02 23:36:46,203 DEBUG [main] - OCSP is not enabled.
2014-08-02 23:36:46,204 INFO [main] - Successfully imported trusted certificate with Subject
DN:L&#61;KRAKOW,ST&#61;MALOPOLSKA,CN&#61;CUCM861,OU&#61;TAC,O&#61;CISCO,C&#61;PL
2014-08-02 23:36:46,204 INFO [main] - OUT -- DefaultCertMgr.java - importTrustCert -
Successfully imported trusted certificate with Subject
```

DN:L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL

at this moment importing the tomcat-trust ends. CM finishes adding tomcat-trust to the trust store and removes CSR file if any.

```
2014-08-02 23:36:46,204 INFO [main] - result of import operations is ::Import of trust certificate is successful
2014-08-02 23:36:46,204 INFO [main] - OUT -- DefaultCertMgr.java - importCert -
2014-08-02 23:36:46,204 INFO [main] - OUT -- TomcatCertMgr.java - importCertToTomcatTrustStore -
2014-08-02 23:36:46,204 INFO [main] - Tomcat Self-signed certificate copied in Tomcat trust-store successfully
2014-08-02 23:36:46,204 INFO [main] - OUT -- TomcatCertMgr.java - copyToTomcatTrustStore -
2014-08-02 23:36:46,204 DEBUG [main] - GenCert returned
2014-08-02 23:36:46,204 DEBUG [main] - CSR FileName is tomcat-trust.csr
2014-08-02 23:36:46,204 DEBUG [main] - CSR File Deleted:
/usr/local/platform/.security/tomcat/keys/tomcat-trust.csr
2014-08-02 23:36:46,204 INFO [main] - Delete CSR File:
/usr/local/platform/.security/tomcat/keys/tomcat-trust.csr
2014-08-02 23:36:46,204 DEBUG [main] - Private Key in DER Form is: tomcat-trust_priv_csr.der
2014-08-02 23:36:46,204 DEBUG [main] - PEM Key in PEM form is:tomcat-trust_priv_csr.pem
2014-08-02 23:36:46,206 INFO [main] - OUT -- DefaultCertMgr.java - regenCert -
2014-08-02 23:36:46,206 INFO [main] - IN -- CertMgr.java - logResult(result, desc, resultFile) -
2014-08-02 23:36:46,206 INFO [main] - CertMgmt Operation Result : null
2014-08-02 23:36:46,207 INFO [main] - OUT -- CertMgr.java - logResult -
2014-08-02 23:36:46,207 INFO [main] - OUT -- CertMgr.java - doOp -
2014-08-02 23:36:46,207 INFO [main] - OUT -- CertMgr.java - mainIntenal -
```

El rol de CM finaliza aquí. Echemos un vistazo a los registros de certCN en el nodo de editor. Dado que se suscribe a la notificación de cambio de la DB, se le notificará el cambio de certificado en la tabla de CERTIFICADOS.

```
2014-08-02 23:36:45,605 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-02 23:36:45,607 INFO [Thread-5] - Inside CERTIFICATE - I/U option..
2014-08-02 23:36:45,607 DEBUG [Thread-5] - Updated Data in CERTIFICATE
::<msg><type>DBL</type><table>certificate</table><tableid>41</tableid><action>U</action><time>14
07015405</time><old><cdrserver>2</cdrserver><cdrtime>1407012599</cdrtime><pkid>533dbbfc-78ce-
b46f-7d64-
cd2b7c536f6d</pkid><servername>CUCM861</servername><subjectname>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM86
1,OU=TAC,O=CISCO,C=PL</subjectname><issuename>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,
C=PL</issuename><serialnumber>6cf5bc855b681f658f9e7506d3ec6ea5</serialnumber><certificate></cer
tificate><ipv4address>10.48.46.29</ipv4address><ipv6address></ipv6address><timetolive>NULL</time
tolive><ifx_replcheck>6043073097765093380</ifx_replcheck></old><new><servername>CUCM861</servern
ame><subjectname>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL</subjectname><issuename>
L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL</issuename><serialnumber>42c86b2cf293630f
e27bbddc7fd02a39</serialnumber><certificate>changed</certificate><ipv4address>10.48.46.29</ipv4a
ddress><ipv6address></ipv6address><timetolive>NULL</timetolive></new></msg>
2014-08-02 23:36:45,607 DEBUG [Thread-5] - Certificate PKID : 533dbbfc-78ce-b46f-7d64-
cd2b7c536f6d , ipAddress : 10.48.46.29 , OldSerialNo : 6cf5bc855b681f658f9e7506d3ec6ea5 ,
NewSerialNo : 42c86b2cf293630fe27bbddc7fd02a39
2014-08-02 23:36:45,607 INFO [Thread-5] - OUT - process.
2014-08-02 23:36:45,608 INFO [InsertThread --- 7] - IN -- CertKeystoreHandler.java - run() -
2014-08-02 23:36:45,609 DEBUG [InsertThread --- 7] - InsertThread --- 7 -- START --
```

getting PKID for which the change occurred

```
2014-08-02 23:36:45,609 DEBUG [InsertThread --- 7] - DB Value UPDATE: 533dbbfc-78ce-b46f-7d64-
cd2b7c536f6d
2014-08-02 23:36:45,609 INFO [InsertThread --- 7] - IN -- CertKeystoreHandler.java -
updateIntoKeystore() -
2014-08-02 23:36:45,610 INFO [InsertThread --- 7] - IN -- CertDBImpl.java -
getCertificate(certBash64SHA1:null --pkid:533dbbfc-78ce-b46f-7d64-cd2b7c536f6d
2014-08-02 23:36:45,611 DEBUG [InsertThread --- 7] - Connection Initialized to localnode.
Connection HashCode:22502526 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,611 DEBUG [InsertThread --- 7] - Select Query to getCertificate :SELECT
```

```

A.*,B.HASH FROM CERTIFICATE A, CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND A.PKID =
"533dbbfc-78ce-b46f-7d64-cd2b7c536f6d"
2014-08-02 23:36:45,611 DEBUG [InsertThread --- 7] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-02 23:36:45,611 DEBUG [InsertThread --- 7] - Got connection from pool
2014-08-02 23:36:45,681 DEBUG [InsertThread --- 7] - Closing the resultset.
2014-08-02 23:36:45,681 DEBUG [InsertThread --- 7] - Closing the connection. Connection
HashCode:22502526 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,681 DEBUG [InsertThread --- 7] - Attempting to close connection
2014-08-02 23:36:45,681 DEBUG [InsertThread --- 7] - Removing connection <database, jdbcurl2>
from ConnectionManager list
2014-08-02 23:36:45,681 DEBUG [InsertThread --- 7] - removeConnectionFromConnectionList()
2014-08-02 23:36:45,681 DEBUG [InsertThread --- 7] - Removing connection
<com.informix.jdbc.IfxDriver@1ccblae> from connection list
2014-08-02 23:36:45,682 DEBUG [InsertThread --- 7] - Connection
<com.informix.jdbc.IfxDriver@1ccblae> is not closed, adding it back to the pool entry
<database, jdbcurl2>
2014-08-02 23:36:45,682 INFO [InsertThread --- 7] - Connection/Statement/Resultset is closed
properly.
2014-08-02 23:36:45,682 DEBUG [InsertThread --- 7] - Connection released from
CertDBImpl.getCertificate method.
2014-08-02 23:36:45,682 INFO [InsertThread --- 7] - OUT -- CertDBImpl.java - getCertificate -
2014-08-02 23:36:45,682 INFO [InsertThread --- 7] - IN -- CertDBImpl.java -
getCertUnitByPkid(pkid) -
2014-08-02 23:36:45,683 DEBUG [InsertThread --- 7] - Connection Initialized to localnode.
Connection HashCode:25877029 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)

## getting info about changed certificate
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - Select Query to getCertUnitByPkid :SELECT
A.PKID, A.FKCERTIFICATE, A.TKCERTIFICATESERVICE, B.NAME UNIT FROM
CERTIFICATESERVICECERTIFICATEMAP A, TYPECERTIFICATESERVICE B WHERE A.FKCERTIFICATE="533dbbfc-
78ce-b46f-7d64-cd2b7c536f6d" AND A.TKCERTIFICATESERVICE = B.ENUM
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - Try to get a connection from pool
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - getting local connection from Pool
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - Getting connection from connection pool
entry <database, jdbcurl2>
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - There are currently 2 connection pool
entries
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - Adding connection
<com.informix.jdbc.IfxDriver@1ccblae> to connection list
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - Marking connection
<com.informix.jdbc.IfxDriver@1ccblae> as used
2014-08-02 23:36:45,684 DEBUG [InsertThread --- 7] - Got connection from pool
2014-08-02 23:36:45,687 DEBUG [InsertThread --- 7] - Closing the resultset.
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Closing the connection. Connection
HashCode:25877029 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Attempting to close connection
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Removing connection <database, jdbcurl2>
from ConnectionManager list
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - removeConnectionFromConnectionList()
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Removing connection
<com.informix.jdbc.IfxDriver@1ccblae> from connection list
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Connection
<com.informix.jdbc.IfxDriver@1ccblae> is not closed, adding it back to the pool entry
<database, jdbcurl2>
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - Connection/Statement/Resultset is closed
properly.
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Resultset released from
CertDBImpl.getCertUnitByPkid method.
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - OUT -- CertDBImpl.java - getCertUnitByPkid -
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - UNIT : tomcat

```

```
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - CurrentIPAddress : 10.48.46.29
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - RemoteIPAddress : 10.48.46.29
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - OldSerialNo
:6cf5bc855b681f658f9e7506d3ec6ea5
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - NewSerialNo
:42c86b2cf293630fe27bbddc7fd02a39
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - IN -- CertUtil.java -
getListFromComaSeperatedStr(..) -
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - OUT -- CertUtil.java -
getListFromComaSeperatedStr -
```

as you know tomcat and tomcat-trust certificates are covered by change notification.

Since both ones has been properly updated by CM service there is nothing to do for the ## certCN service here.

```
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - tomcat --- is included unit for CN
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Change notification not require on same
node except tomcat cert.
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - UNIT : tomcat-trust
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - CurrentIPAddress : 10.48.46.29
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - RemoteIPAddress : 10.48.46.29
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - OldSerialNo
:6cf5bc855b681f658f9e7506d3ec6ea5
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - NewSerialNo
:42c86b2cf293630fe27bbddc7fd02a39
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - IN -- CertUtil.java -
getListFromComaSeperatedStr(..) -
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - OUT -- CertUtil.java -
getListFromComaSeperatedStr -
2014-08-02 23:36:45,688 INFO [InsertThread --- 7] - tomcat-trust --- is included unit for CN
2014-08-02 23:36:45,688 DEBUG [InsertThread --- 7] - Change notification not require on same
node except tomcat cert.
2014-08-02 23:36:45,689 INFO [InsertThread --- 7] - tomcat-trust Certificate successfully
updated in trust-store by Change Notification..
2014-08-02 23:36:45,689 INFO [InsertThread --- 7] - OUT -- CertKeystoreHandler.java -
updateIntoKeystore -
2014-08-02 23:36:45,689 DEBUG [InsertThread --- 7] - InsertThread --- 7 -- END --
2014-08-02 23:36:45,689 INFO [InsertThread --- 7] - OUT -- CertKeystoreHandler.java - run -
```

Por lo tanto, el servicio certCN no modificó los certificados en el nodo de editor.

f. Ahora veamos cómo se presenta en el nodo de suscriptor. El nuevo certificado se insertó en la DB y se replicó en el nodo de suscriptor. Se notificó a la certCN sobre el cambio en la DB. Se recortó con la operación completa en la siguiente sub (comentarios en línea):

certCN on sub is notified about the change in the DB

```
2014-08-02 23:36:46,147 INFO [Thread-5] - IN - process. changeData &colon;
2014-08-02 23:36:46,149 INFO [Thread-5] - Inside CERTIFICATE - I/U option..
```

details about the change are in from DBL (PKID, old serial, new serial, etc.)

```
2014-08-02 23:36:46,149 DEBUG [Thread-5] - Updated Data in CERTIFICATE
::<msg><type>DBL</type><table>certificate</table><tableid>41</tableid><action>U</action><time>14
07015406</time><old><cdrserver>2</cdrserver><cdrtime>1407012599</cdrtime><pkid>533dbbfc-78ce-
b46f-7d64-
cd2b7c536f6d</pkid><servername>CUCM861</servername><subjectname>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM86
1,OU=TAC,O=CISCO,C=PL</subjectname><issuename>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,
C=PL</issuename><serialnumber>6cf5bc855b681f658f9e7506d3ec6ea5</serialnumber><certificate></cer
tificate><ipv4address>10.48.46.29</ipv4address><ipv6address></ipv6address><timetolive>NULL</time
tolive><ifx_replcheck>6043073097765093380</ifx_replcheck></old><new><pkid>533dbbfc-78ce-b46f-
7d64-
cd2b7c536f6d</pkid><servername>CUCM861</servername><subjectname>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM86
1,OU=TAC,O=CISCO,C=PL</subjectname><issuename>L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,
C=PL</issuename><serialnumber>42c86b2cf293630fe27bbddc7fd02a39</serialnumber><certificate>chang
```

```
ed</certificate><ipv4address>10.48.46.29</ipv4address><ipv6address></ipv6address><timetolive>NUL
L</timetolive></new></msg>
2014-08-02 23:36:46,149 DEBUG [Thread-5] - Certificate PKID : 533dbbfc-78ce-b46f-7d64-
cd2b7c536f6d , ipAddress : 10.48.46.29 , OldSerialNo : 6cf5bc855b681f658f9e7506d3ec6ea5 ,
NewSerialNo : 42c86b2cf293630fe27bbddc7fd02a39
2014-08-02 23:36:46,150 INFO [Thread-5] - OUT - process.
2014-08-02 23:36:46,151 INFO [InsertThread --- 34] - IN -- CertKeystoreHandler.java - run() -
2014-08-02 23:36:46,152 DEBUG [InsertThread --- 34] - InsertThread --- 34 -- START --
2014-08-02 23:36:46,152 DEBUG [InsertThread --- 34] - DB Value UPDATE: 533dbbfc-78ce-b46f-7d64-
cd2b7c536f6d
2014-08-02 23:36:46,152 INFO [InsertThread --- 34] - IN -- CertKeystoreHandler.java -
updateIntoKeystore() -
2014-08-02 23:36:46,153 INFO [InsertThread --- 34] - IN -- CertDBImpl.java -
getCertificate(certBash64SHA1:null --pkid:533dbbfc-78ce-b46f-7d64-cd2b7c536f6d
2014-08-02 23:36:46,153 DEBUG [InsertThread --- 34] - Connection Initialized to localnode.
Connection HashCode:30330150 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:46,153 DEBUG [InsertThread --- 34] - Select Query to getCertificate :SELECT
A.*,B.HASH FROM CERTIFICATE A, CERTIFICATEHASHMAP B WHERE A.PKID=B.FKCERTIFICATE AND A.PKID =
"533dbbfc-78ce-b46f-7d64-cd2b7c536f6d"
2014-08-02 23:36:46,153 DEBUG [InsertThread --- 34] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - Try to get a connection from pool
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - getting local connection from Pool
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - Getting connection from connection pool
entry <database,jdbcurl2>
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - There are currently 2 connection pool
entries
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - Checking if connection limit has been
reached for database
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - Connecting to subscriber so max number of
connections allowed is 100
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - Number of connections in use is 0
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - There are currently 2 connection pool
entries
2014-08-02 23:36:46,154 DEBUG [InsertThread --- 34] - Number of available connections in pool: 0
2014-08-02 23:36:46,193 DEBUG [InsertThread --- 34] - Adding connection
<com.informix.jdbc.IfxSqlConnect@1feba51> to connection list
2014-08-02 23:36:46,194 DEBUG [InsertThread --- 34] - Marking connection
<com.informix.jdbc.IfxSqlConnect@1feba51> as used
2014-08-02 23:36:46,194 DEBUG [InsertThread --- 34] - Got connection from pool
2014-08-02 23:36:46,197 DEBUG [InsertThread --- 34] - Closing the resultset.
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - Closing the connection. Connection
HashCode:30330150 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - Attempting to close connection
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - Removing connection <database,jdbcurl2>
from ConnectionManager list
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - removeConnectionFromConnectionList()
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - Removing connection
<com.informix.jdbc.IfxSqlConnect@1feba51> from connection list
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - Connection
<com.informix.jdbc.IfxSqlConnect@1feba51> is not closed, adding it back to the pool entry
<database,jdbcurl2>
2014-08-02 23:36:46,198 INFO [InsertThread --- 34] - Connection/Statement/Resultset is closed
properly.
2014-08-02 23:36:46,198 DEBUG [InsertThread --- 34] - Connection released from
CertDBImpl.getCertificate method.
2014-08-02 23:36:46,198 INFO [InsertThread --- 34] - OUT -- CertDBImpl.java - getCertificate -
2014-08-02 23:36:46,198 INFO [InsertThread --- 34] - IN -- CertDBImpl.java -
getCertUnitByPkid(pkid) -
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Connection Initialized to localnode.
Connection HashCode:8005144 --Details:Connector(NOT CONNECTED:
Driver=com.informix.jdbc.IfxDriver;)
```

quering DB for the changed certificate and getting details of it

```
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Select Query to getCertUnitByPkid :SELECT
A.PKID, A.FKCERTIFICATE, A.TKCERTIFICATESERVICE, B.NAME UNIT FROM
CERTIFICATESERVICECERTIFICATEMAP A, TYPECERTIFICATESERVICE B WHERE A.FKCERTIFICATE="533dbbfc-
78ce-b46f-7d64-cd2b7c536f6d" AND A.TKCERTIFICATESERVICE = B.ENUM
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - getConn:
usePooling[true]connectToLocalDB[true]_target[0]connectToPubByDefault[false]
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Try to get a connection from pool
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - getting local connection from Pool
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Getting connection from connection pool
entry <database,jdbcurl2>
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - There are currently 2 connection pool
entries
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Adding connection
<com.informix.jdbc.IfxDriver@1feba51> to connection list
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Marking connection
<com.informix.jdbc.IfxDriver@1feba51> as used
2014-08-02 23:36:46,199 DEBUG [InsertThread --- 34] - Got connection from pool
2014-08-02 23:36:46,203 DEBUG [InsertThread --- 34] - Closing the resultset.
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - Closing the connection. Connection
HashCode:8005144 --Details:Connector(CONNECTED: Driver=com.informix.jdbc.IfxDriver;)
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - Attempting to close connection
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - Removing connection <database, jdbcurl2>
from ConnectionManager list
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - removeConnectionFromConnectionList()
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - Removing connection
<com.informix.jdbc.IfxDriver@1feba51> from connection list
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - Connection
<com.informix.jdbc.IfxDriver@1feba51> is not closed, adding it back to the pool entry
<database,jdbcurl2>
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - Connection/Statement/Resultset is closed
properly.
2014-08-02 23:36:46,204 DEBUG [InsertThread --- 34] - Resultset released from
CertDBImpl.getCertUnitByPkid method.
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - OUT -- CertDBImpl.java - getCertUnitByPkid
-
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - UNIT : tomcat
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - CurrentIPAddress : 10.48.46.30
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - RemoteIPAddress : 10.48.46.29
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - OldSerialNo
:6cf5bc855b681f658f9e7506d3ec6ea5
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - NewSerialNo
:42c86b2cf293630fe27bbddc7fd02a39
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - IN -- CertUtil.java -
getListFromComaSeperatedStr(..) -
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - OUT -- CertUtil.java -
getListFromComaSeperatedStr -
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - tomcat --- is included unit for CN
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - IN -- CertUtil.java -
loadCertFromString(cert) -
2014-08-02 23:36:46,204 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,209 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-02 23:36:46,209 INFO [InsertThread --- 34] - OUT -- CertUtil.java - loadCertFromString -
2014-08-02 23:36:46,209 INFO [InsertThread --- 34] - IN -- CertDBUtil.java -
checkDeleteAndImport(unit, dbCert) -
2014-08-02 23:36:46,209 INFO [InsertThread --- 34] - DB CertInfo.--
SN:88769680872451706773275250466208361017--
SubjectDN:L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL--GetNotBefore:Sat Aug 02
23:36:44 CEST 2014--GetNotAfter:Thu Aug 01 23:36:43 CEST 2019
```

verifying that you have this certificate in trust store

```
2014-08-02 23:36:46,209 INFO [InsertThread --- 34] - loading certificate element named [tomcat-
```

```
trust]
2014-08-02 23:36:46,210 INFO [InsertThread --- 34] - determining certificates in group [product-
cpi] with type [trust-certs]
2014-08-02 23:36:46,210 INFO [InsertThread --- 34] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-02 23:36:46,212 INFO [InsertThread --- 34] - looking for first [trust-certs] in
[product-cpi]
2014-08-02 23:36:46,212 INFO [InsertThread --- 34] - loaded element [tomcat-trust]
2014-08-02 23:36:46,212 INFO [InsertThread --- 34] - determining cert dir for [tomcat-trust]
2014-08-02 23:36:46,212 INFO [InsertThread --- 34] - looking for first [dir] in [tomcat-trust]
2014-08-02 23:36:46,212 INFO [InsertThread --- 34] - getting the value of [dir]
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] - value is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] - cert dir is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-
_G3.description] match is false
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.description] match is false
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-_G3.pem]
match is true
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-_G3.der]
match is true
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore] match is false
```

this is the one you are looking for

```
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.der] match is true
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.der] match is true
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description] match is false
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/7e0370f0.0] match is false
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/d0aacffb.0] match is false
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/101f99a6.0] match is false
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem] match is true
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.pem] match is true
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-02 23:36:46,213 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,214 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
```

certificate file is being deleted from the filesystem

```
2014-08-02 23:36:46,214 DEBUG [InsertThread --- 34] - SUBJECTDN of DBCert and FileSystemCert
compared correctly..
2014-08-02 23:36:46,214 DEBUG [InsertThread --- 34] - FILE SYSTEM CERT TO DELETE AND RE-IMPORT..
2014-08-02 23:36:46,214 INFO [InsertThread --- 34] - IN -- CertDBUtil.java -
deleteTrustCertInFileSystem.. unit : tomcat :: FileName ::
/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
2014-08-02 23:36:46,214 INFO [InsertThread --- 34] - IN -- CertDBUtil.java -
populateOpInfo(operation, unit, type, fileLocation, x509Cert, isDBInsert) -
```

```
2014-08-02 23:36:46,214 INFO [InsertThread --- 34] - loading certificate element named [tomcat-trust]
2014-08-02 23:36:46,214 INFO [InsertThread --- 34] - determining certificates in group [product-cpi] with type [trust-certs]
2014-08-02 23:36:46,214 INFO [InsertThread --- 34] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - looking for first [trust-certs] in
[product-cpi]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - loaded element [tomcat-trust]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - determining key dir for [tomcat-trust]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - looking for first [key-dir] in [tomcat-trust]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - getting the value of [key-dir]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - value is
[/usr/local/platform/.security/tomcat/keys]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - key dir is
[/usr/local/platform/.security/tomcat/keys]
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - OUT -- CertDBUtil.java - populateOpInfo -
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - IN -- CertMgr.java - getCertMgrObj(unit) -
tomcat-trust
```

certCN will call CM api to perform this task. But nothing will land in CM logs. All details can be found below

```
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - OUT -- CertMgr.java - getCertMgrObj -
com.cisco.cpi.certMgmt.manager.TomcatCertMgr@15b0e9f
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
deleteCert(info) -
decode:      true
op:         delete
unit:       tomcat-trust
keystoreUnit:tomcat-trust
logFile:    /var/log/active/platform/log/cert-mgmt.log
resultFile: /var/log/active/platform/log/certde-info.xml
keyDir:     /usr/local/platform/.security/tomcat/keys
certDir:    /usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
srcCert:    null
type:       trust-certs
rootCACert: null
trustDir:   null
DNAME:     null
description:null
isDBInsert:false
```

```
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - parsed filename: 'CUCM861.pem'
2014-08-02 23:36:46,215 DEBUG [InsertThread --- 34] - filename: 'CUCM861.pem'
2014-08-02 23:36:46,215 DEBUG [InsertThread --- 34] - fileRoot: 'CUCM861'
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
deleteDERandPEM(filenameRoot, parentDir, info) -
2014-08-02 23:36:46,215 DEBUG [InsertThread --- 34] -
ParentDir:/usr/local/platform/.security/tomcat/trust-certsFileName.(DER/PEM):CUCM861
2014-08-02 23:36:46,215 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,224 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-02 23:36:46,224 INFO [InsertThread --- 34] - No plugins registered for DB Store
2014-08-02 23:36:46,224 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
deleteDERandPEM -
2014-08-02 23:36:46,224 DEBUG [InsertThread --- 34] - deleteDERandPEM: sCertDir =
/usr/local/platform/.security/tomcat/trust-certs --- sAlias = CUCM861
```

cert file deleted. you need to remove it from key store

```
2014-08-02 23:36:46,225 INFO [InsertThread --- 34] - IN -- TomcatCertMgr.java -
removeFromKeyStore(..) -
2014-08-02 23:36:46,225 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
```



```
removeFromKeyStore(keystoreFile, keystorePass, alias) -
2014-08-02 23:36:46,225 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadKeyStore(keystoreFile, keystorePass) -
2014-08-02 23:36:46,232 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java - loadKeyStore
-
2014-08-02 23:36:46,238 DEBUG [InsertThread --- 34] - Removing certificate from keystore :
CUCM861
2014-08-02 23:36:46,238 DEBUG [InsertThread --- 34] - Size of the keystore after delete is : 2
2014-08-02 23:36:46,238 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
removeFromKeyStore -
2014-08-02 23:36:46,238 INFO [InsertThread --- 34] - OUT -- TomcatCertMgr.java -
removeFromKeyStore -
2014-08-02 23:36:46,239 INFO [InsertThread --- 34] - trustdir
:/usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,239 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,239 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
python /usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,295 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,295 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:46,295 DEBUG [InsertThread --- 34] - setOwnershipAndPermissions : trust-certs
2014-08-02 23:36:46,296 DEBUG [InsertThread --- 34] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,296 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,296 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chown -R certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,299 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,299 DEBUG [InsertThread --- 34] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,299 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,299 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chgrp -R ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,302 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,302 DEBUG [InsertThread --- 34] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,302 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,302 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chmod -R 755 /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
setOwnershipAndPermissions -
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java - deleteCert -
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - OUT -- CertDBUtil.java -
deleteTrustCertInFileSystem -
```

certificate will be reimported to the filesystem now into

```
/usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - IN -- CertDBUtil.java -
importTrustCertInFileSystem.. unit : tomcat
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - IN -- CertDBUtil.java -
populateOpInfo(operation, unit, type, fileLocation, x509Cert, isDBInsert) -
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - loading certificate element named [tomcat-
trust]
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - determining certificates in group [product-
cpi] with type [trust-certs]
2014-08-02 23:36:46,306 INFO [InsertThread --- 34] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - looking for first [trust-certs] in
[product-cpi]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - loaded element [tomcat-trust]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - determining key dir for [tomcat-trust]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - looking for first [key-dir] in [tomcat-
trust]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - getting the value of [key-dir]
```

```
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - value is
[/usr/local/platform/.security/tomcat/keys]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - key dir is
[/usr/local/platform/.security/tomcat/keys]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - loading certificate element named [tomcat-
trust]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - determining certificates in group [product-
cpu] with type [trust-certs]
2014-08-02 23:36:46,308 INFO [InsertThread --- 34] - loading the config file
[/usr/local/platform/conf/cert-conf.xml]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - looking for first [trust-certs] in
[product-cpi]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - loaded element [tomcat-trust]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - determining cert dir for [tomcat-trust]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - looking for first [dir] in [tomcat-trust]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - getting the value of [dir]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - value is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - cert dir is
[/usr/local/platform/.security/tomcat/trust-certs]
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - OUT -- CertDBUtil.java - populateOpInfo -
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - IN -- CertMgr.java - getCertMgrObj(unit) -
tomcat-trust
```

again CM API is called to perform this task

```
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - OUT -- CertMgr.java - getCertMgrObj -
com.cisco.cpi.certMgmt.manager.TomcatCertMgr@1b8be9f
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
importCert(info) -
decode:      true
op:         import
unit:       tomcat-trust
keystoreUnit:tomcat-trust
logFile:    /var/log/active/platform/log/cert-mgmt.log
resultFile: /var/log/active/platform/log/certde-info.xml
keyDir:     /usr/local/platform/.security/tomcat/keys
certDir:    /usr/local/platform/.security/tomcat/trust-certs
srcCert:    null
type:       trust-certs
rootCACert: null
trustDir:   null
DNAME:      null
description:null
isDBInsert:false
```

```
2014-08-02 23:36:46,310 DEBUG [InsertThread --- 34] - Checking validity of cert
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - Verifying certificate
L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - IN -- CertUtil.java - parseCNfromDN(DN,
sSearchStr) -
2014-08-02 23:36:46,310 DEBUG [InsertThread --- 34] - parseCNfromDN( certSubjDN:
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:46,310 DEBUG [InsertThread --- 34] - Truncating CN
'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:46,310 INFO [InsertThread --- 34] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-02 23:36:46,310 DEBUG [InsertThread --- 34] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - trying to load cert from trust store
::/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - cert not available in trust store
::L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
importTrustCert(info, cert) -
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
```

```
saveToTrustStore(info, cert) -
2014-08-02 23:36:46,311 ERROR [InsertThread --- 34] - trust directory parameter is null
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
saveTrustCert(cert, targetDir, certType) -
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - IN -- CertUtil.java - parseCNfromDN(DN,
sSearchStr) -
2014-08-02 23:36:46,311 DEBUG [InsertThread --- 34] - parseCNfromDN( certSubjDN:
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:46,311 DEBUG [InsertThread --- 34] - Truncating CN
'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-02 23:36:46,311 DEBUG [InsertThread --- 34] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'
2014-08-02 23:36:46,311 INFO [InsertThread --- 34] - IN -- CertUtil.java - parseCNfromDN(DN,
sSearchStr) -
2014-08-02 23:36:46,312 DEBUG [InsertThread --- 34] - parseCNfromDN( certSubjDN:
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL')
2014-08-02 23:36:46,312 DEBUG [InsertThread --- 34] - Truncating CN
'CUCM861,OU=TAC,O=CISCO,C=PL' -> 'CUCM861'
2014-08-02 23:36:46,312 INFO [InsertThread --- 34] - OUT -- CertUtil.java - parseCNfromDN -
2014-08-02 23:36:46,312 DEBUG [InsertThread --- 34] - Parsed CN 'CUCM861' from DN
'L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL'
2014-08-02 23:36:46,312 DEBUG [InsertThread --- 34] - target filename for imported cert:
'CUCM861.pem'
2014-08-02 23:36:46,312 DEBUG [InsertThread --- 34] - existing certificate with same filename
not found.
```

saving cert as PEM and DER formats

```
2014-08-02 23:36:46,312 DEBUG [InsertThread --- 34] - Saving PEM encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem'
2014-08-02 23:36:46,312 INFO [InsertThread --- 34] - IN -- CryptoUtil.java - saveAsPEM(..) -
File : /usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem
2014-08-02 23:36:46,313 INFO [InsertThread --- 34] - OUT -- CryptoUtil.java - saveAsPEM -
2014-08-02 23:36:46,313 DEBUG [InsertThread --- 34] - Saving DER encoded cert
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.der'
2014-08-02 23:36:46,314 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java - saveTrustCert
-
```

saving new certificate into keystore

```
2014-08-02 23:36:46,314 INFO [InsertThread --- 34] - IN -- TomcatCertMgr.java -
saveToKeyStore(..) -
2014-08-02 23:36:46,314 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
saveToKeyStore(keystoreFile, keystorePass, x509Certificate, alias) -
2014-08-02 23:36:46,314 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadKeyStore(keystoreFile, keystorePass) -
2014-08-02 23:36:46,323 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java - loadKeyStore
-
2014-08-02 23:36:46,323 INFO [InsertThread --- 34] - Size of the keystore before import is : 2
2014-08-02 23:36:46,323 INFO [InsertThread --- 34] - Importing certificate : CUCM861
2014-08-02 23:36:46,330 INFO [InsertThread --- 34] - Size of the keystore after import is : 3
2014-08-02 23:36:46,330 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
saveToKeyStore -
2014-08-02 23:36:46,330 INFO [InsertThread --- 34] - OUT -- TomcatCertMgr.java - saveToKeyStore
-
2014-08-02 23:36:46,330 DEBUG [InsertThread --- 34] - TrustCert description filename :
'CUCM861.description'
2014-08-02 23:36:46,330 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
createDescriptionFile(name, description) -
2014-08-02 23:36:46,330 INFO [InsertThread --- 34] - description is :Trust Certificate
2014-08-02 23:36:46,331 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
createDescriptionFile -
2014-08-02 23:36:46,331 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:46,331 DEBUG [InsertThread --- 34] - setOwnershipAndPermissions :
```

CUCM861.description

```
2014-08-02 23:36:46,331 DEBUG [InsertThread --- 34] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description'
2014-08-02 23:36:46,331 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,331 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chown certbase /usr/local/platform/.security/tomcat/trust-certs/CUCM861.description
2014-08-02 23:36:46,334 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,334 DEBUG [InsertThread --- 34] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description'
2014-08-02 23:36:46,334 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,334 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chgrp ccmbase /usr/local/platform/.security/tomcat/trust-certs/CUCM861.description
2014-08-02 23:36:46,337 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,337 DEBUG [InsertThread --- 34] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description'
2014-08-02 23:36:46,337 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,337 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chmod 755 /usr/local/platform/.security/tomcat/trust-certs/CUCM861.description
2014-08-02 23:36:46,339 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,339 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
setOwnershipAndPermissions -
2014-08-02 23:36:46,339 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
saveToTrustStore -
2014-08-02 23:36:46,340 INFO [InsertThread --- 34] - trustdir
:./usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,340 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,340 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
python /usr/local/platform/bin/c_rehash.py /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,425 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,425 INFO [InsertThread --- 34] - IN -- DefaultCertMgr.java -
setOwnershipAndPermissions(file) -
2014-08-02 23:36:46,425 DEBUG [InsertThread --- 34] - setOwnershipAndPermissions : trust-certs
2014-08-02 23:36:46,426 DEBUG [InsertThread --- 34] - Changing ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,426 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,426 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chown -R certbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,429 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,429 DEBUG [InsertThread --- 34] - Changing group ownership of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,429 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,430 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chgrp -R ccmbase /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,433 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,433 DEBUG [InsertThread --- 34] - Changing mode of file
'/usr/local/platform/.security/tomcat/trust-certs'
2014-08-02 23:36:46,433 INFO [InsertThread --- 34] - IN -- Util.java - sysExec(exe, args) -
2014-08-02 23:36:46,433 DEBUG [InsertThread --- 34] - Executing command from Util.sysExec :
/bin/chmod -R 755 /usr/local/platform/.security/tomcat/trust-certs
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- Util.java - sysExec -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
setOwnershipAndPermissions -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - No plugins registered for DB Store
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - IN -- CryptoUtil.java - isOCSPEnabled(..) -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - IN -- CryptoUtil.java -
getCertMonitorXmlParser(..) -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- CryptoUtil.java -
getCertMonitorXmlParser -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- CryptoUtil.java - isOCSPEnabled -
false
2014-08-02 23:36:46,437 DEBUG [InsertThread --- 34] - OCSP is not enabled.
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - Successfully imported trusted certificate
with Subject DN:L#61;KRAKOW,ST#61;MALOPOLSKA,CN#61;CUCM861,OU#61;TAC,O#61;CISCO,C#61;PL
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java -
```

importTrustCert - Successfully imported trusted certificate with Subject
DN:L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL

import ends with success, some additional checks are performed below

2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - result of import operations is ::Import of trust certificate is successful
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- DefaultCertMgr.java - importCert -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- CertDBUtil.java - importTrustCertInFileSystem -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OUT -- CertDBUtil.java - checkDeleteAndImport -
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - UNIT : tomcat-trust
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - CurrentIPAddress : 10.48.46.30
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - RemoteIPAddress : 10.48.46.29
2014-08-02 23:36:46,437 INFO [InsertThread --- 34] - OldSerialNo :6cf5bc855b681f658f9e7506d3ec6ea5
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - NewSerialNo :42c86b2cf293630fe27bbddc7fd02a39
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - IN -- CertUtil.java - getListFromComaSeperatedStr(..) -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - OUT -- CertUtil.java - getListFromComaSeperatedStr -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - tomcat-trust --- is included unit for CN
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - IN -- CertUtil.java - loadCertFromString(cert) -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java - loadCertificate(..) -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java - loadCertificate -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - OUT -- CertUtil.java - loadCertFromString -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - IN -- CertDBUtil.java - checkDeleteAndImport(unit, dbCert) -
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - DB CertInfo.-- SN:88769680872451706773275250466208361017--
SubjectDN:L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL--GetNotBefore:Sat Aug 02 23:36:44 CEST 2014--GetNotAfter:Thu Aug 01 23:36:43 CEST 2019
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - loading certificate element named [tomcat-trust]
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - determining certificates in group [product-cpi] with type [trust-certs]
2014-08-02 23:36:46,438 INFO [InsertThread --- 34] - loading the config file [/usr/local/platform/conf/cert-conf.xml]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - looking for first [trust-certs] in [product-cpi]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - loaded element [tomcat-trust]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - determining cert dir for [tomcat-trust]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - looking for first [dir] in [tomcat-trust]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - getting the value of [dir]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - value is [/usr/local/platform/.security/tomcat/trust-certs]
2014-08-02 23:36:46,441 INFO [InsertThread --- 34] - cert dir is [/usr/local/platform/.security/tomcat/trust-certs]
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - [/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-_G3.description] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - [/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.description] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - [/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-_G3.pem] match is true
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - [/usr/local/platform/.security/tomcat/trust-certs/VeriSign_Class_3_Secure_Server_CA_-_G3.der] match is true
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -

```

[/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.der] match is true
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.der] match is true
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.description] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/7e0370f0.0] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/d0aacffb.0] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/101f99a6.0] match is false
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861.pem] match is true
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] -
[/usr/local/platform/.security/tomcat/trust-certs/CUCM861s.pem] match is true
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-02 23:36:46,442 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-02 23:36:46,443 DEBUG [InsertThread --- 34] - SUBJECTDN of DBCert and FileSystemCert
compared correctly..
2014-08-02 23:36:46,443 DEBUG [InsertThread --- 34] - Certificate already exists in FileSystem..
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - IN -- RSACryptoEngine.java -
loadCertificate(..) -
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - OUT -- RSACryptoEngine.java -
loadCertificate -
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - OUT -- CertDBUtil.java -
checkDeleteAndImport -
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - tomcat-trust Certificate successfully
updated in trust-store by Change Notification..
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - OUT -- CertKeystoreHandler.java -
updateIntoKeystore -
2014-08-02 23:36:46,443 DEBUG [InsertThread --- 34] - InsertThread --- 34 -- END --
2014-08-02 23:36:46,443 INFO [InsertThread --- 34] - OUT -- CertKeystoreHandler.java - run -

```

Puede volver a confirmar lo anterior en el sistema de archivos del suscriptor. tomcat-trust for pub se actualizó en trust-certs (verifique la fecha de modificación).

```

[root@CUCM861s tomcat]# pwd
/usr/local/platform/.security/tomcat
[root@CUCM861s tomcat]# ls -la certs
total 48
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 22:51 .
drwxr-xr-x 5 root      root    4096 Apr  4 14:33 ..
-rwxr-xr-x 1 certbase ccmbase  941 Aug  2 22:51 tomcat.der
-rwxr-xr-x 1 certbase ccmbase   64 Aug  2 22:51 tomcat.description
-rwxr-xr-x 1 certbase ccmbase 2598 Aug  2 22:51 tomcat.keystore
-rwxr-xr-x 1 certbase ccmbase 1330 Aug  2 22:51 tomcat.pem
[root@CUCM861s tomcat]# ls -la trust-certs
total 108
drwxr-xr-x 2 certbase ccmbase 4096 Aug  2 23:36 .
drwxr-xr-x 5 root      root    4096 Apr  4 14:33 ..
lrwxrwxrwx 1 certbase ccmbase   11 Aug  2 23:36 101f99a6.0 -> CUCM861.pem
lrwxrwxrwx 1 certbase ccmbase   42 Aug  2 23:36 7e0370f0.0 ->
VeriSign_Class_3_Secure_Server_CA_-_G3.pem
-rwxr-xr-x 1 certbase ccmbase  939 Aug  2 23:36 CUCM861.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 23:36 CUCM861.description

```

```

-rwxr-xr-x 1 certbase ccmbase 1326 Aug  2 23:36 CUCM861.pem
-rwxr-xr-x 1 certbase ccmbase  941 Aug  2 22:51 CUCM861s.der
-rwxr-xr-x 1 certbase ccmbase   44 Aug  2 22:51 CUCM861s.description
-rwxr-xr-x 1 certbase ccmbase 1330 Aug  2 22:51 CUCM861s.pem
lrwxrwxrwx 1 certbase ccmbase   12 Aug  2 23:36 d0aacffb.0 -> CUCM861s.pem
-rwxr-xr-x 1 certbase ccmbase 3907 Aug  2 23:36 tomcat-trust.keystore
-rwxr-xr-x 1 certbase ccmbase 1520 Apr  4 14:33 VeriSign_Class_3_Secure_Server_CA_-_G3.der
-rwxr-xr-x 1 certbase ccmbase   44 Apr  4 14:33 VeriSign_Class_3_Secure_Server_CA_-_G3.description
-rwxr-xr-x 1 certbase ccmbase 2114 Apr  4 14:33 VeriSign_Class_3_Secure_Server_CA_-_G3.pem
[root@CUCM861s tomcat]# md5sum trust-certs/CUCM861.der
a0dd8031bcd3c269844ddf8a3fafd476c trust-certs/CUCM861.der

```

Por último, puede verificar el certificado tomcat-trust de pub en la GUI. La GUI nos mostrará el certificado que se lee del sistema de archivos, no de la base de datos.

The screenshot shows the 'Certificate Configuration' window with the following sections:

- Status:** Ready
- Certificate Settings:**
 - File Name: CUCM861.pem
 - Certificate Name: tomcat-trust
 - Certificate Type: trust-certs
 - Certificate Group: product-cpi
 - Description: Trust Certificate
- Certificate File Data:**

```

[
  Version: V3
  Serial Number: 88769680872451706773275250466208361017
  SignatureAlgorithm: SHA1withRSA (1.2.840.113549.1.1.5)
  Issuer Name: L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL
  Validity From: Sat Aug 02 23:36:44 CEST 2014
    To: Thu Aug 01 23:36:43 CEST 2019
  Subject Name: L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL
  Key: RSA (1.2.840.113549.1.1.1)
  Key value:
  3082010a0282010100b46ce5c17323962babf797a031ecda073e02163e38f79600766c439fb1dd35d7891439fd2b88c9de9514b6
  f00fa42db0511eca717a9b7996558b6d5c7d5df6b97b338fc8f3524c78c5129495f19a56dd3436549ff338061844b99c93989a5f92
  0ac76cd245ebb2f38e0f0ca1ced2df87f8dd7f37c8f16561fc7a61d64a01f218eb6a23e56c95e91747299602b58e4512f37778028fd
  260029cc5def003768969c096b39880e677a2a008eb7517379717b5d45fb4ce8b9486921ef8828b58ec8348b2b41c34420401b4a
  28e4ee32b4c76dc8d590324d6774ac68f1a4ef54a0d6c277527ec4dc0223ea1457b152bd88c1178b0cedaa9c518512d3f92bae22
  d432b0203010001
  Extensions: 3 present
  [
    Extension: KeyUsage (OID.2.5.29.15)
    Critical: false
    Usages: digitalSignature, keyEncipherment, dataEncipherment, keyAgreement, keyCertSign,
  ]
  [
    Extension: ExtKeyUsageSyntax (OID.2.5.29.37)
    Critical: false
    Usage oids: 1.3.6.1.5.5.7.3.1, 1.3.6.1.5.5.7.3.2, 1.3.6.1.5.5.7.3.5,
  ]
]

```

Esto finaliza el proceso de regenerar el certificado de tomcat en el nodo de editor y propagar este cambio en el clúster.

5. Troubleshoot

5.A. Advertencias conocidas: categorización

A continuación, puede encontrar una lista de defectos comunes relacionados con los certificados y los CM.

A. Relacionado con la propagación incorrecta de un cambio en los certificados:

[CSCul78787](#) - No se pueden eliminar certificados de confianza de CM 9.1 incluso después de detener el servicio CertCN

[CSCto86463](#) - Los certificados eliminados reaparecen, no se pueden eliminar certificados de CUCM

[CSCth79451](#) - Las entradas de la base de datos del certificado deben actualizarse mientras se cambia el nombre de host/IP

[CSCup28852](#) - restablecimiento del teléfono cada 7 minutos debido a la actualización de la certificación cuando se usa una certificación de varios servidores

B Se encontró durante las operaciones de DRS:

[CSCtn50405](#) - La copia de seguridad de DRF de CUCM no realiza copias de seguridad de los certificados

[CSCtt95983](#) - El certificado CAPF no se copia de seguridad/restaura con DRF

[CSCup71297](#) - Actualización de certificado incorrecta después de la restauración de DRS

C. Varios y doc:

[CSCup54818](#) - Certificados [DOC] firmados por CA (tamaño de clave >=4096) no admitidos en modo mixto

[CSCud49047](#) - Opción RTMT para descargar registros de servicio de notificación de cambio de certificado

[CSCup88555](#) - Se necesita validar la longitud del número de serie mientras se carga el certificado nuevo

5.B. Sugerencias y trucos

a. Hay una tabla en la base de datos que une los enums con el tipo de certificado correspondiente. Puede ver estas enums con bastante frecuencia en las consultas de DB relacionadas (registros CM/certCN, tabla CERTIFICATESSERVICECERTIFICATEMAP). Para obtener esa asignación, debe echar un vistazo a TYPECERTIFICATESSERVICE

```
admin:run sql select * from TYPECERTIFICATESSERVICE
enum name                moniker                                usestruststore
=====
1    Phone-trust          CERTIFICATE_SERVICE_PHONE_TRUST       t
2    Phone-VPN-trust      CERTIFICATE_SERVICE_PHONE_VPN_TRUST   t
3    CallManager          CERTIFICATE_SERVICE_CALLMANAGER       f
4    CallManager-trust    CERTIFICATE_SERVICE_CALLMANAGER_TRUST t
5    tomcat                CERTIFICATE_SERVICE_TOMCAT            f
6    tomcat-trust         CERTIFICATE_SERVICE_TOMCAT_TRUST      t
7    ipsec                 CERTIFICATE_SERVICE_IPSEC             f
8    ipsec-trust          CERTIFICATE_SERVICE_IPSEC_TRUST       t
```


9	CAPF	CERTIFICATE_SERVICE_CAPF	f
10	CAPF-trust	CERTIFICATE_SERVICE_CAPF_TRUST	t
11	TVS	CERTIFICATE_SERVICE_TVS	f
12	TVS-trust	CERTIFICATE_SERVICE_TVS_TRUST	t
13	directory-trust	CERTIFICATE_SERVICE_DIRECTORY_TRUST	t
14	Phone-SAST-trust	CERTIFICATE_SERVICE_PHONE_SAST_TRUST	t
15	Phone-CTL-trust	CERTIFICATE_SERVICE_PHONE_CTL_TRUST	t
16	userlicensing-trust	CERTIFICATE_SERVICE_USERLICENSING_TRUST	t

b. Consideremos que necesita consultar la DB y enumerar todos los certificados. La consulta debe devolver pkid y el número de serie del certificado, IP y el nombre del nodo, el tipo de certificado y su nombre de sujeto. Marque lo siguiente:

```
ejecute SQL SELECT CERTIFICATE.pkid, CERTIFICATE.SerialNumber,
CERTIFICATEPROCESSNODEMAP.direcciónipv4, CERTIFICATEPROCESSNODEMAP.
servername, TYPECERTIFICATESERVICE.name, subjectname from
CERTIFICATEPROCESSNODEMAP INNER JOIN CERTIFICATE ON
CERTIFICATEPROCESSNODEMAP.fkcertificate = CERTIFICATE.pkid INNER JOIN
CERTIFICATESERVICECERTIFICATEMAP ON CERTIFICATESERVICECERTIFICATEMAP.
fkcertificate = CERTIFICATE.pkid JOIN TYPECERTIFICATESERVICE ON
TYPECERTIFICATESERVICE.enum = CERTIFICATESERVICECERTIFICATEMAP.
tkcertificateservice order by CERTIFICATEPROCESSNODEMAP.servername
```

El resultado de ejemplo que puede encontrar en el siguiente fragmento.

```
admin:run sql select CERTIFICATE.pkid, CERTIFICATE.serialnumber,
CERTIFICATEPROCESSNODEMAP.ipv4address, CERTIFICATEPROCESSNODEMAP.servername,
TYPECERTIFICATESERVICE.name, subjectname from CERTIFICATEPROCESSNODEMAP inner join CERTIFICATE
ON CERTIFICATEPROCESSNODEMAP.fkcertificate=CERTIFICATE.pkid inner join
CERTIFICATESERVICECERTIFICATEMAP ON
CERTIFICATESERVICECERTIFICATEMAP.fkcertificate=CERTIFICATE.pkid JOIN TYPECERTIFICATESERVICE ON
TYPECERTIFICATESERVICE.enum=CERTIFICATESERVICECERTIFICATEMAP.tkcertificateservice order by
CERTIFICATEPROCESSNODEMAP.servername
pkid                serialnumber                ipv4address servername
name                subjectname
=====
=====
=====
=====
===
e380b725-19b1-e3ec-71bf-1bb106d3d454 6a6967b3000000000003                10.48.46.29 CUCM861
CAPF-trust          CN=Cisco Manufacturing CA,O=Cisco Systems
cc7b18b3-3a50-3dcb-578a-1ca50e076198 17226b84000000000012                10.48.46.29 CUCM861
CallManager-trust
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL,2.5.4.5=#134034346262356539376665336362306
239323739666339333332636639373830303863623132316337356532316231623263663234616537656237363963323
935
664b66c9-485c-aedf-9848-ed34616b8fe7 1461af2a00000000000a                10.48.46.29 CUCM861
CallManager-trust
CN=TVGRTHC501,1.2.840.113549.1.9.2=#130a54564752544843353031,1.2.840.113549.1.9.8=#130d31302e313
0362e36352e323130,2.5.4.5=#130b46474c3137343732353241
cc7b18b3-3a50-3dcb-578a-1ca50e076198 17226b84000000000012                10.48.46.29 CUCM861
Phone-SAST-trust
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL,2.5.4.5=#134034346262356539376665336362306
239323739666339333332636639373830303863623132316337356532316231623263663234616537656237363963323
935
0c879119-476e-c608-049c-03710c47cdd2 5a82be1ec30346af4c295fb8fc41a7f7 10.48.46.29 CUCM861
CallManager-trust CN=ciscolab-AD-CA,DC=cisco,DC=lab
a2735f97-cbc0-81f6-dadf-c145b657b22e 59dacc01be1dbe84541bc8193a09267e 10.48.46.29 CUCM861
CallManager-trust L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-91e6eb10,OU=TAC,O=CISCO,C=PL
```

311830a0-8b8d-2216-7037-f60940976dcd 353fb24bd70f14a346c1f3a9ac725675 10.48.46.29 CUCM861
CallManager-trust CN=CAP-RTP-002,O=Cisco Systems
a2735f97-cbc0-81f6-dadf-c145b657b22e 59dacc01be1dbe84541bc8193a09267e 10.48.46.29 CUCM861
CAPF L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-91e6eb10,OU=TAC,O=CISCO,C=PL
3fb48b23-84e7-cecf-dd24-e38cbd32c20f 6249ccbedf4df00155ddcd482dac43e6 10.48.46.29 CUCM861
Phone-SAST-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
a2735f97-cbc0-81f6-dadf-c145b657b22e 59dacc01be1dbe84541bc8193a09267e 10.48.46.29 CUCM861
CAPF-trust L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-91e6eb10,OU=TAC,O=CISCO,C=PL
311830a0-8b8d-2216-7037-f60940976dcd 353fb24bd70f14a346c1f3a9ac725675 10.48.46.29 CUCM861
CAPF-trust CN=CAP-RTP-002,O=Cisco Systems
07849796-ff87-eee3-ef89-61f368b3e34a 7f325a657ab1316fbd8334b565e55033 10.48.46.29 CUCM861 TVS
L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
9cbcb782-c37d-6f63-7608-2f51a683ceb6 609bf431ad462fe12b4c571866458dee 10.48.46.29 CUCM861
ipsec L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
33a86281-4f7e-2833-0c4e-12a9259b5fea 484c2e9b1996a63e45e57dc067d68ec2 10.48.46.29 CUCM861
Phone-SAST-trust L=Krakow,ST=Malopolska,CN=CUCM9X,OU=TAC,O=Cisco Systems,C=PL
9cbcb782-c37d-6f63-7608-2f51a683ceb6 609bf431ad462fe12b4c571866458dee 10.48.46.29 CUCM861
ipsec-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
b98fc2a9-ffc1-31b2-f793-701a4b4b59c4 6cdbac937a099bf9eaf8324de5440ff4 10.48.46.29 CUCM861
CallManager-trust L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-0087c0a5,OU=TAC,O=CISCO,C=PL
533dbbfc-78ce-b46f-7d64-cd2b7c536f6d 42c86b2cf293630fe277bbddc7fd02a39 10.48.46.29 CUCM861
tomcat L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
a6b18f66-bf72-261d-8ecd-bfcea02add4e 68052e2e9cd6c979079e6449ff873031 10.48.46.29 CUCM861
tomcat L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861s,OU=TAC,O=CISCO,C=PL
533dbbfc-78ce-b46f-7d64-cd2b7c536f6d 42c86b2cf293630fe277bbddc7fd02a39 10.48.46.29 CUCM861
tomcat-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
6fe4bd7d-76fe-1d19-4e5e-9cfa4f073487 692c45e5f81da30a779e73907e17ef7f 10.48.46.29 CUCM861
CAPF-trust L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-8480bdc7,OU=TAC,O=CISCO,C=PL
839d761f-f8e8-695b-bf1d-d08ce93b621e 6ecc7aa5a7032009b8cebcf4e952d491 10.48.46.29 CUCM861
tomcat-trust CN=VeriSign Class 3 Secure Server CA - G3,OU=Terms of use at
<https://www.verisign.com/rpa> (c)10,OU=VeriSign Trust Network,O=VeriSign\, Inc.,C=US
a6b18f66-bf72-261d-8ecd-bfcea02add4e 68052e2e9cd6c979079e6449ff873031 10.48.46.29 CUCM861
tomcat-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861s,OU=TAC,O=CISCO,C=PL
3c241de1-2eec-e63a-667c-c07147e298d5 5ff87b282b54dc8d42a315b568c9adff 10.48.46.29 CUCM861
CallManager-trust CN=Cisco Root CA 2048,O=Cisco Systems
6fe4bd7d-76fe-1d19-4e5e-9cfa4f073487 692c45e5f81da30a779e73907e17ef7f 10.48.46.29 CUCM861
CAPF L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-8480bdc7,OU=TAC,O=CISCO,C=PL
3c241de1-2eec-e63a-667c-c07147e298d5 5ff87b282b54dc8d42a315b568c9adff 10.48.46.29 CUCM861
CAPF-trust CN=Cisco Root CA 2048,O=Cisco Systems
6fe4bd7d-76fe-1d19-4e5e-9cfa4f073487 692c45e5f81da30a779e73907e17ef7f 10.48.46.29 CUCM861
CallManager-trust L=KRAKOW,ST=MALOPOLSKA,CN=CAPF-8480bdc7,OU=TAC,O=CISCO,C=PL
5a4e9685-e9c4-dc52-586d-a36c927208b5 7612f960153d6f9f4e42202032b72356 10.48.46.29 CUCM861
CallManager-trust CN=CAP-RTP-001,O=Cisco Systems
3cf492fa-e88e-e751-040e-c31827870353 4a5d72eb7de2768c9d70260c8e3b4096 10.48.46.29 CUCM861
CallManager L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861s,OU=TAC,O=CISCO,C=PL
5a4e9685-e9c4-dc52-586d-a36c927208b5 7612f960153d6f9f4e42202032b72356 10.48.46.29 CUCM861
CAPF-trust CN=CAP-RTP-001,O=Cisco Systems
3cf492fa-e88e-e751-040e-c31827870353 4a5d72eb7de2768c9d70260c8e3b4096 10.48.46.29 CUCM861
Phone-SAST-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861s,OU=TAC,O=CISCO,C=PL
e380b725-19b1-e3ec-71bf-1bb106d3d454 6a6967b3000000000003 10.48.46.29 CUCM861
CallManager-trust CN=Cisco Manufacturing CA,O=Cisco Systems
3cf492fa-e88e-e751-040e-c31827870353 4a5d72eb7de2768c9d70260c8e3b4096 10.48.46.29 CUCM861
CallManager-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861s,OU=TAC,O=CISCO,C=PL
cc7b18b3-3a50-3dcb-578a-1ca50e076198 17226b84000000000012 10.48.46.29 CUCM861
CallManager
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL,2.5.4.5=#134034346262356539376665336362306
23932373966633933332636639373830303863623132316337356532316231623263663234616537656237363963323
935
cc7b18b3-3a50-3dcb-578a-1ca50e076198 17226b84000000000012 10.48.46.30 CUCM861s
CallManager-trust
CN=CUCM861,OU=TAC,O=CISCO,L=KRAKOW,ST=MALOPOLSKA,C=PL,2.5.4.5=#134034346262356539376665336362306
23932373966633933332636639373830303863623132316337356532316231623263663234616537656237363963323
935
cc7b18b3-3a50-3dcb-578a-1ca50e076198 17226b84000000000012 10.48.46.30 CUCM861s

Phone-SAST-trust

CN=CUCM861, OU=TAC, O=CISCO, L=KRAKOW, ST=MALOPOLSKA, C=PL, 2.5.4.5=#134034346262356539376665336362306
23932373966633933332636639373830303863623132316337356532316231623263663234616537656237363963323
935

a2735f97-cbc0-81f6-dadf-c145b657b22e 59dacc01be1dbe84541bc8193a09267e 10.48.46.30 CUCM861s

CallManager-trust L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-91e6eb10, OU=TAC, O=CISCO, C=PL

a2735f97-cbc0-81f6-dadf-c145b657b22e 59dacc01be1dbe84541bc8193a09267e 10.48.46.30 CUCM861s

CAPF L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-91e6eb10, OU=TAC, O=CISCO, C=PL

a2735f97-cbc0-81f6-dadf-c145b657b22e 59dacc01be1dbe84541bc8193a09267e 10.48.46.30 CUCM861s

CAPF-trust L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-91e6eb10, OU=TAC, O=CISCO, C=PL

9cbcb782-c37d-6f63-7608-2f51a683ceb6 609bf431ad462fe12b4c571866458dee 10.48.46.30 CUCM861s

ipsec L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL

9cbcb782-c37d-6f63-7608-2f51a683ceb6 609bf431ad462fe12b4c571866458dee 10.48.46.30 CUCM861s

ipsec-trust L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL

533dbbfc-78ce-b46f-7d64-cd2b7c536f6d 42c86b2cf293630fe277bbddc7fd02a39 10.48.46.30 CUCM861s

tomcat L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL

533dbbfc-78ce-b46f-7d64-cd2b7c536f6d 42c86b2cf293630fe277bbddc7fd02a39 10.48.46.30 CUCM861s

tomcat-trust L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861, OU=TAC, O=CISCO, C=PL

839d761f-f8e8-695b-bf1d-d08ce93b621e 6ecc7aa5a7032009b8cebcf4e952d491 10.48.46.30 CUCM861s

tomcat-trust CN=VeriSign Class 3 Secure Server CA - G3, OU=Terms of use at

https://www.verisign.com/rpa (c)10, OU=VeriSign Trust Network, O=VeriSign\, Inc., C=US

3c241de1-2eec-e63a-667c-c07147e298d5 5ff87b282b54dc8d42a315b568c9adff 10.48.46.30 CUCM861s

CallManager-trust CN=Cisco Root CA 2048, O=Cisco Systems

3c241de1-2eec-e63a-667c-c07147e298d5 5ff87b282b54dc8d42a315b568c9adff 10.48.46.30 CUCM861s

CAPF-trust CN=Cisco Root CA 2048, O=Cisco Systems

5a4e9685-e9c4-dc52-586d-a36c927208b5 7612f960153d6f9f4e42202032b72356 10.48.46.30 CUCM861s

CallManager-trust CN=CAP-RTP-001, O=Cisco Systems

5a4e9685-e9c4-dc52-586d-a36c927208b5 7612f960153d6f9f4e42202032b72356 10.48.46.30 CUCM861s

CAPF-trust CN=CAP-RTP-001, O=Cisco Systems

e380b725-19b1-e3ec-71bf-1bb106d3d454 6a6967b30000000000003 10.48.46.30 CUCM861s

CallManager-trust CN=Cisco Manufacturing CA, O=Cisco Systems

cc7b18b3-3a50-3dcb-578a-1ca50e076198 17226b84000000000012 10.48.46.30 CUCM861s

CallManager

CN=CUCM861, OU=TAC, O=CISCO, L=KRAKOW, ST=MALOPOLSKA, C=PL, 2.5.4.5=#134034346262356539376665336362306
23932373966633933332636639373830303863623132316337356532316231623263663234616537656237363963323
935

3cf492fa-e88e-e751-040e-c31827870353 4a5d72eb7de2768c9d70260c8e3b4096 10.48.46.30 CUCM861s

Phone-SAST-trust L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

664b66c9-485c-aedf-9848-ed34616b8fe7 1461af2a000000000000a 10.48.46.30 CUCM861s

CallManager-trust

CN=TVGRTHC501, 1.2.840.113549.1.9.2=#130a54564752544843353031, 1.2.840.113549.1.9.8=#130d31302e313
0362e36352e323130, 2.5.4.5=#130b46474c3137343732353241

6fe4bd7d-76fe-1d19-4e5e-9cfa4f073487 692c45e5f81da30a779e73907e17ef7f 10.48.46.30 CUCM861s

CallManager-trust L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-8480bdc7, OU=TAC, O=CISCO, C=PL

3cf492fa-e88e-e751-040e-c31827870353 4a5d72eb7de2768c9d70260c8e3b4096 10.48.46.30 CUCM861s

CallManager-trust L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

6fe4bd7d-76fe-1d19-4e5e-9cfa4f073487 692c45e5f81da30a779e73907e17ef7f 10.48.46.30 CUCM861s

CAPF L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-8480bdc7, OU=TAC, O=CISCO, C=PL

3cf492fa-e88e-e751-040e-c31827870353 4a5d72eb7de2768c9d70260c8e3b4096 10.48.46.30 CUCM861s

CallManager L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

6fe4bd7d-76fe-1d19-4e5e-9cfa4f073487 692c45e5f81da30a779e73907e17ef7f 10.48.46.30 CUCM861s

CAPF-trust L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-8480bdc7, OU=TAC, O=CISCO, C=PL

648651b6-f175-8307-7d19-810061b27eed 7da8a70fe1b3a9bebe2f85000498d935 10.48.46.30 CUCM861s

ipsec L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

0c27516c-bb4e-dc88-0bb9-f672394b265f 5de78d9912f1d88be14b2472c6eb1865 10.48.46.30 CUCM861s

L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

b98fc2a9-ffc1-31b2-f793-701a4b4b59c4 6cdbc937a099bf9eaf8324de5440ff4 10.48.46.30 CUCM861s

CallManager-trust L=KRAKOW, ST=MALOPOLSKA, CN=CAPF-0087c0a5, OU=TAC, O=CISCO, C=PL

a6b18f66-bf72-261d-8ecd-bfcea02add4e 68052e2e9cd6c979079e6449ff873031 10.48.46.30 CUCM861s

tomcat-trust L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

a6b18f66-bf72-261d-8ecd-bfcea02add4e 68052e2e9cd6c979079e6449ff873031 10.48.46.30 CUCM861s

tomcat L=KRAKOW, ST=MALOPOLSKA, CN=CUCM861s, OU=TAC, O=CISCO, C=PL

33a86281-4f7e-2833-0c4e-12a9259b5fea 484c2e9b1996a63e45e57dc067d68ec2 10.48.46.30 CUCM861s

Phone-SAST-trust L=Krakow, ST=Malopolska, CN=CUCM9X, OU=TAC, O=Cisco Systems, C=PL

TVS

```

311830a0-8b8d-2216-7037-f60940976dcd 353fb24bd70f14a346c1f3a9ac725675 10.48.46.30 CUCM861s
CAPF-trust CN=CAP-RTP-002,O=Cisco Systems
3fb48b23-84e7-cecf-dd24-e38cbd32c20f 6249ccbedf4df00155ddcd482dac43e6 10.48.46.30 CUCM861s
Phone-SAST-trust L=KRAKOW,ST=MALOPOLSKA,CN=CUCM861,OU=TAC,O=CISCO,C=PL
311830a0-8b8d-2216-7037-f60940976dcd 353fb24bd70f14a346c1f3a9ac725675 10.48.46.30 CUCM861s
CallManager-trust CN=CAP-RTP-002,O=Cisco Systems
0c879119-476e-c608-049c-03710c47cdd2 5a82be1ec30346af4c295fb8fc41a7f7 10.48.46.30 CUCM861s
CallManager-trust CN=ciscolab-AD-CA,DC=cisco,DC=lab
e380b725-19b1-e3ec-71bf-1bb106d3d454 6a6967b3000000000003 10.48.46.30 CUCM861s
CAPF-trust CN=Cisco Manufacturing CA,O=Cisco Systems

```

Los anteriores pueden ser muy útiles al resolver problemas relacionados con el certificado de sincronización entre la DB y el sistema de archivos.

c. Para verificar la fecha de vencimiento del certificado, puede utilizar el comando OpenSSL (requiere raíz):

Ejemplo de salida:

```

[root@CUCM861 certs]# openssl x509 -noout -dates -in tomcat.pem
notBefore=Aug  2 21:36:44 2014 GMT
notAfter=Aug  1 21:36:43 2019 GMT
[root@CUCM861 certs]#

```

d. Para comprobar lo mismo que arriba, pero para el certificado que reside en la base de datos, debe conocer el número de serie o PKID del certificado que desea verificar. La tarea requiere ejecutar dos comandos de bash (antes, debe realizar "su-informix").

```

echo "UNLOAD to ' cert_dumped_to_file ' Delimiter" "Select Certificate from Certificate Where
SerialNumber = ' 6a6967b3000000000003 "' | DBAccess-e ccm9_1_2_10000_28

```

Lo anterior creará un archivo **cert_dumped_to_file** donde se almacenará el resultado del comando **SQL**. Lo importante es utilizar el nombre correcto de la base de datos. Puede encontrarla en la herramienta dbaccess (al seleccionar la conexión de DB).

El segundo comando se utiliza para mostrar la fecha:

```

sed 's/\\/g' cert_dump_to_file | openssl x509 -noout -date

```

Ejemplo de salida:

```

[root@CUCM861 certs]# su - informix
-bash-3.2$ echo "unload to 'cert_dumped_to_file' delimiter " " select certificate from
certificate where serialnumber = '6a6967b3000000000003'"|dbaccess -e ccm9_1_2_10000_28

Database selected.

unload to 'cert_dumped_to_file' delimiter      select certificate from certificate where
serialnumber = '6a6967b3000000000003'

1 row(s) unloaded.

Database closed.

```

```
-bash-3.2$ sed 's/\\/\\/g' cert_dumped_to_file | openssl x509 -noout -dates
notBefore=Jun 10 22:16:01 2005 GMT
notAfter=May 14 20:25:42 2029 GMT
```

5.C. Verificación del certificado del servicio CCM

CallManager como servicio tiene que verificar el certificado de cliente para un correcto protocolo de enlace TLS/SSL con el teléfono o la gateway.

Los errores se pueden encontrar en rastreos de SDL/SDI junto con un código de error que hace referencia a la biblioteca de OpenSSL:

```
00370874,000 |09:50:27.713 |AppInfo |SdISSTCPLListener::verify_cb pre-verify=0,cert verify
errno=20,depth=0
00370875,000 |09:50:27.713 |AppInfo |HandleSSLERror - Falló la verificación del certificado:(Error
de verificación:20)- no se pudo obtener el certificado del emisor local para 192.168.255.95:52089
```

Lista de códigos de error de OpenSSL:

<https://www.openssl.org/docs/apps/verify.html#DIAGNOSTICS>

Cuando genera certificados firmados por CA, asegúrese de que se generen con el uso correcto de la clave según lo solicitado en CSR; de lo contrario, es posible que no se verifiquen correctamente:

http://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/cucos/8_6_1/cucos/osg_861_cm/iptpc_h6.html#wp1055278

CUCM utiliza la biblioteca openssl para las operaciones de certificado, de modo que pueda verificar manualmente el certificado en la raíz. A continuación, se presenta el ejemplo de certificado tomcat firmado por la CA externa:

```
[root@cucmpub trust-certs]# ls -l e87b20d3.0
lrwxrwxrwx 1 certbase ccmbase 31 Jul 8 00:01
e87b20d3.0 -> molszowy-WIN-V8HGEMMBHOU-CA.pem
```

```
[root@cucmpub trust-certs]# cd /usr/local/platform/.security/tomcat/certs
[root@cucmpub certs]# openssl verify -CApath /usr/local/platform/.security/tomcat/trust-certs
tomcat.pem
```

```
tomcat.pem: OK
```

5.D. Verificación de tomcat trust-store y keystore

Tomcat puede utilizar dos implementaciones diferentes de SSL:

- la implementación de JSSE proporcionada como parte del tiempo de ejecución de Java (desde 1.4)
- la implementación de APR, que utiliza el motor OpenSSL de manera predeterminada.

Qué implementación SSL utiliza Tomcat se puede verificar en el archivo de configuración **server.xml** (ubicado en */usr/local/thirdparty/jakarta-tomcat/conf*) en la configuración del conector HTTPS - los almacenes de claves se utilizan en la implementación JSSE, los certificados en

pem/der-form se utilizan en la implementación APR:

```
<Connector SSLEnabled="true" URIEncoding="UTF-8" acceptCount="100"
ciphers="TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384,TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256,TLS_RSA_WITH_AES_256_CBC_SHA,TLS_DHE_DSS_WITH_AES_256_CBC_SHA,TLS_RSA_WITH_AES_128_CBC_SHA,TLS_DHE_RSA_WITH_AES_128_CBC_SHA,SSL_RSA_WITH_3DES_EDE_CBC_SHA,SSL_DHE_RSA_WITH_3DES_EDE_CBC_SHA" clientAuth="false"
disableUploadTimeout="true" enableLookups="false"
keystoreFile="/usr/local/platform/.security/tomcat/certs/tomcat.keystore"
keystorePass="pPSTJpLa8La EpVp" keystoreType="PKCS12" maxHttpHeaderSize="8192"
maxSpareThread="150" maxThread="150" minSpareThread="25" port="443" protocol="HTTP/1.1"
esquema="https" secure="true" server="" sessionTimeout="3600" sslProtocol="TLSv1.2"
sessionCacheSize="10000"/>
```

El certificado que se presenta cuando intenta iniciar una conexión a una de las aplicaciones web albergadas por tomcat se encuentra en un keystore protegido por contraseña:

```
/usr/local/platform/.security/tomcat/certs/tomcat.keystore
```

Para verificar su contenido, se puede acceder a este keystore con OpenSSL Utilite:

```
openssl pkcs12 -in /usr/local/platform/.security/tomcat/certs/tomcat.keystore -info -password
file:/usr/local/platform/.security/tomcat/keys/tomcat.passphrase
```

El resultado del comando proporcionado anteriormente mostrará el certificado codificado con pem del servicio tomcat, y también se introducirá una clave privada después de la keystorePass en un símbolo del sistema.

Los servicios alojados por tomcat, que necesitan verificación de certificados para las conexiones de SSL salientes (como una conexión segura a LDAP por IMS), están utilizando tomcat-trust.keystore como almacenamiento de trusts para verificar los certificados presentados por el servidor durante el protocolo de enlace SSL.

Ubicación de truststore:

```
/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore
```

Obtenga una lista de certificados de trust-store:

```
openssl pkcs12 -in /usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore -info -
password file:/usr/local/platform/.security/tomcat/keys/tomcat-trust.passphrase
```

Descargue certificados del almacén de trusts en un archivo temporal y véalos a la vez:

```
openssl pkcs12 -in /usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore -info -
password file:/usr/local/platform/.security/tomcat/keys/tomcat-trust.passphrase 2>dev/null
1>/root/tomcat-trust.pem
```

```
openssl crl2pkcs7 -nocrl -certfile /root/tomcat-trust.pem | openssl pkcs7 -print_certs -noout -text
```

Si falta el certificado, que debe estar en truststore, se puede importar al keystore:

```
keytool -importcert -file somecert.pem -storetype pkcs12 -keystore
/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore -storepass $(cat
/usr/local/platform/.security/tomcat/keys/tomcat-trust.passphrase)
```

Si se daña todo el trust-store, se puede restaurar con el siguiente script:

```
#!/bin/bash
```

```
MV/usr/local/Platform/.Security/Tomcat/Trust-certs/Tomcat-Trust.keystore{,.bak}
```

```
passphrase=$(cat /usr/local/platform/.security/tomcat/keys/tomcat-trust.passphrase)
```

```
for f in /usr/local/platform/.security/tomcat/trust-certs/*.pem
do
```

```
echo "procesando $f"
```

```
/usr/local/thirdparty/java/j2sdk/bin/keytool -importcert -keystore
```

```
/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore -alias "${(basename
${f%*.pem})}" -noprompt -storepass $passphrase -storetype pkcs12 -providername JsafeJCE -
providerclass com.rsa.jsafe.provider.JsafeJCE -providerpath
```

```
/usr/local/thirdparty/java/cryptojFIPS.jar -file "$f"
```

```
Fin
```

```
chown certbase:ccmbase /usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore
```

```
chmod 755 /usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore
```

```
chcon —reference='/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore.bak'
```

```
/usr/local/platform/.security/tomcat/trust-certs/tomcat-trust.keystore
```

El texto de un script puede guardarse en un archivo y ejecutarse de la siguiente manera:

```
sbash /root/truststore_repair.sh
```