

# Cisco IOS 라우터에서 다중 ID 인증 기관 구성

## 목차

[소개](#)

[사전 요구 사항](#)

[요구 사항](#)

[사용되는 구성 요소](#)

[표기 규칙](#)

[네트워크 다이어그램](#)

[여러 인증서를 가져오도록 Cisco IOS 라우터 구성](#)

[다음을 확인합니다.](#)

[구성 예](#)

[문제 해결](#)

[문제 해결 명령](#)

[Entrust CA 서버의 인증서](#)

[Microsoft CA 서버의 인증서](#)

[show 명령 출력](#)

[관련 정보](#)

## 소개

이 문서에서는 CA(Multiple-Identity Certificate Authority)를 지원하도록 Cisco IOS® 라우터를 구성하는 방법에 대해 설명합니다. 두 회사 또는 두 사업부 간의 공동 프로젝트와 같은 일부 상황에서는 (신뢰 관계가 없는 다른 CA에 등록하는) 각 측의 라우터가 IPSec VPN을 사용하여 통신해야 합니다. 예지 라우터에는 두 CA 도메인의 라우터와 통신하려면 두 개의 ID 인증서 집합이 필요할 수 있습니다. 이 문서에서는 여러 ID 인증서를 가져오기 위해 여러 CA 서버에 Cisco 라우터를 등록하는 방법에 대해 설명합니다. 간단한 예를 사용하여 확인이 제공됩니다.

## 사전 요구 사항

### 요구 사항

이 기능은 Cisco IOS® 소프트웨어 릴리스 12.2(2)T에 도입되었습니다. 이전 버전의 소프트웨어는 이 문서에 표시된 구성을 사용할 수 없습니다.

### 사용되는 구성 요소

이 문서의 정보는 다음 소프트웨어 및 하드웨어 버전을 기반으로 합니다.

- Cisco IOS Software 릴리스 12.2(4)T1이 포함된 Cisco 7200 라우터
- Windows 2000 서버의 Microsoft CA 서버

- Windows NT 서버에 CA 서버 위임


이 문서의 정보는 특정 랩 환경의 디바이스를 토대로 작성되었습니다. 이 문서에 사용된 모든 디바이스는 초기화된(기본) 컨피그레이션으로 시작되었습니다. 현재 네트워크가 작동 중인 경우, 모든 명령어의 잠재적인 영향을 미리 숙지하시기 바랍니다.

## 표기 규칙

문서 표기 규칙에 대한 자세한 내용은 [Cisco 기술 팁 표기 규칙을 참조하십시오](#).

## 네트워크 다이어그램

아래 다이어그램에서 SJhub, SJVPN 및 SJPKI는 백본 네트워크에 연결되는 3개의 Cisco 7200 라우터입니다. SJhub는 허브 라우터이며, 백본 네트워크에 상주하는 Entrust CA 및 Microsoft CA 서버의 다중 ID 인증서가 있습니다. SJVPN은 Entrust CA 서버에 등록되고 SJPKI는 Microsoft CA 서버에 등록됩니다.

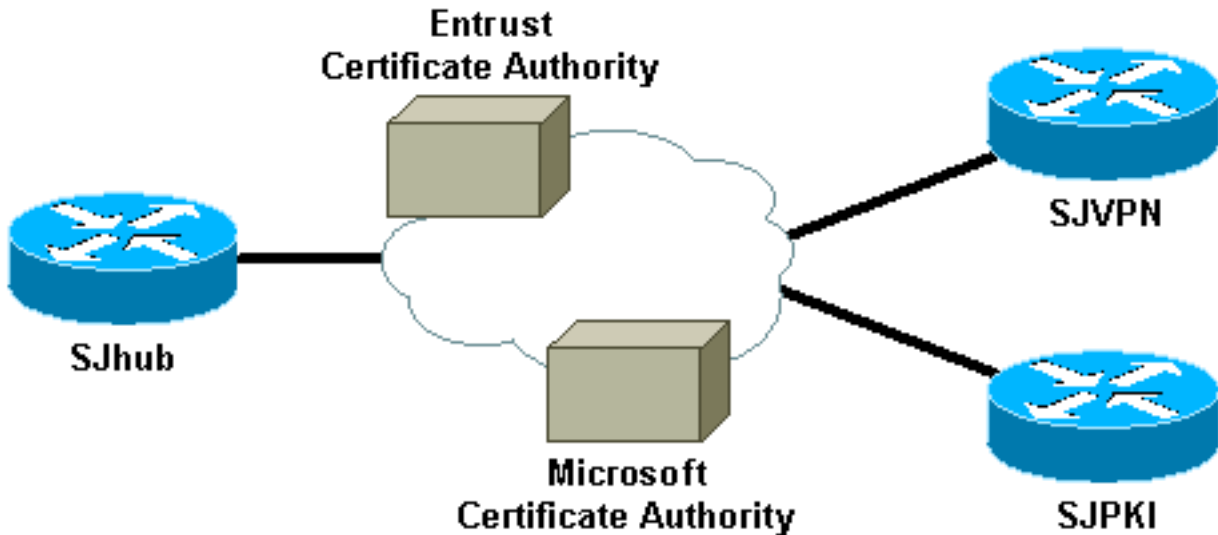

## 여러 인증서를 가져오도록 Cisco IOS 라우터 구성

이 섹션에는 이 문서에서 설명하는 기능을 구성하기 위한 정보가 표시됩니다.

**참고:** 이 문서에 사용된 명령에 대한 추가 정보를 찾으려면 [명령 조회 도구\(등록된 고객만 해당\)](#)를 사용합니다.

**참고:** 아래 절차에 표시된 출력 중 일부는 간격 고려 사항을 위해 여러 줄로 래핑되었습니다.

1. 라우터에서 RSA 키를 생성합니다.

```
SJhub#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SJhub(config)#ip domain-name sjtac.com
SJhub(config)#crypto key generate rsa
The name for the keys will be: SJhub.sjtac.com
Choose the size of the key modulus in the range of 360 to 2048 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

How many bits in the modulus [512]:
Generating RSA keys ...
```

[OK]

## 2. 라우터에서 첫 번째 암호화 CA ID를 정의합니다. 여기에 사용된 서버는 Entrust CA 서버입니다.

```
SJhub(config)#crypto ca identity EntrustPKI
SJhub(ca-identity)#enrollment url http://171.69.89.16
SJhub(ca-identity)#enrollment mode ra
SJhub(ca-identity)#query url ldap://171.69.89.16
SJhub(ca-identity)#exit
```

## 3. CA 및 RA(등록 기관) 인증서를 가져오고 라우터를 Entrust CA에 등록합니다.

```
SJhub(config)#crypto ca authenticate EntrustPKI
Certificate has the following attributes:
Fingerprint: 1FCDF2C8 2DEDA6AC 4819D4C4 B4CFF2F5
% Do you accept this certificate? [yes/no]: y

SJhub(config)#crypto ca enroll EntrustPKI
%
% Start certificate enrollment ..
% Create a challenge password. You will need to verbally provide this
password to the CA Administrator in order to revoke your certificate.
For security reasons your password will not be saved in the configuration.
Please make a note of it.

Password:
Re-enter password:

% The subject name in the certificate will be: SJhub.sjtac.com
% Include the router serial number in the subject name? [yes/no]: n
% Include an IP address in the subject name? [yes/no]: n
Request certificate from CA? [yes/no]: y
% Certificate request sent to Certificate Authority
% The certificate request fingerprint will be displayed.
% The 'show crypto ca certificate' command will also show the fingerprint.
```

```
SJhub(config)# Fingerprint: B530BB30 70D2C565 E6F20A88 BB86A75A
```

## 4. 인증서를 확인합니다.

```
SJhub#show crypto ca certificates
Certificate
Status: Available
Certificate Serial Number: 3B2FD63F
Key Usage: General Purpose
Issuer:
OU = sjvpn
O = cisco
C = us
Subject Name Contains:
Name: SJhub.sjtac.com
CRL Distribution Point:
CN = CRL1, OU = sjvpn, O = cisco, C = us
Validity Date:
start date: 21:48:52 UTC Jan 9 2002
end date: 22:18:52 UTC Jan 9 2003
Associated Identity: EntrustPKI
RA Signature Certificate
Status: Available
Certificate Serial Number: 3B2FD319
Key Usage: Signature
Issuer:
OU = sjvpn
O = cisco
C = us
```

Subject:  
CN = First Officer  
OU = sjvpn  
O = cisco  
C = us  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 22:03:31 UTC Jun 19 2001  
end date: 22:33:31 UTC Jun 19 2004  
Associated Identity: EntrustPKI

RA KeyEncipher Certificate  
Status: Available  
Certificate Serial Number: 3B2FD318  
Key Usage: Encryption  
Issuer:  
OU = sjvpn  
O = cisco  
C = us  
Subject:  
CN = First Officer  
OU = sjvpn  
O = cisco  
C = us  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 22:03:31 UTC Jun 19 2001  
end date: 22:33:31 UTC Jun 19 2004  
Associated Identity: EntrustPKI

CA Certificate  
Status: Available  
Certificate Serial Number: 3B2FD307  
Key Usage: General Purpose  
Issuer:  
OU = sjvpn  
O = cisco  
C = us  
Subject:  
OU = sjvpn  
O = cisco  
C = us  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 22:02:40 UTC Jun 19 2001  
end date: 22:32:40 UTC Jun 19 2021  
Associated Identity: EntrustPKI

5. 라우터에 있는 두 번째 CA의 암호화 CA ID를 정의합니다. 여기서 Microsoft CA 서버를 사용합  
니다.

```
SJhub(config)#crypto ca identity MicrosoftCA
SJhub(ca-identity)#enrollment url
                        http://171.69.89.182:80/certsrv/mscep/mscep.$
SJhub(ca-identity)#enrollment mode ra
SJhub(ca-identity)#query url ldap://171.69.89.182
SJhub(ca-identity)#exit
```

6. Microsoft CA 서버에서 CA 및 RA 인증서를 가져옵니다.

```
SJhub(config)#crypto ca authenticate MicrosoftCA
Certificate has the following attributes:
```

Fingerprint: 5FC47E85 9A2724A2 7242F172 BFB87F7E

% Do you accept this certificate? [yes/no]: y

## 7. Microsoft CA 서버에 등록하고 라우터의 ID 인증서를 가져옵니다.

```
SJhub(config)#crypto ca enroll MicrosoftCA
```

```
%
```

```
% Start certificate enrollment ..
```

```
% Create a challenge password. You will need to verbally provide this password to the CA Administrator in order to revoke your certificate.
```

```
For security reasons your password will not be saved in the configuration. Please make a note of it.
```

```
Password:
```

```
Re-enter password:
```

```
% The subject name in the certificate will be: SJhub.sjtac.com
```

```
% Include the router serial number in the subject name? [yes/no]: n
```

```
% Include an IP address in the subject name? [yes/no]: n
```

```
Request certificate from CA? [yes/no]: y
```

```
% Certificate request sent to Certificate Authority
```

```
% The certificate request fingerprint will be displayed.
```

```
% The 'show crypto ca certificate' command will also show the fingerprint.
```

```
SJhub(config)# Fingerprint: 4046052F 2D32A725 235D55E9 694DF3EA
```

## 8. 인증서를 확인합니다. 두 개의 인증서 집합이 표시되어야 합니다.

```
SJhub#show crypto ca certificates
```

```
Certificate
```

```
Status: Available
```

```
Certificate Serial Number: 132BD14C00000000000B
```

```
Key Usage: General Purpose
```

```
Issuer:
```

```
CN = SJKICA
```

```
OU = SJKI
```

```
O = SJTAC
```

```
L = SAN JOSE
```

```
ST = CA
```

```
C = US
```

```
Subject Name Contains:
```

```
Name: SJhub.sjtac.com
```

```
CRL Distribution Point:
```

```
ldap:///CN=SJKICA,CN=sjvnpmspki,CN=CDP,CN=Public%20Key%20Services,  
CN=Services, CN=Configuration,DC=sjpk,  
DC=com?certificateRevocationList?base?  
objectclass=cRLDistributionPoint
```

```
Validity Date:
```

```
start date: 18:36:23 UTC Jan 13 2002
```

```
end date: 18:36:23 UTC Jan 13 2004
```

```
Associated Identity: MicrosoftCA
```

```
RA Signature Certificate
```

```
Status: Available
```

```
Certificate Serial Number: 054E60AD000000000002
```

```
Key Usage: Signature
```

```
Issuer:
```

```
CN = SJKICA
```

```
OU = SJKI
```

```
O = SJTAC
```

```
L = SAN JOSE
```

```
ST = CA
```

```
C = US
```

```
Subject:
```

```
CN = SJVPNRA
```

```
OU = SJKI
```

```
O = SJTAC
```

```
L = SAN JOSE
```

```
ST = CA
```

C = US  
CRL Distribution Point:  
ldap:///CN=SJPKICA,CN=svvpnmspi,CN=CDP,CN=Public%20Key%20Services,  
CN=Services,CN=Configuration,DC=sjpki,  
DC=com?certificateRevocationList?base?  
objectclass=cRLDistributionPoint  
Validity Date:  
start date: 01:59:27 UTC Jan 11 2002  
end date: 01:59:27 UTC Jan 11 2004  
Associated Identity: MicrosoftCA

RA KeyEncipher Certificate  
Status: Available  
Certificate Serial Number: 054E63CE000000000003  
Key Usage: Encryption

Issuer:  
CN = SJPKICA  
OU = SJPKI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

Subject:  
CN = SJVPNRA  
OU = SJPKI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

CRL Distribution Point:  
ldap:///CN=SJPKICA,CN=svvpnmspi,CN=CDP,CN=Public%20Key%20Services,  
CN=Services,CN=Configuration,DC=sjpki,  
DC=com?certificateRevocationList?base?  
objectclass=cRLDistributionPoint  
Validity Date:  
start date: 01:59:28 UTC Jan 11 2002  
end date: 01:59:28 UTC Jan 11 2004  
Associated Identity: MicrosoftCA

CA Certificate  
Status: Available  
Certificate Serial Number: 091B47AEE8CFE2A94D3E8B38F292F5AF  
Key Usage: General Purpose

Issuer:  
CN = SJPKICA  
OU = SJPKI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

Subject:  
CN = SJPKICA  
OU = SJPKI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

CRL Distribution Point:  
ldap:///CN=SJPKICA,CN=svvpnmspi,CN=CDP,CN=Public%20Key%20Services,  
CN=Services,CN=Configuration,DC=sjpki,  
DC=com?certificateRevocationList?base?  
objectclass=cRLDistributionPoint  
Validity Date:  
start date: 01:51:39 UTC Jan 11 2002

end date: 02:00:04 UTC Jan 11 2007  
Associated Identity: MicrosoftCA

CA Certificate

Status: Available  
Certificate Serial Number: 3B2FD307  
Key Usage: General Purpose  
Issuer:  
OU = sjvpn  
O = cisco  
C = us  
Subject:  
OU = sjvpn  
O = cisco  
C = us  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 22:02:40 UTC Jun 19 2001  
end date: 22:32:40 UTC Jun 19 2021  
Associated Identity: EntrustPKI

RA KeyEncipher Certificate

Status: Available  
Certificate Serial Number: 3B2FD318  
Key Usage: Encryption  
Issuer:  
OU = sjvpn  
O = cisco  
C = us  
Subject:  
CN = First Officer  
OU = sjvpn  
O = cisco  
C = us  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 22:03:31 UTC Jun 19 2001  
end date: 22:33:31 UTC Jun 19 2004  
Associated Identity: EntrustPKI

RA Signature Certificate

Status: Available  
Certificate Serial Number: 3B2FD319  
Key Usage: Signature  
Issuer:  
OU = sjvpn  
O = cisco  
C = us  
Subject:  
CN = First Officer  
OU = sjvpn  
O = cisco  
C = us  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 22:03:31 UTC Jun 19 2001  
end date: 22:33:31 UTC Jun 19 2004  
Associated Identity: EntrustPKI

Certificate  
Status: Available

Certificate Serial Number: 3B2FD63F  
Key Usage: General Purpose  
Issuer:  
OU = sjvpn  
O = cisco  
C = us  
Subject Name Contains:  
Name: SJhub.sjtac.com  
CRL Distribution Point:  
CN = CRL1, OU = sjvpn, O = cisco, C = us  
Validity Date:  
start date: 21:48:52 UTC Jan 9 2002  
end date: 22:18:52 UTC Jan 9 2003  
Associated Identity: EntrustPKI

## 다음을 확인합니다.

이 섹션에서는 IOS 라우터가 여러 ID 인증서를 처리하는 방법을 확인하는 간단한 설정을 사용합니다. 위의 네트워크 다이어그램은 허브 앤 스포크 토폴로지를 형성하는 3개의 7200 라우터를 보여줍니다. 허브 라우터(SJhub)에는 두 개의 ID 인증서가 있습니다. 하나는 Entrust CA 서버에서, 다른 하나는 Microsoft CA 서버에서 가져옵니다. 스포크 라우터(SJVPN)에는 동일한 Entrust CA 서버의 ID 인증서가 하나씩 있으며 다른 스포크 라우터(SJPKI)에는 동일한 Microsoft CA 서버의 ID 인증서가 하나씩 있습니다. 이 예에서는 허브 라우터가 공동 프로젝트에서 두 회사의 연결 지점을 시뮬레이션합니다. 다중 ID CA 지원의 도움을 받아 스포크가 서로 다른 CA에 등록되어 있더라도 허브는 양쪽과 통신할 수 있습니다.

## 구성에

모든 라우터의 컨피그레이션이 참조로 아래에 나열되어 있습니다.

- [SJ허브](#)
- [SJVPN](#)
- [SJPKI](#)

```
SJhub(허브 라우터)

SJhub#write terminal
Building configuration...

Current configuration : 19665 bytes
!
! Last configuration change at 18:40:55 UTC Sun Jan 13
2002
! NVRAM config last updated at 18:41:45 UTC Sun Jan 13
2002
!
version 12.2
no parser cache
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname SJhub
!
enable password cisco
!
ip subnet-zero
```



```
ip cef
!
!
ip telnet source-interface Loopback88
no ip domain-lookup
ip domain-name sjtac.com
!
ip audit notify log
ip audit po max-events 100
ip ssh time-out 120
ip ssh authentication-retries 3
!
crypto ca identity EntrustPKI
  enrollment mode ra
  enrollment url http://171.69.89.16:80
  query url ldap://171.69.89.16
!
crypto ca identity MicrosoftCA
  enrollment mode ra
  enrollment url
http://171.69.89.182:80/certsrv/mscep/mscep.dll
  query url ldap://171.69.89.182
  crl optional
crypto ca certificate chain EntrustPKI
  certificate ca 3B2FD307
    308202E4 3082024D A0030201 0202043B 2FD30730 0D06092A
864886F7 0D010105
    0500302D 310B3009 06035504 06130275 73310E30 0C060355
040A1305 63697363
    6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303130
36313932 32303234
    305A170D 32313036 31393232 33323430 5A302D31 0B300906
03550406 13027573
    310E300C 06035504 0A130563 6973636F 310E300C 06035504
0B130573 6A76706E
30819F30 0D06092A 864886F7 0D010101 05000381 8D003081
89028181 00E8C25B
    EDF4A6EE A352B142 C16578F4 FBDAF45E 4F2F7733 8D2B8879
96138C63 1DB713BF
    753BF845 2D7E600F AAF4D75B 9E959513 BB13FF13 36696F48
86C464F2 CF854A66
    4F8E83F8 025F216B A44D4BB2 39ADD1A5 1BCCF812 09A19BDC
468EEAE1 B6C2A378
    69C81348 1A9CD61C 551216F2 8B168FBB 94CBEF37 E1D9A8F7
80BBC17F D1020301
    0001A382 010F3082 010B3011 06096086 480186F8 42010104
04030200 07304F06
    03551D1F 04483046 3044A042 A040A43E 303C310B 30090603
55040613 02757331
    0E300C06 0355040A 13056369 73636F31 0E300C06 0355040B
1305736A 76706E31
    0D300B06 03550403 13044352 4C31302B 0603551D 10042430
22800F32 30303130
    36313932 32303234 305A810F 32303231 30363139 32323332
34305A30 0B060355
    1D0F0404 03020106 301F0603 551D2304 18301680 1446C160
9CDBEA53 EE80A480
    601A9658 3B0DF80D 2F301D06 03551D0E 04160414 46C1609C
DBEA53EE 80A48060
    1A96583B 0DF80D2F 300C0603 551D1304 05300301 01FF301D
06092A86 4886F67D
    07410004 10300E1B 0856352E 303A342E 30030204 90300D06
092A8648 86F70D01
    01050500 03818100 7E3DBAC4 8CAE7D5A B19C0625 8780D222
```

F965A1A2 C0C25B84  
CBC5A203 BF50FAC4 9656699A 52D8CB46 40776237 87163118  
8F3C0F47 D2CAA36B  
6AB34F99 AB71269E 78C0AC10 DA0B9EC5 AE448B46 701254CF  
3EBC64C1 5DBB2EE5  
56C0140B B0C83497 D79FB148 80018F51 3A4B6174 590B85AA  
9CE3B391 629406AA  
7CE9CC0D 01593E6B  
quit  
certificate ra-encrypt 3B2FD318  
308202D0 30820239 A0030201 0202043B 2FD31830 0D06092A  
864886F7 0D010105  
0500302D 310B3009 06035504 06130275 73310E30 0C060355  
040A1305 63697363  
6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303130  
36313932 32303333  
315A170D 30343036 31393232 33333331 5A304531 0B300906  
03550406 13027573  
310E300C 06035504 0A130563 6973636F 310E300C 06035504  
0B130573 6A76706E  
31163014 06035504 03130D46 69727374 204F6666 69636572  
30819F30 0D06092A  
864886F7 0D010101 05000381 8D003081 89028181 00BFC427  
727E15E9 30CB1BCB  
C0EFFB2F 3E4916D4 EC365F57 C13D1356 6388E66D 7BCCBCB9  
04DA2E7C C9639F31  
AF15E7B1 E698A33C 0EB447E4 B3B72EC8 766EADCF 9883E612  
AD782E39 B0603A90  
0322CE78 D6735E07 BDC022F1 1164EC9E 31FC5309 9AA9DC1D  
69ECC316 8727A6CB  
ADCFB488 FF904D6D 9D9E5778 05B24D4B BB5B4F5F 4D020301  
0001A381 E43081E1  
300B0603 551D0F04 04030205 20301B06 03551D09 04143012  
30100609 2A864886  
F67D0744 1D310302 0100304F 0603551D 1F044830 463044A0  
42A040A4 3E303C31  
0B300906 03550406 13027573 310E300C 06035504 0A130563  
6973636F 310E300C  
06035504 0B130573 6A76706E 310D300B 06035504 03130443  
524C3130 1F060355  
1D230418 30168014 46C1609C DBEA53EE 80A48060 1A96583B  
0DF80D2F 301D0603  
551D0E04 16041400 A7C3DD9F 9FAB0A25 E1485FC7 DB88A63F  
78CE4830 09060355  
1D130402 30003019 06092A86 4886F67D 07410004 0C300A1B  
0456352E 30030204  
B0300D06 092A8648 86F70D01 01050500 03818100 69105382  
0BE0BA59 B0CD2652  
9C6A4585 940C7882 DCEB1D1E 610B8525 0C032A76 2C8758C2  
F5CA1EF4 B946848A  
C49047D5 6D1EF218 FA082A00 16CCD9FC 42DF3B05 A8EF2AAD  
151637DE 67885BB2  
BA0BB6A1 308F63FF 21C3CB00 9272257A 3C292645 FD62D486  
C247F067 301C2FEE  
5CF6D12B 6CFA1DAA E74E8B8E 5B017A2E 5BB6C5F9  
quit  
certificate ra-sign 3B2FD319  
308202FF 30820268 A0030201 0202043B 2FD31930 0D06092A  
864886F7 0D010105  
0500302D 310B3009 06035504 06130275 73310E30 0C060355  
040A1305 63697363  
6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303130  
36313932 32303333  
315A170D 30343036 31393232 33333331 5A304531 0B300906

03550406 13027573  
310E300C 06035504 0A130563 6973636F 310E300C 06035504  
0B130573 6A76706E  
31163014 06035504 03130D46 69727374 204F6666 69636572  
30819F30 0D06092A  
864886F7 0D010101 05000381 8D003081 89028181 00E85434  
395790E9 416ED13D  
72F1A411 333A0984 66B8F68A 0ECA7E2B CBC40C39 A21E2D8A  
5F94772D 69846720  
73227891 E43D46B6 B2D1DDC5 385C5135 DB2075F1 4D252ACF  
AC80DA4C 2111946F  
26F7193B 8EA1CA66 8332D2A1 5310B2D7 07C985A8 0B44CE37  
BC95EAFB C328D4C6  
73B3B35E 0F6D25F5 DCAC6AFA 2DAAD6D1 47BB3396 E1020301  
0001A382 01123082  
010E300B 0603551D 0F040403 02078030 2B060355 1D100424  
3022800F 32303031  
30363139 32323033 33315A81 0F323030 33303732 37303233  
3333315A 301B0603  
551D0904 14301230 1006092A 864886F6 7D07441D 31030201  
00304F06 03551D1F  
04483046 3044A042 A040A43E 303C310B 30090603 55040613  
02757331 0E300C06  
0355040A 13056369 73636F31 0E300C06 0355040B 1305736A  
76706E31 0D300B06  
03550403 13044352 4C31301F 0603551D 23041830 16801446  
C1609CDB EA53EE80  
A480601A 96583B0D F80D2F30 1D060355 1D0E0416 04147BD2  
620C611F 3AC69FB3  
155FD8F9 8A7CF353 3A583009 0603551D 13040230 00301906  
092A8648 86F67D07  
4100040C 300A1B04 56352E30 030204B0 300D0609 2A864886  
F70D0101 05050003  
8181003A A6431D7D 1979DDF9 CC99D8F8 CC987F67 DBF67280  
2A9418E9 C6255B08  
DECDE1C2 50FCB1A6 544F1D51 C214162E E2403DAB 2F1294C4  
841240ED FD6F799C  
130A0B24 AC74DD74 C60EB5CD EC648631 E0B88B3F 3D19A2E1  
6492958E 9F64746E  
45C080AE E5A6C245 7827D7B1 380A6FE8 A01D9022 7F52AD9C  
B596743A 853549C5 771DA2  
quit  
certificate 3B2FD63F  
308202C2 3082022B A0030201 0202043B 2FD63F30 0D06092A  
864886F7 0D010105  
0500302D 310B3009 06035504 06130275 73310E30 0C060355  
040A1305 63697363  
6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303230  
31303932 31343835  
325A170D 30333031 30393232 31383532 5A304D31 0B300906  
03550406 13027573  
310E300C 06035504 0A130563 6973636F 310E300C 06035504  
0B130573 6A76706E  
311E301C 06092A86 4886F70D 01090216 0F534A68 75622E73  
6A746163 2E636F6D  
305C300D 06092A86 4886F70D 01010105 00034B00 30480241  
00B5C0D3 B5DC7620  
0C08953F E10C3391 8E262A72 2F5268F2 E53EEC89 BA7A1634  
A736B835 77C5F7DF  
72255DF2 CE121603 30CA8A2B 7C1E41D5 4983C9E6 5901198E  
0F020301 0001A382  
01113082 010D300B 0603551D 0F040403 0205A030 1A060355  
1D110413 3011820F  
534A6875 622E736A 7461632E 636F6D30 2B060355 1D100424

```
3022800F 32303032
 30313039 32313438 35325A81 0F323030 32303932 32313031
3835325A 304F0603
 551D1F04 48304630 44A042A0 40A43E30 3C310B30 09060355
04061302 7573310E
 300C0603 55040A13 05636973 636F310E 300C0603 55040B13
05736A76 706E310D
 300B0603 55040313 0443524C 31301F06 03551D23 04183016
801446C1 609CDBEA
 53EE80A4 80601A96 583B0DF8 0D2F301D 0603551D 0E041604
14FBE38B 58E5868B
 65C3AED1 5CE7C8E9 6658815B 1C300906 03551D13 04023000
30190609 2A864886
  F67D0741 00040C30 0A1B0456 352E3003 0204B030 0D06092A
864886F7 0D010105
 05000381 81001732 4B19CE9F 5EDA454B D782B240 D9FEC161
215AC65E 4DD449B9
 022ADDE6 489D5125 949BA7E7 68B61D2C 3E6F0871 4A9E1DC0
95EBCB11 875CE3BD
649D5BC0 E85B77AD 8541DBC9 2904DA65 0BF441D7 A2BEBD12
0EA438D2 AB6B8AFC
 2E25AB87 B0C277C0 7B5C521A A5B8989B 7D854F3A 619393D1
CF666429 E2AE8615
 03EE4DD7 13BB
quit
crypto ca certificate chain MicrosoftCA
certificate 132BD14C000000000000B
 3082044C 308203F6 A0030201 02020A13 2BD14C00 00000000
0B300D06 092A8648
 86F70D01 01050500 305F310B 30090603 55040613 02555331
0B300906 03550408
 13024341 3111300F 06035504 07130853 414E204A 4F534531
0E300C06 0355040A
 1305534A 54414331 0E300C06 0355040B 1305534A 504B4931
10300E06 03550403
 1307534A 504B4943 41301E17 0D303230 31313331 38333632
335A170D 30343031
 31333138 33363233 5A302031 1E301C06 092A8648 86F70D01
0902130F 534A6875
 622E736A 7461632E 636F6D30 5C300D06 092A8648 86F70D01
01010500 034B0030
 48024100 B5C0D3B5 DC76200C 08953FE1 0C33918E 262A722F
5268F2E5 3EEC89BA
 7A1634A7 36B83577 C5F7DF72 255DF2CE 12160330 CA8A2B7C
1E41D549 83C9E659
 01198E0F 02030100 01A38202 D1308202 CD300B06 03551D0F
04040302 05A0301D
 0603551D 0E041604 14FBE38B 58E5868B 65C3AED1 5CE7C8E9
6658815B 1C308198
 0603551D 23048190 30818D80 14231557 4F054052 81E113C7
E86D83CB F233B71C
 B1A163A4 61305F31 0B300906 03550406 13025553 310B3009
06035504 08130243
 41311130 0F060355 04071308 53414E20 4A4F5345 310E300C
06035504 0A130553
 4A544143 310E300C 06035504 0B130553 4A504B49 3110300E
06035504 03130753
 4A504B49 43418210 091B47AE E8CFE2A9 4D3E8B38 F292F5AF
301D0603 551D1101
 01FF0413 3011820F 534A6875 622E736A 7461632E 636F6D30
81C60603 551D1F04
 81BE3081 BB3081B8 A081B5A0 81B28681 AF6C6461 703A2F2F
2F434E3D 534A504B
 4943412C 434E3D73 6A76706E 6D73706B 692C434E 3D434450
```

2C434E3D 5075626C  
69632532 304B6579 25323053 65727669 6365732C 434E3D53  
65727669 6365732C  
434E3D43 6F6E6669 67757261 74696F6E 2C44433D 736A706B  
692C4443 3D636F6D  
3F636572 74696669 63617465 5265766F 63617469 6F6E4C69  
73743F62 6173653F  
6F626A65 6374636C 6173733D 63524C44 69737472 69627574  
696F6E50 6F696E74  
3081B706 082B0601 05050701 010481AA 3081A730 81A40608  
2B060105 05073002  
8681976C 6461703A 2F2F2F43 4E3D534A 504B4943 412C434E  
3D414941 2C434E3D  
5075626C 69632532 304B6579 25323053 65727669 6365732C  
434E3D53 65727669  
6365732C 434E3D43 6F6E6669 67757261 74696F6E 2C44433D  
736A706B 692C4443  
3D636F6D 3F634143 65727469 66696361 74653F62 6173653F  
6F626A65 6374636C  
6173733D 63657274 69666963 6174696F 6E417574 686F7269  
7479300C 0603551D  
130101FF 04023000 30130603 551D2504 0C300A06 082B0601  
05050802 02303F06  
092B0601 04018237 14020432 1E300049 00500053 00450043  
0049006E 00740065  
0072006D 00650064 00690061 00740065 004F0066 0066006C  
0069006E 0065300D  
06092A86 4886F70D 01010505 00034100 39A41B77 72A2EF4D  
300D69AE 399894E8  
8DBFADFF AC8D9FEA 81755872 BE242CD9 231932FE 3B4D370C  
F7E4DD76 2DA6E0C1  
B6BA26CA 9955858B 95430434 ODD7C88E  
quit  
certificate ra-sign 054E60AD000000000002  
308204A0 3082044A A0030201 02020A05 4E60AD00 00000000  
02300D06 092A8648  
86F70D01 01050500 305F310B 30090603 55040613 02555331  
0B300906 03550408  
13024341 3111300F 06035504 07130853 414E204A 4F534531  
0E300C06 0355040A  
1305534A 54414331 0E300C06 0355040B 1305534A 504B4931  
10300E06 03550403  
1307534A 504B4943 41301E17 0D303230 31313130 31353932  
375A170D 30343031  
31313031 35393237 5A305F31 0B300906 03550406 13025553  
310B3009 06035504  
08130243 41311130 0F060355 04071308 53414E20 4A4F5345  
310E300C 06035504  
0A130553 4A544143 310E300C 06035504 0B130553 4A504B49  
3110300E 06035504  
03130753 4A56504E 52413081 9F300D06 092A8648 86F70D01  
01010500 03818D00  
30818902 818100E2 61FD62D2 64BED93E 7DBF1FDE 52F0D811  
479A4F4E 48E56811  
83ED9285 F2A3907B F236F508 43742D4A E89A76EF 3CB98722  
D0A7DC1F 432F386C  
721A3379 D50B7EA7 43C07AD0 AA6C087D FDA7BDBF 0BA92FA3  
711A7F54 FBCAF6F6  
633FCEFA AA9D9A8D 2C79550F 99314B3E FC97F764 BC6D6D67  
D79A7292 A679B42F  
4B5C083F 0AA6C902 03010001 A38202A2 3082029E 300B0603  
551D0F04 04030207  
80301506 03551D25 040E300C 060A2B06 01040182 37140201  
303B0609 2B060104

01823714 02042E1E 2C004500 6E007200 6F006C00 6C006D00  
65006E00 74004100  
67006500 6E007400 4F006600 66006C00 69006E00 65301D06  
03551D0E 04160414  
09AD6911 B0F87B73 06A2ECAE 24853CA4 DBB12A9E 30819806  
03551D23 04819030  
818D8014 2315574F 05405281 E113C7E8 6D83CBF2 33B71CB1  
A163A461 305F310B  
30090603 55040613 02555331 0B300906 03550408 13024341  
3111300F 06035504  
07130853 414E204A 4F534531 0E300C06 0355040A 1305534A  
54414331 0E300C06  
0355040B 1305534A 504B4931 10300E06 03550403 1307534A  
504B4943 41821009  
1B47AEE8 CFE2A94D 3E8B38F2 92F5AF30 81C60603 551D1F04  
81BE3081 BB3081B8  
A081B5A0 81B28681 AF6C6461 703A2F2F 2F434E3D 534A504B  
4943412C 434E3D73  
6A76706E 6D73706B 692C434E 3D434450 2C434E3D 5075626C  
69632532 304B6579  
25323053 65727669 6365732C 434E3D53 65727669 6365732C  
434E3D43 6F6E6669  
67757261 74696F6E 2C44433D 736A706B 692C4443 3D636F6D  
3F636572 74696669  
63617465 5265766F 63617469 6F6E4C69 73743F62 6173653F  
6F626A65 6374636C  
6173733D 63524C44 69737472 69627574 696F6E50 6F696E74  
3081B706 082B0601  
05050701 010481AA 3081A730 81A40608 2B060105 05073002  
8681976C 6461703A  
2F2F2F43 4E3D534A 504B4943 412C434E 3D414941 2C434E3D  
5075626C 69632532  
304B6579 25323053 65727669 6365732C 434E3D53 65727669  
6365732C 434E3D43  
6F6E6669 67757261 74696F6E 2C44433D 736A706B 692C4443  
3D636F6D 3F634143  
65727469 66696361 74653F62 6173653F 6F626A65 6374636C  
6173733D 63657274  
69666963 6174696F 6E417574 686F7269 7479300D 06092A86  
4886F70D 01010505  
00034100 2CEFFC7E B2C42AED 167FA630 AB3F9460 5E12B77F  
07BC860A 48A5DBDB  
E942F9B8 1B053148 05A70A17 B2EF37D4 F4234622 DD59571B  
F8D8AF09 2B54D40C 9145302D  
quit  
certificate ra-encrypt 054E63CE000000000003  
3082048E 30820438 A0030201 02020A05 4E63CE00 00000000  
03300D06 092A8648  
86F70D01 01050500 305F310B 30090603 55040613 02555331  
0B300906 03550408  
13024341 3111300F 06035504 07130853 414E204A 4F534531  
0E300C06 0355040A  
1305534A 54414331 0E300C06 0355040B 1305534A 504B4931  
10300E06 03550403  
1307534A 504B4943 41301E17 0D303230 31313130 31353932  
385A170D 30343031  
31313031 35393238 5A305F31 0B300906 03550406 13025553  
310B3009 06035504  
08130243 41311130 0F060355 04071308 53414E20 4A4F5345  
310E300C 06035504  
0A130553 4A544143 310E300C 06035504 0B130553 4A504B49  
3110300E 06035504  
03130753 4A56504E 52413081 9F300D06 092A8648 86F70D01  
01010500 03818D00

30818902 818100C6 E17A9C97 9CD883ED CCE68AAD DA4AF518  
1D1B0056 EAE19CF7  
40A1CBA7 622A83DB 4131898F 5FC662A6 5486D0FB CE253DE5  
26A85487 27CCC45C  
54803AB6 F5644F21 6967296A B075E6A3 0392704C 862A3344  
8F15F512 FE86F257  
6465A4C5 B265DBA5 EBA53F19 D488839E 5881EA32 2943CDF2  
2D03B889 5E47A30B  
C908D29B 64656102 03010001 A3820290 3082028C 300B0603  
551D0F04 04030205  
20301506 03551D25 040E300C 060A2B06 01040182 37140201  
30290609 2B060104  
01823714 02041C1E 1A004300 45005000 45006E00 63007200  
79007000 74006900  
6F006E30 1D060355 1D0E0416 04148F6F 02D57617 E11F78D2  
48547776 FE42DBE3  
D8CC3081 98060355 1D230481 9030818D 80142315 574F0540  
5281E113 C7E86D83  
CBF233B7 1CB1A163 A461305F 310B3009 06035504 06130255  
53310B30 09060355  
04081302 43413111 300F0603 55040713 0853414E 204A4F53  
45310E30 0C060355  
040A1305 534A5441 43310E30 0C060355 040B1305 534A504B  
49311030 0E060355  
04031307 534A504B 49434182 10091B47 AEE8CFE2 A94D3E8B  
38F292F5 AF3081C6  
0603551D 1F0481BE 3081BB30 81B8A081 B5A081B2 8681AF6C  
6461703A 2F2F2F43  
4E3D534A 504B4943 412C434E 3D736A76 706E6D73 706B692C  
434E3D43 44502C43  
4E3D5075 626C6963 2532304B 65792532 30536572 76696365  
732C434E 3D536572  
76696365 732C434E 3D436F6E 66696775 72617469 6F6E2C44  
433D736A 706B692C  
44433D63 6F6D3F63 65727469 66696361 74655265 766F6361  
74696F6E 4C697374  
3F626173 653F6F62 6A656374 636C6173 733D6352 4C446973  
74726962 7574696F  
6E506F69 6E743081 B706082B 06010505 07010104 81AA3081  
A73081A4 06082B06  
01050507 30028681 976C6461 703A2F2F 2F434E3D 534A504B  
4943412C 434E3D41  
49412C43 4E3D5075 626C6963 2532304B 65792532 30536572  
76696365 732C434E  
3D536572 76696365 732C434E 3D436F6E 66696775 72617469  
6F6E2C44 433D736A  
706B692C 44433D63 6F6D3F63 41436572 74696669 63617465  
3F626173 653F6F62  
6A656374 636C6173 733D6365 72746966 69636174 696F6E41  
7574686F 72697479  
300D0609 2A864886 F70D0101 05050003 41008FE9 45687473  
3798A614 D3A41747  
D357B72B 8D286162 91A7B519 B100159E CF283215 28DE4504  
EBB55282 247A9164  
DC6B8185 63F159DC 18F6541B E289FC37 EC74  
quit  
certificate ca 091B47AEE8CFE2A94D3E8B38F292F5AF  
3082032C 308202D6 A0030201 02021009 1B47AEE8 CFE2A94D  
3E8B38F2 92F5AF30  
0D06092A 864886F7 0D010105 0500305F 310B3009 06035504  
06130255 53310B30  
09060355 04081302 43413111 300F0603 55040713 0853414E  
204A4F53 45310E30  
0C060355 040A1305 534A5441 43310E30 0C060355 040B1305

```
534A504B 49311030
 0E060355 04031307 534A504B 49434130 1E170D30 32303131
31303135 3133395A
 170D3037 30313131 30323030 30345A30 5F310B30 09060355
04061302 5553310B
 30090603 55040813 02434131 11300F06 03550407 13085341
4E204A4F 5345310E
 300C0603 55040A13 05534A54 4143310E 300C0603 55040B13
05534A50 4B493110
 300E0603 55040313 07534A50 4B494341 305C300D 06092A86
4886F70D 01010105
 00034B00 30480241 00AEC268 0C6388F1 404A2E97 3C94742D
37070BE0 368069BF
  C98A7AB3 E81131A5 DDC3E41F B9D9EB66 AF504D65 2BD2864C
87260696 8AAFF871
 88A80301 1500F11D 63020301 0001A382 016C3082 01683013
06092B06 01040182
 37140204 061E0400 43004130 0B060355 1D0F0404 03020146
300F0603 551D1301
 01FF0405 30030101 FF301D06 03551D0E 04160414 2315574F
05405281 E113C7E8
 6D83CBF2 33B71CB1 30820100 0603551D 1F0481F8 3081F530
81B8A081 B5A081B2
 8681AF6C 6461703A 2F2F2F43 4E3D534A 504B4943 412C434E
3D736A76 706E6D73
706B692C 434E3D43 44502C43 4E3D5075 626C6963 2532304B
65792532 30536572
 76696365 732C434E 3D536572 76696365 732C434E 3D436F6E
66696775 72617469
 6F6E2C44 433D736A 706B692C 44433D63 6F6D3F63 65727469
66696361 74655265
 766F6361 74696F6E 4C697374 3F626173 653F6F62 6A656374
636C6173 733D6352
 4C446973 74726962 7574696F 6E506F69 6E743038 A036A034
86326874 74703A2F
 2F736A76 706E6D73 706B692E 736A706B 692E636F 6D2F4365
7274456E 726F6C6C
 2F534A50 4B494341 2E63726C 30100609 2B060104 01823715
01040302 0100300D
 06092A86 4886F70D 01010505 00034100 735977DF 7822B944
96A50106 722108F0
 1A60EF86 EFEDA9ED 2C7C9174 5EF48909 B4A66A08 226FBD11
3F20BA61 C556182A
 8E914788 AE6C5363 A769805F 9E2F6458
quit
!
crypto isakmp policy 1
  hash md5
!
crypto isakmp identity hostname
crypto isakmp keepalive 10
!
!
crypto ipsec transform-set myset esp-des esp-md5-hmac
crypto mib ipsec flowmib history tunnel size 200
crypto mib ipsec flowmib history failure size 200
!
crypto map vpn 10 ipsec-isakmp
  set peer 172.16.172.52
  set transform-set myset
  match address 101
crypto map vpn 20 ipsec-isakmp
  set peer 172.16.172.10
  set transform-set myset
```



```
match address 102
!
!
interface Loopback1
 ip address 20.1.1.1 255.255.255.0
!
interface Loopback88
 no ip address
!
interface FastEthernet0/0
 no ip address
 no keepalive
 shutdown
 duplex half
 media-type MII
!
interface Ethernet4/0
 ip address 172.16.172.69 255.255.255.240
 ip route-cache same-interface
 no ip mroute-cache
 duplex half
 crypto map vpn
!
interface Ethernet4/1
 no ip address
 duplex half
!
interface Ethernet4/2
 no ip address
 shutdown
 duplex half
!
interface Ethernet4/3
 no ip address
 shutdown
 duplex half
!
ip default-gateway 172.16.172.65
ip classless
ip route 0.0.0.0 0.0.0.0 172.16.172.65
ip http server
ip pim bidir-enable
!
access-list 101 permit ip 20.1.1.0 0.0.0.255 50.1.1.0
0.0.0.255
access-list 102 permit ip 20.1.1.0 0.0.0.255 10.1.1.0
0.0.0.255
!
!
call rsvp-sync
!
!
mgcp profile default
!
dial-peer cor custom
!
!
!
!
gatekeeper
 shutdown
!
!
line con 0
```

```
exec-timeout 0 0
line aux 0
line vty 0 4
  password cisco
  login
line vty 5 15
  login
!
no scheduler max-task-time
!
end
```

## SJVPN(Entrust CA 서버에 등록된 스포크 라우터)

```
SJVPN#write terminal
Building configuration...

Current configuration : 8980 bytes
!
! Last configuration change at 10:28:19 UTC Sun Jan 13
2002
! NVRAM config last updated at 10:28:20 UTC Sun Jan 13
2002
!
version 12.2
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
service udp-small-servers
service tcp-small-servers
no service dhcp
!
hostname SJVPN
!
enable password cisco
!
ip subnet-zero
ip cef
!
!
no ip domain-lookup
ip domain-name sjvpn.com
!
ip audit notify log
ip audit po max-events 100
ip ssh time-out 120
ip ssh authentication-retries 3
!
crypto ca identity EntrustPKI
  enrollment mode ra
  enrollment url http://171.69.89.16:80
  query url ldap://171.69.89.16
crypto ca certificate chain EntrustPKI
  certificate ca 3B2FD307
    308202E4 3082024D A0030201 0202043B 2FD30730 0D06092A
864886F7 0D010105
    0500302D 310B3009 06035504 06130275 73310E30 0C060355
040A1305 63697363
    6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303130
36313932 32303234
    305A170D 32313036 31393232 33323430 5A302D31 0B300906
03550406 13027573
    310E300C 06035504 0A130563 6973636F 310E300C 06035504
```

0B130573 6A76706E  
30819F30 0D06092A 864886F7 0D010101 05000381 8D003081  
89028181 00E8C25B  
EDF4A6EE A352B142 C16578F4 FBDAF45E 4F2F7733 8D2B8879  
96138C63 1DB713BF  
753BF845 2D7E600F AAF4D75B 9E959513 BB13FF13 36696F48  
86C464F2 CF854A66  
4F8E83F8 025F216B A44D4BB2 39ADD1A5 1BCCF812 09A19BDC  
468EEAE1 B6C2A378  
69C81348 1A9CD61C 551216F2 8B168FBB 94CBEF37 E1D9A8F7  
80BBC17F D1020301  
0001A382 010F3082 010B3011 06096086 480186F8 42010104  
04030200 07304F06  
03551D1F 04483046 3044A042 A040A43E 303C310B 30090603  
55040613 02757331  
0E300C06 0355040A 13056369 73636F31 0E300C06 0355040B  
1305736A 76706E31  
0D300B06 03550403 13044352 4C31302B 0603551D 10042430  
22800F32 30303130  
36313932 32303234 305A810F 32303231 30363139 32323332  
34305A30 0B060355  
1D0F0404 03020106 301F0603 551D2304 18301680 1446C160  
9CDBEA53 EE80A480  
601A9658 3B0DF80D 2F301D06 03551D0E 04160414 46C1609C  
DBEA53EE 80A48060  
1A96583B 0DF80D2F 300C0603 551D1304 05300301 01FF301D  
06092A86 4886F67D  
07410004 10300E1B 0856352E 303A342E 30030204 90300D06  
092A8648 86F70D01  
01050500 03818100 7E3DBAC4 8CAE7D5A B19C0625 8780D222  
F965A1A2 C0C25B84  
CBC5A203 BF50FAC4 9656699A 52D8CB46 40776237 87163118  
8F3C0F47 D2CAA36B  
6AB34F99 AB71269E 78C0AC10 DA0B9EC5 AE448B46 701254CF  
3EBC64C1 5DBB2EE5  
56C0140B B0C83497 D79FB148 80018F51 3A4B6174 590B85AA  
9CE3B391 629406AA  
7CE9CC0D 01593E6B  
quit  
certificate ra-encrypt 3B2FD318  
308202D0 30820239 A0030201 0202043B 2FD31830 0D06092A  
864886F7 0D010105  
0500302D 310B3009 06035504 06130275 73310E30 0C060355  
040A1305 63697363  
6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303130  
36313932 32303333  
315A170D 30343036 31393232 33333331 5A304531 0B300906  
03550406 13027573  
310E300C 06035504 0A130563 6973636F 310E300C 06035504  
0B130573 6A76706E  
31163014 06035504 03130D46 69727374 204F6666 69636572  
30819F30 0D06092A  
864886F7 0D010101 05000381 8D003081 89028181 00BFC427  
727E15E9 30CB1BCB  
C0EFFB2F 3E4916D4 EC365F57 C13D1356 6388E66D 7BCCBCB9  
04DA2E7C C9639F31  
AF15E7B1 E698A33C 0EB447E4 B3B72EC8 766EADCF 9883E612  
AD782E39 B0603A90  
0322CE78 D6735E07 BDC022F1 1164EC9E 31FC5309 9AA9DC1D  
69ECC316 8727A6CB  
ADCFB488 FF904D6D 9D9E5778 05B24D4B BB5B4F5F 4D020301  
0001A381 E43081E1  
300B0603 551D0F04 04030205 20301B06 03551D09 04143012  
30100609 2A864886

F67D0744 1D310302 0100304F 0603551D 1F044830 463044A0  
42A040A4 3E303C31  
0B300906 03550406 13027573 310E300C 06035504 0A130563  
6973636F 310E300C  
  
06035504 0B130573 6A76706E 310D300B 06035504 03130443  
524C3130 1F060355  
1D230418 30168014 46C1609C DBEA53EE 80A48060 1A96583B  
0DF80D2F 301D0603  
551D0E04 16041400 A7C3DD9F 9FAB0A25 E1485FC7 DB88A63F  
78CE4830 09060355  
1D130402 30003019 06092A86 4886F67D 07410004 0C300A1B  
0456352E 30030204  
B0300D06 092A8648 86F70D01 01050500 03818100 69105382  
0BE0BA59 B0CD2652  
9C6A4585 940C7882 DCEB1D1E 610B8525 0C032A76 2C8758C2  
F5CA1EF4 B946848A  
C49047D5 6D1EF218 FA082A00 16CCD9FC 42DF3B05 A8EF2AAD  
151637DE 67885BB2  
BA0BB6A1 308F63FF 21C3CB00 9272257A 3C292645 FD62D486  
C247F067 301C2FEE  
5CF6D12B 6CFA1DAA E74E8B8E 5B017A2E 5BB6C5F9  
quit  
certificate ra-sign 3B2FD319  
308202FF 30820268 A0030201 0202043B 2FD31930 0D06092A  
864886F7 0D010105  
0500302D 310B3009 06035504 06130275 73310E30 0C060355  
040A1305 63697363  
6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303130  
36313932 32303333  
315A170D 30343036 31393232 33333331 5A304531 0B300906  
03550406 13027573  
310E300C 06035504 0A130563 6973636F 310E300C 06035504  
0B130573 6A76706E  
31163014 06035504 03130D46 69727374 204F6666 69636572  
30819F30 0D06092A  
864886F7 0D010101 05000381 8D003081 89028181 00E85434  
395790E9 416ED13D  
72F1A411 333A0984 66B8F68A 0ECA7E2B CBC40C39 A21E2D8A  
5F94772D 69846720  
73227891 E43D46B6 B2D1DDC5 385C5135 DB2075F1 4D252ACF  
AC80DA4C 2111946F  
26F7193B 8EA1CA66 8332D2A1 5310B2D7 07C985A8 0B44CE37  
BC95EAFB C328D4C6  
73B3B35E 0F6D25F5 DCAC6AFA 2DAAD6D1 47BB3396 E1020301  
0001A382 01123082  
010E300B 0603551D 0F040403 02078030 2B060355 1D100424  
3022800F 32303031  
30363139 32323033 33315A81 0F323030 33303732 37303233  
3333315A 301B0603  
551D0904 14301230 1006092A 864886F6 7D07441D 31030201  
00304F06 03551D1F  
04483046 3044A042 A040A43E 303C310B 30090603 55040613  
02757331 0E300C06  
0355040A 13056369 73636F31 0E300C06 0355040B 1305736A  
76706E31 0D300B06  
03550403 13044352 4C31301F 0603551D 23041830 16801446  
C1609CDB EA53EE80  
A480601A 96583B0D F80D2F30 1D060355 1D0E0416 04147BD2  
620C611F 3AC69FB3  
155FD8F9 8A7CF353 3A583009 0603551D 13040230 00301906  
092A8648 86F67D07  
4100040C 300A1B04 56352E30 030204B0 300D0609 2A864886  
F70D0101 05050003

```
8181003A A6431D7D 1979DDF9 CC99D8F8 CC987F67 DBF67280
2A9418E9 C6255B08
  DECDE1C2 50FCB1A6 544F1D51 C214162E E2403DAB 2F1294C4
841240ED FD6F799C
  130A0B24 AC74DD74 C60EB5CD EC648631 E0B88B3F 3D19A2E1
6492958E 9F64746E
  45C080AE E5A6C245 7827D7B1 380A6FE8 A01D9022 7F52AD9C
B596743A 853549C5 771DA2
  quit
  certificate 3B2FD65B
  308202C2 3082022B A0030201 0202043B 2FD65B30 0D06092A
864886F7 0D010105
  0500302D 310B3009 06035504 06130275 73310E30 0C060355
040A1305 63697363
  6F310E30 0C060355 040B1305 736A7670 6E301E17 0D303230
31313132 30313630
  385A170D 30333031 31313230 34363038 5A304D31 0B300906
03550406 13027573
  310E300C 06035504 0A130563 6973636F 310E300C 06035504
0B130573 6A76706E
  311E301C 06092A86 4886F70D 01090216 0F534A56 504E2E73
6A76706E 2E636F6D
  305C300D 06092A86 4886F70D 01010105 00034B00 30480241
00EC4BE5 44E6ABC4
  404BBBAD FE61E486 F2F85AC5 751EAC1D E68BD930 09958131
A977BA90 13BFD94D
  297E41CA 23CDB0A3 EC38A296 49F61BBE 8037C94E F7FF6F35
29020301 0001A382
  01113082 010D300B 0603551D 0F040403 0205A030 1A060355
1D110413 3011820F
  534A5650 4E2E736A 76706E2E 636F6D30 2B060355 1D100424
3022800F 32303032
  30313131 32303136 30385A81 0F323030 32303932 34303834
3630385A 304F0603
  551D1F04 48304630 44A042A0 40A43E30 3C310B30 09060355
04061302 7573310E
  300C0603 55040A13 05636973 636F310E 300C0603 55040B13
05736A76 706E310D
  300B0603 55040313 0443524C 31301F06 03551D23 04183016
801446C1 609CDBEA
  53EE80A4 80601A96 583B0DF8 0D2F301D 0603551D 0E041604
14494FC9 CE8C0C8E
  2B078D54 EF43111B 3F1FAAB2 8A300906 03551D13 04023000
30190609 2A864886
  F67D0741 00040C30 0A1B0456 352E3003 0204B030 0D06092A
864886F7 0D010105
  05000381 81006C96 16AB6674 1FF8D1AB 27FA7384 0C08272A
8D68C826 8F80006B
  0C146105 2FB8BDF9 CCC85262 2133F1EF FC7AA2F9 48191740
86AFC27C EF5AD773
  768C5597 A953316B 839617FE 210B1195 3E5CD64A B643ADFC
43A57C8E 1D56BD39
  5812109B 2C8301E1 BC30A6E1 8E634030 1851AC22 CD941F9C
65F21608 0229AFB4
  126FD11A 6825
  quit
!
crypto isakmp policy 1
  hash md5
!
crypto isakmp identity hostname
crypto isakmp keepalive 10
!
```

```
crypto ipsec transform-set myset esp-des esp-md5-hmac
crypto mib ipsec flowmib history tunnel size 200
crypto mib ipsec flowmib history failure size 200
!
crypto map vpn 10 ipsec-isakmp
  set peer 172.16.172.69
  set transform-set myset
  match address 101
!
!
!
!
!
!
!
!
!
controller ISA 3/1
!
!
!
!
interface Ethernet1/0
  ip address 172.16.172.52 255.255.255.248
  no ip redirects
  duplex half
  crypto map vpn
!
interface Ethernet1/1
  ip address 50.1.1.1 255.255.255.0
  no ip redirects
  duplex half
!
interface Ethernet1/2
  no ip address
  shutdown
  duplex half
!
interface Ethernet1/3
  no ip address
  shutdown
  duplex half
!
ip classless
ip route 0.0.0.0 0.0.0.0 172.16.172.49
no ip http server
ip pim bidir-enable
!
access-list 101 permit ip 50.1.1.0 0.0.0.255 20.1.1.0
0.0.0.255
!
snmp-server community public RO
!
call rsvp-sync
!
!
mgcp profile default
!
dial-peer cor custom
!
!
!
!
!
gatekeeper
```

```
shutdown
!
!
line con 0
  exec-timeout 0 0
line aux 0
line vty 0 4
  password cisco
  no login
line vty 5 15
  login
!
no scheduler max-task-time
!
end
```

**SJVPN#show crypto ca certificates**

```
CA Certificate
  Status: Available
  Certificate Serial Number: 3B2FD307
  Key Usage: General Purpose
  Issuer:
    OU = sjvpn
    O = cisco
    C = us
  Subject:
    OU = sjvpn
    O = cisco
    C = us
  CRL Distribution Point:
    CN = CRL1, OU = sjvpn, O = cisco, C = us
  Validity Date:
    start date: 22:02:40 UTC Jun 19 2001
    end date: 22:32:40 UTC Jun 19 2021
  Associated Identity: EntrustPKI
```

```
RA KeyEncipher Certificate
  Status: Available
  Certificate Serial Number: 3B2FD318
  Key Usage: Encryption
  Issuer:
    OU = sjvpn
    O = cisco
    C = us
  Subject:
    CN = First Officer
    OU = sjvpn
    O = cisco
    C = us
  CRL Distribution Point:
    CN = CRL1, OU = sjvpn, O = cisco, C = us
  Validity Date:
    start date: 22:03:31 UTC Jun 19 2001
    end date: 22:33:31 UTC Jun 19 2004
  Associated Identity: EntrustPKI
```

```
RA Signature Certificate
  Status: Available
  Certificate Serial Number: 3B2FD319
  Key Usage: Signature
  Issuer:
    OU = sjvpn
    O = cisco
  C = us
```

Subject:

CN = First Officer  
OU = sjvpn  
O = cisco  
C = us

CRL Distribution Point:

CN = CRL1, OU = sjvpn, O = cisco, C = us

Validity Date:

start date: 22:03:31 UTC Jun 19 2001  
end date: 22:33:31 UTC Jun 19 2004

Associated Identity: EntrustPKI

Certificate

Status: Available

Certificate Serial Number: 3B2FD65B

Key Usage: General Purpose

Issuer:

OU = sjvpn  
O = cisco

C = us

Subject Name Contains:

Name: SJVPN.sjvpn.com

CRL Distribution Point:

CN = CRL1, OU = sjvpn, O = cisco, C = us

Validity Date:

start date: 20:16:08 UTC Jan 11 2002  
end date: 20:46:08 UTC Jan 11 2003

Associated Identity: EntrustPKI

## SJPKI(Microsoft CA 서버에 등록된 스포크 라우터)

```
SJPKI#write terminal
```

```
Building configuration...
```

```
Current configuration : 12452 bytes
```

```
!  
! Last configuration change at 18:40:41 UTC Sun Jan 13  
2002  
! NVRAM config last updated at 18:42:15 UTC Sun Jan 13  
2002  
!  
version 12.2  
service timestamps debug uptime  
service timestamps log uptime  
no service password-encryption  
service udp-small-servers  
service tcp-small-servers  
!  
hostname SJPKI  
!  
!  
ip subnet-zero  
ip cef  
!  
!  
ip domain-name sjtac  
!  
ip audit notify log  
ip audit po max-events 100  
ip ssh time-out 120  
ip ssh authentication-retries 3  
!
```



```
crypto ca identity MicrosoftPKI
  enrollment mode ra
  enrollment url
http://171.69.89.182:80/certsrv/mscep/mscep.dll
  query url ldap://171.69.89.182
  crl optional
!
!
crypto ca certificate chain MicrosoftPKI
  certificate ca 091B47AEE8CFE2A94D3E8B38F292F5AF
    3082032C 308202D6 A0030201 02021009 1B47AEE8 CFE2A94D
3E8B38F2 92F5AF30
    0D06092A 864886F7 0D010105 0500305F 310B3009 06035504
06130255 53310B30
    09060355 04081302 43413111 300F0603 55040713 0853414E
204A4F53 45310E30
    0C060355 040A1305 534A5441 43310E30 0C060355 040B1305
534A504B 49311030
    0E060355 04031307 534A504B 49434130 1E170D30 32303131
31303135 3133395A
    170D3037 30313131 30323030 30345A30 5F310B30 09060355
04061302 5553310B
    30090603 55040813 02434131 11300F06 03550407 13085341
4E204A4F 5345310E
    300C0603 55040A13 05534A54 4143310E 300C0603 55040B13
05534A50 4B493110
    300E0603 55040313 07534A50 4B494341 305C300D 06092A86
4886F70D 01010105
00034B00 30480241 00AEC268 0C6388F1 404A2E97 3C94742D
37070BE0 368069BF
    C98A7AB3 E81131A5 DDC3E41F B9D9EB66 AF504D65 2BD2864C
87260696 8AAFF871
    88A80301 1500F11D 63020301 0001A382 016C3082 01683013
06092B06 01040182
    37140204 061E0400 43004130 0B060355 1D0F0404 03020146
300F0603 551D1301
    01FF0405 30030101 FF301D06 03551D0E 04160414 2315574F
05405281 E113C7E8
    6D83CBF2 33B71CB1 30820100 0603551D 1F0481F8 3081F530
81B8A081 B5A081B2
    8681AF6C 6461703A 2F2F2F43 4E3D534A 504B4943 412C434E
3D736A76 706E6D73
    706B692C 434E3D43 44502C43 4E3D5075 626C6963 2532304B
65792532 30536572
    76696365 732C434E 3D536572 76696365 732C434E 3D436F6E
66696775 72617469
    6F6E2C44 433D736A 706B692C 44433D63 6F6D3F63 65727469
66696361 74655265
    766F6361 74696F6E 4C697374 3F626173 653F6F62 6A656374
636C6173 733D6352
    4C446973 74726962 7574696F 6E506F69 6E743038 A036A034
86326874 74703A2F
    2F736A76 706E6D73 706B692E 736A706B 692E636F 6D2F4365
7274456E 726F6C6C
    2F534A50 4B494341 2E63726C 30100609 2B060104 01823715
01040302 0100300D
    06092A86 4886F70D 01010505 00034100 735977DF 7822B944
96A50106 722108F0
    1A60EF86 EFEDA9ED 2C7C9174 5EF48909 B4A66A08 226FBD11
3F20BA61 C556182A
    8E914788 AE6C5363 A769805F 9E2F6458
quit
certificate ra-encrypt 054E63CE000000000003
3082048E 30820438 A0030201 02020A05 4E63CE00 00000000
```

03300D06 092A8648  
86F70D01 01050500 305F310B 30090603 55040613 02555331  
0B300906 03550408  
13024341 3111300F 06035504 07130853 414E204A 4F534531  
0E300C06 0355040A  
1305534A 54414331 0E300C06 0355040B 1305534A 504B4931  
10300E06 03550403  
1307534A 504B4943 41301E17 0D303230 31313130 31353932  
385A170D 30343031  
31313031 35393238 5A305F31 0B300906 03550406 13025553  
310B3009 06035504  
08130243 41311130 0F060355 04071308 53414E20 4A4F5345  
310E300C 06035504  
0A130553 4A544143 310E300C 06035504 0B130553 4A504B49  
3110300E 06035504  
03130753 4A56504E 52413081 9F300D06 092A8648 86F70D01  
01010500 03818D00  
30818902 818100C6 E17A9C97 9CD883ED CCE68AAD DA4AF518  
1D1B0056 EAE19CF7  
40A1CBA7 622A83DB 4131898F 5FC662A6 5486D0FB CE253DE5  
26A85487 27CCC45C  
54803AB6 F5644F21 6967296A B075E6A3 0392704C 862A3344  
8F15F512 FE86F257  
6465A4C5 B265DBA5 EBA53F19 D488839E 5881EA32 2943CDF2  
2D03B889 5E47A30B  
C908D29B 64656102 03010001 A3820290 3082028C 300B0603  
551D0F04 04030205  
20301506 03551D25 040E300C 060A2B06 01040182 37140201  
30290609 2B060104  
01823714 02041C1E 1A004300 45005000 45006E00 63007200  
79007000 74006900  
6F006E30 1D060355 1D0E0416 04148F6F 02D57617 E11F78D2  
48547776 FE42DBE3  
D8CC3081 98060355 1D230481 9030818D 80142315 574F0540  
5281E113 C7E86D83  
CBF233B7 1CB1A163 A461305F 310B3009 06035504 06130255  
53310B30 09060355  
04081302 43413111 300F0603 55040713 0853414E 204A4F53  
45310E30 0C060355  
040A1305 534A5441 43310E30 0C060355 040B1305 534A504B  
49311030 0E060355  
04031307 534A504B 49434182 10091B47 AEE8CFE2 A94D3E8B  
38F292F5 AF3081C6  
0603551D 1F0481BE 3081BB30 81B8A081 B5A081B2 8681AF6C  
6461703A 2F2F2F43  
4E3D534A 504B4943 412C434E 3D736A76 706E6D73 706B692C  
434E3D43 44502C43  
4E3D5075 626C6963 2532304B 65792532 30536572 76696365  
732C434E 3D536572  
76696365 732C434E 3D436F6E 66696775 72617469 6F6E2C44  
433D736A 706B692C  
44433D63 6F6D3F63 65727469 66696361 74655265 766F6361  
74696F6E 4C697374  
3F626173 653F6F62 6A656374 636C6173 733D6352 4C446973  
74726962 7574696F  
6E506F69 6E743081 B706082B 06010505 07010104 81AA3081  
A73081A4 06082B06  
01050507 30028681 976C6461 703A2F2F 2F434E3D 534A504B  
4943412C 434E3D41  
49412C43 4E3D5075 626C6963 2532304B 65792532 30536572  
76696365 732C434E  
3D536572 76696365 732C434E 3D436F6E 66696775 72617469  
6F6E2C44 433D736A  
706B692C 44433D63 6F6D3F63 41436572 74696669 63617465

3F626173 653F6F62  
6A656374 636C6173 733D6365 72746966 69636174 696F6E41  
7574686F 72697479  
300D0609 2A864886 F70D0101 05050003 41008FE9 45687473  
3798A614 D3A41747  
D357B72B 8D286162 91A7B519 B100159E CF283215 28DE4504  
EBB55282 247A9164  
DC6B8185 63F159DC 18F6541B E289FC37 EC74  
quit  
certificate ra-sign 054E60AD000000000002  
308204A0 3082044A A0030201 02020A05 4E60AD00 00000000  
02300D06 092A8648  
86F70D01 01050500 305F310B 30090603 55040613 02555331  
0B300906 03550408  
13024341 3111300F 06035504 07130853 414E204A 4F534531  
0E300C06 0355040A  
1305534A 54414331 0E300C06 0355040B 1305534A 504B4931  
10300E06 03550403  
1307534A 504B4943 41301E17 0D303230 31313130 31353932  
375A170D 30343031  
31313031 35393237 5A305F31 0B300906 03550406 13025553  
310B3009 06035504  
08130243 41311130 0F060355 04071308 53414E20 4A4F5345  
310E300C 06035504  
0A130553 4A544143 310E300C 06035504 0B130553 4A504B49  
3110300E 06035504  
03130753 4A56504E 52413081 9F300D06 092A8648 86F70D01  
01010500 03818D00  
30818902 818100E2 61FD62D2 64BED93E 7DBF1FDE 52F0D811  
479A4F4E 48E56811  
83ED9285 F2A3907B F236F508 43742D4A E89A76EF 3CB98722  
D0A7DC1F 432F386C  
721A3379 D50B7EA7 43C07AD0 AA6C087D FDA7BDBF 0BA92FA3  
711A7F54 FB CAFBF6  
633FCEFA AA9D9A8D 2C79550F 99314B3E FC97F764 BC6D6D67  
D79A7292 A679B42F  
4B5C083F 0AA6C902 03010001 A38202A2 3082029E 300B0603  
551D0F04 04030207  
80301506 03551D25 040E300C 060A2B06 01040182 37140201  
303B0609 2B060104  
01823714 02042E1E 2C004500 6E007200 6F006C00 6C006D00  
65006E00 74004100  
67006500 6E007400 4F006600 66006C00 69006E00 65301D06  
03551D0E 04160414  
09AD6911 B0F87B73 06A2ECAE 24853CA4 DBB12A9E 30819806  
03551D23 04819030  
818D8014 2315574F 05405281 E113C7E8 6D83CBF2 33B71CB1  
A163A461 305F310B  
30090603 55040613 02555331 0B300906 03550408 13024341  
3111300F 06035504  
07130853 414E204A 4F534531 0E300C06 0355040A 1305534A  
54414331 0E300C06  
0355040B 1305534A 504B4931 10300E06 03550403 1307534A  
504B4943 41821009  
1B47AEE8 CFE2A94D 3E8B38F2 92F5AF30 81C60603 551D1F04  
81BE3081 BB3081B8  
A081B5A0 81B28681 AF6C6461 703A2F2F 2F434E3D 534A504B  
4943412C 434E3D73  
6A76706E 6D73706B 692C434E 3D434450 2C434E3D 5075626C  
69632532 304B6579  
25323053 65727669 6365732C 434E3D53 65727669 6365732C  
434E3D43 6F6E6669  
67757261 74696F6E 2C44433D 736A706B 692C4443 3D636F6D  
3F636572 74696669

63617465 5265766F 63617469 6F6E4C69 73743F62 6173653F  
6F626A65 6374636C  
6173733D 63524C44 69737472 69627574 696F6E50 6F696E74  
3081B706 082B0601  
05050701 010481AA 3081A730 81A40608 2B060105 05073002  
8681976C 6461703A  
2F2F2F43 4E3D534A 504B4943 412C434E 3D414941 2C434E3D  
5075626C 69632532  
304B6579 25323053 65727669 6365732C 434E3D53 65727669  
6365732C 434E3D43  
6F6E6669 67757261 74696F6E 2C44433D 736A706B 692C4443  
3D636F6D 3F634143  
65727469 66696361 74653F62 6173653F 6F626A65 6374636C  
6173733D 63657274  
69666963 6174696F 6E417574 686F7269 7479300D 06092A86  
4886F70D 01010505  
00034100 2CEFFC7E B2C42AED 167FA630 AB3F9460 5E12B77F  
07BC860A 48A5DBDB  
E942F9B8 1B053148 05A70A17 B2EF37D4 F4234622 DD59571B  
F8D8AF09 2B54D40C 9145302D  
quit  
certificate 0961EAC400000000000A  
30820444 308203EE A0030201 02020A09 61EAC400 00000000  
0A300D06 092A8648  
86F70D01 01050500 305F310B 30090603 55040613 02555331  
0B300906 03550408  
13024341 3111300F 06035504 07130853 414E204A 4F534531  
0E300C06 0355040A  
1305534A 54414331 0E300C06 0355040B 1305534A 504B4931  
10300E06 03550403  
1307534A 504B4943 41301E17 0D303230 31313132 30353931  
375A170D 30343031  
31313230 35393137 5A301C31 1A301806 092A8648 86F70D01  
0902130B 534A504B  
492E736A 74616330 5C300D06 092A8648 86F70D01 01010500  
034B0030 48024100  
C7FB363F 410E22E5 1B5649A6 8948CC05 D8A58518 A3633227  
F6908EE1 7809600F  
80771B65 09316FA0 DCB317D3 7FB6D7DF BBAC418D 2D8E2ABA  
418A49AE 7961560D  
02030100 01A38202 CD308202 C9300B06 03551D0F 04040302  
05A0301D 0603551D  
0E041604 142C9F6B 2DAFF8F8 C040121B B78AA486 0CD207E0  
DF308198 0603551D  
23048190 30818D80 14231557 4F054052 81E113C7 E86D83CB  
F233B71C B1A163A4  
61305F31 0B300906 03550406 13025553 310B3009 06035504  
08130243 41311130  
0F060355 04071308 53414E20 4A4F5345 310E300C 06035504  
0A130553 4A544143  
310E300C 06035504 0B130553 4A504B49 3110300E 06035504  
03130753 4A504B49  
43418210 091B47AE E8CFE2A9 4D3E8B38 F292F5AF 30190603  
551D1101 01FF040F  
300D820B 534A504B 492E736A 74616330 81C60603 551D1F04  
81BE3081 BB3081B8  
A081B5A0 81B28681 AF6C6461 703A2F2F 2F434E3D 534A504B  
4943412C 434E3D73  
6A76706E 6D73706B 692C434E 3D434450 2C434E3D 5075626C  
69632532 304B6579  
25323053 65727669 6365732C 434E3D53 65727669 6365732C  
434E3D43 6F6E6669  
67757261 74696F6E 2C44433D 736A706B 692C4443 3D636F6D  
3F636572 74696669

```

63617465 5265766F 63617469 6F6E4C69 73743F62 6173653F
6F626A65 6374636C
6173733D 63524C44 69737472 69627574 696F6E50 6F696E74
3081B706 082B0601
05050701 010481AA 3081A730 81A40608 2B060105 05073002
8681976C 6461703A
2F2F2F43 4E3D534A 504B4943 412C434E 3D414941 2C434E3D
5075626C 69632532
304B6579 25323053 65727669 6365732C 434E3D53 65727669
6365732C 434E3D43
6F6E6669 67757261 74696F6E 2C44433D 736A706B 692C4443
3D636F6D 3F634143
65727469 66696361 74653F62 6173653F 6F626A65 6374636C
6173733D 63657274
69666963 6174696F 6E417574 686F7269 7479300C 0603551D
130101FF 04023000
30130603 551D2504 0C300A06 082B0601 05050802 02303F06
092B0601 04018237
14020432 1E300049 00500053 00450043 0049006E 00740065
0072006D 00650064
00690061 00740065 004F0066 0066006C 0069006E 0065300D
06092A86 4886F70D
01010505 00034100 377A0F69 2909A243 11F41B30 4F3B125F
DDE22145 0BEA2BF1
4E030C8E B82DCFF9 3639C047 AF40A0A7 EE0FF252 71E48C82
4AA309C4 9343BFB6
2C9C2D81 FE788AF3
quit
!
crypto isakmp policy 1
 hash md5
!
crypto isakmp identity hostname
crypto isakmp keepalive 10
!
!
crypto ipsec transform-set myset esp-des esp-md5-hmac
crypto mib ipsec flowmib history tunnel size 200
crypto mib ipsec flowmib history failure size 200
!
crypto map vpn 10 ipsec-isakmp
 set peer 172.16.172.69
 set transform-set myset
 match address 101
!
!
!
!
!
!
!
!
!
!
controller ISA 2/1
!
!
!
!
interface Ethernet1/0
 ip address 172.16.172.10 255.255.255.240
 ip broadcast-address 172.16.172.0
 no ip redirects
 duplex half
 crypto map vpn

```

```
!  
interface Ethernet1/1  
  ip address 10.1.1.2 255.255.255.0  
  ip broadcast-address 10.1.1.0  
  duplex half  
!  
interface Ethernet1/2  
  no ip address  
  ip broadcast-address 0.0.0.0  
  shutdown  
  duplex half  
!  
interface Ethernet1/3  
  no ip address  
  ip broadcast-address 0.0.0.0  
  shutdown  
  duplex half  
!  
router ospf 1  
  log-adjacency-changes  
  redistribute static subnets  
  network 10.1.1.0 0.0.0.255 area 0  
!  
ip classless  
ip route 0.0.0.0 0.0.0.0 172.16.172.1  
no ip http server  
ip pim bidir-enable  
!  
access-list 101 permit ip 10.1.1.0 0.0.0.255 20.1.1.0  
0.0.0.255  
!  
route-map tftp permit 10  
  match ip address 150  
!  
!  
call rsvp-sync  
!  
!  
mgcp profile default  
!  
dial-peer cor custom  
!  
!  
!  
!  
gatekeeper  
  shutdown  
!  
!  
line con 0  
  exec-timeout 0 0  
line aux 0  
line vty 0 4  
  login  
line vty 5 15  
  login  
!  
!  
end
```

```
SJPKI#show crypto ca cert
```

```
CA Certificate
```

```
  Status: Available
```

```
  Certificate Serial Number:
```

091B47AEE8CFE2A94D3E8B38F292F5AF

Key Usage: General Purpose

Issuer:

CN = SJKICA  
OU = SJKPI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

Subject:

CN = SJKICA  
OU = SJKPI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

CRL Distribution Point:

ldap:///CN=SJKICA,CN=sjvpmnspki,CN=CDP,CN=Public%20Key%  
20Services,  
CN=Services,CN=Configuration,DC=sjpi,DC=com?

certificateRevocationList?base?objectclass=cRLDistributi  
onPoint

Validity Date:

start date: 01:51:39 UTC Jan 11 2002  
end date: 02:00:04 UTC Jan 11 2007

Associated Identity: MicrosoftPKI

RA KeyEncipher Certificate

Status: Available

Certificate Serial Number: 054E63CE000000000003

Key Usage: Encryption

Issuer:

CN = SJKICA  
OU = SJKPI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

Subject:

CN = SJVPNRA  
OU = SJKPI  
O = SJTAC  
L = SAN JOSE  
ST = CA  
C = US

CRL Distribution Point:

ldap:///CN=SJKICA,CN=sjvpmnspki,CN=CDP,CN=Public%20Key%  
20Services,  
CN=Services,CN=Configuration,DC=sjpi,DC=com?

certificateRevocationList?base?objectclass=cRLDistributi  
onPoint

Validity Date:

start date: 01:59:28 UTC Jan 11 2002  
end date: 01:59:28 UTC Jan 11 2004

Associated Identity: MicrosoftPKI

RA Signature Certificate

Status: Available

Certificate Serial Number: 054E60AD000000000002

Key Usage: Signature

Issuer:

```
CN = SJKICA
OU = SJKI
O = SJTAC
L = SAN JOSE
ST = CA
C = US
Subject:
CN = SJVPNRA
OU = SJKI
O = SJTAC
L = SAN JOSE
ST = CA
C = US
CRL Distribution Point:

ldap:///CN=SJKICA,CN=svpnmspki,CN=CDP,CN=Public%20Key%
20Services,
CN=Services,CN=Configuration,DC=sjpki,DC=com?

certificateRevocationList?base?objectclass=cRLDistributi
onPoint
Validity Date:
start date: 01:59:27 UTC Jan 11 2002
end date: 01:59:27 UTC Jan 11 2004
Associated Identity: MicrosoftPKI

Certificate
Status: Available
Certificate Serial Number: 0961EAC400000000000A
Key Usage: General Purpose
Issuer:
CN = SJKICA
OU = SJKI
O = SJTAC
L = SAN JOSE
ST = CA
C = US
Subject Name Contains:
Name: SJKI.sjtac
CRL Distribution Point:

ldap:///CN=SJKICA,CN=svpnmspki,CN=CDP,CN=Public%20Key%
20Services,
CN=Services,CN=Configuration,DC=sjpki,DC=com?

certificateRevocationList?base?objectclass=cRLDistributi
onPoint
Validity Date:
start date: 20:59:17 UTC Jan 11 2002
end date: 20:59:17 UTC Jan 11 2004
Associated Identity: MicrosoftPKI
```

## 문제 해결

### 문제 해결 명령

일부 IPSec 관련 IOS debug 명령을 사용하여 IKE(Internet Key Exchange) 협상이 여러 ID 인증서와 어떻게 작동하는지 확인할 수 있습니다.

일부 **show** 명령은 [출력 인터프리터](#) 틀에서 지원되는데(등록된 고객만), 이 틀을 사용하면 **show** 명



명 출력의 분석 결과를 볼 수 있습니다.

참고: debug 명령을 실행하기 전에 [디버그 명령에 대한 중요 정보를 참조하십시오.](#)

- **debug crypto isakmp** - IKE 이벤트에 대한 메시지를 표시합니다.
- **debug crypto ipsec** - IPsec 이벤트를 표시합니다.
- **debug crypto pki transaction** - CA와 라우터 간의 상호 작용(메시지 유형) 추적을 위한 디버그 메시지를 표시합니다.
- **debug crypto pki message** - CA와 라우터 간의 상호 작용(메시지 덤프) 세부 정보에 대한 디버그 메시지를 표시합니다.

## [Entrust CA 서버의 인증서](#)

다음 디버그가 SJVPN 및 SJhub에서 수집되었습니다. 일반적으로 SJVPN은 허브 라우터 SJhub에 대한 IPsec 터널을 시작하려고 시도합니다. SJhub는 지원하는 각 CA 도메인에 대해 CERT\_REQ 페이로드를 전송합니다. 각 **CERT\_REQ 페이로드**는 인증서 발급자의 DN(Distinguished Name)을 포함합니다. 그런 다음 SJVPN은 CERT\_REQ에서 DN을 매핑하고 자체 인증서를 SJhub에 전송합니다.

아래 예에서 SJhub 라우터는 SJVPN 라우터에서 보낸 **CERT\_REQ**를 기반으로 인증서를 전송합니다. Entrust CA 서버의 인증서가 사용됩니다.

- [SJVPN에서 수집된 디버그](#)
- [SJhub에서 수집된 디버그](#)
- [라우터의 CRL\(Certificate Revocation List\) 캐싱](#)

## [SJVPN에서 수집된 디버그](#)

```
00:02:24: IPSEC(sa_request): ,
(key eng. msg.) src= 172.16.172.52, dest= 172.16.172.69,
src_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xFA8261EB(4202848747), conn_id= 0, keysize= 0, flags= 0x4004
00:02:24: ISAKMP: received ke message (1/1)
00:02:24: ISAKMP: local port 500, remote port 500
00:02:24: ISAKMP (0:2): Input = IKE_MSG_FROM_IPSEC, IKE_SA_REQ_MM
Old State = IKE_READY New State = IKE_I_MM1
00:02:24: ISAKMP (0:2): beginning Main Mode exchange
00:02:24: ISAKMP (0:2): sending packet to 172.16.172.69 (I) MM_NO_STATE
00:02:24: ISAKMP (0:2): received packet from 172.16.172.69 (I) MM_NO_STATE
00:02:24: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_I_MM1 New State = IKE_I_MM2

00:02:24: ISAKMP (0:2): processing SA payload. message ID = 0
00:02:24: ISAKMP (0:2): Checking ISAKMP transform 1
against priority 1 policy
00:02:24: ISAKMP: encryption DES-CBC
00:02:24: ISAKMP: hash MD5
00:02:24: ISAKMP: default group 1
00:02:24: ISAKMP: auth RSA sig
00:02:24: ISAKMP: life type in seconds
00:02:24: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80
```

00:02:24: ISAKMP (0:2): atts are acceptable. Next payload is 0  
00:02:24: ISAKMP (0:2): SA is doing RSA signature authentication  
using id type ID\_FQDN  
00:02:24: ISAKMP (0:2): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Old State = IKE\_I\_MM2 New State = IKE\_I\_MM2  
  
00:02:24: ISAKMP (0:2): sending packet to 172.16.172.69 (I) MM\_SA\_SETUP  
00:02:24: ISAKMP (0:2): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Old State = IKE\_I\_MM2 New State = IKE\_I\_MM3  
  
00:02:24: ISAKMP (0:2): received packet from 172.16.172.69 (I) MM\_SA\_SETUP  
00:02:24: ISAKMP (0:2): Input = IKE\_MESG\_FROM\_PEER, IKE\_MM\_EXCH  
.ld State = IKE\_I\_MM3 New State = IKE\_I\_MM4  
  
00:02:24: ISAKMP (0:2): processing KE payload. message ID = 0  
00:02:24: ISAKMP (0:2): processing NONCE payload. message ID = 0  
00:02:24: ISAKMP (0:2): SKEYID state generated  
**00:02:24: ISAKMP (0:2): processing CERT\_REQ payload. message ID = 0**  
**00:02:24: ISAKMP (0:2): peer wants a CT\_X509\_SIGNATURE cert**  
**00:02:24: ISAKMP (0:2): peer want cert issued by CN = SJPKICA,**  
**OU = SJPKI, O = SJTAC, L = SAN JOSE, ST = CA, C = US**  
**00:02:24: ISAKMP (0:2): can't find router cert for signature!**  
**00:02:24: ISAKMP (2): issuer name is not a trusted root.**  
**00:02:24: ISAKMP (0:2): processing CERT\_REQ payload. message ID = 0**  
**00:02:24: ISAKMP (0:2): peer wants a CT\_X509\_SIGNATURE cert**  
**00:02:24: ISAKMP (0:2): peer want cert issued by OU = sjvnp,**  
**O = cisco, C = us**  
00:02:24: ISAKMP (0:2): processing vendor id payload  
00:02:24: ISAKMP (0:2): speaking to another IOS box!  
00:02:24: ISAKMP (0:2): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Old State = IKE\_I\_MM4 New State = IKE\_I\_MM4  
  
00:02:24: ISAKMP (2): ID payload  
next-payload : 6  
type : 2  
protocol : 17  
port : 500  
length : 19  
00:02:24: ISAKMP (2): Total payload length: 23  
00:02:24: ISAKMP (0:2): sending packet to 172.16.172.69 (I) MM\_KEY\_EXCH  
00:02:24: ISAKMP (0:2): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Old State = IKE\_I\_MM4 New State = IKE\_I\_MM5  
  
00:02:26: ISAKMP (0:2): received packet from 172.16.172.69 (I) MM\_KEY\_EXCH  
00:02:26: ISAKMP (0:2): Input = IKE\_MESG\_FROM\_PEER, IKE\_MM\_EXCH  
Old State = IKE\_I\_MM5 New State = UNKNOWN  
  
00:02:26: ISAKMP (0:2): processing ID payload. message ID = 0  
**00:02:26: ISAKMP (0:2): processing CERT payload. message ID = 0**  
**00:02:26: ISAKMP (0:2): processing a CT\_X509\_SIGNATURE cert**  
**00:02:26: CRYPTO\_PKI: status = 0: poll CRL**  
**00:02:27: CRYPTO\_PKI: ldap\_bind() succeeded.**  
**00:02:27: CRYPTO\_PKI: set CRL update timer with delay: 46206**  
**00:02:27: CRYPTO\_PKI: the current router time: 13:07:32 UTC Jan 14 2002**  
  
**00:02:27: CRYPTO\_PKI: the last CRL update time: 00:57:38 UTC Jan 14 2002**  
**00:02:27: CRYPTO\_PKI: the next CRL update time: 01:57:38 UTC Jan 15 2002**  
**00:02:27: CRYPTO\_PKI: status = 0: failed to get public key from the storage**  
**00:02:27: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**  
**00:02:27: CRYPTO\_PKI: status = 0: failed to get public key from the storage**  
**00:02:27: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**  
**00:02:27: CRYPTO\_PKI: status = 0: failed to get public key from the storage**  
**00:02:27: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**  
**00:02:28: CRYPTO\_PKI: transaction GetCRL completed**

00:02:28: CRYPTO\_PKI: blocking callback received status: 105  
00:02:28: CRYPTO\_PKI: Certificate verified, chain status= 1  
00:02:28: ISAKMP (0:2): processing SIG payload. message ID = 0  
00:02:28: ISAKMP (2): sa->peer.name = , sa->peer\_id.id.id\_fqdn.fqdn  
= SJhub.sjtac.com  
00:02:28: ISAKMP:received payload type 14  
00:02:28: ISAKMP (0:2): processing keep alive: proposal=10/2 sec.,  
actual=10/2 sec.  
00:02:28: ISA.!!  
Success rate is 40 percent (2/5), round-trip min/avg/max = 1/2/4 ms  
SJVPN#KMP (0:2): peer knows about the keepalive extension mechanism.  
00:02:28: ISAKMP (0:2): read keepalive extended attribute VPI: /0x2/0x4  
00:02:28: ISAKMP (0:2): peer keepalives capabilities: 0x1  
00:02:28: ISAKMP (0:2): SA has been authenticated with 172.16.172.69  
00:02:28: ISAKMP (0:2): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Old State = UNKNOWN New State = UNKNOWN  
  
00:02:28: ISAKMP (0:2): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Old State = UNKNOWN New State = IKE\_P1\_COMPLETE  
  
00:02:28: ISAKMP (0:2): beginning Quick Mode exchange, M-ID of -304515331  
00:02:28: ISAKMP (0:2): sending packet to 172.16.172.69 (I) QM\_IDLE  
00:02:28: ISAKMP (0:2): Node -304515331, Input = IKE\_MSG\_INTERNAL, IKE\_INIT\_QM  
Old State = IKE\_QM\_READY New State = IKE\_QM\_I\_QM1  
  
00:02:28: ISAKMP (0:2): Input = IKE\_MSG\_INTERNAL, IKE\_PHASE1\_COMPLETE  
Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE  
  
00:02:28: ISAKMP (0:2): received packet from 172.16.172.69 (I) QM\_IDLE  
00:02:28: ISAKMP (0:2): processing HASH payload. message ID = -304515331  
00:02:28: ISAKMP (0:2): processing SA payload. message ID = -304515331  
00:02:28: ISAKMP (0:2): Checking IPsec proposal 1  
00:02:28: ISAKMP: transform 1, ESP\_DES  
00:02:28: ISAKMP: attributes in transform:  
00:02:28: ISAKMP: encaps is 1  
00:02:28: ISAKMP: SA life type in seconds  
00:02:28: ISAKMP: SA life duration (basic) of 3600  
00:02:28: ISAKMP: SA life type in kilobytes  
00:02:28: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0  
00:02:28: ISAKMP: authenticator is HMAC-MD5  
00:02:28: ISAKMP (0:2): atts are acceptable.  
00:02:28: IPSEC(validate\_proposal\_request): proposal part #1,  
(key eng. msg.) dest= 172.16.172.69, src= 172.16.172.52,  
dest\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),  
src\_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),  
protocol= ESP, transform= esp-des esp-md5-hmac ,  
lifedur= 0s and 0kb,  
spi= 0x0(0), conn\_id= 0, keysize= 0, flags= 0x4  
00:02:28: ISAKMP (0:2): processing NONCE payload. message ID = -304515331  
00:02:28: ISAKMP (0:2): processing ID payload. message ID = -304515331  
00:02:28: ISAKMP (0:2): processing ID payload. message ID = -304515331  
00:02:28: ISAKMP (0:2): Creating IPsec SAs  
00:02:28: inbound SA from 172.16.172.69 to 172.16.172.52  
(proxy 20.1.1.0 to 50.1.1.0)  
00:02:28: has spi 0xFA8261EB and conn\_id 2029 and flags 4  
00:02:28: lifetime of 3600 seconds  
00:02:28: lifetime of 4608000 kilobytes  
00:02:28: outbound SA from 172.16.172.52 to 172.16.172.69  
(proxy 50.1.1.0 to 20.1.1.0 )  
00:02:28: has spi 206728450 and conn\_id 2030 and flags 4  
00:02:28: lifetime of 3600 seconds  
00:02:28: lifetime of 4608000 kilobytes  
00:02:28: IPSEC(key\_engine): got a queue event...  
00:02:28: IPSEC(initialize\_sas): ,

```
(key eng. msg.) dest= 172.16.172.52, src= 172.16.172.69,
dest_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),
src_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xFA8261EB(4202848747), conn_id= 2029, keysize= 0, flags= 0x4
00:02:28: IPSEC(initialize_sas): ,
(key eng. msg.) src= 172.16.172.52, dest= 172.16.172.69,
src_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xC526D02(206728450), conn_id= 2030, keysize= 0, flags= 0x4
00:02:28: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.16.172.52, sa_prot= 50,
sa_spi= 0xFA8261EB(4202848747),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2029
00:02:28: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.16.172.69, sa_prot= 50,
sa_spi= 0xC526D02(206728450),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2030
00:02:28: ISAKMP (0:2): sending packet to 172.16.172.69 (I) QM_IDLE
00:02:28: ISAKMP (0:2): deleting node -304515331 error FALSE reason ""
00:02:28: ISAKMP (0:2): Node -304515331, Input = IKE_MSG_FROM_PEER,
IKE_QM_EXCH
Old State = IKE_QM_I_QM1 New State = IKE_QM_PHASE2_COMPLETE
```

```
00:02:36: ISAKMP (0:2): received packet from 172.16.172.69 (I) QM_IDLE
00:02:36: ISAKMP (0:2): processing HASH payload. message ID = -2051070354
00:02:36: ISAKMP (0:2): processing NOTIFY ITS_ALIVE protocol 1
spi 0, message ID = -2051070354, sa = 62DF2768
00:02:36: ISAKMP (0:2): deleting node -2051070354 error
FALSE reason "informational (in) state 1"
00:02:36: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE
```

```
00:02:36: ISAKMP (0:2): sending packet to 172.16.172.69 (I) QM_IDLE
00:02:36: ISAKMP (0:2): purging node -739583249
00:02:36: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_MSG_KEEP_ALIVE
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE
```

## [SJhub에서 수집된 디버그](#)

```
00:02:18: ISAKMP (0:0): received packet from 172.16.172.52 (N) NEW SA
00:02:18: ISAKMP: local port 500, remote port 500
00:02:18: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_READY New State = IKE_R_MM1
00:02:18: ISAKMP (0:2): processing SA payload. message ID = 0
00:02:18: ISAKMP (0:2): Checking ISAKMP transform 1 against priority 1 policy
00:02:18: ISAKMP: encryption DES-CBC
00:02:18: ISAKMP: hash MD5
00:02:18: ISAKMP: default group 1
00:02:18: ISAKMP: auth RSA sig
00:02:18: ISAKMP: life type in seconds
00:02:18: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80
00:02:18: ISAKMP (0:2): atts are acceptable. Next payload is 3
00:02:18: ISAKMP (0:2): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_R_MM1 New State = IKE_R_MM1
```

```
00:02:18: ISAKMP (0:2): SA is doing RSA signature authentication
using id type ID_FQDN
00:02:18: ISAKMP (0:2): sending packet to 172.16.172.52 (R) MM_SA_SETUP
00:02:18: ISAKMP (0:2): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
```

Old State = IKE\_R\_MM1 New State = IKE\_R\_MM2

00:02:18: ISAKMP (0:2): received packet from 172.16.172.52 (R) MM\_SA\_SETUP

00:02:18: ISAKMP (0:2): Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH

Old State = IKE\_R\_MM2 New State = IKE\_R\_MM3

00:02:18: ISAKMP (0:2): processing KE payload. message ID = 0

00:02:19: ISAKMP (0:2): processing NONCE payload. message ID = 0

00:02:19: ISAKMP (0:2): SKEYID state generated

**00:02:19: ISAKMP (0:2): processing CERT\_REQ payload. message ID = 0**

**00:02:19: ISAKMP (0:2): peer wants a CT\_X509\_SIGNATURE cert**

**00:02:19: ISAKMP (0:2): peer want cert issued by OU = sjvpn, O = cisco, C = us**

00:02:19: ISAKMP (0:2): processing vendor id payload

00:02:19: ISAKMP (0:2): speaking to another IOS box!

00:02:19: ISAKMP (0:2): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE

Old State = IKE\_R\_MM3 New State = IKE\_R\_MM3

00:02:19: ISAKMP (0:2): sending packet to 172.16.172.52 (R) MM\_KEY\_EXCH

00:02:19: ISAKMP (0:2): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE

Old State = IKE\_R\_MM3 New State = IKE\_R\_MM4

00:02:19: ISAKMP (0:2): received packet from 172.16.172.52 (R) MM\_KEY\_EXCH

00:02:19: ISAKMP (0:2): Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH

Old State = IKE\_R\_MM4 New State = IKE\_R\_MM5

00:02:19: ISAKMP (0:2): processing ID payload. message ID = 0

**00:02:19: ISAKMP (0:2): processing CERT payload. message ID = 0**

**00:02:19: ISAKMP (0:2): processing a CT\_X509\_SIGNATURE cert**

**00:02:19: CRYPTO\_PKI: status = 0: poll CRL**

**00:02:19: CRYPTO\_PKI: ldap\_bind() succeeded.**

**00:02:20: CRYPTO\_PKI: set CRL update timer with delay: 49920**

**00:02:20: CRYPTO\_PKI: the current router time: 12:05:38 UTC Jan 14 2002**

**00:02:20: CRYPTO\_PKI: the last CRL update time: 00:57:38 UTC Jan 14 2002**

**00:02:20: CRYPTO\_PKI: the next CRL update time: 01:57:38 UTC Jan 15 2002**

**00:02:20: CRYPTO\_PKI: status = 0: failed to get public key from the storage**

**00:02:20: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**

**00:02:20: CRYPTO\_PKI: status = 0: failed to get public key from the storage**

**00:02:20: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**

**00:02:20: CRYPTO\_PKI: status = 0: failed to get public key from the storage**

**00:02:20: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**

**00:02:20: CRYPTO\_PKI: status = 0: failed to get public key from the storage**

**00:02:20: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**

**00:02:20: CRYPTO\_PKI: status = 0: failed to get public key from the storage**

**00:02:20: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**

**00:02:20: CRYPTO\_PKI: status = 0: failed to get public key from the storage**

**00:02:20: CRYPTO\_PKI: status = 65535: failed to get issuer pubkey in cert**

**00:02:21: CRYPTO\_PKI: transaction GetCRL completed**

**00:02:21: CRYPTO\_PKI: blocking callback received status: 105**

**00:02:21: CRYPTO\_PKI: Certificate verified, chain status= 1**

**00:02:21: ISAKMP (0:2): processing SIG payload. message ID = 0**

**00:02:21: ISAKMP (2): sa->peer.name = , sa->peer\_id.id.id\_fqdn.fqdn**

**= SJVPN.sjvpn.com**

00:02:21: ISAKMP:received payload type 14

00:02:21: ISAKMP (0:2): processing keep alive: proposal=10/2 sec.,  
actual=10/2 sec.

00:02:21: ISAKMP (0:2): peer knows about the keepalive extension mechanism.

00:02:21: ISAKMP (0:2): read keepalive extended attribute VPI: /0x2/0x4

00:02:21: ISAKMP (0:2): peer keepalives capabilities: 0x1

**00:02:21: ISAKMP (0:2): SA has been authenticated with 172.16.172.52**

00:02:21: ISAKMP (0:2): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE

Old State = IKE\_R\_MM5 New State = IKE\_R\_MM5

00:02:21: ISAKMP (2): ID payload

```
next-payload : 6
type : 2
protocol : 17
port : 500
length : 19
00:02:21: ISAKMP (2): Total payload length: 23
00:02:21: ISAKMP (0:2): sending packet to 172.16.172.52 (R) QM_IDLE
00:02:21: ISAKMP (0:2): Input = IKE_MESG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_R_MM5 New State = IKE_P1_COMPLETE

00:02:23: ISAKMP (0:2): received packet from 172.16.172.52 (R) QM_IDLE
00:02:23: ISAKMP (0:2): processing HASH payload. message ID = -304515331
00:02:23: ISAKMP (0:2): processing SA payload. message ID = -304515331
00:02:23: ISAKMP (0:2): Checking IPsec proposal 1
00:02:23: ISAKMP: transform 1, ESP_DES
00:02:23: ISAKMP: attributes in transform:
00:02:23: ISAKMP: encaps is 1
00:02:23: ISAKMP: SA life type in seconds
00:02:23: ISAKMP: SA life duration (basic) of 3600
00:02:23: ISAKMP: SA life type in kilobytes
00:02:23: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0
00:02:23: ISAKMP: authenticator is HMAC-MD5
00:02:23: ISAKMP (0:2): atts are acceptable.
00:02:23: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) dest= 172.16.172.69, src= 172.16.172.52,
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
src_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4
00:02:23: ISAKMP (0:2): processing NONCE payload. message ID = -304515331
00:02:23: ISAKMP (0:2): processing ID payload. message ID = -304515331
00:02:23: ISAKMP (2): ID_IPV4_ADDR_SUBNET src 50.1.1.0/255.255.255.0

    prot 0 port 0
00:02:23: ISAKMP (0:2): processing ID payload. message ID = -304515331
00:02:23: ISAKMP (2): ID_IPV4_ADDR_SUBNET dst 20.1.1.0/255.255.255.0
    prot 0 port 0
00:02:23: ISAKMP (0:2): asking for 1 spis from ipsec
00:02:23: ISAKMP (0:2): Node -304515331, Input = IKE_MESG_FROM_PEER,
    IKE_QM_EXCH
Old State = IKE_QM_READY New State = IKE_QM_SPI_STARVE

00:02:23: IPSEC(key_engine): got a queue event...
00:02:23: IPSEC(spi_response): getting spi 206728450 for SA
from 172.16.172.52 to 172.16.172.69 for prot 3
00:02:23: ISAKMP: received ke message (2/1)
00:02:23: ISAKMP (0:2): sending packet to 172.16.172.52 (R) QM_IDLE
00:02:23: ISAKMP (0:2): Node -304515331, Input = IKE_MESG_FROM_IPSEC,
    IKE_SPI_REPLY
Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2

00:02:23: ISAKMP (0:2): received packet from 172.16.172.52 (R) QM_IDLE
00:02:23: ISAKMP (0:2): Creating IPsec SAs
00:02:23: inbound SA from 172.16.172.52 to 172.16.172.69
(proxy 50.1.1.0 to 20.1.1.0)
00:02:23: has spi 0xC526D02 and conn_id 2000 and flags 4
00:02:23: lifetime of 3600 seconds
00:02:23: lifetime of 4608000 kilobytes
00:02:23: outbound SA from 172.16.172.69 to 172.16.172.52
(proxy 20.1.1.0 to 50.1.1.0 )
00:02:23: has spi -92118549 and conn_id 2001 and flags 4
00:02:23: lifetime of 3600 seconds
00:02:23: lifetime of 4608000 kilobytes
```

```

00:02:23: ISAKMP (0:2): deleting node -304515331 error
      FALSE reason "quick mode done (await())"
00:02:23: ISAKMP (0:2): Node -304515331, Input = IKE_MSG_FROM_PEER,
      IKE_QM_EXCH
Old State = IKE_QM_R_QM2 New State = IKE_QM_PHASE2_COMPLETE

00:02:23: IPSEC(key_engine): got a queue event...
00:02:23: IPSEC(initialize_sas): ,
(key eng. msg.) dest= 172.16.172.69, src= 172.16.172.52,
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
src_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xC526D02(206728450), conn_id= 2000, keysize= 0, flags= 0x4
00:02:23: IPSEC(initialize_sas): ,
(key eng. msg.) src= 172.16.172.69, dest= 172.16.172.52,
src_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 50.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xFA8261EB(4202848747), conn_id= 2001, keysize= 0, flags= 0x4
00:02:23: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.16.172.69, sa_prot= 50,
sa_spi= 0xC526D02(206728450),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2000
00:02:23: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.16.172.52, sa_prot= 50,
sa_spi= 0xFA8261EB(4202848747),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2001
00:02:31: ISAKMP (0:2): sending packet to 172.16.172.52 (R) QM_IDLE
00:02:31: ISAKMP (0:2): purging node -2051070354
00:02:31: ISAKMP (0:2): Input = IKE_MSG_FROM_TIMER, IKE_TIMER_IM_ALIVE
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

00:02:31: ISAKMP (0:2): received packet from 172.16.172.52 (R) QM_IDLE
00:02:31: ISAKMP (0:2): processing HASH payload. message ID = -739583249
00:02:31: ISAKMP (0:2): processing NOTIFY ITS_ALIVE_ACK protocol 1
spi 0, message ID = -739583249, sa = 62DF5324
00:02:31: ISAKMP (0:2): peer 172.16.172.52 is alive!
00:02:31: ISAKMP (0:2): deleting node -739583249 error
      FALSE reason "informational (in) state 1"
00:02:31: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

```

## [라우터의 CRL\(Certificate Revocation List\) 캐싱](#)

```
SJVPN#show crypto ca crls
```

```
CRL Issuer Name:
```

```
OU = sjvpn, O = cisco, C = us
```

```
LastUpdate: 00:57:38 UTC Jan 14 2002
```

```
NextUpdate: 01:57:38 UTC Jan 15 2002
```

```
Retrieved from CRL Distribution Point:
```

```
LDAP: CN = CRL1, OU = sjvpn, O = cisco, C = us
```

```
SJhub#show crypto ca crls
```

```
CRL Issuer Name:
```

```
OU = sjvpn, O = cisco, C = us
```

```
LastUpdate: 00:57:38 UTC Jan 14 2002
```

```
NextUpdate: 01:57:38 UTC Jan 15 2002
```

```
Retrieved from CRL Distribution Point:
```

```
LDAP: CN = CRL1, OU = sjvpn, O = cisco, C = us
```

## [Microsoft CA 서버의 인증서](#)

IKE 협상 중에 SJPKI 및 SJhub에서 다음 디버그가 수집되었습니다. SJPKI가 첫 번째 CERT\_REQ 페이로드를 확인한 후 데이터베이스에서 일치하는 인증서를 발견하므로 두 번째 CERT\_REQ 페이로드를 계속 조사하지 않습니다. 이 경우 Microsoft CA 서버의 인증서가 IKE 인증에 사용됩니다.

- [SJPKI에서 수집된 디버그](#)
- [SJhub에서 수집된 디버그](#)

## [SJPKI에서 수집된 디버그](#)

```
2d21h: IPSEC(sa_request): ,
(key eng. msg.) src= 172.16.172.10, dest= 172.16.172.69,
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xE8559075(3897921653), conn_id= 0, keysize= 0, flags= 0x4004
2d21h: ISAKMP: received ke message (1/1)
2d21h: ISAKMP: local port 500, remote port 500
2d21h: ISAKMP (0:1): Input = IKE_MSG_FROM_IPSEC, IKE_SA_REQ_MM
Old State = IKE_READY New State = IKE_I_MM1
2d21h: ISAKMP (0:1): beginning Main Mode exchange
2d21h: ISAKMP (0:1): sending packet to 172.16.172.69 (I) MM_NO_STATE
2d21h: ISAKMP (0:1): received packet from 172.16.172.69 (I) MM_NO_STATE
2d21h: ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_I_MM1 New State = IKE_I_MM2

2d21h: ISAKMP (0:1): processing SA payload. message ID = 0
2d21h: ISAKMP (0:1): Checking ISAKMP transform 1 against priority 1 policy
2d21h: ISAKMP: encryption DES-CBC
2d21h: ISAKMP: hash MD5
2d21h: ISAKMP: default group 1
2d21h: ISAKMP: auth RSA sig
2d21h: ISAKMP: life type in seconds
2d21h: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80
2d21h: ISAKMP (0:1): atts are acceptable. Next payload is 0
2d21h: ISAKMP (0:1): SA is doing RSA signature authentication
    using id type ID_FQDN
2d21h: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_I_MM2 New State = IKE_I_MM2

2d21h: ISAKMP (0:1): sending packet to 172.16.172.69 (I) MM_SA_SETUP
2d21h: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_I_MM2 New State = IKE_I_MM3

2d21h: ISAKMP (0:1): received packet from 172.16.172.69 (I) MM_SA_SETUP
2d21h: ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_I_MM3 New State = IKE_I_MM4

2d21h: ISAKMP (0:1): processing KE payload. message ID = 0
2d21h: .!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 1/3/4 ms
SJPKI# ISAKMP (0:1): processing NONCE payload. message ID = 0
2d21h: ISAKMP (0:1): SKEYID state generated
2d21h: ISAKMP (0:1): processing CERT_REQ payload. message ID = 0
2d21h: ISAKMP (0:1): peer wants a CT_X509_SIGNATURE cert
2d21h: ISAKMP (0:1): peer want cert issued by CN = SJPKICA,
OU = SJPKI, O = SJTAC, L = SAN JOSE, ST = CA, C = US
2d21h: ISAKMP (0:1): already have a matching cert for this peer.
Finish processing cert req.
2d21h: ISAKMP (0:1): processing vendor id payload
```



2d21h: ISAKMP (0:1): speaking to another IOS box!  
2d21h: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Old State = IKE\_I\_MM4 New State = IKE\_I\_MM4

2d21h: ISAKMP (1): ID payload  
next-payload : 6  
type : 2  
protocol : 17  
port : 500  
length : 15

2d21h: ISAKMP (1): Total payload length: 19  
2d21h: ISAKMP: growing send buffer from 1024 to 3072  
2d21h: ISAKMP (0:1): sending packet to 172.16.172.69 (I) MM\_KEY\_EXCH  
2d21h: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Old State = IKE\_I\_MM4 New State = IKE\_I\_MM5

2d21h: ISAKMP (0:1): received packet from 172.16.172.69 (I) MM\_KEY\_EXCH  
2d21h: ISAKMP (0:1): Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH  
Old State = IKE\_I\_MM5 New State = UNKNOWN

2d21h: ISAKMP (0:1): processing ID payload. message ID = 0  
**2d21h: ISAKMP (0:1): processing CERT payload. message ID = 0**  
**2d21h: ISAKMP (0:1): processing a CT\_X509\_SIGNATURE cert**  
**2d21h: CRYPTO\_PKI: status = 0: crl check ignored**  
**2d21h: CRYPTO\_PKI: WARNING: Certificate, private key**  
**or CRL was not found while selecting CRL**

**2d21h: CRYPTO\_PKI: cert revocation status unknown.**  
**2d21h: ISAKMP (0:1): cert approved with warning**  
**2d21h: ISAKMP (0:1): processing SIG payload. message ID = 0**  
**2d21h: ISAKMP (1): sa->peer.name = , sa->peer\_id.id.id\_fqdn.fqdn**  
**= SJhub.sjtac.com**

2d21h: ISAKMP:received payload type 14  
2d21h: ISAKMP (0:1): processing keep alive: proposal=10/2 sec.,  
actual=10/2 sec.

2d21h: ISAKMP (0:1): peer knows about the keepalive extension mechanism.  
2d21h: ISAKMP (0:1): read keepalive extended attribute VPI: /0x2/0x4  
2d21h: ISAKMP (0:1): peer keepalives capabilities: 0x1  
2d21h: ISAKMP (0:1): SA has been authenticated with 172.16.172.69  
2d21h: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Old State = UNKNOWN New State = UNKNOWN

2d21h: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Old State = UNKNOWN New State = IKE\_P1\_COMPLETE

2d21h: ISAKMP (0:1): beginning Quick Mode exchange, M-ID of -1644677681  
2d21h: ISAKMP (0:1): sending packet to 172.16.172.69 (I) QM\_IDLE  
2d21h: ISAKMP (0:1): Node -1644677681, Input = IKE\_MSG\_INTERNAL, IKE\_INIT\_QM  
Old State = IKE\_QM\_READY New State = IKE\_QM\_I\_QM1

2d21h: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PHASE1\_COMPLETE  
Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE

2d21h: ISAKMP (0:1): received packet from 172.16.172.69 (I) QM\_IDLE  
2d21h: ISAKMP (0:1): processing HASH payload. message ID = -1644677681

2d21h: ISAKMP (0:1): processing SA payload. message ID = -1644677681  
2d21h: ISAKMP (0:1): Checking IPsec proposal 1  
2d21h: ISAKMP: transform 1, ESP\_DES  
2d21h: ISAKMP: attributes in transform:  
2d21h: ISAKMP: encaps is 1  
2d21h: ISAKMP: SA life type in seconds  
2d21h: ISAKMP: SA life duration (basic) of 3600  
2d21h: ISAKMP: SA life type in kilobytes

```
2d21h: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0
2d21h: ISAKMP: authenticator is HMAC-MD5
2d21h: ISAKMP (0:1): atts are acceptable.
2d21h: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) dest= 172.16.172.69, src= 172.16.172.10,
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4
2d21h: ISAKMP (0:1): processing NONCE payload. message ID = -1644677681
2d21h: ISAKMP (0:1): processing ID payload. message ID = -1644677681
2d21h: ISAKMP (0:1): processing ID payload. message ID = -1644677681
2d21h: ISAKMP (0:1): Creating IPsec SAs
2d21h: inbound SA from 172.16.172.69 to 172.16.172.10
(proxy 20.1.1.0 to 10.1.1.0)
2d21h: has spi 0xE8559075 and conn_id 2029 and flags 4
2d21h: lifetime of 3600 seconds
2d21h: lifetime of 4608000 kilobytes
2d21h: outbound SA from 172.16.172.10 to 172.16.172.69
(proxy 10.1.1.0 to 20.1.1.0 )
2d21h: has spi -889328648 and conn_id 2030 and flags 4
2d21h: lifetime of 3600 seconds
2d21h: lifetime of 4608000 kilobytes
2d21h: IPSEC(key_engine): got a queue event...
2d21h: IPSEC(initialize_sas): ,
(key eng. msg.) dest= 172.16.172.10, src= 172.16.172.69,
dest_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
src_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xE8559075(3897921653), conn_id= 2029, keysize= 0, flags= 0x4
2d21h: IPSEC(initialize_sas): ,
(key eng. msg.) src= 172.16.172.10, dest= 172.16.172.69,
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xCAFDEBF8(3405638648), conn_id= 2030, keysize= 0, flags= 0x4
2d21h: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.16.172.10, sa_prot= 50,
sa_spi= 0xE8559075(3897921653),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2029
2d21h: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.16.172.69, sa_prot= 50,
sa_spi= 0xCAFDEBF8(3405638648),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2030
2d21h: ISAKMP (0:1): sending packet to 172.16.172.69 (I) QM_IDLE
2d21h: ISAKMP (0:1): deleting node -1644677681 error FALSE reason ""
2d21h: ISAKMP (0:1): Node -1644677681, Input = IKE_MSG_FROM_PEER,
IKE_QM_EXCH
Old State = IKE_QM_I_QM1 New State = IKE_QM_PHASE2_COMPLETE

SJPKI#
2d22h: ISAKMP (0:1): received packet from 172.16.172.69 (I) QM_IDLE
2d22h: ISAKMP (0:1): processing HASH payload. message ID = -2115263482
2d22h: ISAKMP (0:1): processing NOTIFY ITS_ALIVE protocol 1
spi 0, message ID = -2115263482, sa = 6335D814
2d22h: ISAKMP (0:1): deleting node -2115263482 error
FALSE reason "informational (in) state 1"
2d22h: ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

2d22h: ISAKMP (0:1): sending packet to 172.16.172.69 (I) QM_IDLE
```

2d22h: ISAKMP (0:1): purging node -1850875331  
2d22h: ISAKMP (0:1): Input = IKE\_MSG\_FROM\_PEER, IKE\_MSG\_KEEP\_ALIVE

SJPKI#Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE

## SJhub에서 수집된 디버그

SJhub#

```
00:07:26: ISAKMP (0:0): received packet from 172.16.172.10 (N) NEW SA
00:07:26: ISAKMP: local port 500, remote port 500
00:07:26: ISAKMP (0:3): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_READY New State = IKE_R_MM1
00:07:26: ISAKMP (0:3): processing SA payload. message ID = 0
00:07:26: ISAKMP (0:3): Checking ISAKMP transform 1 against priority 1 policy
00:07:26: ISAKMP: encryption DES-CBC
00:07:26: ISAKMP: hash MD5
00:07:26: ISAKMP: default group 1
00:07:26: ISAKMP: auth RSA sig
00:07:26: ISAKMP: life type in seconds
00:07:26: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80
00:07:26: ISAKMP (0:3): atts are acceptable. Next payload is 3
00:07:26: ISAKMP (0:3): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_R_MM1 New State = IKE_R_MM1

00:07:26: ISAKMP (0:3): SA is doing RSA signature authentication
    using id type ID_FQDN
00:07:26: ISAKMP (0:3): sending packet to 172.16.172.10 (R) MM_SA_SETUP
00:07:26: ISAKMP (0:3): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_R_MM1 New State = IKE_R_MM2

00:07:26: ISAKMP (0:3): received packet from 172.16.172.10 (R) MM_SA_SETUP
00:07:26: ISAKMP (0:3): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_R_MM2 New State = IKE_R_MM3

00:07:26: ISAKMP (0:3): processing KE payload. message ID = 0
00:07:26: ISAKMP (0:3): processing NONCE payload. message ID = 0
00:07:26: ISAKMP (0:3): SKEYID state generated
00:07:26: ISAKMP (0:3): processing CERT_REQ payload. message ID = 0
00:07:26: ISAKMP (0:3): peer wants a CT_X509_SIGNATURE cert
00:07:26: ISAKMP (0:3): peer want cert issued by CN = SJPKICA,
OU = SJPKI, O = SJTAC, L = SAN JOSE, ST = CA, C = US
00:07:26: ISAKMP (0:3): processing vendor id payload
00:07:26: ISAKMP (0:3): speaking to another IOS box!
00:07:26: ISAKMP (0:3): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_R_MM3 New State = IKE_R_MM3

00:07:26: ISAKMP (0:3): sending packet to 172.16.172.10 (R) MM_KEY_EXCH
00:07:26: ISAKMP (0:3): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_R_MM3 New State = IKE_R_MM4

00:07:26: ISAKMP (0:3): received packet from 172.16.172.10 (R) MM_KEY_EXCH
00:07:26: ISAKMP (0:3): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_R_MM4 New State = IKE_R_MM5

00:07:26: ISAKMP (0:3): processing ID payload. message ID = 0
00:07:26: ISAKMP (0:3): processing CERT payload. message ID = 0
00:07:26: ISAKMP (0:3): processing a CT_X509_SIGNATURE cert
00:07:26: CRYPTO_PKI: status = 0: crl check ignored
00:07:26: CRYPTO_PKI: WARNING: Certificate, private key
or CRL was not found while selecting CRL

00:07:26: CRYPTO_PKI: cert revocation status unknown.
00:07:26: ISAKMP (0:3): cert approved with warning
```

00:07:26: ISAKMP (0:3): processing SIG payload. message ID = 0  
00:07:26: ISAKMP (3): sa->peer.name = , sa->peer\_id.id.id\_fqdn.fqdn  
= SJKPI.sjtac  
00:07:26: ISAKMP:received payload type 14  
00:07:26: ISAKMP (0:3): processing keep alive: proposal=10/2 sec.,  
actual=10/2 sec.  
00:07:26: ISAKMP (0:3): peer knows about the keepalive extension mechanism.  
00:07:26: ISAKMP (0:3): read keepalive extended attribute VPI: /0x2/0x4  
00:07:26: ISAKMP (0:3): peer keepalives capabilities: 0x1  
00:07:26: ISAKMP (0:3): SA has been authenticated with 172.16.172.10  
00:07:26: ISAKMP (0:3): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Old State = IKE\_R\_MM5 New State = IKE\_R\_MM5  
  
00:07:26: ISAKMP (3): ID payload  
next-payload : 6  
type : 2  
protocol : 17  
port : 500  
length : 19  
00:07:26: ISAKMP (3): Total payload length: 23  
00:07:26: ISKAMP: growing send buffer from 1024 to 3072  
00:07:26: ISAKMP (0:3): sending packet to 172.16.172.10 (R) QM\_IDLE  
00:07:26: ISAKMP (0:3): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Old State = IKE\_R\_MM5 New State = IKE\_P1\_COMPLETE  
  
00:07:26: ISAKMP (0:3): received packet from 172.16.172.10 (R) QM\_IDLE  
00:07:26: ISAKMP (0:3): processing HASH payload. message ID = -1644677681  
00:07:26: ISAKMP (0:3): processing SA payload. message ID = -1644677681  
00:07:26: ISAKMP (0:3): Checking IPsec proposal 1  
00:07:26: ISAKMP: transform 1, ESP\_DES  
00:07:26: ISAKMP: attributes in transform:  
00:07:26: ISAKMP: encaps is 1  
00:07:26: ISAKMP: SA life type in seconds  
00:07:26: ISAKMP: SA life duration (basic) of 3600  
00:07:26: ISAKMP: SA life type in kilobytes  
00:07:26: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0  
00:07:26: ISAKMP: authenticator is HMAC-MD5  
00:07:26: ISAKMP (0:3): atts are acceptable.  
00:07:26: IPSEC(validate\_proposal\_request): proposal part #1,  
(key eng. msg.) dest= 172.16.172.69, src= 172.16.172.10,  
dest\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),  
src\_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),  
protocol= ESP, transform= esp-des esp-md5-hmac ,  
lifedur= 0s and 0kb,  
spi= 0x0(0), conn\_id= 0, keysize= 0, flags= 0x4  
00:07:26: ISAKMP (0:3): processing NONCE payload. message ID = -1644677681  
00:07:26: ISAKMP (0:3): processing ID payload. message ID = -1644677681  
00:07:26: ISAKMP (3): ID\_IPV4\_ADDR\_SUBNET src 10.1.1.0/255.255.255.0  
prot 0 port 0  
00:07:26: ISAKMP (0:3): processing ID payload. message ID = -1644677681  
00:07:26: ISAKMP (3): ID\_IPV4\_ADDR\_SUBNET dst 20.1.1.0/255.255.255.0  
prot 0 port 0  
00:07:26: ISAKMP (0:3): asking for 1 spis from ipsec  
00:07:26: ISAKMP (0:3): Node -1644677681,  
Input = IKE\_MESG\_FROM\_PEER, IKE\_QM\_EXCH  
Old State = IKE\_QM\_READY New State = IKE\_QM\_SPI\_STARVE  
  
00:07:26: IPSEC(key\_engine): got a queue event...  
00:07:26: IPSEC(spi\_response): getting spi 3405638648 for SA  
from 172.16.172.10 to 172.16.172.69 for prot 3  
00:07:26: ISAKMP: received ke message (2/1)  
00:07:27: ISAKMP (0:3): sending packet to 172.16.172.10 (R) QM\_IDLE  
00:07:27: ISAKMP (0:3): Node -1644677681, Input = IKE\_MESG\_FROM\_IPSEC,  
IKE\_SPI\_REPLY

Old State = IKE\_QM\_SPI\_STARVE New State = IKE\_QM\_R\_QM2

00:07:27: ISAKMP (0:3): received packet from 172.16.172.10 (R) QM\_IDLE

00:07:27: ISAKMP (0:3): Creating IPsec SAs

00:07:27: inbound SA from 172.16.172.10 to 172.16.172.69  
(proxy 10.1.1.0 to 20.1.1.0)

00:07:27: has spi 0xCAFDEBF8 and conn\_id 2002 and flags 4

00:07:27: lifetime of 3600 seconds

00:07:27: lifetime of 4608000 kilobytes

00:07:27: outbound SA from 172.16.172.69 to 172.16.172.10  
(proxy 20.1.1.0 to 10.1.1.0 )

00:07:27: has spi -397045643 and conn\_id 2003 and flags 4

00:07:27: lifetime of 3600 seconds

00:07:27: lifetime of 4608000 kilobytes

00:07:27: ISAKMP (0:3): deleting node -1644677681 error  
FALSE reason "quick mode done (await())"

00:07:27: ISAKMP (0:3): Node -1644677681, Input = IKE\_MESG\_FROM\_PEER,  
IKE\_QM\_EXCH

Old State = IKE\_QM\_R\_QM2 New State = IKE\_QM\_PHASE2\_COMPLETE

00:07:27: IPSEC(key\_engine): got a queue event...

00:07:27: IPSEC(initialize\_sas): ,

(key eng. msg.) dest= 172.16.172.69, src= 172.16.172.10,

dest\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),

src\_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),

protocol= ESP, transform= esp-des esp-md5-hmac ,

lifedur= 3600s and 4608000kb,

spi= 0xCAFDEBF8(3405638648), conn\_id= 2002, keysize= 0, flags= 0x4

00:07:27: IPSEC(initialize\_sas): ,

(key eng. msg.) src= 172.16.172.69, dest= 172.16.172.10,

src\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),

dest\_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),

protocol= ESP, transform= esp-des esp-md5-hmac ,

lifedur= 3600s and 4608000kb,

spi= 0xE8559075(3897921653), conn\_id= 2003, keysize= 0, flags= 0x4

00:07:27: IPSEC(create\_sa): sa created,

(sa) sa\_dest= 172.16.172.69, sa\_prot= 50,

sa\_spi= 0xCAFDEBF8(3405638648),

sa\_trans= esp-des esp-md5-hmac , sa\_conn\_id= 2002

00:07:27: IPSEC(create\_sa): sa created,

(sa) sa\_dest= 172.16.172.10, sa\_prot= 50,

sa\_spi= 0xE8559075(3897921653),

sa\_trans= esp-des esp-md5-hmac , sa\_conn\_id= 2003

00:07:30: ISAKMP (0:2): sending packet to 172.16.172.52 (R) QM\_IDLE

00:07:30: ISAKMP (0:2): purging node -652282805

00:07:30: ISAKMP (0:2): Input = IKE\_MESG\_FROM\_TIMER, IKE\_TIMER\_IM\_ALIVE

Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE

00:07:30: ISAKMP (0:2): received packet from 172.16.172.52 (R) QM\_IDLE

00:07:30: ISAKMP (0:2): processing HASH payload. message ID = 564680579

00:07:30: ISAKMP (0:2): processing NOTIFY ITS\_ALIVE\_ACK protocol 1

spi 0, message ID = 564680579, sa = 62DF5324

00:07:30: ISAKMP (0:2): peer 172.16.172.52 is alive!

00:07:30: ISAKMP (0:2): deleting node 564680579 error

FALSE reason "informational (in) state 1"

00:07:30: ISAKMP (0:2): Input = IKE\_MESG\_FROM\_PEER, IKE\_INFO\_NOTIFY

Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE

00:07:32: ISAKMP (0:2): purging node 1414513005

00:07:36: ISAKMP (0:3): sending packet to 172.16.172.10 (R) QM\_IDLE

00:07:36: ISAKMP (0:3): purging node -2115263482

00:07:36: ISAKMP (0:3): Input = IKE\_MESG\_FROM\_TIMER, IKE\_TIMER\_IM\_ALIVE

Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE

```

00:07:36: ISAKMP (0:3): received packet from 172.16.172.10 (R) QM_IDLE
00:07:36: ISAKMP (0:3): processing HASH payload. message ID = -1850875331
00:07:36: ISAKMP (0:3): processing NOTIFY ITS_ALIVE_ACK protocol 1
spi 0, message ID = -1850875331, sa = 63338630
00:07:36: ISAKMP (0:3): peer 172.16.172.10 is alive!
00:07:36: ISAKMP (0:3): deleting node -1850875331 error
FALSE reason "informational (in) state 1"
00:07:36: ISAKMP (0:3): Input = IKE_MESG_FROM_PEER, IKE_INFO_NOTIFY
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

00:07:40: ISAKMP (0:2): received packet from 172.16.172.52 (R) QM_IDLE
00:07:40: ISAKMP (0:2): processing HASH payload. message ID = 2075099983
00:07:40: ISAKMP (0:2): processing NOTIFY ITS_ALIVE protocol 1
spi 0, message ID = 2075099983, sa = 62DF5324
00:07:40: ISAKMP (0:2): deleting node 2075099983 error
FALSE reason "informational (in) state 1"
00:07:40: ISAKMP (0:2): Input = IKE_MESG_FROM_PEER, IKE_INFO_NOTIFY
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

00:07:40: ISAKMP (0:2): sending packet to 172.16.172.52 (R) QM_IDLE
00:07:40: ISAKMP (0:2): purging node 1356214450
00:07:40: ISAKMP (0:2): Input = IKE_MESG_FROM_PEER, IKE_MESG_KEEP_ALIVE
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

```

## show 명령 출력

터널이 성공적으로 협상된 후 **show crypto ipsec sa** 명령을 사용하여 라우터에서 ISAKMP 및 IPsec 보안 연결을 확인할 수 있습니다. 샘플 출력은 아래와 같습니다.

```

SJhub#show crypto isakmp sa
dst src state conn-id slot
172.16.172.69 172.16.172.10 QM_IDLE 3 0
172.16.172.69 172.16.172.52 QM_IDLE 2 0

SJhub#show crypto ipsec sa

interface: Ethernet4/0
Crypto map tag: vpn, local addr. 172.16.172.69

local ident (addr/mask/prot/port): (20.1.1.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (10.1.1.0/255.255.255.0/0/0)
current_peer: 172.16.172.10
PERMIT, flags={origin_is_acl,}
#pkts encaps: 4, #pkts encrypt: 4, #pkts digest 4
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify 4
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 0, #recv errors 0

local crypto endpt.: 172.16.172.69, remote crypto endpt.: 172.16.172.10
path mtu 1500, media mtu 1500
current outbound spi: E8559075

inbound esp sas:
spi: 0xCAFDEBF8(3405638648)
transform: esp-des esp-md5-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2002, flow_id: 3, crypto map: vpn
sa timing: remaining key lifetime (k/sec): (4607998/3434)
IV size: 8 bytes
replay detection support: Y

```

inbound ah sas:

inbound pcg sas:

outbound esp sas:

spi: 0xE8559075(3897921653)  
transform: esp-des esp-md5-hmac ,  
in use settings ={Tunnel, }  
slot: 0, conn id: 2003, flow\_id: 4, crypto map: vpn  
sa timing: remaining key lifetime (k/sec): (4607999/3434)  
IV size: 8 bytes  
replay detection support: Y

outbound ah sas:

outbound pcg sas:

**local ident (addr/mask/prot/port): (20.1.1.0/255.255.255.0/0/0)**  
**remote ident (addr/mask/prot/port): (50.1.1.0/255.255.255.0/0/0)**  
**current\_peer: 172.16.172.52**  
**PERMIT, flags={origin\_is\_acl,}**  
**#pkts encaps: 2, #pkts encrypt: 2, #pkts digest 2**  
**#pkts decaps: 2, #pkts decrypt: 2, #pkts verify 2**  
#pkts compressed: 0, #pkts decompressed: 0  
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0  
#send errors 0, #recv errors 0

local crypto endpt.: 172.16.172.69, remote crypto endpt.: 172.16.172.52  
path mtu 1500, media mtu 1500  
current outbound spi: FA8261EB

inbound esp sas:

spi: 0xC526D02(206728450)  
transform: esp-des esp-md5-hmac ,  
in use settings ={Tunnel, }  
slot: 0, conn id: 2000, flow\_id: 1, crypto map: vpn  
sa timing: remaining key lifetime (k/sec): (4607999/3108)  
IV size: 8 bytes  
replay detection support: Y

inbound ah sas:

inbound pcg sas:

outbound esp sas:

spi: 0xFA8261EB(4202848747)  
transform: esp-des esp-md5-hmac ,  
in use settings ={Tunnel, }  
slot: 0, conn id: 2001, flow\_id: 2, crypto map: vpn  
sa timing: remaining key lifetime (k/sec): (4607999/3108)  
IV size: 8 bytes  
replay detection support: Y

outbound ah sas:

outbound pcg sas:

**SJVPN#show crypto isakmp sa**  
dst src state conn-id slot  
172.16.172.69 172.16.172.52 QM\_IDLE 2 0

SJVPN#show crypto ipsec sa

interface: Ethernet1/0

Crypto map tag: vpn, local addr. 172.16.172.52

local ident (addr/mask/prot/port): (50.1.1.0/255.255.255.0/0/0)

remote ident (addr/mask/prot/port): (20.1.1.0/255.255.255.0/0/0)

current\_peer: 172.16.172.69

PERMIT, flags={origin\_is\_acl,}

#pkts encaps: 2, #pkts encrypt: 2, #pkts digest 2

#pkts decaps: 2, #pkts decrypt: 2, #pkts verify 2

#pkts compressed: 0, #pkts decompressed: 0

#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0

#send errors 3, #recv errors 0

local crypto endpt.: 172.16.172.52, remote crypto endpt.: 172.16.172.69

path mtu 1500, media mtu 1500

current outbound spi: C526D02

inbound esp sas:

spi: 0xFA8261EB(4202848747)

transform: esp-des esp-md5-hmac ,

in use settings ={Tunnel, }

slot: 0, conn id: 2029, flow\_id: 1, crypto map: vpn

sa timing: remaining key lifetime (k/sec): (4607999/3398)

IV size: 8 bytes

replay detection support: Y

inbound ah sas:

inbound pcg sas:

outbound esp sas:

spi: 0xC526D02(206728450)

transform: esp-des esp-md5-hmac ,

in use settings ={Tunnel, }

slot: 0, conn id: 2030, flow\_id: 2, crypto map: vpn

sa timing: remaining key lifetime (k/sec): (4607999/3389)

IV size: 8 bytes

replay detection support: Y

outbound ah sas:

outbound pcg sas:

SJPKI#show crypto isa sa

dst src state conn-id slot

172.16.172.69 172.16.172.10 QM\_IDLE 1 0

SJPKI#show crypto ipsec sa

interface: Ethernet1/0

Crypto map tag: vpn, local addr. 172.16.172.10

local ident (addr/mask/prot/port): (10.1.1.0/255.255.255.0/0/0)

remote ident (addr/mask/prot/port): (20.1.1.0/255.255.255.0/0/0)

current\_peer: 172.16.172.69

PERMIT, flags={origin\_is\_acl,}

#pkts encaps: 7, #pkts encrypt: 7, #pkts digest 7

#pkts decaps: 7, #pkts decrypt: 7, #pkts verify 7

#pkts compressed: 0, #pkts decompressed: 0

#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0

#send errors 3, #recv errors 0



local crypto endpt.: 172.16.172.10, remote crypto endpt.: 172.16.172.69  
path mtu 1500, media mtu 1500  
current outbound spi: CAFDEBF8

inbound esp sas:  
spi: 0xE8559075(3897921653)  
transform: esp-des esp-md5-hmac ,  
in use settings ={Tunnel, }  
slot: 0, conn id: 2029, flow\_id: 1, crypto map: vpn  
sa timing: remaining key lifetime (k/sec): (4607998/3308)  
IV size: 8 bytes  
replay detection support: Y

inbound ah sas:

inbound pcg sas:

outbound esp sas:  
spi: 0xCAFDEBF8(3405638648)  
transform: esp-des esp-md5-hmac ,  
in use settings ={Tunnel, }  
slot: 0, conn id: 2030, flow\_id: 2, crypto map: vpn  
sa timing: remaining key lifetime (k/sec): (4607999/3308)  
IV size: 8 bytes  
replay detection support: Y

outbound ah sas:

outbound pcg sas:

## [관련 정보](#)

- [IP Security\(IPSec\) 제품 지원 페이지](#)
- [Technical Support - Cisco Systems](#)