

兩個具有重疊專用網路的Cisco VPN 3000集中器之間的IPSec

目錄

[簡介](#)

[必要條件](#)

[需求](#)

[採用元件](#)

[網路圖表](#)

[慣例](#)

[配置VPN 3000集中器A](#)

[配置Cisco VPN 3000 Concentrator B](#)

[驗證](#)

[驗證VPN 3000 Concentrator A配置](#)

[驗證VPN 3000 Concentrator B配置](#)

[疑難排解](#)

[排除VPN 3000 Concentrator A配置故障](#)

[排除VPN 3000 Concentrator B配置故障](#)

[相關資訊](#)

簡介

本文檔介紹如何在站點到站點IPSec VPN中配置Cisco VPN 3000集中器，在VPN網關後面使用重疊的網路地址。在本示例中，在VPN 3000 Concentrator 3.6版中引入的增強型網路地址轉換(NAT)功能用於轉換IPSec VPN隧道每一端的重疊網路，以更改非重疊範圍內的地址。

必要條件

需求

嘗試此設定之前，請確保符合以下要求：

- Cisco VPN 3000 Concentrator知識
- IPSec VPN知識

採用元件

本文中的資訊係根據以下軟體和硬體版本：

- Cisco VPN 3000 Concentrator版本3.6或更高版本

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除（預設）的組態來啟動。如果您的網路正在作用，請確保您已瞭解任何指令可能造成的影響。

網路圖表

本檔案會使用以下網路設定：



專用LAN 1和專用LAN 2的IP子網均為14.38.100.0/24。這將模擬IPSec通道兩端的重疊地址空間。

在本示例中，VPN 3000集中器執行雙向NAT轉換，以便兩個專用LAN可以通過IPSec隧道通訊。該轉換表示專用LAN 1通過IPSec隧道「看到」專用LAN 2為14.38.200.0/24，而專用LAN 2通過IPSec隧道「看到」專用LAN 1為14.38.80.0/24。

慣例

如需文件慣例的詳細資訊，請參閱[思科技術提示慣例](#)。

配置VPN 3000集中器A

使用以下步驟配置VPN 3000集中器A。

1. 在Configuration > System > Tunneling Protocols > IPsec > LAN-to-LAN > Modify下，配置VPN集中器A上LAN到LAN會話提議和引數。在「本地網路」部分的「IP地址」欄位中輸入14.38.80.0/24。在「遠端網路」部分的「IP地址」欄位中輸入14.38.200.0/24。完成後按一下Apply。

Configuration | System | Tunneling Protocols | IPSec | LAN-to-LAN | Modify

Modify an IPSec LAN-to-LAN connection.

Name: VPN TUNNEL Enter the name for this LAN-to-LAN connection.

Interface: Ethernet 2 (Public) (172.18.124.132) Select the interface for this LAN-to-LAN connection.

Peer: 172.18.124.131 Enter the IP address of the remote peer for this LAN-to-LAN connection.

Digital Certificate: None (Use Preshared Keys) Select the digital certificate to use.

Certificate: Entire certificate chain Choose how to send the digital certificate to the IKE peer.
 Identity certificate only

Preshared Key: rtpvpn Enter the preshared key for this LAN-to-LAN connection.

Authentication: ESP/MD5/HMAC-128 Specify the packet authentication mechanism to use.

Encryption: 3DES-168 Specify the encryption mechanism to use.

IKE Proposal: IKE-3DES-MD6 Select the IKE Proposal to use for this LAN-to-LAN connection.

Filter: --None-- Choose the filter to apply to the traffic that is tunneled through this LAN-to-LAN connection.

IPSec NAT-T: Check to let NAT-T compatible IPSec peers establish this LAN-to-LAN connection through a NAT device. You must also enable IPSec over NAT-T under NAT Transparency.

Bandwidth Policy: --None-- Choose the bandwidth policy to apply to this LAN-to-LAN connection.

Routing: None Choose the routing mechanism to use. Parameters below are ignored if Network Autodiscovery is chosen.

Local Network: If a LAN-to-LAN NAT rule is used, this is the Translated Network address.

Network List: Use IP Address/Wildcard-mask below Specify the local network address list or the IP address and wildcard mask for this LAN-to-LAN connection.

IP Address: 14.38.80.0 Note: Enter a wildcard mask, which is the reverse of a subnet mask. A wildcard mask has 1s in bit positions to ignore, 0s in bit positions to match. For example, 10.10.1.0/0.0.0.255 = all 10.10.1.nnn addresses.

Wildcard Mask: 0.0.0.255

Remote Network: If a LAN-to-LAN NAT rule is used, this is the Remote Network address.

Network List: Use IP Address/Wildcard-mask below Specify the remote network address list or the IP address and wildcard mask for this LAN-to-LAN connection.

IP Address: 14.38.200.0 Note: Enter a wildcard mask, which is the reverse of a subnet mask. A wildcard mask has 1s in bit positions to ignore, 0s in bit positions to match. For example, 10.10.1.0/0.0.0.255 = all 10.10.1.nnn addresses.

Wildcard Mask: 0.0.0.255

Apply Cancel

2. 通過轉至 Configuration > Policy Management > Traffic Management > NAT > LAN到LAN規則 > Modify 為專用 LAN 2 建立靜態 NAT，目標為專用 LAN 1。在 IP Address 行中，在 Source Network 欄位中輸入 14.38.100.0/24，在 Translated Network 欄位中輸入 14.38.80.0/24，在 Remote Network 欄位中輸入 14.38.200.0/24，然後按一下 Apply。

Configuration | Policy Management | Traffic Management | NAT | LAN-to-LAN Rules | Modify

Modify a LAN-to-LAN NAT rule.

Static Static: maps source IP addresses to translated IP addresses on a one-to-one basis. Static mappings apply to both inbound and outbound traffic.

NAT Type: Dynamic Dynamic: maps source IP addresses to one of a pool of available translated IP addresses. Dynamic mappings apply to outbound traffic only.

PAT PAT: Dynamic mapping with Port Address Translation. PAT applies to outbound traffic only.

Source Network: specifies the source IP address and wildcard mask to be translated.

Translated Network: specifies the translated IP address and wildcard mask for the Local Network. It is the local address of the LAN-to-LAN connection.

Remote Network: specifies the destination IP address and wildcard mask for which this rule applies. To allow any remote network, set IP address/wildcard mask to 0.0.0.0/255.255.255.255. It is the remote address of the LAN-to-LAN connection.

Source Network	Translated Network	Remote Network
IP Address: 14.38.100.0	: 14.38.80.0 ->	14.38.200.0
Wildcard Mask: 0.0.0.255	: 0.0.0.255 ->	0.0.0.255

Apply Cancel

3. 選擇 Configuration > Policy Management > Traffic Management > NAT > Enable，然後選擇 Check 以在 LAN 到 LAN 隧道上啟用 NAT 規則。按一下「Apply」。

Configuration | Policy Management | Traffic Management | NAT | Enable

This section lets you enable system-wide NAT rules.

Interface NAT Rules Enabled Check to enable NAT rules on interfaces.

LAN-to-LAN Tunnel NAT Rule Enabled Check to enable NAT rules on LAN-to-LAN tunnels.

Apply Cancel

配置Cisco VPN 3000 Concentrator B

使用以下步驟配置Cisco VPN 3000 Concentrator B。

1. 通過選擇Configuration > System > Tunneling Protocols > IPSec > LAN-to-LAN > Modify，在VPN集中器B上配置LAN到LAN會話提議和引數。在「本地網路」部分的「IP地址」欄位中輸入14.38.200.0/24。在「遠端網路」部分的「IP地址」欄位中輸入14.38.80.0/24。完成後按一下Apply。

Configuration | System | Tunneling Protocols | IPSec | LAN-to-LAN | Modify

Modify an IPSec LAN-to-LAN connection.

Name	RTP NAT TUNNEL	Enter the name for this LAN-to-LAN connection.
Interface	Ethernet 2 (Public) (172.18.124.131)	Select the interface for this LAN-to-LAN connection.
Peer	172.18.124.132	Enter the IP address of the remote peer for this LAN-to-LAN connection.
Digital Certificate	None (Use Preshared Keys)	Select the digital certificate to use.
Certificate	<input type="radio"/> Entire certificate chain	Choose how to send the digital certificate to the IKE peer.
Transmission	<input checked="" type="radio"/> Identity certificate only	
Preshared Key	rtpppn	Enter the preshared key for this LAN-to-LAN connection.
Authentication	ESP:MD5+HMAC-128	Specify the packet authentication mechanism to use.
Encryption	3DES-168	Specify the encryption mechanism to use.
IKE Proposal	IKE-3DES-MD6	Select the IKE Proposal to use for this LAN-to-LAN connection.
Filter	--None--	Choose the filter to apply to the traffic that is tunneled through this LAN-to-LAN connection.
IPSec NAT-T	<input type="checkbox"/>	Check to let NAT-T compatible IPSec peers establish this LAN-to-LAN connection through a NAT device. You must also enable IPSec over NAT-T under NAT Transparency.
Bandwidth Policy	--None--	Choose the bandwidth policy to apply to this LAN-to-LAN connection.
Routing	None	Choose the routing mechanism to use. Parameters below are ignored if Network Autodiscovery is chosen.

Local Network: If a LAN-to-LAN NAT rule is used, this is the Translated Network address.

Network List	Use IP Address/Wildcard mask below	Specify the local network address list or the IP address and wildcard mask for this LAN-to-LAN connection.
IP Address	14.38.200.0	Note: Enter a <i>wildcard</i> mask, which is the reverse of a subnet mask. A wildcard mask has 1s in bit positions to ignore, 0s in bit positions to match. For example, 10.10.1.0/0.0.0.255 = all 10.10.1.nnn addresses.
Wildcard Mask	0.0.0.255	

Remote Network: If a LAN-to-LAN NAT rule is used, this is the Remote Network address.

Network List	Use IP Address/Wildcard mask below	Specify the remote network address list or the IP address and wildcard mask for this LAN-to-LAN connection.
IP Address	14.38.80.0	Note: Enter a <i>wildcard</i> mask, which is the reverse of a subnet mask. A wildcard mask has 1s in bit positions to ignore, 0s in bit positions to match. For example, 10.10.1.0/0.0.0.255 = all 10.10.1.nnn addresses.
Wildcard Mask	0.0.0.255	

Apply Cancel

2. 通過選擇Configuration > Policy Management > Traffic Management > NAT > LAN-to-LAN Rules > Modify為專用LAN 1建立靜態NAT。在IP Address行中，在Source Network欄位中輸入14.38.100.0/24，在Translated Network欄位中輸入14.38.200.0/24，在Remote Network欄位中輸入14.38.80.0/24，然後按一下Apply。

Configuration | Policy Management | Traffic Management | NAT | LAN-to-LAN Rules | Modify

Modify a LAN-to-LAN NAT rule.

Static Static: maps source IP addresses to translated IP addresses on a one-to-one basis. Static mappings apply to both inbound and outbound traffic.

Dynamic Dynamic: maps source IP addresses to one of a pool of available translated IP addresses. Dynamic mappings apply to outbound traffic only.

PAT PAT: Dynamic mapping with Port Address Translation. PAT applies to outbound traffic only.

Source Network: specifies the source IP address and wildcard mask to be translated.

Translated Network: specifies the translated IP address and wildcard mask for the Local Network. It is the local address of the LAN-to-LAN connection.


Remote Network: specifies the destination IP address and wildcard mask for which this rule applies. To allow any remote network, set IP address/wildcard mask to 0.0.0.0/255.255.255.255. It is the remote address of the LAN-to-LAN connection.

Source Network	Translated Network	Remote Network
IP Address 14.38.100.0	: 14.38.200.0	-> 14.38.80.0
Wildcard Mask 0.0.0.255	: 0.0.0.255	-> 0.0.0.255

Apply Cancel

3. 選擇Configuration > Policy Management > Traffic Management > NAT > Enable，然後選擇

Check以在LAN到LAN隧道上啟用NAT規則。按一下「Apply」。

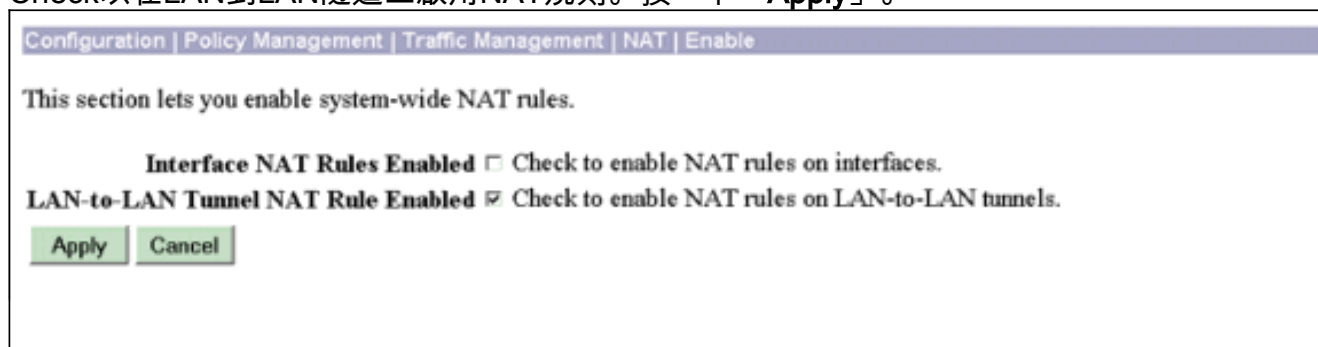


驗證

驗證VPN 3000 Concentrator A配置

本節提供的資訊可用於確認您的組態是否正常運作。

[輸出直譯器工具](#)(僅供註冊客戶使用)支援某些show命令，此工具可讓您檢視show命令輸出的分析。

- 若要啟動通道，請從私有LAN 2裝置(14.38.200.10)傳送ping到私有LAN 1(14.38.80.200)上的IP位址。

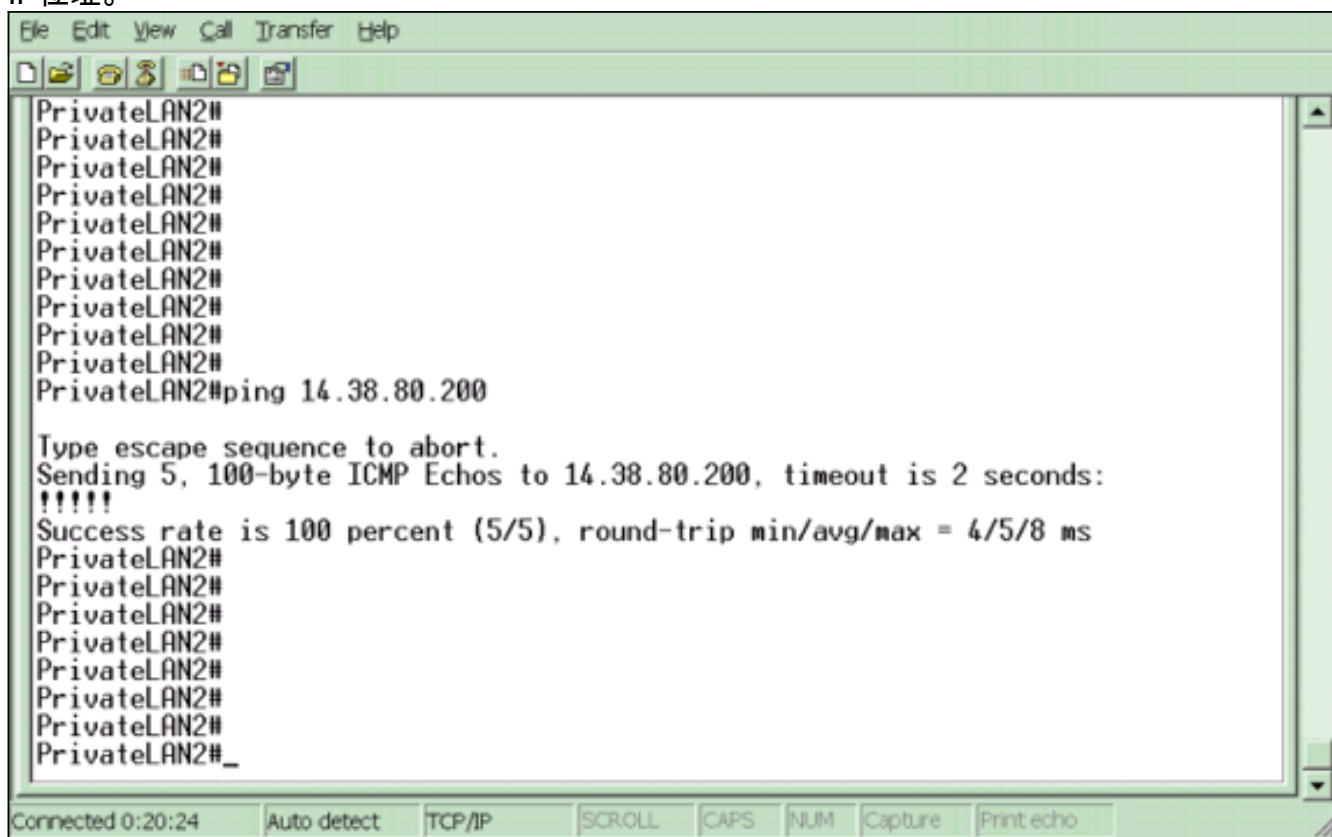

- 通過選擇Administration > Administrative Sessions > Detail，確認Internet金鑰交換(IKE)和IPSec會話顯示具有NAT的專用LAN 1和專用LAN 2。

Administration Administer Sessions Detail				Wednesday, 07 August 2002 12:49:04			
Back to Sessions							
Connection Name	IP Address	Protocol	Encryption	Login Time	Duration	Bytes Tx	Bytes Rx
VPN TUNNEL	172.18.124.131	IPSec/LAN-to-LAN	3DES-168	Aug 06 13:20:24	23:28:40	1456	1040
IKE Sessions: 1							
IPSec Sessions: 1							
IKE Session							
Session ID 1				Encryption Algorithm 3DES-168			
Hashing Algorithm MD5				Diffie-Hellman Group Group 2 (1024-bit)			
Authentication Mode Pre-Shared Keys				IKE Negotiation Mode Main			
Rekey Time Interval 36400 seconds							
IPSec Session							
Session ID 2				Remote Address 14.38.200.0/0.0.0.255			
Local Address 14.38.80.0/0.0.0.255				Encryption Algorithm 3DES-168			
Hashing Algorithm MD5				SEP 1			
Encapsulation Mode Tunnel				Rekey Time Interval 28800 seconds			
Bytes Received 1040				Bytes Transmitted 1456			

驗證VPN 3000 Concentrator B配置

本節提供的資訊可用於確認您的組態是否正常運作。有關在診斷VPN 3000集中器的連線問題時設定和檢視日誌的資訊，請參閱[排除VPN 3000集中器上的連線問題](#)。

[輸出直譯器工具](#) (僅供註冊客戶使用) 支援某些show命令，此工具可讓您檢視show命令輸出的分析。

通過選擇**管理 > 管理會話 > 詳細資訊**，確認IKE和IPSec會話顯示使用NAT的專用LAN 2和專用LAN 1。

Administration Administer Sessions Detail				Friday, 09 August 2002 12:36:38			
Back to Sessions							
Connection Name	IP Address	Protocol	Encryption	Login Time	Duration	Bytes Tx	Bytes Rx
RTP NAT TUNNEL	172.18.124.132	IPSec/LAN-to-LAN	3DES-168	Aug 08 13:17:22	23:19:15	1040	1456
IKE Sessions: 1							
IPSec Sessions: 1							
IKE Session							
Session ID 1				Encryption Algorithm 3DES-168			
Hashing Algorithm MD5				Diffie-Hellman Group Group 2 (1024-bit)			
Authentication Mode Pre-Shared Keys				IKE Negotiation Mode Main			
Rekey Time Interval 36400 seconds							
IPSec Session							
Session ID 2				Remote Address 14.38.200.0/0.0.0.255			
Local Address 14.38.200.0/0.0.0.255				Encryption Algorithm 3DES-168			
Hashing Algorithm MD5				SEP 1			
Encapsulation Mode Tunnel				Rekey Time Interval 28800 seconds			
Bytes Received 1456				Bytes Transmitted 1040			

疑難排解

排除VPN 3000 Concentrator A配置故障

在VPN集中器上，開啟日誌記錄，選擇**Configuration > System > Events > Classes > Modify**。提供以下選項：

- IKE
- IKEDBG
- IKEDECODE
- IPSEC
- IPSECDBG
- IPSECDECODE
- 記錄嚴重性= 1-13
- 控制檯嚴重性= 1-3

您可以通過選擇**Monitoring > Event Log**來檢索事件日誌。

有關在診斷VPN 3000集中器連線問題時設定和檢視日誌的其他資訊，請參閱[排除VPN 3000集中器上的連線問題](#)。

```
1 08/09/2002 13:14:22.690 SEV=8 IKEDBG/0 RPT=52040 172.18.124.132
RECEIVED Message (msgid=0) with payloads :
HDR + SA (1) + VENDOR (13) + NONE (0) ... total length : 108
```

```
3 08/09/2002 13:14:22.690 SEV=9 IKEDBG/0 RPT=52041 172.18.124.132
processing SA payload
```

```
4 08/09/2002 13:14:22.690 SEV=8 IKEDBG/0 RPT=52042
Proposal # 1, Transform # 1, Type ISAKMP, Id IKE
Parsing received transform:
Phase 1 failure against global IKE proposal # 1:
Mismatched attr types for class Auth Method:
Rcv'd: Preshared Key
Cfg'd: XAUTH with Preshared Key (Initiator authenticated)
```

```
10 08/09/2002 13:14:22.690 SEV=7 IKEDBG/0 RPT=52043 172.18.124.132
Oakley proposal is acceptable
```

```
11 08/09/2002 13:14:22.690 SEV=9 IKEDBG/47 RPT=28 172.18.124.132
processing VID payload
```

```
12 08/09/2002 13:14:22.690 SEV=9 IKEDBG/49 RPT=24 172.18.124.132
Received Fragmentation VID
```

```
13 08/09/2002 13:14:22.690 SEV=5 IKEDBG/64 RPT=6 172.18.124.132
IKE Peer included IKE fragmentation capability flags:
Main Mode: True
Aggressive Mode: True
```

```
15 08/09/2002 13:14:22.690 SEV=9 IKEDBG/0 RPT=52044 172.18.124.132
processing IKE SA
```

```
16 08/09/2002 13:14:22.690 SEV=8 IKEDBG/0 RPT=52045
Proposal # 1, Transform # 1, Type ISAKMP, Id IKE
Parsing received transform:
Phase 1 failure against global IKE proposal # 1:
Mismatched attr types for class Auth Method:
Rcv'd: Preshared Key
```

Cfg'd: XAUTH with Preshared Key (Initiator authenticated)

22 08/09/2002 13:14:22.690 SEV=7 IKEDBG/28 RPT=5 172.18.124.132
IKE SA Proposal # 1, Transform # 1 acceptable
Matches global IKE entry # 2

23 08/09/2002 13:14:22.690 SEV=9 IKEDBG/0 RPT=52046 172.18.124.132
constructing ISA_SA for isakmp

24 08/09/2002 13:14:22.690 SEV=9 IKEDBG/46 RPT=26 172.18.124.132
constructing Fragmentation VID + extended capabilities payload

25 08/09/2002 13:14:22.690 SEV=8 IKEDBG/0 RPT=52047 172.18.124.132
SENDING Message (msgid=0) with payloads :
HDR + SA (1) + VENDOR (13) ... total length : 108

27 08/09/2002 13:14:22.700 SEV=8 IKEDBG/0 RPT=52048 172.18.124.132
RECEIVED Message (msgid=0) with payloads :
HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13)
) + NONE (0) ... total length : 256

30 08/09/2002 13:14:22.700 SEV=8 IKEDBG/0 RPT=52049 172.18.124.132
RECEIVED Message (msgid=0) with payloads :
HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13)
) + NONE (0) ... total length : 256

33 08/09/2002 13:14:22.700 SEV=9 IKEDBG/0 RPT=52050 172.18.124.132
processing ke payload

34 08/09/2002 13:14:22.700 SEV=9 IKEDBG/0 RPT=52051 172.18.124.132
processing ISA_KE

35 08/09/2002 13:14:22.700 SEV=9 IKEDBG/1 RPT=83 172.18.124.132
processing nonce payload

36 08/09/2002 13:14:22.700 SEV=9 IKEDBG/47 RPT=29 172.18.124.132
processing VID payload

37 08/09/2002 13:14:22.700 SEV=9 IKEDBG/49 RPT=25 172.18.124.132
Received Cisco Unity client VID

38 08/09/2002 13:14:22.700 SEV=9 IKEDBG/47 RPT=30 172.18.124.132
processing VID payload

39 08/09/2002 13:14:22.700 SEV=9 IKEDBG/49 RPT=26 172.18.124.132
Received xauth V6 VID

40 08/09/2002 13:14:22.700 SEV=9 IKEDBG/47 RPT=31 172.18.124.132
processing VID payload

41 08/09/2002 13:14:22.700 SEV=9 IKEDBG/38 RPT=9 172.18.124.132
Processing VPN 3000 spoofing IOS Vendor ID payload (version: 1.0.0, capabilities
: 20000001)

43 08/09/2002 13:14:22.700 SEV=9 IKEDBG/47 RPT=32 172.18.124.132
processing VID payload

44 08/09/2002 13:14:22.700 SEV=9 IKEDBG/49 RPT=27 172.18.124.132
Received Altiga GW VID

45 08/09/2002 13:14:22.730 SEV=9 IKEDBG/0 RPT=52052 172.18.124.132
constructing ke payload

46 08/09/2002 13:14:22.730 SEV=9 IKEDBG/1 RPT=84 172.18.124.132
constructing nonce payload

47 08/09/2002 13:14:22.730 SEV=9 IKEDBG/46 RPT=27 172.18.124.132
constructing Cisco Unity VID payload

48 08/09/2002 13:14:22.730 SEV=9 IKEDBG/46 RPT=28 172.18.124.132
constructing xauth V6 VID payload

49 08/09/2002 13:14:22.730 SEV=9 IKEDBG/48 RPT=10 172.18.124.132
Send IOS VID

50 08/09/2002 13:14:22.730 SEV=9 IKEDBG/38 RPT=10 172.18.124.132
Constructing VPN 3000 spoofing IOS Vendor ID payload (version: 1.0.0, capabilities: 20000001)

52 08/09/2002 13:14:22.730 SEV=9 IKEDBG/46 RPT=29 172.18.124.132
constructing VID payload

53 08/09/2002 13:14:22.730 SEV=9 IKEDBG/48 RPT=11 172.18.124.132
Send Altiga GW VID

54 08/09/2002 13:14:22.730 SEV=9 IKEDBG/0 RPT=52053 172.18.124.132
Generating keys for Responder...

55 08/09/2002 13:14:22.730 SEV=8 IKEDBG/0 RPT=52054 172.18.124.132
SENDING Message (msgid=0) with payloads :
HDR + KE (4) + NONCE (10) ... total length : 256

57 08/09/2002 13:14:22.770 SEV=8 IKEDBG/0 RPT=52055 172.18.124.132
RECEIVED Message (msgid=0) with payloads :
HDR + ID (5) + HASH (8) + IOS KEEPALIVE (14) + VENDOR (13) + NONE (0) ... total length : 92

60 08/09/2002 13:14:22.770 SEV=9 IKEDBG/1 RPT=85 172.18.124.132
Group [172.18.124.132]
Processing ID

61 08/09/2002 13:14:22.770 SEV=9 IKEDBG/0 RPT=52056 172.18.124.132
Group [172.18.124.132]
processing hash

62 08/09/2002 13:14:22.770 SEV=9 IKEDBG/0 RPT=52057 172.18.124.132
Group [172.18.124.132]
computing hash

63 08/09/2002 13:14:22.770 SEV=9 IKEDBG/34 RPT=9 172.18.124.132
Processing IOS keep alive payload: proposal=32767/32767 sec.

64 08/09/2002 13:14:22.770 SEV=9 IKEDBG/47 RPT=33 172.18.124.132
Group [172.18.124.132]
processing VID payload

65 08/09/2002 13:14:22.770 SEV=9 IKEDBG/49 RPT=28 172.18.124.132
Group [172.18.124.132]
Received DPD VID

66 08/09/2002 13:14:22.770 SEV=9 IKEDBG/23 RPT=6 172.18.124.132
Group [172.18.124.132]
Starting group lookup for peer 172.18.124.132

67 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/1 RPT=7
AUTH_Open() returns 9

68 08/09/2002 13:14:22.770 SEV=7 AUTH/12 RPT=7
Authentication session opened: handle = 9

69 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/3 RPT=9
AUTH_PutAttrTable(9, 8c6274)

70 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/6 RPT=6
AUTH_GroupAuthenticate(9, 2f1c798, 599818)

71 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/59 RPT=9
AUTH_BindServer(511c62c, 0, 0)

72 08/09/2002 13:14:22.770 SEV=9 AUTHDBG/69 RPT=9
Auth Server db1704 has been bound to ACB 511c62c, sessions = 1

73 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/65 RPT=9
AUTH_CreateTimer(511c62c, 0, 0)

74 08/09/2002 13:14:22.770 SEV=9 AUTHDBG/72 RPT=9
Reply timer created: handle = 66001B

75 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/179 RPT=9
AUTH_SyncToServer(511c62c, 0, 0)

76 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/180 RPT=9
AUTH_SendLockReq(511c62c, 0, 0)

77 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/61 RPT=9
AUTH_BuildMsg(511c62c, 0, 0)

78 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/64 RPT=9
AUTH_StartTimer(511c62c, 0, 0)

79 08/09/2002 13:14:22.770 SEV=9 AUTHDBG/73 RPT=9
Reply timer started: handle = 66001B, timestamp = 17178934, timeout = 30000

80 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/62 RPT=9
AUTH_SndRequest(511c62c, 0, 0)

81 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/50 RPT=17
IntDB_Decode(37f1908, 149)

82 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/47 RPT=17
IntDB_Xmt(511c62c)

83 08/09/2002 13:14:22.770 SEV=9 AUTHDBG/71 RPT=9
xmit_cnt = 1

84 08/09/2002 13:14:22.770 SEV=8 AUTHDBG/47 RPT=18
IntDB_Xmt(511c62c)

85 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/49 RPT=9
IntDB_Match(511c62c, 5119cc4)

86 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/63 RPT=9
AUTH_RcvReply(511c62c, 0, 0)

87 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/50 RPT=18
IntDB_Decode(5119cc4, 835)

88 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/48 RPT=9
IntDB_Rcv(511c62c)

89 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/66 RPT=9
AUTH_DeleteTimer(511c62c, 0, 0)

90 08/09/2002 13:14:22.870 SEV=9 AUTHDBG/74 RPT=9
Reply timer stopped: handle = 66001B, timestamp = 17178944

91 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/58 RPT=9
AUTH_Callback(511c62c, 0, 0)

92 08/09/2002 13:14:22.870 SEV=6 AUTH/41 RPT=8 172.18.124.132
Authentication successful: handle = 9, server = Internal, group = 172.18.124.132

93 08/09/2002 13:14:22.870 SEV=7 IKEDBG/0 RPT=52058 172.18.124.132
Group [172.18.124.132]
Found Phase 1 Group (172.18.124.132)

94 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/4 RPT=8
AUTH_GetAttrTable(9, 8c6520)

95 08/09/2002 13:14:22.870 SEV=7 IKEDBG/14 RPT=7 172.18.124.132
Group [172.18.124.132]
Authentication configured for Internal

96 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/2 RPT=7
AUTH_Close(9)

97 08/09/2002 13:14:22.870 SEV=9 IKEDBG/1 RPT=86 172.18.124.132
Group [172.18.124.132]
constructing ID

98 08/09/2002 13:14:22.870 SEV=9 IKEDBG/0 RPT=52059
Group [172.18.124.132]
construct hash payload

99 08/09/2002 13:14:22.870 SEV=9 IKEDBG/0 RPT=52060 172.18.124.132
Group [172.18.124.132]
computing hash

100 08/09/2002 13:14:22.870 SEV=9 IKEDBG/34 RPT=10 172.18.124.132
Constructing IOS keep alive payload: proposal=32767/32767 sec.

101 08/09/2002 13:14:22.870 SEV=9 IKEDBG/46 RPT=30 172.18.124.132
Group [172.18.124.132]
constructing dpd vid payload

102 08/09/2002 13:14:22.870 SEV=8 IKEDBG/0 RPT=52061 172.18.124.132
SENDING Message (msgid=0) with payloads :
HDR + ID (5) + HASH (8) ... total length : 92

104 08/09/2002 13:14:22.870 SEV=4 IKE/119 RPT=8 172.18.124.132
Group [172.18.124.132]
PHASE 1 COMPLETED

105 08/09/2002 13:14:22.870 SEV=6 IKE/121 RPT=6 172.18.124.132
Keep-alive type for this connection: DPD

106 08/09/2002 13:14:22.870 SEV=7 IKEDBG/0 RPT=52062 172.18.124.132
Group [172.18.124.132]
Starting phase 1 rekey timer: 73440000 (ms)

107 08/09/2002 13:14:22.870 SEV=4 AUTH/22 RPT=38

User 172.18.124.132 connected

108 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/60 RPT=9
AUTH_UnbindServer(511c62c, 0, 0)

109 08/09/2002 13:14:22.870 SEV=9 AUTHDBG/70 RPT=9
Auth Server db1704 has been unbound from ACB 511c62c, sessions = 0

110 08/09/2002 13:14:22.870 SEV=8 AUTHDBG/10 RPT=7
AUTH_Int_FreeAuthCB(511c62c)

111 08/09/2002 13:14:22.870 SEV=7 AUTH/13 RPT=7
Authentication session closed: handle = 9

112 08/09/2002 13:14:22.970 SEV=8 IKEDBG/0 RPT=52063 172.18.124.132
RECEIVED Message (msgid=56fdca09) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NOTIFY (11) + NONE (0)
... total length : 180

115 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52064 172.18.124.132
Group [172.18.124.132]
processing hash

116 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52065 172.18.124.132
Group [172.18.124.132]
processing SA payload

117 08/09/2002 13:14:22.970 SEV=9 IKEDBG/1 RPT=87 172.18.124.132
Group [172.18.124.132]
processing nonce payload

118 08/09/2002 13:14:22.970 SEV=9 IKEDBG/1 RPT=88 172.18.124.132
Group [172.18.124.132]
Processing ID

119 08/09/2002 13:14:22.970 SEV=5 IKE/35 RPT=4 172.18.124.132
Group [172.18.124.132]
Received remote IP Proxy Subnet data in ID Payload:
Address 14.38.80.0, Mask 255.255.255.0, Protocol 0, Port 0

122 08/09/2002 13:14:22.970 SEV=9 IKEDBG/1 RPT=89 172.18.124.132
Group [172.18.124.132]
Processing ID

123 08/09/2002 13:14:22.970 SEV=5 IKE/34 RPT=6 172.18.124.132
Group [172.18.124.132]
Received local IP Proxy Subnet data in ID Payload:
Address 14.38.200.0, Mask 255.255.255.0, Protocol 0, Port 0

126 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52066 172.18.124.132
Group [172.18.124.132]
Processing Notify payload

127 08/09/2002 13:14:22.970 SEV=8 IKEDBG/0 RPT=52067
QM IsRekeyed old sa not found by addr

128 08/09/2002 13:14:22.970 SEV=5 IKE/66 RPT=8 172.18.124.132
Group [172.18.124.132]
IKE Remote Peer configured for SA: L2L: RTP NAT TUNNEL

129 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52068 172.18.124.132
Group [172.18.124.132]
processing IPSEC SA

130 08/09/2002 13:14:22.970 SEV=7 IKEDBG/27 RPT=6 172.18.124.132

Group [172.18.124.132]

IPSec SA Proposal # 1, Transform # 1 acceptable

131 08/09/2002 13:14:22.970 SEV=7 IKEDBG/0 RPT=52069 172.18.124.132

Group [172.18.124.132]

IKE: requesting SPI!

132 08/09/2002 13:14:22.970 SEV=6 IKE/0 RPT=5

Received unexpected event EV_ACTIVATE_NEW_SA in state MM_ACTIVE

133 08/09/2002 13:14:22.970 SEV=9 IPSECDBG/6 RPT=41

IPSEC key message parse - msgtype 6, len 208, vers 1, pid 00000000, seq 12, err 0, type 2, mode 0, state 32, label 0, pad 0, spi 00000000, encrKeyLen 0, hashKey Len 0, ivlen 0, alg 0, hmacAlg 0, lifetype 0, lifetime1 21, lifetime2 0, dsId 30 0

137 08/09/2002 13:14:22.970 SEV=9 IPSECDBG/1 RPT=155

Processing KEY_GETSPI msg!

138 08/09/2002 13:14:22.970 SEV=7 IPSECDBG/13 RPT=9

Reserved SPI 840508266

139 08/09/2002 13:14:22.970 SEV=8 IKEDBG/6 RPT=9

IKE got SPI from key engine: SPI = 0x3219236a

140 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52070 172.18.124.132

Group [172.18.124.132]

oakley constructing quick mode

141 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52071 172.18.124.132

Group [172.18.124.132]

constructing blank hash

142 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52072 172.18.124.132

Group [172.18.124.132]

constructing ISA_SA for ipsec

143 08/09/2002 13:14:22.970 SEV=9 IKEDBG/1 RPT=90 172.18.124.132

Group [172.18.124.132]

constructing ipsec nonce payload

144 08/09/2002 13:14:22.970 SEV=9 IKEDBG/1 RPT=91 172.18.124.132

Group [172.18.124.132]

constructing proxy ID

145 08/09/2002 13:14:22.970 SEV=7 IKEDBG/0 RPT=52073 172.18.124.132

Group [172.18.124.132]

Transmitting Proxy Id:

Remote subnet: 14.38.80.0 Mask 255.255.255.0 Protocol 0 Port 0

Local subnet: 14.38.200.0 mask 255.255.255.0 Protocol 0 Port 0

149 08/09/2002 13:14:22.970 SEV=9 IKEDBG/0 RPT=52074 172.18.124.132

Group [172.18.124.132]

constructing qm hash

150 08/09/2002 13:14:22.970 SEV=8 IKEDBG/0 RPT=52075 172.18.124.132

SENDING Message (msgid=56fdca09) with payloads :

HDR + HASH (8) + SA (1) ... total length : 152

152 08/09/2002 13:14:22.980 SEV=8 IKEDBG/0 RPT=52076 172.18.124.132

RECEIVED Message (msgid=56fdca09) with payloads :

HDR + HASH (8) + NONE (0) ... total length : 48

154 08/09/2002 13:14:22.980 SEV=9 IKEDBG/0 RPT=52077 172.18.124.132
Group [172.18.124.132]
processing hash

155 08/09/2002 13:14:22.980 SEV=9 IKEDBG/0 RPT=52078 172.18.124.132
Group [172.18.124.132]
loading all IPSEC SAs

156 08/09/2002 13:14:22.980 SEV=9 IKEDBG/1 RPT=92 172.18.124.132
Group [172.18.124.132]
Generating Quick Mode Key!

157 08/09/2002 13:14:22.980 SEV=9 IKEDBG/1 RPT=93 172.18.124.132
Group [172.18.124.132]
Generating Quick Mode Key!

158 08/09/2002 13:14:22.980 SEV=7 IKEDBG/0 RPT=52079 172.18.124.132
Group [172.18.124.132]
Loading subnet:
Dst: 14.38.200.0 mask: 255.255.255.0
Src: 14.38.80.0 mask: 255.255.255.0

161 08/09/2002 13:14:22.980 SEV=4 IKE/49 RPT=12 172.18.124.132
Group [172.18.124.132]
Security negotiation complete for LAN-to-LAN Group (172.18.124.132)
Responder, Inbound SPI = 0x3219236a, Outbound SPI = 0x3607c2f4

164 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/6 RPT=42
IPSEC key message parse - msgtype 1, len 622, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 64, label 0, pad 0, spi 3607c2f4, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 21, lifetime2 0, dsId 0

167 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=156
Processing KEY_ADD msg!

168 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=157
key_msghdr2secassoc(): Enter

169 08/09/2002 13:14:22.980 SEV=7 IPSECDBG/1 RPT=158
No USER filter configured

170 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=159
KeyProcessAdd: Enter

171 08/09/2002 13:14:22.980 SEV=8 IPSECDBG/1 RPT=160
KeyProcessAdd: Adding outbound SA

172 08/09/2002 13:14:22.980 SEV=8 IPSECDBG/1 RPT=161
KeyProcessAdd: src 14.38.200.0 mask 0.0.0.255, dst 14.38.80.0 mask 0.0.0.255

173 08/09/2002 13:14:22.980 SEV=8 IPSECDBG/1 RPT=162
KeyProcessAdd: FilterIpssecAddIkeSa success

174 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/6 RPT=43
IPSEC key message parse - msgtype 3, len 335, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 32, label 0, pad 0, spi 3219236a, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 21, lifetime2 0, dsId 0

177 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=163
Processing KEY_UPDATE msg!

178 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=164
Update inbound SA addresses

```
179 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=165
key_msghdr2secassoc(): Enter

180 08/09/2002 13:14:22.980 SEV=7 IPSECDBG/1 RPT=166
No USER filter configured

181 08/09/2002 13:14:22.980 SEV=9 IPSECDBG/1 RPT=167
KeyProcessUpdate: Enter

182 08/09/2002 13:14:22.980 SEV=8 IPSECDBG/1 RPT=168
KeyProcessUpdate: success

183 08/09/2002 13:14:22.980 SEV=8 IKEDBG/7 RPT=9
IKE got a KEY_ADD msg for SA: SPI = 0x3607c2f4

184 08/09/2002 13:14:22.980 SEV=8 IKEDBG/0 RPT=52080
pitcher: rcv KEY_UPDATE, spi 0x3219236a

185 08/09/2002 13:14:22.980 SEV=4 IKE/120 RPT=12 172.18.124.132
Group [172.18.124.132]
PHASE 2 COMPLETED (msgid=56fdca09)

186 08/09/2002 13:14:24.690 SEV=7 IPSECDBG/1 RPT=169
IPSec Inbound SA has received data!

187 08/09/2002 13:14:24.690 SEV=8 IKEDBG/0 RPT=52081
pitcher: recv KEY_SA_ACTIVE spi 0x3219236a

188 08/09/2002 13:14:24.690 SEV=8 IKEDBG/0 RPT=52082
KEY_SA_ACTIVE no old rekey centry found with new spi 0x3219236a, mess_id 0x0
```

[排除VPN 3000 Concentrator B配置故障](#)

有關在診斷VPN 3000集中器的連線問題時設定和檢視日誌的資訊，請參閱[排除VPN 3000集中器上的連線問題](#)。發出 `debug` 指令之前，請先參閱有關 `Debug` 指令的重要資訊。

```
1 08/07/2002 13:27:13.970 SEV=7 IPSECDBG/10 RPT=4
IPSEC ipsec_output() can call key_acquire() because 590 seconds have elapsed since last IKE negotiation began (src 0x0e265065, dst 0x01b99224)

3 08/07/2002 13:27:13.970 SEV=7 IPSECDBG/14 RPT=5
Sending KEY_ACQUIRE to IKE for src 14.38.80.101, dst 14.38.200.3

4 08/07/2002 13:27:13.970 SEV=8 IKEDBG/0 RPT=52300
pitcher: received a key acquire message!

5 08/07/2002 13:27:13.970 SEV=4 IKE/41 RPT=5 172.18.124.131
IKE Initiator: New Phase 1, Intf 2, IKE Peer 172.18.124.131
local Proxy Address 14.38.80.0, remote Proxy Address 14.38.200.0,
SA (L2L: VPN TUNNEL)

8 08/07/2002 13:27:13.970 SEV=9 IKEDBG/0 RPT=52301 172.18.124.131
constructing ISA_SA for isakmp

9 08/07/2002 13:27:13.970 SEV=9 IKEDBG/46 RPT=26 172.18.124.131
constructing Fragmentation VID + extended capabilities payload
```

10 08/07/2002 13:27:13.970 SEV=8 IKEDBG/0 RPT=52302 172.18.124.131
SENDING Message (msgid=0) with payloads :
HDR + SA (1) + VENDOR (13) ... total length : 108

12 08/07/2002 13:27:13.970 SEV=8 IKEDBG/0 RPT=52303 172.18.124.131
RECEIVED Message (msgid=0) with payloads :
HDR + SA (1) + VENDOR (13) + NONE (0) ... total length : 108

14 08/07/2002 13:27:13.970 SEV=8 IKEDBG/0 RPT=52304 172.18.124.131
RECEIVED Message (msgid=0) with payloads :
HDR + SA (1) + VENDOR (13) + NONE (0) ... total length : 108

16 08/07/2002 13:27:13.970 SEV=9 IKEDBG/0 RPT=52305 172.18.124.131
processing SA payload

17 08/07/2002 13:27:13.970 SEV=7 IKEDBG/0 RPT=52306 172.18.124.131
Oakley proposal is acceptable

18 08/07/2002 13:27:13.970 SEV=9 IKEDBG/47 RPT=31 172.18.124.131
processing VID payload

19 08/07/2002 13:27:13.970 SEV=9 IKEDBG/49 RPT=26 172.18.124.131
Received Fragmentation VID

20 08/07/2002 13:27:13.970 SEV=5 IKEDBG/64 RPT=7 172.18.124.131
IKE Peer included IKE fragmentation capability flags:
Main Mode: True
Aggressive Mode: True

22 08/07/2002 13:27:13.970 SEV=9 IKEDBG/0 RPT=52307 172.18.124.131
constructing ke payload

23 08/07/2002 13:27:13.970 SEV=9 IKEDBG/1 RPT=70 172.18.124.131
constructing nonce payload

24 08/07/2002 13:27:13.970 SEV=9 IKEDBG/46 RPT=27 172.18.124.131
constructing Cisco Unity VID payload

25 08/07/2002 13:27:13.970 SEV=9 IKEDBG/46 RPT=28 172.18.124.131
constructing xauth V6 VID payload

26 08/07/2002 13:27:13.970 SEV=9 IKEDBG/48 RPT=11 172.18.124.131
Send IOS VID

27 08/07/2002 13:27:13.970 SEV=9 IKEDBG/38 RPT=11 172.18.124.131
Constructing VPN 3000 spoofing IOS Vendor ID payload (version: 1.0.0, capabilities: 20000001)

29 08/07/2002 13:27:13.970 SEV=9 IKEDBG/46 RPT=29 172.18.124.131
constructing VID payload

30 08/07/2002 13:27:13.970 SEV=9 IKEDBG/48 RPT=12 172.18.124.131
Send Altiga GW VID

31 08/07/2002 13:27:13.970 SEV=8 IKEDBG/0 RPT=52308 172.18.124.131
SENDING Message (msgid=0) with payloads :
HDR + KE (4) + NONCE (10) ... total length : 256

33 08/07/2002 13:27:14.010 SEV=8 IKEDBG/0 RPT=52309 172.18.124.131
RECEIVED Message (msgid=0) with payloads :
HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13)
) + NONE (0) ... total length : 256

36 08/07/2002 13:27:14.010 SEV=8 IKEDBG/0 RPT=52310 172.18.124.131
RECEIVED Message (msgid=0) with payloads :
HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13)
) + NONE (0) ... total length : 256

39 08/07/2002 13:27:14.010 SEV=9 IKEDBG/0 RPT=52311 172.18.124.131
processing ke payload

40 08/07/2002 13:27:14.010 SEV=9 IKEDBG/0 RPT=52312 172.18.124.131
processing ISA_KE

41 08/07/2002 13:27:14.010 SEV=9 IKEDBG/1 RPT=71 172.18.124.131
processing nonce payload

42 08/07/2002 13:27:14.010 SEV=9 IKEDBG/47 RPT=32 172.18.124.131
processing VID payload

43 08/07/2002 13:27:14.010 SEV=9 IKEDBG/49 RPT=27 172.18.124.131
Received Cisco Unity client VID

44 08/07/2002 13:27:14.010 SEV=9 IKEDBG/47 RPT=33 172.18.124.131
processing VID payload

45 08/07/2002 13:27:14.010 SEV=9 IKEDBG/49 RPT=28 172.18.124.131
Received xauth V6 VID

46 08/07/2002 13:27:14.010 SEV=9 IKEDBG/47 RPT=34 172.18.124.131
processing VID payload

47 08/07/2002 13:27:14.010 SEV=9 IKEDBG/38 RPT=12 172.18.124.131
Processing VPN 3000 spoofing IOS Vendor ID payload (version: 1.0.0, capabilities
: 20000001)

49 08/07/2002 13:27:14.010 SEV=9 IKEDBG/47 RPT=35 172.18.124.131
processing VID payload

50 08/07/2002 13:27:14.010 SEV=9 IKEDBG/49 RPT=29 172.18.124.131
Received Altiga GW VID

51 08/07/2002 13:27:14.040 SEV=9 IKEDBG/0 RPT=52313 172.18.124.131
Generating keys for Initiator...

52 08/07/2002 13:27:14.040 SEV=9 IKEDBG/1 RPT=72 172.18.124.131
Group [172.18.124.131]
constructing ID

53 08/07/2002 13:27:14.040 SEV=9 IKEDBG/0 RPT=52314
Group [172.18.124.131]
construct hash payload

54 08/07/2002 13:27:14.040 SEV=9 IKEDBG/0 RPT=52315 172.18.124.131
Group [172.18.124.131]
computing hash

55 08/07/2002 13:27:14.040 SEV=9 IKEDBG/34 RPT=11 172.18.124.131

Constructing IOS keep alive payload: proposal=32767/32767 sec.

56 08/07/2002 13:27:14.040 SEV=9 IKEDBG/46 RPT=30 172.18.124.131
Group [172.18.124.131]
constructing dpd vid payload

57 08/07/2002 13:27:14.040 SEV=8 IKEDBG/0 RPT=52316 172.18.124.131
SENDING Message (msgid=0) with payloads :
HDR + ID (5) + HASH (8) ... total length : 92

59 08/07/2002 13:27:14.140 SEV=8 IKEDBG/0 RPT=52317 172.18.124.131
RECEIVED Message (msgid=0) with payloads :
HDR + ID (5) + HASH (8) + IOS KEEPALIVE (14) + VENDOR (13) + NONE (0) ... total
length : 92

62 08/07/2002 13:27:14.140 SEV=9 IKEDBG/1 RPT=73 172.18.124.131
Group [172.18.124.131]
Processing ID

63 08/07/2002 13:27:14.140 SEV=9 IKEDBG/0 RPT=52318 172.18.124.131
Group [172.18.124.131]
processing hash

64 08/07/2002 13:27:14.140 SEV=9 IKEDBG/0 RPT=52319 172.18.124.131
Group [172.18.124.131]
computing hash

65 08/07/2002 13:27:14.140 SEV=9 IKEDBG/34 RPT=12 172.18.124.131
Processing IOS keep alive payload: proposal=32767/32767 sec.

66 08/07/2002 13:27:14.140 SEV=9 IKEDBG/47 RPT=36 172.18.124.131
Group [172.18.124.131]
processing VID payload

67 08/07/2002 13:27:14.140 SEV=9 IKEDBG/49 RPT=30 172.18.124.131
Group [172.18.124.131]
Received DPD VID

68 08/07/2002 13:27:14.140 SEV=9 IKEDBG/23 RPT=6 172.18.124.131
Group [172.18.124.131]
Starting group lookup for peer 172.18.124.131

69 08/07/2002 13:27:14.140 SEV=8 AUTHDBG/1 RPT=2
AUTH_Open() returns 6

70 08/07/2002 13:27:14.140 SEV=7 AUTH/12 RPT=2
Authentication session opened: handle = 6

71 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/3 RPT=2
AUTH_PutAttrTable(6, 8c6274)

72 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/6 RPT=2
AUTH_GroupAuthenticate(6, 50097dc, 599818)

73 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/59 RPT=2
AUTH_BindServer(9a05c60, 0, 0)

74 08/07/2002 13:27:14.150 SEV=9 AUTHDBG/69 RPT=2
Auth Server 15dd704 has been bound to ACB 9a05c60, sessions = 1

75 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/65 RPT=2
AUTH_CreateTimer(9a05c60, 0, 0)

76 08/07/2002 13:27:14.150 SEV=9 AUTHDBG/72 RPT=2

Reply timer created: handle = 4F0019

77 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/179 RPT=2
AUTH_SyncToServer(9a05c60, 0, 0)

78 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/180 RPT=2
AUTH_SendLockReq(9a05c60, 0, 0)

79 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/61 RPT=2
AUTH_BuildMsg(9a05c60, 0, 0)

80 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/64 RPT=2
AUTH_StartTimer(9a05c60, 0, 0)

81 08/07/2002 13:27:14.150 SEV=9 AUTHDBG/73 RPT=2
Reply timer started: handle = 4F0019, timestamp = 17231134, timeout = 30000

82 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/62 RPT=2
AUTH_SndRequest(9a05c60, 0, 0)

83 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/50 RPT=3
IntDB_Decode(62ea4f8, 149)

84 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/47 RPT=3
IntDB_Xmt(9a05c60)

85 08/07/2002 13:27:14.150 SEV=9 AUTHDBG/71 RPT=2
xmit_cnt = 1

86 08/07/2002 13:27:14.150 SEV=8 AUTHDBG/47 RPT=4
IntDB_Xmt(9a05c60)

87 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/49 RPT=2
IntDB_Match(9a05c60, 9a09658)

88 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/63 RPT=2
AUTH_RcvReply(9a05c60, 0, 0)

89 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/50 RPT=4
IntDB_Decode(9a09658, 636)

90 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/48 RPT=2
IntDB_Rcv(9a05c60)

91 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/66 RPT=2
AUTH_DeleteTimer(9a05c60, 0, 0)

92 08/07/2002 13:27:14.250 SEV=9 AUTHDBG/74 RPT=2
Reply timer stopped: handle = 4F0019, timestamp = 17231144

93 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/58 RPT=2
AUTH_Callback(9a05c60, 0, 0)

94 08/07/2002 13:27:14.250 SEV=6 AUTH/41 RPT=2 172.18.124.131
Authentication successful: handle = 6, server = Internal, group = 172.18.124.131

95 08/07/2002 13:27:14.250 SEV=7 IKEDBG/0 RPT=52320 172.18.124.131
Group [172.18.124.131]
Found Phase 1 Group (172.18.124.131)

96 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/4 RPT=2
AUTH_GetAttrTable(6, 8c6520)

97 08/07/2002 13:27:14.250 SEV=7 IKEDBG/14 RPT=6 172.18.124.131

Group [172.18.124.131]
Authentication configured for Internal

98 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/2 RPT=2
AUTH_Close(6)

99 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52321 172.18.124.131
Group [172.18.124.131]
Oakley begin quick mode

100 08/07/2002 13:27:14.250 SEV=4 IKE/119 RPT=7 172.18.124.131
Group [172.18.124.131]
PHASE 1 COMPLETED

101 08/07/2002 13:27:14.250 SEV=6 IKE/121 RPT=6 172.18.124.131
Keep-alive type for this connection: DPD

102 08/07/2002 13:27:14.250 SEV=7 IKEDBG/0 RPT=52322 172.18.124.131
Group [172.18.124.131]
Starting phase 1 rekey timer: 82080000 (ms)

103 08/07/2002 13:27:14.250 SEV=4 AUTH/22 RPT=27
User 172.18.124.131 connected

104 08/07/2002 13:27:14.250 SEV=9 IPSECDBG/6 RPT=36
IPSEC key message parse - msgtype 6, len 208, vers 1, pid 00000000, seq 9, err 0
, type 2, mode 0, state 32, label 0, pad 0, spi 00000000, encrKeyLen 0, hashKeyLen 0, ivlen 0, alg 0, hmacAlg 0, lifetype 0, lifetime1 21, lifetime2 0, dsId 300

107 08/07/2002 13:27:14.250 SEV=9 IPSECDBG/1 RPT=135
Processing KEY_GETSPI msg!

108 08/07/2002 13:27:14.250 SEV=7 IPSECDBG/13 RPT=8
Reserved SPI 651287217

109 08/07/2002 13:27:14.250 SEV=8 IKEDBG/6 RPT=8
IKE got SPI from key engine: SPI = 0x26d1dab1

110 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52323 172.18.124.131
Group [172.18.124.131]
oakley constructing quick mode

111 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52324 172.18.124.131
Group [172.18.124.131]
constructing blank hash

112 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52325 172.18.124.131
Group [172.18.124.131]
constructing ISA_SA for ipsec

113 08/07/2002 13:27:14.250 SEV=9 IKEDBG/1 RPT=74 172.18.124.131
Group [172.18.124.131]
constructing ipsec nonce payload

114 08/07/2002 13:27:14.250 SEV=9 IKEDBG/1 RPT=75 172.18.124.131
Group [172.18.124.131]
constructing proxy ID

115 08/07/2002 13:27:14.250 SEV=7 IKEDBG/0 RPT=52326 172.18.124.131
Group [172.18.124.131]
Transmitting Proxy Id:
Local subnet: 14.38.80.0 mask 255.255.255.0 Protocol 0 Port 0
Remote subnet: 14.38.200.0 Mask 255.255.255.0 Protocol 0 Port 0

119 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52327 172.18.124.131
Group [172.18.124.131]
constructing qm hash

120 08/07/2002 13:27:14.250 SEV=8 IKEDBG/0 RPT=52328 172.18.124.131
SENDING Message (msgid=201d0d40) with payloads :
HDR + HASH (8) + SA (1) ... total length : 180

122 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/60 RPT=2
AUTH_UnbindServer(9a05c60, 0, 0)

123 08/07/2002 13:27:14.250 SEV=9 AUTHDBG/70 RPT=2
Auth Server 15dd704 has been unbound from ACB 9a05c60, sessions = 0

124 08/07/2002 13:27:14.250 SEV=8 AUTHDBG/10 RPT=2
AUTH_Int_FreeAuthCB(9a05c60)

125 08/07/2002 13:27:14.250 SEV=7 AUTH/13 RPT=2
Authentication session closed: handle = 6

126 08/07/2002 13:27:14.250 SEV=8 IKEDBG/0 RPT=52329 172.18.124.131
RECEIVED Message (msgid=201d0d40) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) ... total length : 152

129 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52330 172.18.124.131
Group [172.18.124.131]
processing hash

130 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52331 172.18.124.131
Group [172.18.124.131]
processing SA payload

131 08/07/2002 13:27:14.250 SEV=9 IKEDBG/1 RPT=76 172.18.124.131
Group [172.18.124.131]
processing nonce payload

132 08/07/2002 13:27:14.250 SEV=9 IKEDBG/1 RPT=77 172.18.124.131
Group [172.18.124.131]
Processing ID

133 08/07/2002 13:27:14.250 SEV=9 IKEDBG/1 RPT=78 172.18.124.131
Group [172.18.124.131]
Processing ID

134 08/07/2002 13:27:14.250 SEV=9 IKEDBG/0 RPT=52332 172.18.124.131
Group [172.18.124.131]
loading all IPSEC SAs

135 08/07/2002 13:27:14.250 SEV=9 IKEDBG/1 RPT=79 172.18.124.131
Group [172.18.124.131]
Generating Quick Mode Key!

136 08/07/2002 13:27:14.260 SEV=9 IKEDBG/1 RPT=80 172.18.124.131
Group [172.18.124.131]
Generating Quick Mode Key!

137 08/07/2002 13:27:14.260 SEV=7 IKEDBG/0 RPT=52333 172.18.124.131
Group [172.18.124.131]
Loading subnet:
Dst: 14.38.200.0 mask: 255.255.255.0
Src: 14.38.80.0 mask: 255.255.255.0

140 08/07/2002 13:27:14.260 SEV=4 IKE/49 RPT=9 172.18.124.131

Group [172.18.124.131]
Security negotiation complete for LAN-to-LAN Group (172.18.124.131)
Initiator, Inbound SPI = 0x26d1dab1, Outbound SPI = 0x2f285111

143 08/07/2002 13:27:14.260 SEV=9 IKEDBG/0 RPT=52334 172.18.124.131
Group [172.18.124.131]
oakley constructing final quick mode

144 08/07/2002 13:27:14.260 SEV=8 IKEDBG/0 RPT=52335 172.18.124.131
SENDING Message (msgid=201d0d40) with payloads :
HDR + HASH (8) + NONE (0) ... total length : 72

146 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/6 RPT=37
IPSEC key message parse - msgtype 1, len 622, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 64, label 0, pad 0, spi 2f285111, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 21, lifetime2 0, dsId 0

149 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=136
Processing KEY_ADD msg!

150 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=137
key_msghdr2secassoc(): Enter

151 08/07/2002 13:27:14.260 SEV=7 IPSECDBG/1 RPT=138
No USER filter configured

152 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=139
KeyProcessAdd: Enter

153 08/07/2002 13:27:14.260 SEV=8 IPSECDBG/1 RPT=140
KeyProcessAdd: Adding outbound SA

154 08/07/2002 13:27:14.260 SEV=8 IPSECDBG/1 RPT=141
KeyProcessAdd: src 14.38.80.0 mask 0.0.0.255, dst 14.38.200.0 mask 0.0.0.255

155 08/07/2002 13:27:14.260 SEV=8 IPSECDBG/1 RPT=142
KeyProcessAdd: FilterIpssecAddIkeSa success

156 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/6 RPT=38
IPSEC key message parse - msgtype 3, len 335, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 32, label 0, pad 0, spi 26d1dab1, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 21, lifetime2 0, dsId 0

159 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=143
Processing KEY_UPDATE msg!

160 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=144
Update inbound SA addresses

161 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=145
key_msghdr2secassoc(): Enter

162 08/07/2002 13:27:14.260 SEV=7 IPSECDBG/1 RPT=146
No USER filter configured

163 08/07/2002 13:27:14.260 SEV=9 IPSECDBG/1 RPT=147
KeyProcessUpdate: Enter

164 08/07/2002 13:27:14.260 SEV=8 IPSECDBG/1 RPT=148
KeyProcessUpdate: success

165 08/07/2002 13:27:14.260 SEV=8 IKEDBG/7 RPT=8
IKE got a KEY_ADD msg for SA: SPI = 0x2f285111

166 08/07/2002 13:27:14.260 SEV=8 IKEDBG/0 RPT=52336
pitcher: rcv KEY_UPDATE, spi 0x26d1dab1

167 08/07/2002 13:27:14.260 SEV=4 IKE/120 RPT=9 172.18.124.131
Group [172.18.124.131]
PHASE 2 COMPLETED (msgid=201d0d40)

168 08/07/2002 13:27:15.970 SEV=7 IPSECDBG/1 RPT=149
IPSec Inbound SA has received data!

169 08/07/2002 13:27:15.970 SEV=8 IKEDBG/0 RPT=52337
pitcher: rcv KEY_SA_ACTIVE spi 0x26d1dab1

170 08/07/2002 13:27:15.970 SEV=8 IKEDBG/0 RPT=52338
KEY_SA_ACTIVE no old rekey centry found with new spi 0x26d1dab1, mess_id 0x0

相關資訊

- [Cisco VPN 3000系列集中器支援頁面](#)
- [Cisco VPN 3000系列使用者端支援頁面](#)
- [IPSec支援頁面](#)
- [技術支援 - Cisco Systems](#)