

# 記錄RV110W上的電子郵件設定

## 目標

RV110W能夠將系統資訊日誌傳送到電子郵件帳戶。此功能可讓管理員瞭解路由器的最新狀態。本文說明如何在RV110W上配置電子郵件日誌設定。

## 適用裝置

- RV110W

## 程式步驟

### 記錄電子郵件配置

步驟1.使用路由器配置實用程式選擇**Administration > Logging > Email Settings**。將開啟**電子郵件設定**頁面。

**E-mail Settings**

**Log E-mail Configuration**

E-mail Logs:  Enable

Minimum Email Log Severity: Information

E-mail Server Address:

E-mail Server Port:  (Range: 1 - 65535)

Return E-mail Address:

Send to E-mail Address (1):

Send to E-mail Address (2) (Optional):

Send to E-mail Address (3) (Optional):

E-mail Encryption (SSL):  Enable

Authentication with SMTP server:

E-mail Authentication Username:

E-mail Authentication Password:

E-mail Authentication Test:

**Send E-mail Logs by Schedule**

Unit:

Day:

步驟2.在E-mail Logs的右側，選中**Enable**框以通過電子郵件傳送日誌。

## E-mail Settings

### Log E-mail Configuration

E-mail Logs:	<input checked="" type="checkbox"/> Enable
Minimum Email Log Severity:	Information <a href="#">Configure Severity</a>
E-mail Server Address:	<input type="text"/>
E-mail Server Port:	<input type="text" value="25"/> (Range: 1 - 65535,
Return E-mail Address:	<input type="text"/>
Send to E-mail Address (1):	<input type="text"/>
Send to E-mail Address (2) (Optional):	<input type="text"/>
Send to E-mail Address (3) (Optional):	<input type="text"/>
E-mail Encryption (SSL):	<input type="checkbox"/> Enable
Authentication with SMTP server:	None ▾
E-mail Authentication Username:	<input type="text"/>
E-mail Authentication Password:	<input type="text"/>
E-mail Authentication Test:	<input type="button" value="Test"/>

### Send E-mail Logs by Schedule

Unit:	Never ▾
Day:	Sunday ▾

步驟3.按一下**Configure Severity**以轉到Administration > Logging > Log Settings以配置要傳送電子郵件的日誌。

**附註：**此操作會將您重定向到其他頁面並取消所做的任何更改。

步驟4.在E-mail Server Address欄位中，輸入與收件人電子郵件地址相關聯的電子郵件伺服器地址。

步驟5.在「電子郵件伺服器埠」欄位中，輸入電子郵件服務提供商的埠號。

**附註：**如果電子郵件服務提供商不需要特殊埠號，請在該欄位中保留預設值(25)。


步驟6.在「返回電子郵件地址」欄位中，輸入在主電子郵件地址無效時接收日誌電子郵件的電

子郵件地址。

步驟7.在「Send to E-mail Address(1)(傳送到電子郵件地址(1))」欄位中，輸入接收日誌電子郵件的第一個電子郵件地址。

步驟8.在「Send to E-mail Address(2)(Optional)(傳送到電子郵件地址(2) (可選))」欄位中，輸入接收日誌電子郵件的第二個電子郵件地址 (如果需要)。

步驟9.在「Send to E-mail Address(3)(Optional)(傳送到電子郵件地址(3) (可選))」欄位中，輸入接收日誌電子郵件的第三個電子郵件地址 (如果需要)。

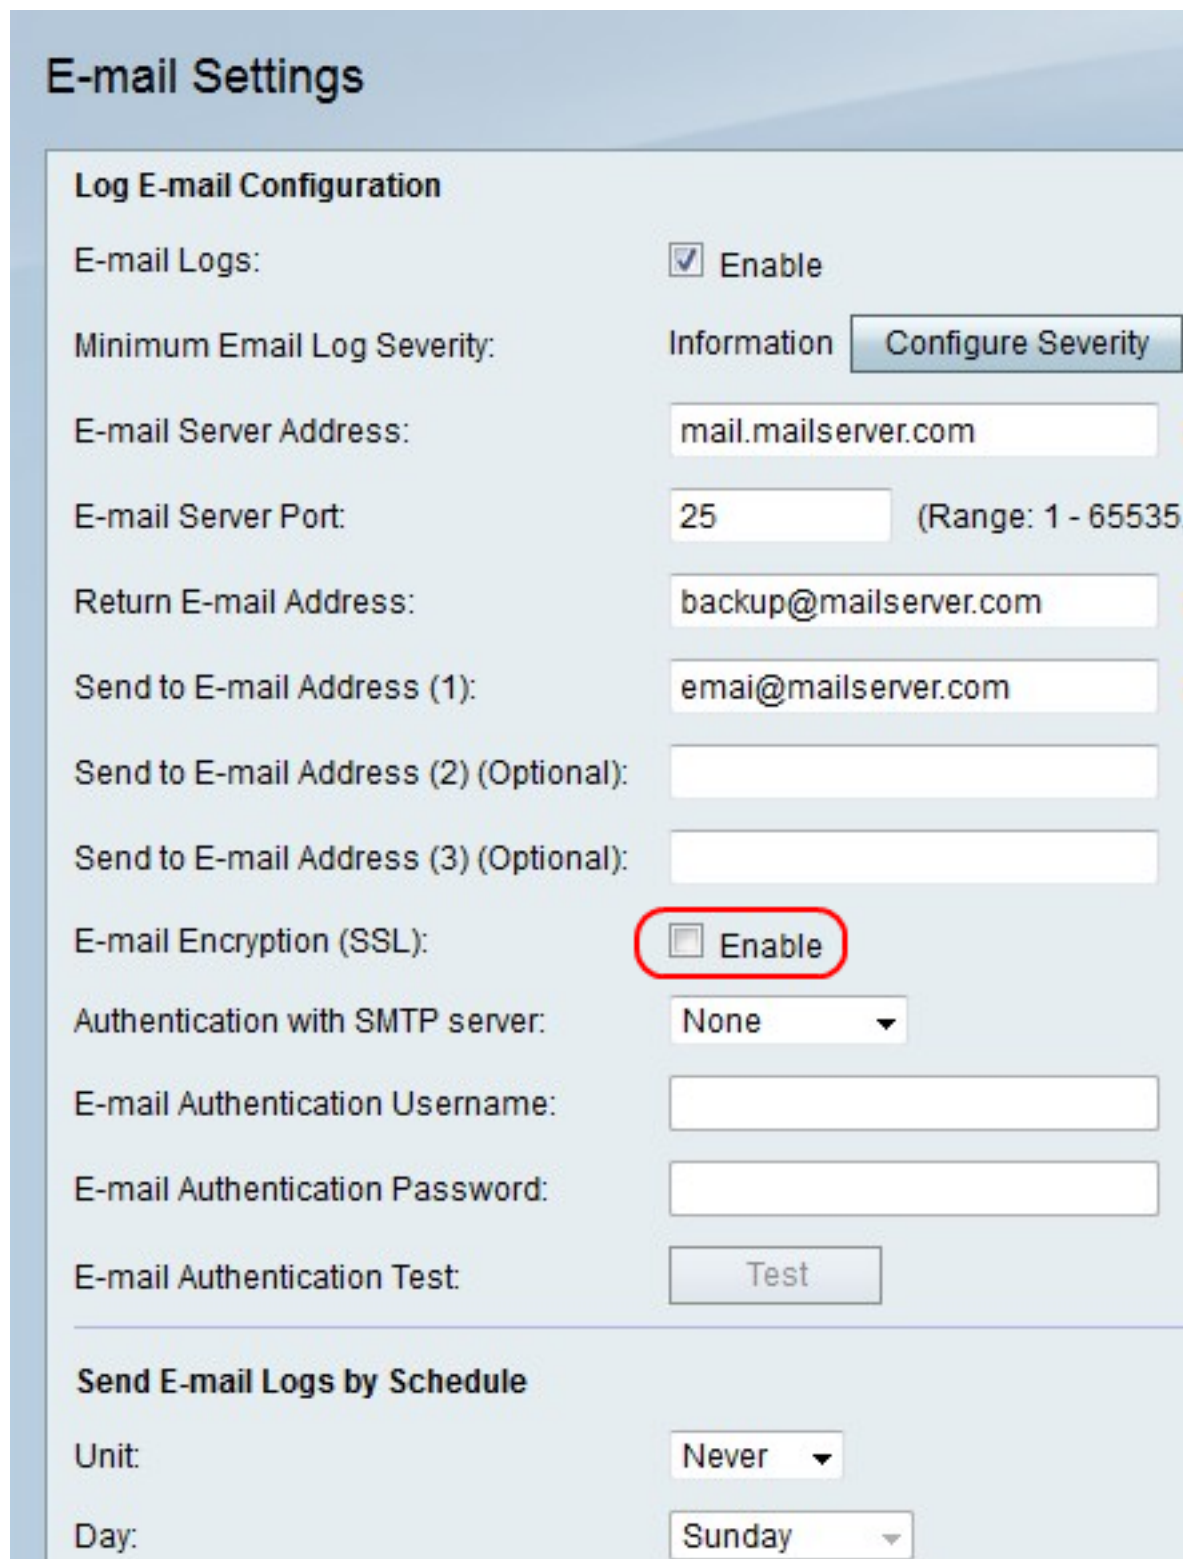

**E-mail Settings**

**Log E-mail Configuration**

E-mail Logs:  Enable

Minimum Email Log Severity: Information [Configure Severity](#)

E-mail Server Address: mail.mailserver.com

E-mail Server Port: 25 (Range: 1 - 65535)

Return E-mail Address: backup@mailserver.com

Send to E-mail Address (1): emai@mailserver.com

Send to E-mail Address (2) (Optional):

Send to E-mail Address (3) (Optional):

E-mail Encryption (SSL):  Enable

Authentication with SMTP server: None

E-mail Authentication Username:

E-mail Authentication Password:

E-mail Authentication Test: Test

---

**Send E-mail Logs by Schedule**

Unit: Never

Day: Sunday

步驟10.在電子郵件加密(SSL)的右側，勾選**Enable**框以加密電子郵件。

## E-mail Settings

### Log E-mail Configuration

E-mail Logs:	<input checked="" type="checkbox"/> Enable
Minimum Email Log Severity:	Information <a href="#">Configure Severity</a>
E-mail Server Address:	<input type="text" value="mail.mailserver.com"/> (
E-mail Server Port:	<input type="text" value="25"/> (Range: 1 - 65535,
Return E-mail Address:	<input type="text" value="backup@mailserver.com"/> (
Send to E-mail Address (1):	<input type="text" value="emai@mailserver.com"/> (
Send to E-mail Address (2) (Optional):	<input type="text"/>
Send to E-mail Address (3) (Optional):	<input type="text"/>
E-mail Encryption (SSL):	<input checked="" type="checkbox"/> Enable
Authentication with SMTP server:	<input type="text" value="None"/> ▼
E-mail Authentication Username:	<input type="text"/>
E-mail Authentication Password:	<input type="text"/>
E-mail Authentication Test:	<input type="button" value="Test"/>

### Send E-mail Logs by Schedule

Unit:	<input type="text" value="Never"/> ▼
Day:	<input type="text" value="Sunday"/> ▼

步驟11.從Authentication with SMTP server下拉選單中，選擇電子郵件伺服器使用的身份驗證型別。

步驟12.如果選擇無，請跳到步驟12。如果選擇其他選項，請在「電子郵件驗證使用者名稱」欄位中輸入電子郵件帳戶的使用者名稱，並在「電子郵件驗證密碼」欄位中輸入該帳戶的密碼。

Minimum Email Log Severity:	Information	<a href="#">Configure Severity</a>
E-mail Server Address:	<input type="text" value="mail.mailserver.com"/>	
E-mail Server Port:	<input type="text" value="25"/>	(Range: 1 - 65535,
Return E-mail Address:	<input type="text" value="backup@mailserver.com"/>	
Send to E-mail Address (1):	<input type="text" value="email@mailserver.com"/>	
Send to E-mail Address (2) (Optional):	<input type="text"/>	
Send to E-mail Address (3) (Optional):	<input type="text"/>	
E-mail Encryption (SSL):	<input checked="" type="checkbox"/> Enable	
Authentication with SMTP server:	LOGIN	
E-mail Authentication Username:	<input type="text" value="email@mailserver.com"/>	
E-mail Authentication Password:	<input type="password" value="••••••••"/>	
E-mail Authentication Test:	<input type="button" value="Test"/>	
<b>Send E-mail Logs by Schedule</b>		
Unit:	Never	
Day:	Sunday	
Time:	12	AM
<input type="button" value="Save"/> <input type="button" value="Cancel"/>		

步驟13. 按一下**Test**以立即測試電子郵件連線。

Minimum Email Log Severity:	Information	<a href="#">Configure Severity</a>
E-mail Server Address:	<input type="text" value="mail.mailserver.com"/>	
E-mail Server Port:	<input type="text" value="25"/>	(Range: 1 - 65535,
Return E-mail Address:	<input type="text" value="backup@mailserver.com"/>	
Send to E-mail Address (1):	<input type="text" value="email@mailserver.com"/>	
Send to E-mail Address (2) (Optional):	<input type="text"/>	
Send to E-mail Address (3) (Optional):	<input type="text"/>	
E-mail Encryption (SSL):	<input checked="" type="checkbox"/> Enable	
Authentication with SMTP server:	LOGIN	
E-mail Authentication Username:	<input type="text" value="email@mailserver.com"/>	
E-mail Authentication Password:	<input type="password" value="••••••••"/>	
E-mail Authentication Test:	<input type="button" value="Test"/>	
<b>Send E-mail Logs by Schedule</b>		
Unit:	Never	
Day:	Sunday	
Time:	12	AM
<input type="button" value="Save"/> <input type="button" value="Cancel"/>		

步驟14.按一下**Save**儲存更改，或按一下**Cancel**放棄更改。

## 按計畫傳送電子郵件日誌

Minimum Email Log Severity: Information

E-mail Server Address:  (F)

E-mail Server Port:  (Range: 1 - 65535, I)

Return E-mail Address:  (F)

Send to E-mail Address (1):  (F)

Send to E-mail Address (2) (Optional):

Send to E-mail Address (3) (Optional):

E-mail Encryption (SSL):  Enable

Authentication with SMTP server:

E-mail Authentication Username:

E-mail Authentication Password:

E-mail Authentication Test:

---

**Send E-mail Logs by Schedule**

Unit:

Day:

Time:

步驟1.從Unit下拉選單中，選擇接收日誌電子郵件的頻率。

**附註：**如果選擇「從不」，則不會傳送日誌電子郵件。

Minimum Email Log Severity: Information [Configure Severity](#)

E-mail Server Address:  (F)

E-mail Server Port:  (Range: 1 - 65535, I)

Return E-mail Address:  (F)

Send to E-mail Address (1):  (F)

Send to E-mail Address (2) (Optional):

Send to E-mail Address (3) (Optional):

E-mail Encryption (SSL):  Enable

Authentication with SMTP server:

E-mail Authentication Username:

E-mail Authentication Password:

E-mail Authentication Test:

---

**Send E-mail Logs by Schedule**

Unit:

Day:

Time:

步驟2.如果您選擇「每週」，則從「每天」下拉選單中選擇「每週接收電子郵件」。



Minimum Email Log Severity: Information

E-mail Server Address:

E-mail Server Port:  (Range: 1 - 65535)

Return E-mail Address:

Send to E-mail Address (1):

Send to E-mail Address (2) (Optional):

Send to E-mail Address (3) (Optional):

E-mail Encryption (SSL):  Enable

Authentication with SMTP server: LOGIN

E-mail Authentication Username:

E-mail Authentication Password:

E-mail Authentication Test:

---

**Send E-mail Logs by Schedule**

Unit:

Day:

Time:  AM

步驟3.如果您選擇每週或每天，請從「時間」下拉選單中選擇一天中的某個時間接收電子郵件。

步驟4.按一下**Save**儲存更改，或按一下**Cancel**放棄更改。