



Cisco 5520 Wireless LAN Controller Deployment Guide

[Cisco 5520 Wireless LAN Controller Deployment Guide](#) 3

[Introduction](#) 3

[Prerequisites](#) 3

[Product Overview](#) 3

[Cisco 5520 Controller Key Attributes](#) 4

[AP Platform Support](#) 6

[Platform Components](#) 6

[SFP Support](#) 13

[Image Specifications](#) 14

[Fault Tolerance Capability](#) 14

[Customer Replaceable Units](#) 15

[Link Aggregation \(LAG\)](#) 16

[Inter-Platform Mobility and Guest Anchor Support](#) 16

[Infrastructure Multicast](#) 16

[New Mobility and MC Support](#) 17

[Look and Feel of the Cisco 5520 Wireless LAN Controller](#) 17

[Out of Band Management on Service Port](#) 23

[Local EAP Support](#) 25

[Wired Guest Access Support](#) 25

Cisco 5520 Wireless LAN Controller Deployment Guide

Introduction

This document introduces the Cisco 5520 Wireless LAN Controller (WLC), and provides general guidelines for its deployment. The purpose of this document is to:

- Provide an overview of the Cisco 5520 WLC, and its deployment within the Cisco Unified Architecture.
- Highlight key service provider features.
- Provide design recommendations and considerations specific to the Cisco 5520 Controller.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

This document is not restricted to specific software and hardware versions.

The information in this document is created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

Refer to [Cisco Technical Tips Conventions](#) for more information on document conventions.

Product Overview



The existing Cisco 5500 series controller scales up to 500 APs, 7,000 clients, and 8 Gbps maximum throughput. The explosion of mobile clients in enterprise empowered by bring your own device (BYOD), the deployment of wireless in mission-critical applications, and the adoption of Wi-Fi in service provider networks enabling new business models require wireless networks to provide larger AP scale, client scale, and higher throughput.

The Cisco Unified Wireless Network Software Release 8.1 addresses these key challenges. Release 8.1 delivers the new Cisco 5520 wireless controller with support for 20 Gbps throughput, 1500 APs, and 20,000 clients to ensure better performance and scale for business critical networks.

The following table captures some of the key hardware capabilities of this new platform.

Table 1: Hardware Capabilities of Cisco 5520 WLC

Hardware Capabilities	5520
Chassis Height	1 RU
Throughput	20 Gbps
AP Support	1500
Client Support	20,000
Data Ports	2 x SFP+
Storage Temperature	-40°C – 65°C
Operating Temperature	5 – 40°C
Operating Humidity	10 – 90% (non-condensing)
Power Options	770 W AC

Cisco 5520 Controller Key Attributes

Some of the key attributes of the Cisco 5520 controller are:

- High AP scale (1500 APs in 1 RU)
- High client density (20,000 clients in 1 RU)
- High throughput of 20 Gbps with 1 RU
- Support for 1500 APs, 1500 AP groups, 1500 FlexConnect groups, and up to 100 APs per FlexConnect group
- Support for 4096 VLANs
- 512 Interface Groups
- PMK Cache size of 40,000
- Support for 25,000 RFIDs tracking, and the detection and containment of up to 24,000 rogue APs, and up to 32,000 rogue clients (over and above the RFIDs)
- 3,000 APs per RRM Group
- 3,20,000 AVC Flows
- High Availability with sub-second AP and client SSO
- TrustSec SXP Support
- Support of all AP modes of operation (Local, FlexConnect, Monitor, Rogue Detector, Sniffer, Bridge, and Flex+bridge)
- Right to Use (RTU) licensing for ease of license enablement and ongoing licensing operations

The following table shows the Cisco Enterprise Campus Controllers comparison at a glance:

Table 2: Cisco Enterprise Campus Controllers comparison

Attributes	5520	5508	WiSM2
Deployment type	Enterprise Campus and full service branch	Enterprise Campus and full service branch	Enterprise Campus
Operational Modes	All AP modes	All AP modes	All AP modes
Maximum Scale	1500 APs 20,000 clients	500 APs 7000 clients	1000 APs 15,000 clients
AP Count Range	1 – 1500	12 – 500	100 – 1000
Licensing	Right to Use (with EULA)	CISL based	CISL based
Connectivity	2 x 10 G ports	8 x 1 G ports	Internal connections to the Catalyst Backplanes
Power	770 W AC (optional redundant PSU)	AC (redundant PSU option)	AC/DC Catalyst chassis redundant PSU option
Maximum Number of FlexConnect Groups	1500	100	100
Maximum Number of APs per FlexConnect Group	100	25	25
Maximum Number of Rogue APs Management	24,000	2,000	4,000
Maximum Number of Rogue Clients Management	32,000	2500	5,000
Maximum Number of RFID	25,000	5,000	10,000
Maximum APs per RRM Group	3,000	1,000	2,000
Maximum AP Groups	1500	500	500
Maximum Interface Groups	512	64	64
Maximum Interfaces per Interface Group	64	64	64
Maximum VLANs Supported	4096	512	512
Maximum WLANs Supported	512	512	512
Fast Secure Roaming Clients/Max PMK Cache	40,000	14,000	30,000



Note Feature support unless otherwise specified will be the same as in 8510.

AP Platform Support

The Cisco 5520 supports the following access point models:

- 1260, 3500, 600
- 1600, 2600, 3600
- 1700, 2700, 3700
- OEAP 600
- 702I, 702W
- Cisco 891 series integrated services router and Cisco 881 series integrated services router
- 1530, 1552WU, 1550, 1570
- 1040, 1140, 1260 support extended to 8.1 with 8.0 parity
- 18xx, 2800 and 3800

Platform Components

Cisco 5520 WLC Front Panel View



Cisco 5520 wireless LAN controller supports several buttons, LED indicators, and a KVM connector on the front panel. It also includes a power button and Locator LED button, along with the following LEDs: System status, PSU status, Fan status, Network LED, and Temperature LED.

Power On Switch and LED Indicator

A Power Button push switch with integrated LED is located on the front panel.

Table 3: Power On Switch and LED Indicator

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	Card Power Status	
	State	Decode
	Off	Card Power Off
	Amber On	Soft Off
	Green On	Card Power On

Locator Switch and LED Indicator

A Unit Identify push switch with integrated LED is available on the front panel and rear panel . Each press on the button toggles between active and non-active states.

System Status LED Indicator

The system status LED located on the front panel indicates the overall system health.

Table 4: System Status LED Indicator

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	System Status	
	State	Decode
	Off	Undefined
	Green On	Card is in normal operating condition
	Amber On	System is in a degraded operational state
	Amber Blinking	Critical fault state

Fan Status LED Indicator

The Fan status LED located on front panel indicates the fan health.

Table 5: Fan Status LED Indicator

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	Fan Status	
	State	Decode
	Off	Undefined
	Green On	Fans are operating and no error condition has been detected
	Amber On	Fans are in a degraded operational state <ul style="list-style-type: none"> • One of N fans has a fault
	Amber Blinking	Critical fault state <ul style="list-style-type: none"> • Two or more fans has a fault



Note Adaptive fan speed to control noise issues seen with 5520 FCS hardware is introduced in release version 8.1.131.0.

Temperature Status LED Indicator

The temperature status LED is located on the front panel and indicates whether or not the system is operating within acceptable temperature limits.

Table 6: Temperature Status LED Indicator

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	Temperature Status	
	State	Decode
	Off	Undefined
	Green On	System is operating at normal temperature
	Amber On	One or more temperature sensors reaches UCR threshold
	Amber Blinking	One or more temperature sensors reaches UNR threshold

Power Supply Status LED Indicator

The power supply status LED is located on the front panel and indicates proper functioning of the power supply.

Table 7: Power Supply Status LED Indicator

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	AC Power Supply Status	
	State	Decode
	Off	Undefined
	Green On	AC power supplies are operating and no error condition has been detected
	Amber On	One or more power supplies are in a degraded operational state
Amber Blinking	One or more power supplies are in a critical fault state	

Network Link LED Indicator


The network LED is located on the front panel and indicates if any of the on-board networking ports are connected and operating.

Table 8: Network Link LED Indicator

LED Indicator Color	Function	
Single Color Green	Network Link Status	
	State	Decode
	Off	Undefined
	Green On	Link on any of the ports, but no activity
	Green Blinking	Activity on any of the ports

Front Panel KVM Break-out Connector


A single female connector provides access to video, two USB ports for keyboard and mouse, and an RS-232C console serial port. An external breakout connector to industry standard interfaces is required. The following figure shows an example cable.

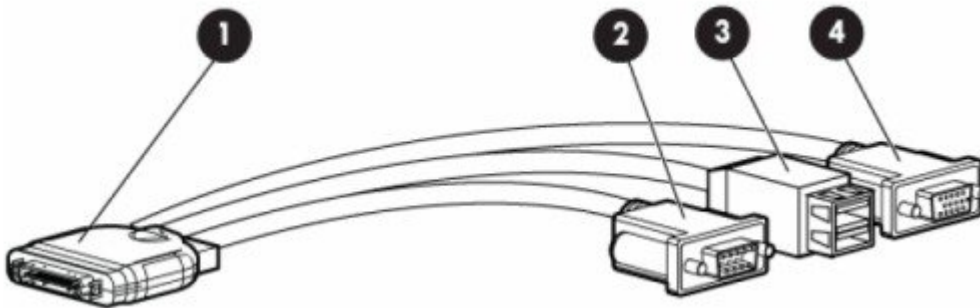

The interfaces for the cable are:

1. Front panel KVM/Console connector
2. DB9 serial port connector
3. Dual Type-A USB 2.0 connectors
4. DB15 Video connector

Cisco 5520 WLC Rear Panel View

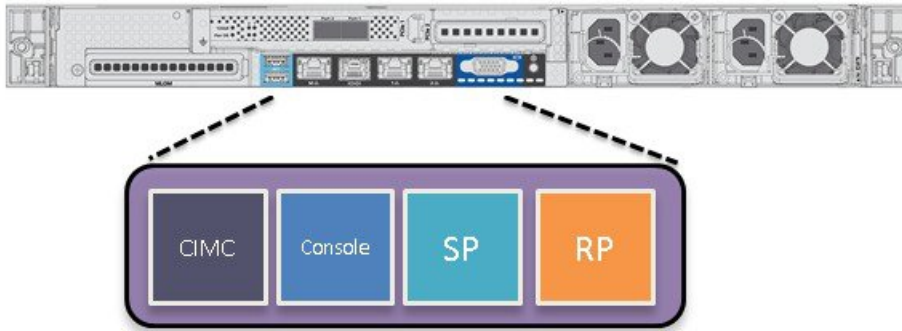

The rear panel has the following interfaces:

1. Two Type A 3.0 USB ports
2. IMC port 10/100/1000 Base-T

To setup the CIMC interface:

- Connect the CIMC cable.
- To enable DHCP to set the IP, use the command **imm dhcp enable**.
- If DHCP is not available, use the command **imm address <ip address> <net mask> <gateway ip>**.
- To view the IP and details, use the command **imm summary**.

(Cisco Controller) >imm ?

```
address      IMM Static IP configuration
dhcp        Enable | Disable | Fallback DHCP
restart     Saves settings and Restarts IMM Module
summary     Displays IMM Parameters
username    Configures Login Username for IMM
```

(Cisco Controller) >show imm chassis ?

```
bios        Fetch Chassis BIOS information
current     Fetch Chassis Current information
fan         Fetch Chassis FAN information
mac         Fetch Chassis MAC information
memory      Fetch Chassis Memory information
power-supply Fetch Chassis Power Supply information
sol-info    Fetch Serial Over Lan information
temperature Fetch Chassis Temperature information
```




Note CIMC web interface is for advanced debugging for TAC and escalation use only. Changing of settings in the CIMC by customer can cause adverse impact on controller software and functionality.

3. SerialCOM connector — Standard RS-232 Serial COM port using RJ-45 connector
4. Ethernet service port (SP) — Management 10/100/1000 Base-T
5. Redundancy Port (RP)

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	Management Interface Port Speed	
	State	Decode
	Off	Link Speed = 10 MbpS
	Amber On	Link Speed = 100 MbpS
	Green On	Link Speed = 1 GbpS

LED Indicator Color	Function	
Bi-color Yellow (Amber) Green	Management Interface Port Status	
	State	Decode
	Off	No Link
	Green On	Link
	Blinking	Traffic Present

6. VGA Connector — Rear panel has a standard VGA port using a female D-Sub-15 Connector
7. ID Switch and LED
8. Two 1/10 G Management and Network ports

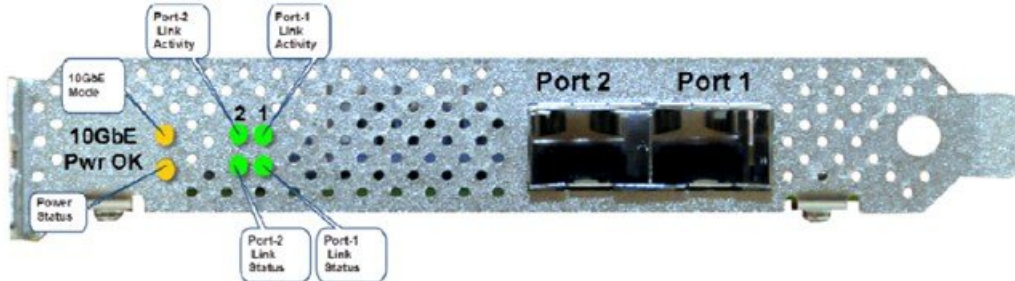

LED	Functional Definition
Pwr OK	LED: (Amber) On indicates power is good
10 G	LED: (Amber) On indicates 10 G mode LED: Off indicates 1 G mode
Port-n Link Status	Green On—Link is up in 10Gbe Mode Amber On—Link is up in 1 Gbe Mode Off—Link status is down
Port-n Link Activity	LED: (Green) blinking indicates link activity

Switching Between 10 G and 1 G

- If there is nothing installed in port 1, the board will be configured for 10 G mode by default. Therefore, to switch to 1 G mode, an SFP module must be installed in port 1 and the system needs to be rebooted.
- Conversely, if an SFP module is installed and the user wants to switch to 4 x 10 G mode, then an SFP+ module must be installed in port 1 and the WLC rebooted.
- Thus, Online Insertion and Removal (OIR) of SFP and SFP+ between 10 G and 1 G is not possible.
- OIR of 10 G to 10 G and 1 G and 1 G is possible.



Note It is recommended to have all ports as either 10 G or 1 G. In case they are different, port 1 SFP determines the mode of operation and functionality on the other SFPs may not work.

Table 9: Functionality of Cisco 5520 WLC when OIR occurs

Hot Swap of SFP/SFP+	Port1	Port2	Remarks
1G to 1G	No	Yes	Cisco 5520 WLC requires reboot for Port1 OIR in 1G

Hot Swap of SFP/SFP+	Port1	Port2	Remarks
1G to 10G	No	No	Cisco 5520 WLC requires reboot between 1G and 10G
10G to 1G	No	No	Cisco 5520 WLC requires reboot between 10G and 1G
10G to 10G	Yes	Yes	No reboot required

SFP Support

Network ports for 5520 WLC support the following Cisco SFP/SFP+ modules:

- GLC-T
- GLC-TE
- SFP-10G-SR
- SFP-10G-LR
- SFP-10G-LRM
- SFP-H10GB-CU1M
- SFP-H10GB-CU2M
- SFP-H10GB-CU2-5M
- SFP-H10GB-CU3M
- SFP-H10GB-CU5M
- SFP-H10GB-ACU7M
- SFP-H10GB-ACU10M
- SFP-10G-AOC7M
- SFP-H10GB-CU1-5M
- SFP-10G-AOC3M
- SFP-10G-AOC1M
- SFP-10G-AOC2M
- SFP-10G-AOC5M
- SFP-10G-AOC10M
- GLC-LH*
- GLC-EX-SMD*
- GLC-SX-MMD*
- SFP-10G-SR-S

- SFP-10G-LR-S



Note *Needs GLC-T on Port 1.

Image Specifications

Cisco 5520 WLC supports all the features of release 8.1.

Feature Not Supported on 5520 Controller Platform

The following features are not supported on the 5520 controller platform:

- Internal DHCP server



Note When AP manager is configured on a dynamic interface and not on the management interface on a 5520 and when both of these interfaces are on the same port (or LAG), web redirect for web-auth will not work. Disable the AP manager on the dynamic interfaces and set it back to the management interface.

Fault Tolerance Capability

The Cisco 5520 supports the stateless N+1 redundancy model . The N+1 HA architecture provides redundancy for controllers across geographically separate data centers with low cost of deployment. A single backup controller can be used to provide backup for multiple primary WLCs.


For more information on this model of redundancy, refer to http://www.cisco.com/c/en/us/td/docs/wireless/technology/hi_avail/N1_High_Availability_Deployment_Guide/N1_HA_Overview.html.

AP and Client SSO


High Availability Stateful Switchover (SSO) model provides a Box-to-Box redundancy with one controller in active state and a second controller in hot standby state. The SSO model monitors the health of the active controller via a redundant (HA) port. Cisco 5520 wireless LAN controller has a failover RP Port.

The configuration on the active controller is synched to the standby controller via the redundant port. In HA, both controllers share the same set of configuration including the IP address of the management interface. The AP's CAPWAP state (for APs in RUN state) is also synched. As a result, APs do not go into Discovery state when the active controller fails. Furthermore, a client's information is synched to the standby WLC when the client associates to the WLC or the client's parameters change. Fully authenticated clients, that is, the ones in Run state, are synched to the standby. Thus, client re-association is avoided on switchover, making the failover seamless for the APs as well as for the clients, resulting in zero client service downtime and no SSID outage.

For more information on the SSO feature and the supported topologies, refer to the [High Availability deployment Guide](#).

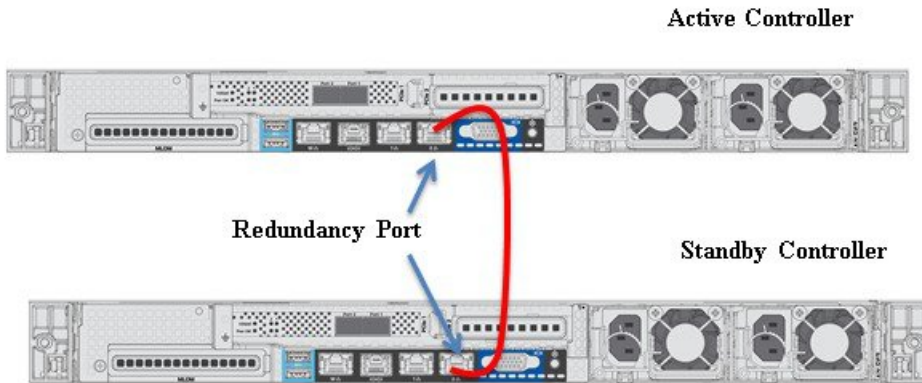

Connecting Cisco 5520 SSO Pair to the Wired Network

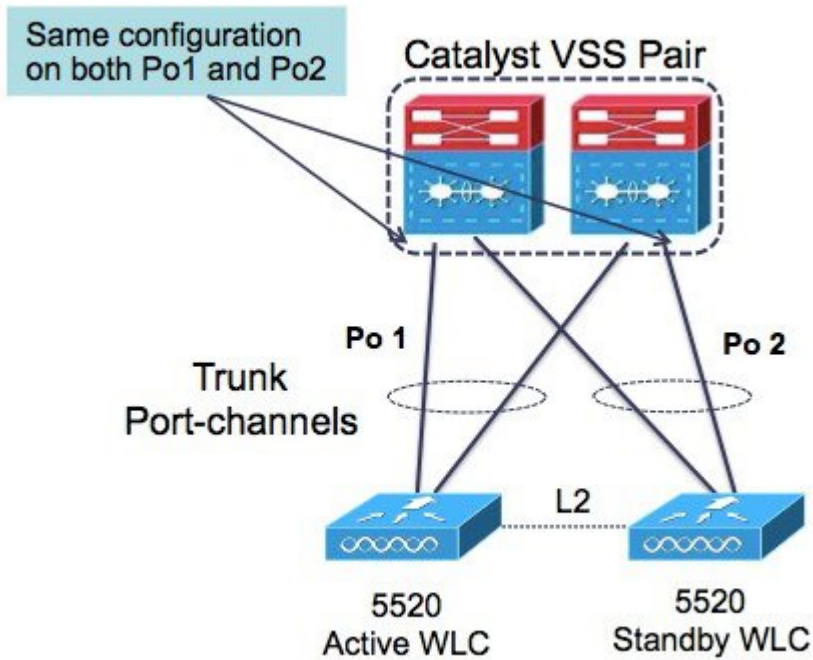

It is recommended to connect to a VSS pair and spread the links in each port-channel between the two physical switches to prevent a WLC switchover upon a failure of one of the VSS switches.

Customer Replaceable Units

Cisco 5520 wireless LAN controller has a minimal amount of separate orderable items, including all of the following:

- Power supply
- SSD Hard Disk Drive (HDD)

- Option to add a redundant power supply on the Cisco 5520 WLC



Note The power supply units are field replaceable.

Link Aggregation (LAG)

A single LAG across the 2 x 10 G interfaces is supported in software versions 8.1 and later. LACP and PAgP are not supported on the controller.

Inter-Platform Mobility and Guest Anchor Support

Guest anchor capability with:

- Cisco WLC 2504/5508 / 8510 / 7510 / WISM2 running as a foreign controller (EOIP Tunnel)
- Cisco 5520 / 8540 WLC running as a foreign controller (EOIP Tunnel)
- Cisco 5760 WLC running as a foreign controller with new mobility turned on (CAPWAP Tunnel)

Foreign controller to a guest anchor which is a:

- Cisco WLC 2504/5508 / 8510 / 7510 / WISM2 (EOIP Tunnel)
- Cisco 5520 / 8540 WLC (EOIP Tunnel)
- Cisco 5760 WLC with new mobility turned on (CAPWAP Tunnel)

CAPWAP has native management plane encryption and optional data payload encryption.

Infrastructure Multicast

Multicast support is enabled in the Cisco 5520 controller with the following restrictions:

- If all APs on the 5520 controller are configured in Local mode, Multicast-Multicast will be the default mode and all features are supported (for example, VideoStream).

If the APs are configured as a mix of Local mode and FlexConnect mode:

- If IPv6 is required on the FlexConnect APs:
 - Disable Global Multicast Mode and change to Multicast-Unicast mode.
 - IPv6 / GARP will work on FlexConnect and Local mode APs, but Multicast data and the VideoStream feature will be disabled.
- IPv6 / GARP is not required on FlexConnect APs:
 - Change the mode to Multicast-Multicast and enable Global Multicast Mode and IGMP / MLD snooping.
 - IPv6, GARP, Multicast Data, and VideoStream are supported on local mode APs.

New Mobility and MC Support

Cisco 5520 supports the new mobility functionality to be compatible with inter-platform IRCM and guest anchor functionality. This platform will not function as an MC.

Look and Feel of the Cisco 5520 Wireless LAN Controller

The Cisco 5520 controller enables console redirect by default with baud rate 9600, simulating a VT100 terminal with no flow control. The 5520 Controller has the same boot sequence as existing controller platforms.

Boot Up and Initial Configuration

- Initial Boot Sequence
- Boot Options
- Loading the OS and Boot Loader
- Loading Controller Services

Initial Controller Configuration

Configuration Wizard — As with all other controller platforms, initial boot up requires configuration using the Wizard menu.

WLAN Express Setup — As with all other controller platforms, 5520 WLC also supports the Express WLAN Setup over wired Ethernet connection.

1 Set Up Your Controller

System Name ?

Country ?

Date & Time

Timezone ?

NTP Server ?

Management IP Address ?

Subnet Mask

Default Gateway

Management VLAN ID ?

1 Set Up Your Controller

2 Create Your Wireless Networks

Employee Network

Network Name

Security

Pass Phrase


Confirm Pass Phrase

VLAN

DHCP Server Address

Guest Network

Back Next

 **Guest Network**

Network Name ?

Security ?

VLAN ?

VLAN IP Address

VLAN Subnet Mask

VLAN Default Gateway

VLAN ID ?

DHCP Server Address

3 Advanced Setting

The screenshot displays a configuration interface with three main steps: 1. Set Up Your Controller, 2. Create Your Wireless Networks, and 3. Advanced Setting. The 'RF Parameter Optimization' section is expanded, showing a toggle switch turned on. Below it, the 'Client Density' slider is set to 'Typical', and the 'Traffic Type' dropdown is set to 'Data and Voice'. The 'Virtual IP Address' is 1.1.1.1, 'Local Mobility Group' is 'miadler', 'Service Port Interface' is 'Manually', 'Service Port IP Address' is 192.168.1.1, and 'Service Port Netmask' is 255.255.255.0. 'Back' and 'Next' buttons are at the bottom.

Step	Label
1	Set Up Your Controller
2	Create Your Wireless Networks
3	Advanced Setting

RF Parameter Optimization

Client Density: (Low, Typical, High)

Traffic Type:

Virtual IP Address:

Local Mobility Group:

Service Port Interface:


Service Port IP Address:

Service Port Netmask:


Back Next

Monitoring and Best Practices

This platform supports the Monitoring Dashboard and the Upgrade audit workflow view.

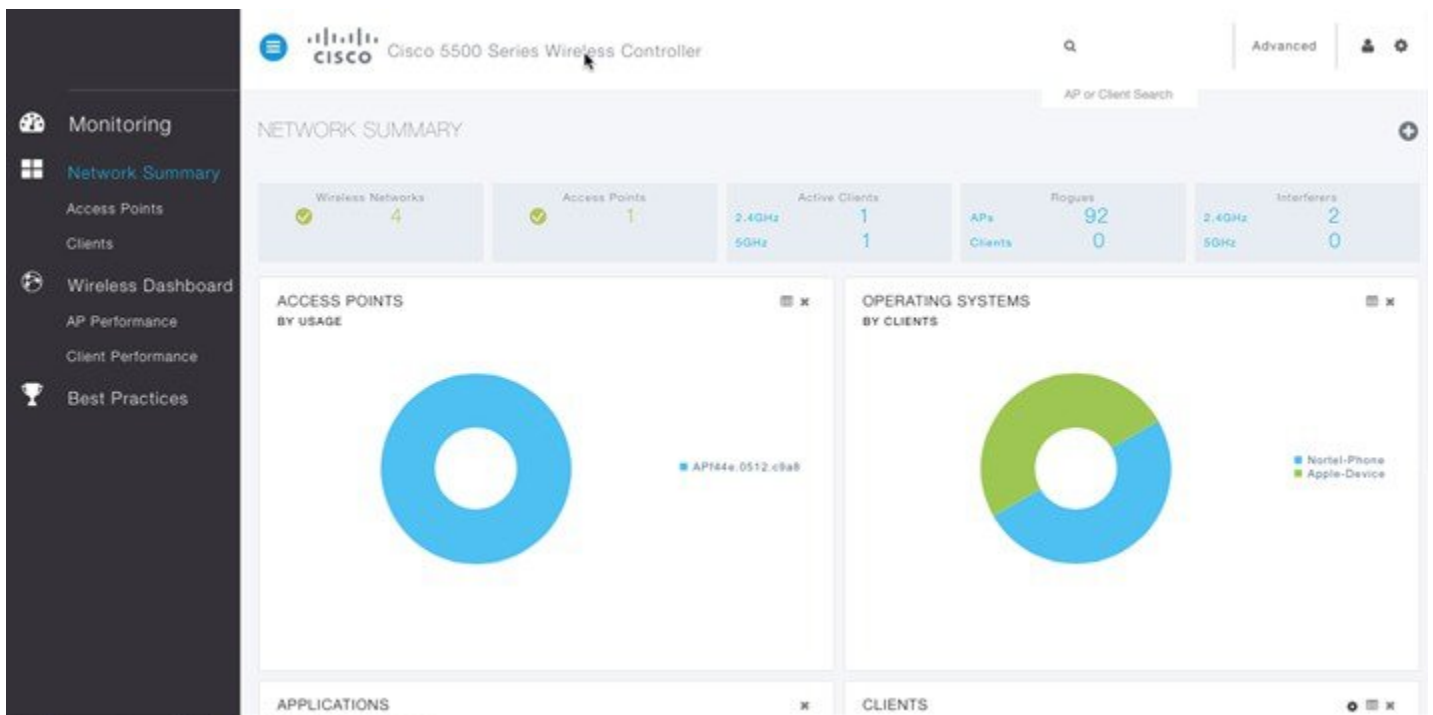

The following screenshot is the Best Practices Audit workflow page.

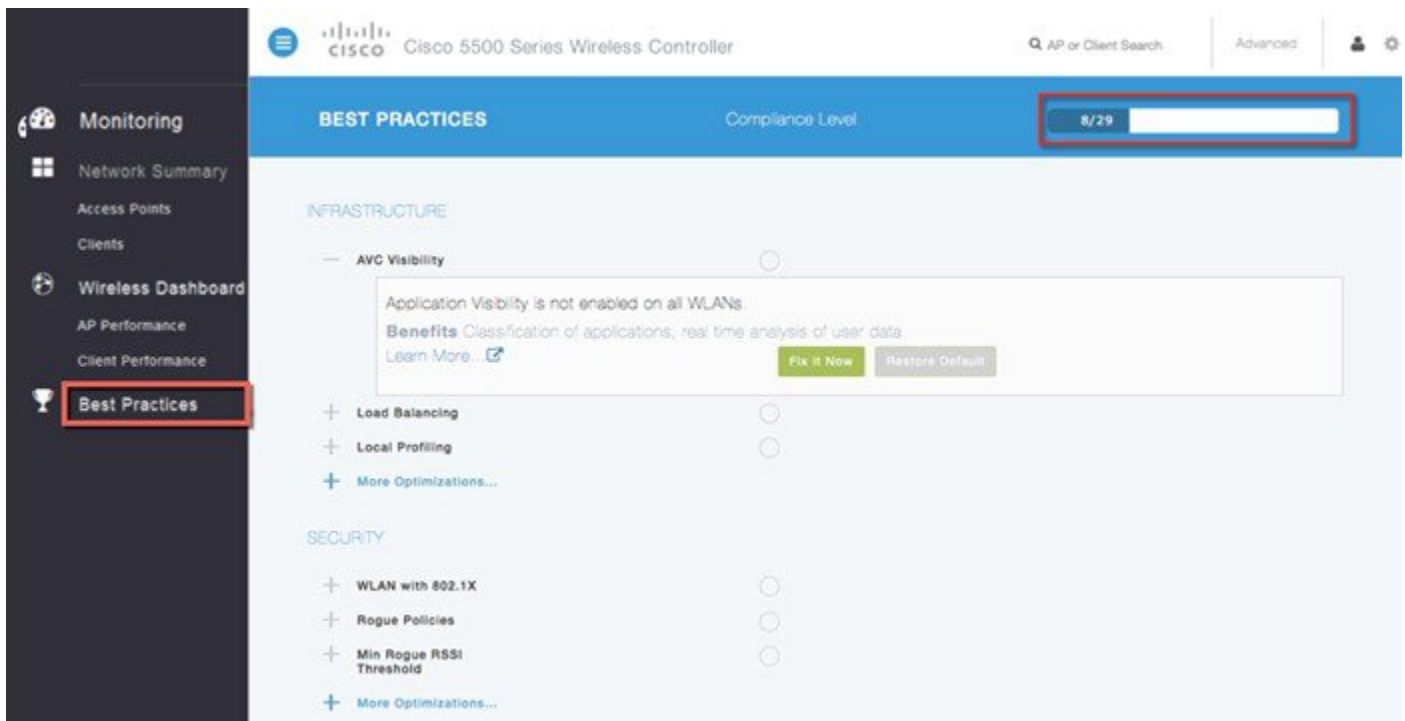

Management Web UI

The management web interface has the same look and feel as existing Cisco wireless LAN controllers.

The screenshot shows the Cisco 5520 Wireless LAN Controller Monitor page. The top navigation bar includes links for MONITOR, WLANs, CONTROLLER, WIRELESS, SECURITY, MANAGEMENT, COMMANDS, HELP, and FEEDBACK. The main content area is divided into several sections:

- Summary:** Displays "1500 Access Points Supported" and a diagram of the controller's rear panel with ports labeled M, X, SP, and P.
- Controller Summary:** Lists key system information:

Management IP Address	9.8.94.195, 11/128
Service Port IP Address	10.104.171.128, 11/128
Software Version	8.1.10.178
Emergency Image Version	8.1.10.72
System Name	pata1-sriniw3
Up Time	0 days, 0 hours, 1 minutes
System Time	Thu Jan 14 01:53:02 2010
Redundancy Mode	Disabled
Internal Temperature	+27 C
802.11a Network State	Enabled
802.11b/g Network State	Enabled
Local Mobility Group	sriniw3-vm
CPU(s) Usage	0%
Individual CPU Usage	0%/0%, 0%/0%, 0%/0%, 0%/0%, 0%/1%, 0%/0%
Memory Usage	7%
- Access Point Summary:** A table showing the status of various radio types:

	Total	Up	Down	
802.11a/n/ac Radios	0	0	0	Detail
802.11b/g/n Radios	0	0	0	Detail
Dual-Band Radios	0	0	0	Detail
All APs	0	0	0	Detail
- Client Summary:** A table showing client counts:

Current Clients	0	Detail
Excluded Clients	0	Detail
Disabled Clients	0	Detail
- Rogue Summary:** Shows zero active rogue APs, clients, or networks.
- Top WLANs:** A table with columns for Profile Name and # of Clients.
- Most Recent Traps:** Lists system events such as "Cold Start" and "Power Supply Status: Power supply 2 is OFF."
- Top Applications:** A table with columns for Application Name, Packet Count, and Byte Count.

Out of Band Management on Service Port


Starting release 8.2 the Service Port capability on the Cisco 5520 Wireless LAN Controller has been enhanced to support the following management services:

- HTTP/HTTPS web-based access
- SNMP polling v2 and v3
- Syslog
- SSH or Telnet
- Transfer download and upload

These services shall be supported in a non-HA topology only in this release

Service Port

The service port is a 10/100/1000 Base-T management port located on the rear panel. Port 4 in the figure below shows the Service Port on the Cisco 5520 Wireless LAN Controller.

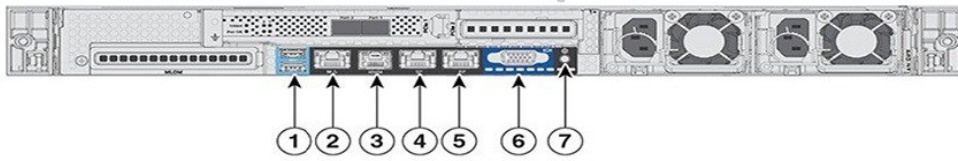

1	Two Type A 3.0 USB ports	5	Redundancy Port (RP)
2	CIMC port 10/100/1000 Base-T	6	VGA Connector—Rear panel has a standard VGA port using a female D-Sub-15 Connector
3	SerialCOM Connector—Standard RS-232 Serial COM port using RJ-45 connector	7	ID Switch and LED
4	Ethernet Service Port (SP)—Management 10/100/1000 Base-T		

Service Port Configuration

The IP address assigned to the service port must be in a non-routable subnet different from the Management subnet. It can be assigned dynamically or statically as shown in the configuration below. There is no change in the service port configuration itself and the commands below are for your reference.

Use the following commands to define the Service port interface with an IPv4 address:

Dynamic assignment of IPv4 address on the Service Port:

- To configure the DHCP server:

```
config interface dhcp service-port enable
```

- To disable the DHCP server:

```
config interface dhcp service-port disable
```

- To configure a static IPv4 address on the Service Port use the following command:

```
config interface address service-port ip-address netmask
```

- To add an IPv4 route to allow out-of-band management of the controller from a remote workstation:

```
config route add network-ip-address ip-netmask gateway
```

- To remove the IPv4 route on the controller:

```
config route delete network-ip-address
```

Use the following commands to define the Service port interface with an IPv6 address:

- To configure the service port using slacc:

```
config ipv6 interface slacc service-port enable
```

- To disable the service port using slacc:

```
config ipv6 interface slacc service-port disable
```

- To configure the IPv6 address:

```
config ipv6 interface address service-port ipv6-address prefix-length
```

- To add an IPv6 route to allow out-of-band management of the controller from a remote workstation:

```
config ipv6 route add network_ipv6_address prefix-length ipv6_gw_addr
```

- To remove the IPv4 route on the controller:

```
config ipv6 route delete network_ipv6_address
```


- To verify the status of the service port after configuration

```
show interface detailed service-port
```

Limitations

- RADIUS, TACACS+ and NMSP to MSE via Service Port not supported in release 8.2
- SP Port OOB Management cannot be enabled when the WLC is in an SSO Pair.

Local EAP Support

Starting Software release 8.2, Cisco 5520 Wireless LAN Controller supports the Local EAP functionality natively on the controller.

Local EAP is an authentication method that allows users and wireless clients to be authenticated locally on the controller. It is designed for use in remote offices that want to maintain connectivity to wireless clients when the backend system becomes disrupted or the external authentication server goes down. When you enable local EAP, the controller serves as the authentication server and the local user database, so it removes dependence on an external authentication server. Local EAP retrieves user credentials from the local user database or the LDAP backend database to authenticate users. Local EAP supports LEAP, EAP-FAST, EAP-TLS, PEAPv0/MSCHAPv2, and PEAPv1/GTC authentication between the controller and wireless clients.

The configuration of Local EAP remains the same as on existing WLCs. A Local EAP Server Configuration Example can be found at <http://www.cisco.com/c/en/us/support/docs/wireless-mobility/wlan-security/91628-own-loc-eap-svr-config.html%23maintask1>

Wired Guest Access Support

Starting Software release 8.2, Cisco 5520 Wireless LAN Controller supports the Wired Guest Access functionality.

A growing number of companies recognize the need to provide Internet access to its customers, partners, and consultants when they visit their facilities. IT managers can provide wired and wireless secured and controlled access to the Internet for guests on the same wireless LAN controller. Guest users must be allowed to connect to designated Ethernet ports and access the guest network as configured by the administrator after they complete the configured authentication methods. Wireless guest users can easily connect to the WLAN Controllers with the current guest access features. This provides a unified wireless and wired guest access experience to the end users.

Wired guest ports are provided in a designated location and plugged into an access switch. The configuration on the access switch puts these ports in one of the wired guest Layer 2 VLANs.

Two separate solutions are available to the customers:

A single WLAN controller (VLAN Translation mode)—the access switch trunks the wired guest traffic in the guest VLAN to the WLAN controller that provides the wired guest access solution. This controller carries out the VLAN translation from the ingress wired guest VLAN to the egress VLAN.

Two WLAN controllers (Auto Anchor mode) - the access switch trunks the wired guest traffic to a local WLAN controller (the controller nearest to the access switch). This local WLAN controller anchors the client onto a Demilitarized Zone (DMZ) Anchor WLAN controller that is configured for wired and wireless guest access. After a successful handoff of the client to the DMZ anchor controller, the DHCP IP address assignment, authentication of the client, and so on are handled in the DMZ WLC. After it completes the authentication, the client is allowed to send and receive traffic.

The configuration of Wired Guest Access remains the same as on existing WLCs. A Wired Guest Access Configuration Example can be found at <http://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/99470-config-wiredguest-00.html>

Licensing

5520 wireless LAN controller supports Right to Use (RTU) licensing model similar to the Cisco Flex 7500 and Cisco 8500 series controllers. This is an Honor-based licensing scheme that allows AP licenses to be enabled on supported controllers with End User License Agreement (EULA) acceptance. The RTU license scheme simplifies addition, deletion, or the transfer of AP adder licenses in the field by eliminating the need for an additional step, additional tools, or access to Cisco.com for PAK license or return materials authorization (RMA) transfers.

Evaluation licenses are valid for 90 days. Notifications will be generated to inform you to buy a permanent license starting 15 days prior to the evaluation license expiration.

If you have more APs connected than those purchased, the licensing status for the controller tracked within the Cisco Prime Infrastructure will turn red.

For more information on the RTU License model, refer to the [Cisco Right to Use Licensing \(RTU\)](#) document.

Smart Licensing is also available, for more information refer to http://www.cisco.com/c/en/us/td/docs/wireless/technology/mesh/8-2/b_Smart_Licensing_Deployment_Guide.html

License Types

These are the three license types:

- **Permanent licenses**—The AP count is programmed into NVM while manufacturing. These licenses are transferable.
- **Adder access point count licenses**—Can be activated through the acceptance of the EULA. These licenses are transferable.
- **Evaluation licenses**—Used for demo and/or trial periods, are valid for 90 days, and default to the full capacity of the controller. The evaluation license can be activated at any time using a CLI command.

Licensing Model Features

- Two Base Bundle SKUs: AIR-CT5520-K9 and AIR-CT5520-50-K9
- Portability of licenses between 5520 and 8540 wireless LAN controllers
- No separate HA-SKU UDI

Table 10: 5520 – Primary SKUs / PIDs

SKU / PID	Description	Comments
AIR-CT5520-K9	Cisco 5520 wireless controller w/rack mounting kit	Base and HA SKU
AIR-CT5520-50-K9	Cisco 5520 wireless controller supporting 50 APs w/rack kit	50 AP Bundle SKU
LIC-CT5520-UPG	Top level SKU for 5520 AP adder licenses	—
LIC-CT5520-1A	Cisco 5520 wireless controller 1 AP adder license	—



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA 95134-1706
USA

Asia Pacific Headquarters
CiscoSystems(USA)Pte.Ltd.
Singapore

Europe Headquarters
CiscoSystemsInternationalBV
Amsterdam,TheNetherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.